


Quick Start Guide


The mobile phone is in compliance with the requirement of EN 60950-1: 2006 amendment A12: 2011. There will appear a warning box when the volume level is over 9. If the user selects  in the warning box, the volume can be increased and the phone will repeat the acknowledgement more than once every 20h of cumulative listening time.



PROTECT YOUR HEARING





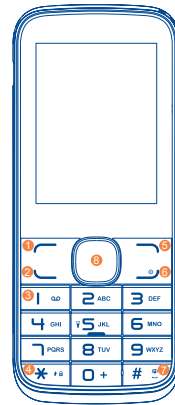












To prevent possible hearing damage, do not listen at high volume levels for long periods. Exercise caution when holding your device near your ear while the loudspeaker is in use.

Your mobile.....


















- 1 Left soft key
- 2 Call log (Idle screen)
Send call
- 3 Voicemail (long press)
- 4 Lock Key (long press * # key)
- 5 Right soft key
- 6 Power on/Power off
End call
- 7 Vibration alert
- 8 Navigation key:
Menu/Confirm an option

1.1 Keys

-  Navigation key
-  Confirm an option (press the middle of the key)
-  Access to call log (idle screen)
-  Power on/off the handset (long press)
-  End call
-  Return to idle
-  Left soft key
-  Right soft key
-  Dial the voicemail number (long press)
-  From Idle screen
 - Short press: enter zero
 - Long press: +, "+" are used for dialing an international call.
-  In Edit mode:
 - Short press: access symbol select.
 - Input 0 (when the input method is numeric)
-  From Idle screen
 - Short press: Input "8"
 - Long press: Lock keypad
-  In Edit mode:
 - Short press: change the input method
-  From Idle screen
 - Short press: Input "#"
 - Long press: activate vibrate/general.
-  In Edit mode:
 - Short press: space
-  From Idle screen
 - Short press: Input "#"
 - Long press: activate vibrate/general.
-  In Edit mode:
 - Short press: space


1.2 Idle screen icons

-  Battery charge level.
-  Vibrate mode: your phone vibrates, but neither rings nor beeps.
-  Headset connected.
-  Silence mode: your phone neither rings, beeps nor vibrates.
-  Alarm clock programmed.
-  Voicemail message arrived.
-  Missed calls.
-  Roaming.
-  Level of network reception.
-  Message unread.
-  MMS unread.
-  Call divert.
-  Message full.
-  Bluetooth activated.
-  When you insert SD card will display this icon in screen.

2 Getting started

2.1 Set-up

Removing and installing the back cover



Removing and installing the battery




Inserting and removing TF card




Inserting and removing SIM



Charging the battery

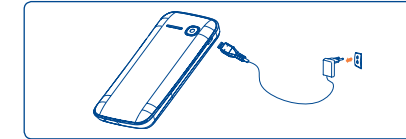

Connect the battery charger to your phone and mains socket respectively.

- The charging may take about 20 minutes to start if the battery is flat.
- Be careful not to force the plug into the socket.
- Make sure the battery is correctly inserted before connecting the charger.
- The mains socket must be near to the phone and easily accessible (avoid electric extension cables).
- When using your telephone for the first time, charge the battery fully (approximately 3 hours). You are advised to fully charge the battery ().
- To reduce power consumption and energy waste, when battery is fully charged, disconnect your charger from the plug; reduce the backlight time, etc.



The charge is complete when the animation stops.

2.2 Power on your phone




Hold down the  key until the phone powers on.

2.3 Power off your phone


Hold down the  key from the idle screen.

3 Calls.....

3.1 Making a call

Dial the desired number, press the  key to place the call. If you make a mistake, you can delete the incorrect digits by pressing the . To hang up the call, press the  key.



Making an emergency call

If your phone is covered by the network, dial emergency number and press the  key to make an emergency call. This works even without a SIM card and without unlocking the keypad.

3.2 Calling your voicemail ⁽¹⁾

You can see SIM voice mail in this menu.

3.3 Receiving a call

When you receive an incoming call, press the  key to talk and then hang up using the  key.

3.4 Available functions during the call


During a call, you can use your directory, short messages, etc. without losing your correspondent.

⁽¹⁾ Contact your network operator to check service availability.

4 Messages.....

4.1 Create SMS

From the main menu select "Messages" to create text message. You can type a message send it to a recipient in the SIM card directory. You can type a message, and you're also able to insert a pre-defined message from "Templates". While writing a message, select "Options" to access all the messaging options.



 Specific letters (accent) will increase the size of the SMS, this may cause multiple SMS to be sent to your recipient.

4.2 Create MMS

Select Messages-Options-New chat-Options-Add subject, it will switch to MMS interface automatically.

5 Contacts.....

5.1 Consulting your contacts

To access the directory from the idle screen, press the  key and select the  icon from the menu.

5.2 Adding a contact

Select the directory in which you wish to create a file, press the "Options", select "New" then save it to "Phone", "SIM" as you like.

6 Call log.....






You can access your call memory by pressing  from the idle screen, or press the  key and select the  icon from the menu.

In this menu, you will see Missed call(s), Dialed call(s), Received call(s) and Rejected call(s), etc.






7 Camera.....

This function enables you to take pictures. Press  to take the picture.




8 Music.....

Use this function to play audio files. Press  to play/pause the audio player, short press  or  to last or next audio, in audio player interface, press  and  to tune volume.

9 Videos.....

Use this funtion to play video files. Press  to play/pause the video player, short press  and  to tune volume; press  or  to last or next video.

10 FM radio.....

Your phone is equipped with a radio. You can use the application as a traditional radio with saved channels. In FM radio interface, press  to play/pause the playing process of the current channel, press  and  to tune volume.

11 Recorder.....

Use this function to record audio files. The phone support WAV and AMR. The recording file you stopped will be stored in Audio file list automatically.

12 My files.....

The phone provides a certain space for users to manage files and support the memory card. The capacity of the memory card is selectable. You can use the file manager to conveniently manage various directories and files on the phone and the memory card.

13 Games.....

Two games named Sokoban and Snake are embedded in the phone. For more information please refer to "help" in the game.

14 Profiles.....

With this menu, you may personalize ringtones for different events and environments.

15 Alarm.....

Your mobile phone has a built-in alarm clock with snooze feature.

16 Calculator.....

Press the up, down, left, right and OK key to select +, -, x, / and = respectively.

Press  to delete the figure.

17 Calendar.....

Once you enter this menu, there is a monthly-view calendar for you to view the date; you can go to any day you want.

18 Fake call.....

You can create fake call through this function.


19 Call filter.....

You can filter the calls you don't want to get through this function.

20 Services.....

STK service is the tool kit of SIM card. This phone supports the service function. The specific items depend on SIM card and network. Service menu will be automatically added to the phone menu when supported by network and SIM card.

21 Settings.....

From the main menu, select the menu  icon and select the function of your choice in order to customize your telephone: Phone settings, Call settings, Connections, Security and Restore factory settings.

22 Bluetooth.....

You can transfer data, such as music to other device using Bluetooth. Search the device and accept/transfer data. The received data is automatically stored in the directory.

23 Java.....

Please install Java firstly through press Options key, then you can manage application as your need.

24 Opera Mini.....

After installed it you can view webpage when you connected with internet.

25 Dorado.....

You can view webpage when you connected with internet through this function.

26 Facebook.....

Open facebook network can communicate.

27 Torch.....

Long press 5 to open the flashlight function.

28 Input mode.....

This mode allows you to type a text by choosing a letter or a sequence of characters associated with a key. Press the key several times until the desired letter is highlighted. When you release the key the highlight character is inserted into the text.

© Copyright 2014 TCT Mobile Limited
All rights reserved

TCT Mobile Limited reserves the right to alter material or technical specification without prior notice.

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

SAR Information Statement

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. * Tests for SAR are conducted with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna,

the lower the power output. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone when tested for use at the ear is **0.515W/Kg** and when worn on the body, as described in this user guide, is **1.34W/Kg**(Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements).. While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement for safe exposure. The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on **2AAZ8-OWNF1030** Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at <http://www.wow-com.com>. * In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.

Body-worn Operation

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of **15mm** must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.