
Accessing the Menu

The Menu Structure


Your phone comes with a variety of useful features and functions, they are group into 7 clusters each represented by an icon and an animation, inside which are features having related functions, some of these functions may have other sub-functions or options.


Level 1		Level 2	Key Press	Function
	ŕ	SMS	To Access:	Stores and manages messages.
	ŕ	Phone Book	(\cdot)	Stores and manages frequently used contacts
	ŕ	Call Records	\bigcirc	Stores and manages call and air time histories.
Standby	ŕ	Settings	To Scroll:	Customize functions and operating parameters.
	Ŷ	Alarm	\$	Set and activate alarms like an alarm clock.
	Ŷ	Extras		Manages collection of useful tools & amusement.
	Ŷ	STK		SIM Tool Kit, depending on your SIM.

Accessing the Menu 23 GIRD

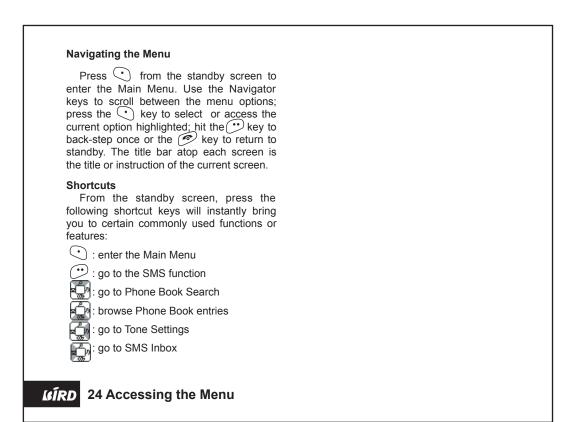

Options	Function Explained
Details	View call details such as Name; Number; Date & Time; and Duration of the
	call. If the number is not in phone book, 'Not in Phone Book' will be displayed
	instead of the name.
Call	Dial the other party's number.
Send Message	Compose and send a message to the contact, see 'SMS' for more information.
Save Number	Store the number to phone book similarly as 'Add' in 'Phone Book' menu.
Delete	Delete current call record.
Delete All	Delete all call records in the current folder.
Last Call	Display a dialogue box showing duration of your last call.
Received Calls	Display a dialogue box showing duration of all your answered calls.
Dialed Calls	Display a dialogue box showing duration of all your made calls.
All Calls	Display a dialogue box showing duration of all your calls.
Reset Timer	Input your phone password to reset the timers.
Tip: Call record	rd may be accessed and viewed from standby by pressing the key. types are identified in front with a phone and arrow icon, the arrow phone means incoming while the reverse is for outgoing, an x means

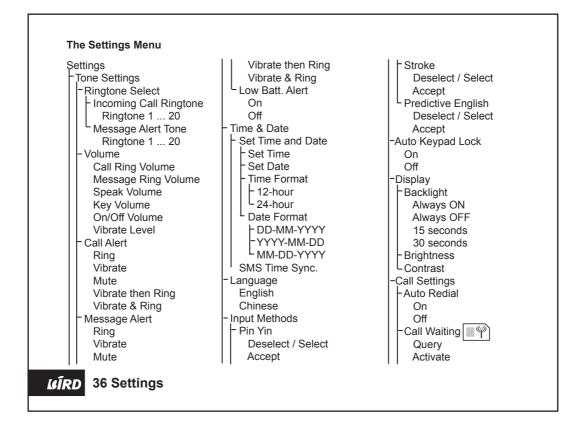

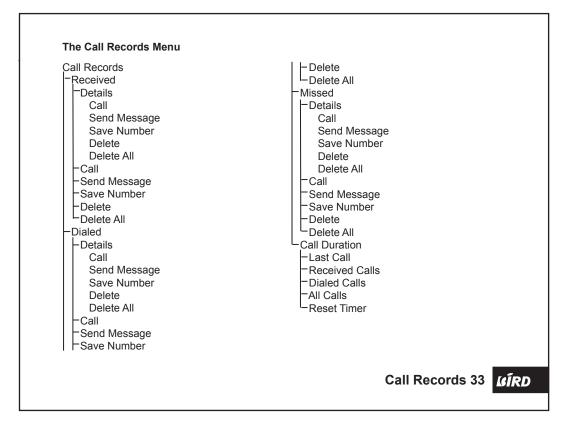

Menu	Function Explained
Received	Stores and manages all your recently answered calls. If the number is
	in the phone book, then the contact name will be displayed; If the
	number is not in the phone book, the telephone number will be
	displayed directly. Use the 🔛 and 🔛 to scroll.
Dialed	Stores and manages all your recently dialed calls. If the number is in
	the phone book, then the contact name will be displayed; If the number
	is not in the phone book, the telephone number will be displayed
	directly. Use the 🔛 and 🔛 to scroll.
Missed	Stores and manages all your recently un-answered calls. If the number
	is in the phone book, then the contact name will be displayed; If the
	number is not in the phone book, the telephone number will be
	displayed directly. Use the 🔛 and 🖼 to scroll
Call Duration	Monitors, stores, and manages air times of your calls.

GÍRD 34 Call records

Your phone can store up to 100 contacts, while the SIM capacity will depend on your SIM card type. From the standby mode, you can press to access the 'Input Name' mode for phone book search, or press to display contact list. When the contact list is displayed, inputting the corresponding letter using the alpha numeric key pad will jump to the first record starts with the corresponding letter. For example, to view entries starts with letter "I", press "5" trice consecutively.

Each contact record in the contact list will have an icon before its name indicating its memory location:




If you have not assigned any number to a key for the speed dial, accessing the list it will be displayed as an 'Invalid Record'. The '1' key is reserve for voice mail access number with operating similar to the speed dial. Tip: It may be helpful to keep another copy of your contacts elsewhere, this saves you a lot of trouble if ever your phone is damaged or lost.
Tip: It is best to store numbers complete with international access code (+), country code, area code, and phone number, check with your provider for details and applicability.

As you are using the Phone Book feature, please see 'Accessing the Menu' for operations, you will be encountering options and sub-menu whose functions in the following table.

Phone Book 31 **ISIRD**

Options	Function Explained	
Accept	Confirm, accept and save input.	
Browse	View contact list, use up and down navigator keys to scroll.	
Details	View contact details: name and number.	
Edit	Input or modify contact name or number, refer to input methods for details.	
Quit	Exit edit/input mode without saving.	
Save	Save the inputs to record.	
Сору	Copy the entry (distinct from 'Copy' of level 2) to SIM or phone from origina	
	location.	
Delete	Copy the entry (distinct from 'Delete' of level 2) to SIM or phone from origina	
	location.	
Call	Dial the current contact's number.	
Send Message	Compose and send a message to the contact, see 'SMS' for more information.	
Add to SIM	Add a contact to SIM memory.	
Add to Phone	Add a contact to phone memory.	
Delete All in SIM	Erase all contact entries in SIM memory.	
Delete All in Phone	Erase all contact entries in phone memory.	
Copy to Phone	Copy the current SIM contact to phone memory.	
Copy to SIM	Copy the current contact in phone memory to SIM.	
Set/Change	Edit or input number for currently selected key.	

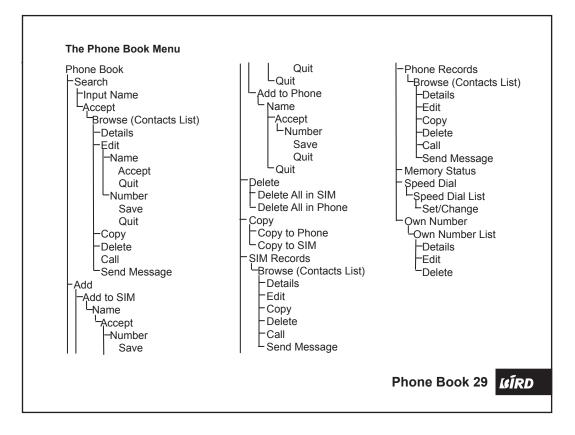

Menu	Function Explained		
Search	Browse the contact list and search for an entry. You can input first part		
	or full name of contact to search, or press Left Soft Key without		
	inputting to show contact list starting from first record in phone book.		
Add	Add a contact (name & number) to SIM or phone memory.		
Delete	Delete all SIM or phone memory contact entries.		
Сору	Copy all contacts from SIM to phone or vise versa.		
SIM Records	Display and browse SIM contacts.		
Phone Records	Display and browse phone contacts.		
Memory Status	View the memory consumption status shown as used / total. Use up or		
	down navigator to shift display between SIM and phone.		
Speed Dial	You can assign most often called numbers to keys "2" to "9", press the		
	corresponding key from standby then the CALL key will instantly dial		
	the number.		
Own Number	View the memory consumption status shown as used / total.		

GÍRD 30 Phone Book

After a new message is composed, selecting 'Send' option to input the recipient number. Or you can press (•) (Search) to access the contact list of your Phone Book and use for to scroll to the desired contact and press to select. Prior to sending, you will be prompted

'Save?', press (•) to send and save the message to Outbox, press (...) to send only.

When a new message is received, an alert prompt 'New Message, Read?' will be displayed, press \bigcirc to read and \bigcirc to return to standby and read later. The message icon will be displayed on the status/icon bar to remind you of existence of unread messages.


Received messages are store in SIM depending on its capacity. Your Phone can store 10 Outbox + 5 Draft messages. If mailbox capacity is filled, the message icon will flash, and a memory full alert prompt will be displayed. Delete some messages to be able to effectively received new messages. When the incoming message is bigger than the available memory, the new message received may be incomplete or damaged.

蓉 Tip: When sending messages, the "sent" status alert from your phone mean only that it has been sent by your phone to the message center number as programmed into the phone, not to the intended recipient. ר. Tip: Do not alter preinstalled

settings by yourself if you do not understand it completely or without proper guidance.

In front of the message items of the message list in the mailboxes is a small icon indicating:

🖂 : Unread message




🕎 : Message in phone memory

As you are using the SMS feature, please see 'Accessing the Menu' for operations, you will be encountering options and submenu whose functions in the following table.



Options	Function Explained
Send	Input number, confirm (accept) or not (cancel) to save, and send message.
Search	Show contact list, scroll to the desired one and press (•) to send.
Custom Send	Show contact list, select contacts to be set as recipients.
Insert Template	Show template list, scroll to desired one and press (•) to add to message.
Insert Contact	Show contact list, select contact to add contact information to message.
Save to Draft	Store composed message to Draft box.
Read	Access and read message.
Delete	Delete current message.
Delete All	Delete all messages in the mailbox.
Delete Selected	Show message list, custom select messages to be deleted.
Template Details	Access and read the template.
Status Report	Activate/deactivate requesting message status report, requires network support
Validity	Set duration of the message to stay with service center if not sent immediately.
Service Center	Input or edit message service center number, check with operator for details.
Info Desk	Activate or deactivate the CBS info desk.
Channel	Select/Add/Delete or Edit (name and number) CBS channel.
Language	Select to receive CBS in all languages or selected languages.
Retrieve Voice Mail	Dial the voice mail number (must be set first) and retrieve your voice mails.
Voice Mailbox	Set or edit your voice mail access number.
Number	
Select	Pick a record or entry.
Accept	Confirm and accept all picked or selected records or entries.

ISÍRD **28 SMS**

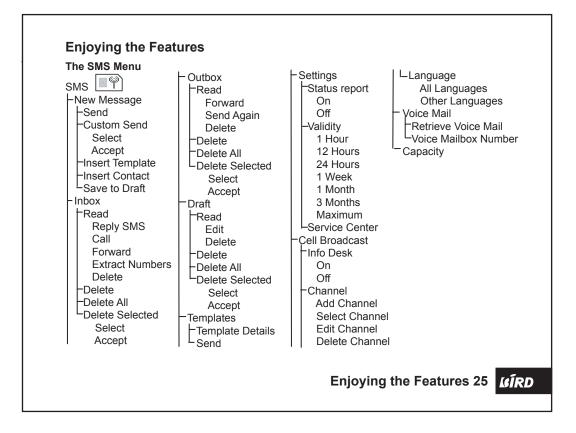

Menu	Function Explained
New Message	Write and send new SMS.
Inbox	Store and manage received messages.
Outbox	Stores and manages unsent and sent and saved messages.
Draft	Stores composed and saved messages.
Templates	Stores frequently used messages so that you won't have to write again.
Settings	Customize message sending and receiving parameters.
Cell Broadcast	Customize CBS parameters. It is an information service provided by the operator where you can receive information broadcasts from your network such as weather forecast, traffic update, news, and taxi service info. Please contact your local network operator for more details.
Voice Mail	Set and access your voice mail, it is where your callers can leave voice messages for you to retrieve later, your network must support this feature and you have to subscribe to it.
Capacity	View the memory consumption status shown as used / total.

GÍRD 26 SMS