

TABLE OF CONTENTS

Introduction

Basic Connection Principles O-2

Hardware Data

DURIUM™ Steel/Aluminum
Tightening Torques O-6

DURIUM™ Hex Bolts Data O-6

UL Tightening Torque UL486 O-7

Cable Data (Tables)

Copper Cable

Copper Tube O-8

Solid Copper Wire O-8

Stranded Copper Cable O-8

Compact Stranded Copper Cable O-9

Flexible Copper Stranded Cable O-10

Aluminum and ACSR Cable

Aluminum Tube O-11

Aluminum 1350 Cable
Bare-Classes AA and A O-11

Aluminum 1350 Cable
Bare-Class B O-11

ACSR Cable O-12

High Strength ACSR Cable O-12

Compact Aluminum 1350 Cable O-13

Aluminum Alloy 5005 Cable O-13

Aluminum 6201 Cable O-13

Aluminum Alloy 8000 Series "O"
Temper Cable O-14 - O-15

Compact ACSR Cable O-15

ACSR/TW Cable (Trap Wire) O-15 - O-16

AAC/TW Cable
(All Aluminum Trap Wire) O-16

ACAR Cable O-16

SSAC Cable O-17

Steel Conductors

Copperweld Cable O-18

Copperweld - Copper Cable O-18

Galvanized Steel Cable O-18

Alumoweld Cable O-19

AWG vs Metric Wire Sizes O-19

Inches - Millimeters

Conversion Chart O-20

Terminal Stud Size Chart O-21

Die Set Conversion Chart

(Obsolete Dies) O-22 - O-28

BURNDY® Conductor

Numbering System O-29 - O-30

Installation Tool Index O-31 - O-41

Catalog Numbers

Requiring MSDS O-42

Color Coding for Overhead

Connectors O-42

Color Coding for

AL/CU Connectors O-43

Color Coding for Copper

Lugs and Splices O-43

Alpha-Numeric Index O-44 - O-67

Product/Trade Name Index O-68

INTRODUCTION

BASIC ELECTRICAL CONNECTION PRINCIPLES

Basic Factors:

The basic factors which influence the design and performance of pressure wire connections are as follows:

1. Creep
2. Surface Oxide
3. Corrosion

A fourth factor, known as thermal effects, is also a consideration, but due to the technical nature and length of the topic, it will not be discussed in this publication.

At the outset it should be pointed out that these factors give rise to much more difficult problems in connections involving aluminum conductors than those encountered in copper to copper connections.

CREEP (COLD FLOW)

Creep is the cold flow of the metal under pressure, and it continues until the pressure reduces to a value at which any further creep is negligible. Creep properties depend on the particular metal or alloy and on its hardness; alloys having less creep than pure metals, and harder metals have less creep than soft metals. In a typical connection, the conductors are generally of pure metal and often of soft temper and therefore, subject to considerable creep. In addition, the condition is further exaggerated when aluminum is the conductor as compared to copper, since its creep rate is many times that of copper.

Effect of Creep: Figure 2 shows typical curves of total contact resistance plotted against total contact force. Curve A shows how the contact resistance continually decreases with increasing contact force. When the full contact force F_1 is reached, the contact resistance reaches the low value of R_1 . In general, the full tightening force on a connector greatly exceeds the maximum force for which there is no appreciable creep. Therefore, the force will gradually settle down to a value after which there will be no further significant creep. Fortunately, however, the

resistance does not climb back up along curve A, the tightening curve, but instead it follows a new curve B, the relaxing curve, along which the resistance changes very little, until the force relaxes to a value such as F_2 .

Admittedly, the point of "no appreciable creep" is difficult to define. For pure metals, especially in the soft state, there is always some creep, even at very low pressures at room temperature. However, we do know that the pressure required to produce the same creep rate is several times greater for copper than for aluminum. Thus, to permit the same contact force F_2 for aluminum and copper, the contact area A required for aluminum can be expected to be considerably greater than that required for copper. This explains why the contact areas for connectors for aluminum must be considerably greater than for copper, and why many light duty connectors for copper are entirely inadequate for aluminum, even when specially plated and when recommended compounds are used on the contact surfaces.

Relaxation: Relaxation of pressure due to creep, or for any other reason, would be a much more difficult factor in a pressure connection were it not for the relationship of contact pressure to contact resistance on the relaxation curve as shown in Figure 2. It is frequently observed that some time after the bolts of a clamp type connector are tightened, the bolt tensions are relaxed appreciably. The question arises as to whether it is necessary to retighten the bolts to the original torque value. In a properly designed connector, retightening is unnecessary since the contact resistance should increase very little due to the relaxation of pressure, as shown by the relaxation curve of Figure 2.

This fact is largely responsible for the successful operation of a compression connector. The application of the compression tool applies very high pressure, establishing very low contact resistance. The removal of the compression tool releases a very large proportion of this pressure, and creep further relaxes this pressure. Fortunately, the contact resistance increases very little due to this pressure relaxation.

Contact Force: The previous analysis shows that the total contact force largely determines the contact resistance. Thus, to achieve the desired low value of contact resistance, the proper size and number of bolts in a clamp type connector must be supplied, and the compression tool must apply the proper force to a compression connector. In addition, the connector must be

designed with sufficient structural strength, contact area, and resilience, to assure that the contact force cannot relax beyond the point where contact resistance begins to rise appreciably, as shown in Figure 2.

SURFACE OXIDE


The contact of pure metallic surfaces cannot be assured in practical connections. Surface contamination must be expected, especially surface oxidation. These surface films are insulators as far as contact resistance is concerned, and they must be broken to achieve metal to metal contact to make an adequate electrical connection. The difficulty of breaking the film depends on the nature of the film, its thickness, and the metal on which it is formed.

Copper oxide is generally broken down by reasonably low values of contact pressure. Unless the copper is badly oxidized, good contact can be obtained with very little or no cleaning.

Silver oxide is even more easily broken down by the contact pressure; and since silver oxide forms less readily at elevated temperatures, silver contact surfaces are preferred over copper when used for higher temperatures. For this reason, it is considered good practice to silver plate copper contact surfaces that must operate at temperatures over 200° C.

On the other hand, aluminum oxide is a hard, tenacious, high resistance film that forms very rapidly on the surface of aluminum exposed to air. In fact, it is the toughness of this film that gives aluminum its good corrosion resistance. The oxide film that forms after more than a few hours is too thick and tough to permit a low resistance contact without cleaning. The aluminum oxide film is transparent so that even the bright and clean appearance of an aluminum connector is no assurance that the low contact resistance can be attained without cleaning.

In addition to the necessity for cleaning the oxide from aluminum, the surface should be covered with a good connector compound to prevent the oxide from reforming. Common practice is to clean the surface with a wire brush or emery cloth. The compound should be applied immediately after cleaning, or the compound should be put on first and the surface scraped through the compound. Present practice is to scratch brush dry and to apply the compound immediately thereafter. This allows a more thorough job of cleaning the conductor.



INTRODUCTION (Continued)

Contact Compounds: Petrolatum or No-Oxid are good contact surface compounds for aluminum, but BURNDY® PENETROX A, a petrolatum type compound containing zinc dust, has the additional advantage of assisting in the breaking down of the contact resistance. How this is accomplished is not certain, but it appears that the zinc particles of PENETROX A probably act as current bridges in the breaks in the oxide film. For more complete information about the PENETROX® line of compounds, refer to the Accessories Section of this catalog.

Interstrand Resistance: The high contact resistance due to the oxide on the strands of an aluminum cable may be responsible for a poor distribution of current among the strands on the cable. Thus, the outer strands may carry much more than their share of the current and overheating of the cable may result. Tests have shown that even on new cable this effect of interstrand resistance can be considerable unless a good contact compound is used. The clamping action tends to break down the oxide and force the compound between the strands. This is particularly true of compression connectors due to the very high unit pressures developed.

The most effective way to break down interstrand resistance of aluminum cable is to use compression connectors filled with a compound having zinc particles. Then, when the end of the cable is inserted in the connector, the compound is forced between the strands where it very effectively breaks down the interstrand resistance upon application of the compressive force.

Plating Aluminum: Plating the contact surfaces of aluminum connectors will prevent the formation of aluminum oxide. Electro-tin, cadmium and zinc platings have been used for this purpose. However, the use of a plated aluminum conductor, does not make it less necessary to scratch brush the aluminum conductor, nor does it reduce the need for a good contact compound. Additional problems are introduced due to the plating on aluminum which render it of very doubtful value over the proper use of bare aluminum. This will be more fully discussed later.

CORROSION

The electrical conductivity and mechanical strength of an electrical connection must remain stable under the deteriorating influences of the environment. This deterioration is corrosion. It is the electrolytic action of moisture and other elements of the atmos-

phere in conjunction with the metals of the connection. If the conductors and connectors are of copper or a corrosion resistant copper alloy, corrosion is usually a minor factor. However, it is a very vital factor if aluminum is involved.

If moisture can be kept away from the connection, corrosion will not be a factor. The electrical connection of a high voltage splice on insulated cable is generally free from corrosion since the taping must be moisture-proof. Similarly, taping may be used to avoid corrosion on bare cable, provided it excludes moisture. It is difficult to get a good tape seal to the conductor itself, especially on stranded cable. If moisture does penetrate the taping, it will not dry out as readily as if the joint were untaped. Various plastic materials are available today for covering low voltage connections or for bare conductor connections on high voltage. Unless such coverings are completely moisture-proof, it is better to rely on installation with a good contact compound, using a connector designed to resist corrosion.

Galvanic Action: Whenever dissimilar metals are in the presence of an electrolyte, a difference in electric potential is developed. One metal becomes the cathode and receives a positive charge. The other becomes the anode and receives a negative charge. When these metals are in contact, an electrical current will flow, as in the case of any short-circuited electric cell. This electrolytic action causes an attack of the anodic metal, leaving the cathodic metal unharmed. The extent of the attack is proportional to the strength of the electrolytic current, which in turn is proportional to the electric potential difference developed.

The magnitude of the potential difference generated between two dissimilar metals can be seen by the position of these metals in the electrolytic series. Figure 3 is such a series. When two metals are in contact in an electrolyte, the one higher up in this series is the anode, the corroded metal, while the one lower is the cathode, the protected metal. The further apart the metals are in this series, the greater the electrolytic potential difference, and the greater the attack to the anodic metal.

Note that copper and aluminum are quite far apart in the series, copper being cathodic and aluminum anodic. Hence, when aluminum and copper are in contact in an electrolyte, the aluminum can be expected to be severely attacked.

Crevice Corrosion: Electrolytic attack can also occur between like metals due to a phenomenon known as oxygen concentration cell or crevice corrosion. Since oxygen is necessary for corrosive action, a variation in the concentration of oxygen where a metal is exposed to an electrolyte will generate a difference of potential, and cause a corrosive attack in the oxygen starved area. Thus, since an electrolyte in a deep crevice is freely exposed to the air at the outside, the concentration of oxygen will be greatest at the mouth of the crevice. Then corrosion can be expected to occur in the crevice remote from the surface. Crevice corrosion can be prevented if the crevice is filled with a compound to exclude moisture. Thus, within the contact groove of an aluminum connector containing an aluminum conductor, there will be numerous crevices in which corrosion will take place unless a good connector compound is applied during installation. Copper, being a more noble metal, appears to be much less subject to crevice corrosion.


Corrosion Testing: The effectiveness of an electrical connection to resist corrosion can be tested in the laboratory under conditions designed to greatly accelerate the natural corrosive conditions of actual service. The most widely accepted means is the standard salt spray chamber. In this chamber the specimens are placed in a salt fog made by atomizing a 20% salt solution at 100 deg F.

FCI - BURNDY Electrical as well as other manufacturers and utility companies, have done a great deal of testing and a considerable area of agreement has been reached. There are, however, minor differences in recommended practices. The problem is concerned with aluminum and aluminum to copper connections since the effect of corrosion on copper to copper connections is far less serious. Let us study the recommended practices.

Aluminum to Aluminum Connections: For joining aluminum to aluminum conductors, there is little disagreement that an aluminum bodied connector is the proper choice, since this obviously eliminates the galvanic corrosion of dissimilar metals. However, even in this case, care must be taken to prevent crevice corrosion and to select an alloy of aluminum for the connector body that is free from cracking due to stress corrosion.

Aluminum to Copper Connections: Similarly, for joining aluminum to copper conductors, an aluminum bodied connector is the best choice since it prevents galvanic corrosion of the aluminum conductor, the


INTRODUCTION (Continued)

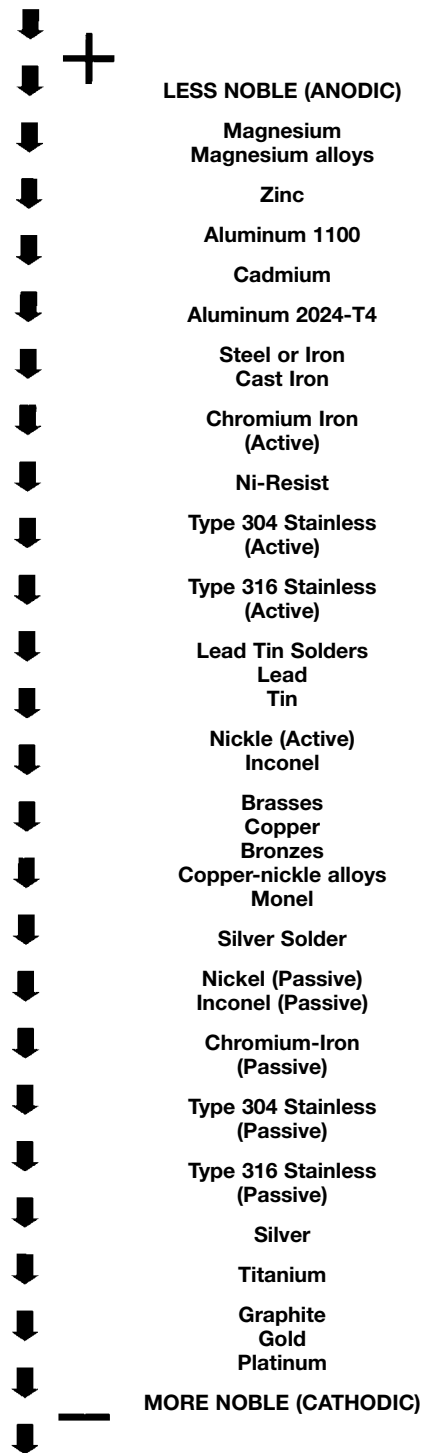

most vulnerable element to attack in the connection. Realizing this, BURNDY® initiated a research program aimed at finding the best way to make an aluminum connector suitable for joining aluminum to copper conductors.

This led to the evolution of the "Massive Anode Principle" of connector design for joining conductors of dissimilar metal. On the basis of this principal, properly designed, all-aluminum connectors became available for universal use in joining aluminum to aluminum or aluminum to copper conductors.

Massive Anode Principle: By making the aluminum connector massive in comparison to the copper conductor, when the copper conductor emerges from the connector, the electrolytic current density over the exposed face of the aluminum connector is greatly reduced. This is schematically represented in Figure 4. Since the rate of corrosion is directly related to the current density on the surface of the anodic material, the relatively large face of the aluminum connector will suffer only minor attack.

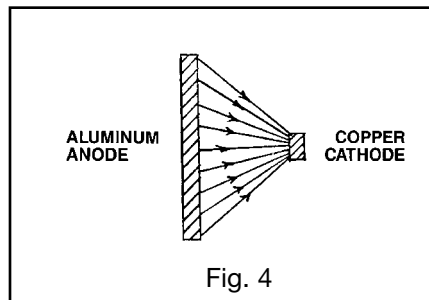

In addition, because the aluminum connector body is massive in the region where the corrosion occurs, the small loss of metal caused by corrosion is insignificant, even after long periods of service. Furthermore, the connector design should be such that clamping bolts, and areas of high stress which provide structural strength, are not in the regions subject to galvanic attack.

The effectiveness of this theory has been amply demonstrated in salt spray corrosion tests in which the connectors were subject to 1,000 hours in the salt spray fog with only minor corrosive pitting adjacent to the copper conductor, as seen in Figure 5. In addition, the aluminum conductor was completely protected, and the joint resistance remained virtually unchanged. The test involved a wide variety of sizes and types of connectors showing the effectiveness for small service connectors as well as large power connectors. Figure 6 shows a large all aluminum

clamp type T connector installed on 3½" diameter copper run and 750 kcmil aluminum tap. The figure shows this connector opened up after the 1,400 hours of the salt spray test. Note that the contact surfaces are bright and clean and the only evidence is minor pitting along the faces adjacent to the copper.

*It should be emphasized that a good compound should be used on the contact surfaces whether aluminum or copper is used in an aluminum connector.

Position of Conductor: A properly designed aluminum connector for joining aluminum to copper must provide adequate separation between the conductors to prevent electrolytic attack on the aluminum conductor. Even then, it is good practice to install the aluminum conductor above the copper conductor if possible. This will prevent pitting of the aluminum conductor due to copper salts being washed over the aluminum.

Plated Aluminum Connectors: Plating has been used as a means to make an aluminum connector suitable for copper conductor. Such platings as copper, zinc, tin and cadmium have been used. The plating of aluminum is much more critical than plating a more noble metal such as copper. In addition, a preplate, usually of copper or brass, must be applied, thus introducing numerous metals and further possibilities for galvanic corrosion.

To be effective in reducing galvanic corrosion between the copper conductor and the aluminum connector, the plated metal must be closer in the Electrolytic Series to copper than is aluminum. It must therefore, be cathodic to aluminum. Since porosity and minor scratches are always present, galvanic action can be expected in the presence of moisture, resulting in attack of the aluminum under the plating. Corrosion tests reveal attack in the form of a mottled appearance and flaking of the plating.

In addition, the presence of plated metal can cause galvanic attack of the aluminum conductor, thus reducing the protection offered to this conductor in an aluminum connector.

Cleaning and the Use of Compound: It should be emphasized that when aluminum connectors or conductors are involved, proper cleaning of the aluminum and the use of a good connector compound, such as BURNDY® PENETROX A, are essential for trouble-free service. BURNDY®, as well as other manufacturers, provide the contact grooves with a coating to make it unnecessary to clean the connectors, but in all cases,

INTRODUCTION (Continued)

the aluminum conductor should be cleaned by means such as scratch brushing, and immediately coated with the connector compound.

To simplify the application of the compound, and to assure its use, almost all BURNDY® aluminum connectors, except the large clamp type substation connectors, are supplied factory filled with PENETROX compound. For the tubular compression connectors, the tubular barrels are sufficiently filled with PENETROX and capped. For other types, the contact grooves are filled with PENETROX and enclosed in plastic packaging in a process called "Stripsealing".

Clamp vs. Compression: In general, a compression connection can be expected to be more corrosion resistant than a clamp connection. The high pressures applied in a compression connector more effectively seal the contact against the penetration of moisture. The tubular sleeve of a compression connector has no side openings such as exist in clamp connectors between the clamping members. On the other hand, the clamp connector can be made more corrosion resistant if the conductor grooves conform more closely with the conductor contour. Thus a clamp connector made to accommodate a wide range of conductor sizes cannot be expected to be as corrosion resistant as one designed for one specific conductor size. Nevertheless, the differences in effectiveness of various designs can be minimized if a good contact compound is used.

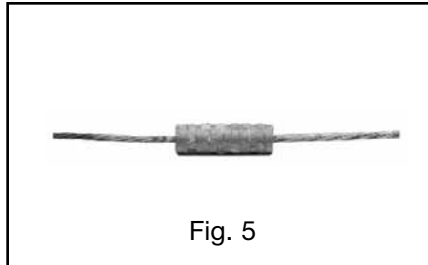


Fig. 5

Negligible Corrosion of Severe Salt Spray on Compression Connector Joining Aluminum to Copper.

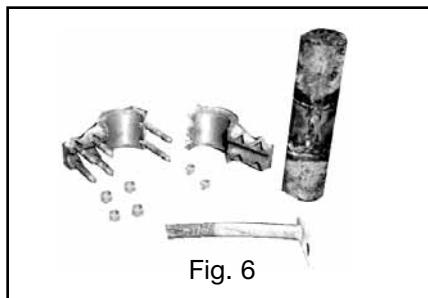


Fig. 6

Large Aluminum Bolted Connector Joining Copper Run to Aluminum Tap After Severe Salt Spray Test.

HARDWARE DATA

RECOMMENDED
TIGHTENING TORQUE

The hardware used in connectors must be compatible with the connector material, have high mechanical strength and be corrosion resistant.

Copper alloy connectors have hardware made of DURIUM™, which is BURNDY's trade name for silicon bronze alloy ASTMB99. This material was first introduced by BURNDY® in 1927 for use in outdoor construction, and today, is the standard throughout the industry.

Aluminum connectors generally have aluminum alloy hardware. The bolts are 2024T4 and anodized to resist corrosion. The nuts are 6061T6, which is resistant to corrosion


Steel Hardware		Aluminum Hardware	
Bolt Size	Recommended Torque (Inch Pounds)	Bolt Size	Recommended Torque (Inch Pounds)
1/4 - 20	80	1/2 - 13	300
5/16 - 18	180	5/8 - 11	480
3/8 - 16	240	3/4 - 10	650
1/2 - 13	480		
5/8 - 11	660		
3/4 - 10	1050		

and does not require anodizing. Bolts are lubricated to eliminate galling and to provide consistent clamping forces.

The size material for clamping hardware are selected to provide the required force when tightened to the recommended torque. To reduce or greatly exceed the recommended torque can adversely affect the performance of the connector.

DURIUM™
(SILICON BRONZE)


HEXAGONAL BOLT DATA

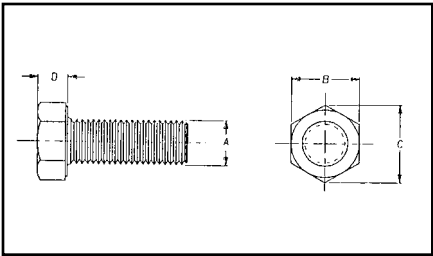

② CATALOG NO. SERIES	"A" (BOLT SIZE)	"B"	"C"	"D"	③ RECOMMENDED TORQUE (in-lb)	MIN. BREAKING FORCE (lb)	MIN. SHEARING FORCE (lb)
25X__HEB	1/4 - 20 UNC	7/16	.50	.16	80	1,780	990
31X__HEB	5/16 - 18 UNC	1/2	.56	.21	180	2,930	1,640
38X__HEB	3/8 - 16 UNC	9/16	.65	.24	240	4,350	2,430
50X__HEB	1/2 - 13 UNC	3/4	.87	.32	480	7,950	4,460
62X__HEB	5/8 - 11 UNC	15/16	1.08	.40	660	12,700	7,100
75X__HEB	3/4 - 10 UNC	1-1/8	1.30	.48	1050	17,510	10,540

1. Material: DURIUM™ (Silicon Bronze)
② " __ " is substituted for bolt length. Consult sales representative for available lengths.
③ These torque values develop maximum bolt preload.
4. This drawing is based on BURNDY® engineering spec.

RECOMMENDED
TERMINATION
HARDWARE

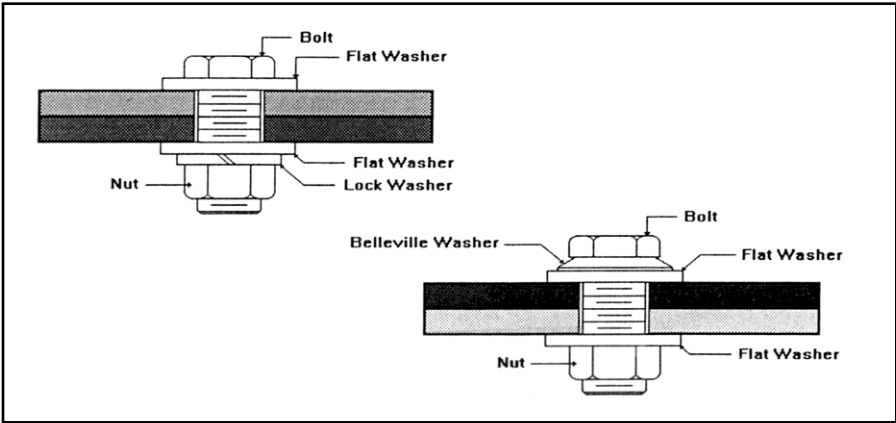

RECOMMENDED
TIGHTENING TORQUE

PER UL486A AND UL486B

Test Wire Size Installed In Connector AWG or kcmil (mm ¹)		Tightening Torque, Pound-Inches (N.m)			
		Slotted Head No. 10 and Larger ¹		Hexagonal Head - External Drive Socket Wrench	
				Split-Bolt Connectors	Other Connectors
		Slot Width - 0.047 Inch (1.2 mm) or Less and Slot Length 1/4 Inch (6.4 mm) or Less	Slot Width - Over 0.047 Inch (1.2 mm) or Slot Length - Over 1/4 Inch (6.4 mm)		
18-10	(.082-5.3)	20 (2.3)	35 (4.0)	80 (9.0)	75 (8.5)
8	(8.4)	25 (2.8)	40 (4.5)	80 (9.0)	75 (8.5)
6-4	(13.3-21.2)	35 (4.0)	45 (5.1)	165 (18.6)	110 (12.4)
3	(26.7)	35 (4.0)	50 (5.6)	275 (31.1)	150 (16.9)
2	(33.6)	40 (4.5)	50 (5.6)	275 (31.1)	150 (16.9)
1	(42.4)	-	50 (5.6)	275 (31.1)	150 (16.9)
1/0-2/0	(53.5-67.4)	-	50 (5.6)	385 (43.5)	180 (20.3)
3/0-4/0	(85.0-107.2)	-	50 (5.6)	500 (56.5)	250 (28.2)
250-350	(127-177)	-	50 (5.6)	650 (73.4)	325 (36.7)
400	(203)	-	50 (5.6)	825 (93.2)	325 (36.7)
500	(253)	-	50 (5.6)	825 (93.2)	375 (42.4)
600-750	(304-380)	-	50 (5.6)	1000 (113.0)	375 (42.4)
800-1000	(406-508)	-	50 (5.6)	1000 (124.3)	500 (56.5)
1250-2000	(635-1010)	-	-	1100 (124.3)	600 (67.8)

TABLE 7.4:

¹ For values of slot width or length not corresponding to those specified, select the largest torque value associated with

the conductor size. Slot width is the nominal design value. Slot length is measured at the bottom of the slot.

Slot Length of Screw Inch (mm) ²	Tightening Torque, Pound-Inches (N-m)	
	Slot Width of Screw Inch (mm) ¹	
	Smaller Than 0.047 (1.2)	0.047 (1.2) and Larger
Less than 5/32 (4)	7 (0.79)	9 (1.0)
5/32 (4)	7 (0.79)	12 (1.4)
3/16 (4.8)	7 (0.79)	12 (1.4)
7/32 (5.6)	7 (0.79)	12 (1.4)
1/4 (6.4)	9 (1.0)	12 (1.4)
9/32 (7.1)		15 (1.7)
Above 9/32 (7.1)		20 (2.3)

TABLE 7.5:

¹ Slot width is the nominal design value
² For slot lengths of intermediate values, select torques pertaining to next shorter slot length. Also, see note ¹ to Table 7.4 for screws with multiple tightening means. Slot length is to be measured at the bottom of the slot.

Socket Size Across Flats Inch (mm) ¹	Tightening Torque, Pound-Inches (N-m)
1/8 (3.2)	45 (5.1)
5/32 (4.0)	100 (11.4)
3/16 (4.8)	120 (13.8)
7/32 (5.6)	150 (17.0)
1/4 (6.4)	200 (22.6)
5/16 (7.9)	275 (31.1)
3/8 (9.5)	375 (42.4)
1/2 (12.7)	500 (56.5)
9/16 (14.3)	600 (67.8)

TABLE 7.6:

¹ See note ¹ to Table 7.4 for screws with multiple tightening means.

CABLE DATA

COPPER TUBE (BUS)

SIZE OF TUBE IPS	DIAMETER OF TUBE (Inches)		WALL THICKNESS (Inches)
	OUTSIDE	INSIDE	
STANDARD PIPE SIZES			
1/4"	0.540	0.375	0.082 5
3/8"	0.675	0.494	0.090 5
1/2"	0.840	0.625	0.107 5
3/4"	1.050	0.822	0.114 0
1"	1.315	1.062	0.126 5
1-1/4"	1.660	1.368	0.146 0
1-1/2"	1.900	1.600	0.150 0
2"	2.375	2.062	0.156 5
2-1/2"	2.875	2.500	0.187 5
3"	3.500	3.062	0.219 0
3-1/2"	4.000	3.500	0.250 0
4"	4.500	4.000	0.250 0
4-1/2"	5.000	4.500	0.250 0
5"	5.563	5.063	0.250 0
6"	6.625	6.125	0.250 0
EXTRA HEAVY PIPE SIZES			
1/4"	0.540	0.294	0.123
3/8"	0.675	0.421	0.127
1/2"	0.840	0.542	0.149
3/4"	1.050	0.736	0.157
1"	1.315	0.951	0.182
1-1/4"	1.660	1.272	0.194
1-1/2"	1.900	1.494	0.203
2"	2.375	1.933	0.221
2-1/2"	2.875	2.315	0.280
3"	3.500	2.892	0.304
3-1/2"	4.000	3.358	0.321
4"	4.500	3.818	0.341
4-1/2"	5.000	4.250	0.375
5"	5.563	4.813	0.375
6"	6.625	5.751	0.437
DOUBLE EXTRA HEAVY PIPE SIZES			
1/2"	0.840	0.252	0.294
3/4"	1.050	0.434	0.308
1"	1.315	0.599	0.358
1-1/4"	1.660	0.896	0.382
1-1/2"	1.900	1.100	0.400
2"	2.375	1.503	0.436
2-1/2"	2.875	1.771	0.552
3"	3.500	2.300	0.600
3-1/2"	4.000	2.728	0.636
4"	4.500	3.152	0.674
4-1/2"	5.000	3.580	0.710
5"	5.563	4.063	0.750
6"	6.625	4.897	0.864

Tube dimensions (excepting wall thickness, of double extra heavy) taken from A.S.T.M. Specification B42-33.
Tubular values based on a density of 0.322 pound per cubic inch.

* Conductivity of 98% I.A.C.S. at 20° C or 68° F.

SOLID COPPER WIRE

(ASTM B1, B2, & B3)

SIZE AWG (SOLID)	WIRE DIA Inch	HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
		NORMAL BREAKING LOAD Pounds	MINIMUM BREAKING LOAD Pounds	ELONGATION IN 10 IN. % MIN.
18	.040 30	85.76	67.61	25
17	.045 26	107.5	84.71	25
16	.050 82	135.2	106.2	25
15	.057 07	170.0	133.0	25
14	.064 08	213.8	166.6	25
13	.071 96	268.2	208.0	25
12	.080 81	337.0	261.6	25
11	.090 74	422.5	327.6	25
10	.101 9	529.2	410.4	25
9	.114 4	661.0	514.2	30
8	.128 5	826.0	643.9	30
7	.128 5	1,030	806.6	30
6	.162 0	1,280	1,010	30
5	.181 9	1,591	1,265	30
4	.204 3	1,970	1,584	30
3	.229 4	2,439	1,984	30
2	.257 6	3,003	2,450	30
1	.289 3	3,688	3,024	30
1/0	.324 9	4,519	3,730	35
2/0	.364 8	5,518	4,599	35
3/0	.409 6	6,722	5,667	35
4/0	.460 0	8,143	6,980	35

STRANDED COPPER WIRE

(ASTM B8 EXCLUDING BREAKING LOADS)

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
STRANDED		Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds
Circular Mills	AWG						
1,022	20	B	7	0.036 3	50.04	40.67	32.09
1,624	18	B	7	0.045 6	78.99	63.91	51.03
2,583	16	B	7	0.057 6	124.7	100.4	81.14
4,107	14	B	7	0.072 6	197.1	157.7	124.2
6,530	12	B	7	0.091 5	311.1	247.7	197.5
10,380	10	B	7	0.116	491.7	388.9	314.0
13,090	9	B	7	0.130	618.2	487.4	395.9
16,510	8	B	7	0.146	777.2	610.7	499.2
20,820	7	B	7	0.164	977.1	765.2	629.5
26,250	6	B	7	0.184	1,288	958.6	793.8
33,100	5	B	7	0.206	1,542	1,201	1001
41,740	4	AA	3	0.254	1,879	1,465	1213
41,740	4	B&A	7	0.232	1,938	1,505	1262
52,630	3	AA	3	0.285	2,359	1,835	1530

CABLE DATA (Continued)

STRANDED COPPER WIRE (Continued)
(ASTM B8 EXCLUDING BREAKING LOADS)

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
STRANDED		Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds
Circular Mills	AWG						
52,630	3	B&A	7	0.260	2,433	1,885	1592
66,370	2	AA	3	0.320	2,913	2,299	1929
66,370	2	B&A	7	0.292	3,045	2,361	2007
83,690	1	AA	3	0.360	3,621	2,879	2432
83,690	1	A	7	0.328	3,804	2,958	2432
83,690	1	B	19	0.332	3,899	3,037	2531
105,500	1/0	A&A	7	0.368	4,752	3,705	3067
105,500	1/0	—	12	0.390	4,841	3,755	3191
105,500	1/0	B	19	0.373	4,901	3,805	3191
133,100	2/0	A&A	7	0.414	5,926	4,640	3867
133,100	2/0	—	12	0.438	6,048	4,703	3867
133,100	2/0	B	19	0.419	6,152	4,765	4024
167,800	3/0	A&A	7	0.464	7,366	5,812	4876
167,800	3/0	—	12	0.492	7,556	5,890	4876
167,800	3/0	B	19	0.470	7,698	5,970	5074
211,600	4/0	A&A	7	0.522	9,154	7,278	6149
211,600	4/0	—	12	0.522	9,483	7,378	6149
211,600	4/0	B	19	0.528	9,617	7,479	6149

COMPACT STRANDED COPPER CABLE
(ASTM SPEC.B496)

CONDUCTOR SIZE		NUMBER OF WIRES	CONDUCTOR DIAMETER (IN.)
KCMIL (OR)	AWG		
1000		61 ¹	1.060
900		61 ¹	0.999
800		61 ¹	0.938
750		61 ¹	0.908
700		61 ¹	0.877
650		61 ¹	0.845
600		61 ¹	0.813
550		61 ¹	0.775
500		37 ²	0.736
450		37 ²	0.700
400		37 ²	0.659
350		37 ²	0.616
300		37 ²	0.570
250		37 ²	0.520
	4/0	19 ³	0.475
	3/0	19 ³	0.423
	2/0	19 ³	0.376
	1/0	19 ³	0.336
	1	19 ³	0.299
	2	7	0.268
	4	7	0.213
	6	7	0.169
	8	7	0.134

¹ 58 Wires Minimum
² 35 Wires Minimum
³ 18 Wires Minimum

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
Circular Mills	Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds
250	AA	12	0.600	11,130	8,717	7265	
250	A	19	0.574	11,360	8,986	7265	
250	B	37	0.575	11,560	8,952	7559	
300	AA	12	0.657	13,170	10,390	8718	
300	A	19	0.628	13,510	10,530	8718	
300	B	37	0.630	13,870	10,740	9071	
350	AA	12	0.710	15,140	12,040	10170	
350	A	19	0.679	15,590	12,200	10170	
350	B	37	0.681	16,060	12,450	10580	
400	A&AA	19	0.726	17,810	13,950	11620	
400	B	37	0.728	18,320	14,140	11620	
450	AA	19	0.770	19,750	15,590	13080	
450	B&A	37	0.772	20,450	15,900	13080	
500	AA	19	0.811	21,950	17,320	14530	
500	B&A	37	0.813	22,510	17,550	14530	
600	A&AA	37	0.891	27,020	21,060	17440	
600	B	61	0.893	27,530	21,350	18140	
700	AA	37	0.963	31,170	24,410	20340	
700	B&A	61	0.964	31,820	24,740	20340	
750	AA	37	0.997	33,400	26,150	21790	
750	B&A	61	0.998	34,090	26,510	21790	
800	AA	37	1.029	35,120	27,710	23250	
800	B&A	61	1.031	36,360	28,270	23250	
900	AA	37	1.092	39,510	31,170	26150	
900	B&A	61	1.094	40,520	31,590	26150	
1,000	AA	37	1.151	43,830	34,400	29060	
1,000	B&A	61	1.152	45,030	35,100	29060	
1,250	A	61	1.288	55,670	43,590	36320	
1,250	B	91	1.289	56,280	43,880	36320	
1,500	A	61	1.411	65,840	51,950	43590	
1,500	B	91	1.412	67,540	52,650	43590	
1,750	A	91	1.526	77,930	61,020	50850	
1,750	B	127	1.526	78,800	61,430	50850	
2,000	A	91	1.630	87,790	69,270	58120	
2,000	B	127	1.632	90,050	70,210	58120	

CABLE DATA (Continued)

FLEXIBLE COPPER STRANDED CABLE

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
8	41/.0201	.156	I
8	49/.0184	.166	G
8	133/.0111	.167	H
8	168/.010	.157	K
8	420/.0063	.162	M
7	49/.0206	.185	G
7	52/.0201	.185	I
7	133/.0125	.188	H
7	210/.010	.179	K
7	532/.0063	.196	M
6	49/.0231	.208	G
6	63/.0201	.207	I
6	133/.0140	.210	H
6	266/.010	.210	K
6	665/.0063	.215	M
5	49/.0260	.234	G
5	84/.0201	.235	I
5	133/.0158	.237	H
5	336/.010	.235	K
5	836/.0063	.240	M
4	49/.0292	.263	G
4	105/.0201	.263	I
4	133/.0177	.266	H
4	420/.010	.272	K
4	1064/.0063	.269	M
3	49/.0328	.295	G
3	133/.0199	.299	H
3	133/.0201	.291	I
3	532/.010	.304	K
3	1323/.0063	.305	M
2	49/.0368	.331	G
2	133/.0223	.335	H
2	161/.0201	.319	I
2	665/.010	.338	K
2	1666/.0063	.337	M
1	133/.0251	.377	G
1	210/.0201	.367	I
1	259/.018	.378	H
1	836/.010	.397	K
1	2107/.0063	.376	M
1/0	133/.0282	.423	G
1/0	259/.0202	.424	H
1/0	266/.0201	.441	I
1/0	1064/.010	.451	K
1/0	2646/.0063	.423	M
2/0	133/.0316	.474	G
2/0	259/.0227	.477	H
2/0	342/.0201	.500	I
2/0	1323/.010	.470	K
2/0	3325/.0063	.508	M
3/0	133/.0355	.533	G
3/0	259/.0255	.536	H
3/0	418/.0201	.549	I
3/0	1666/.010	.533	K
3/0	4256/.0063	.576	M
4/0	133/.0399	.599	G
4/0	259/.0286	.601	H
4/0	532/.0201	.613	I
4/0	2107/.010	.627	K
4/0	5320/.0063	.645	M

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
250	259/.0311	.650	G
250	427/.0242	.653	H
250	637/.0201	.682	I
250	2499/.010	.682	K
250	6384/.0063	.713	M
300	259/.0340	.714	G
300	427/.0265	.716	H
300	735/.0201	.737	I
300	2989/.010	.768	K
300	7581/.0063	.768	M
350	259/.0368	.773	G
350	427/.0286	.772	H
350	882/.0201	.800	I
350	3458/.010	.809	K
350	8806/.0063	.825	M
400	259/.0393	.825	G
400	427/.0306	.826	H
400	980/.0201	.831	I
400	3990/.010	.878	K
400	10101/.0063	.901	M
450	259/.0417	.876	G
450	427/.0325	.878	H
450	1127/.0201	.894	I
450	4522/.010	.933	K
450	11396/.0063	.940	M
500	259/.0439	.922	G
500	427/.0342	.923	H
500	1225/.0201	.941	I
500	5054/.010	.988	K
500	12691/.0063	.997	M
600	427/.0375	1.013	G
600	703/.0292	1.022	H
600	1470/.0201	1.027	I
600	5985/.010	1.125	K
600	14945/.0063	1.084	M
700	427/.0405	1.094	G
700	703/.0316	1.106	H
700	1729/.0201	1.194	I
700	6916/.010	1.207	K
700	17507/.0063	1.183	M
800	427/.0433	1.169	G
800	703/.0337	1.180	H
800	1995/.0201	1.290	I
800	7980/.010	1.305	K
800	20069/.0063	1.256	M
900	427/.0459	1.239	G
900	703/.0358	1.253	H
900	2261/.0201	1.372	I
900	9065/.010	1.323	K
900	22631/.0063	1.331	M
1000	427/.0484	1.307	G
1000	703/.0377	1.320	H
1000	2527/.0201	1.427	I
1000	10101/.010	1.419	K
1000	25193/.0063	1.404	M

CABLE DATA (Continued)

FLEXIBLE COPPER STRANDED CABLE

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
8	41/.0201	.156	I
8	49/.0184	.166	G
8	133/.0111	.167	H
8	168/.010	.157	K
8	420/.0063	.162	M
7	49/.0206	.185	G
7	52/.0201	.185	I
7	133/.0125	.188	H
7	210/.010	.179	K
7	532/.0063	.196	M
6	49/.0231	.208	G
6	63/.0201	.207	I
6	133/.0140	.210	H
6	266/.010	.210	K
6	665/.0063	.215	M
5	49/.0260	.234	G
5	84/.0201	.235	I
5	133/.0158	.237	H
5	336/.010	.235	K
5	836/.0063	.240	M
4	49/.0292	.263	G
4	105/.0201	.263	I
4	133/.0177	.266	H
4	420/.010	.272	K
4	1064/.0063	.269	M
3	49/.0328	.295	G
3	133/.0199	.299	H
3	133/.0201	.291	I
3	532/.010	.304	K
3	1323/.0063	.305	M
2	49/.0368	.331	G
2	133/.0223	.335	H
2	161/.0201	.319	I
2	665/.010	.338	K
2	1666/.0063	.337	M
1	133/.0251	.377	G
1	210/.0201	.367	I
1	259/.018	.378	H
1	836/.010	.397	K
1	2107/.0063	.376	M
1/0	133/.0282	.423	G
1/0	259/.0202	.424	H
1/0	266/.0201	.441	I
1/0	1064/.010	.451	K
1/0	2646/.0063	.423	M
2/0	133/.0316	.474	G
2/0	259/.0227	.477	H
2/0	342/.0201	.500	I
2/0	1323/.010	.470	K
2/0	3325/.0063	.508	M
3/0	133/.0355	.533	G
3/0	259/.0255	.536	H
3/0	418/.0201	.549	I
3/0	1666/.010	.533	K
3/0	4256/.0063	.576	M
4/0	133/.0399	.599	G
4/0	259/.0286	.601	H
4/0	532/.0201	.613	I
4/0	2107/.010	.627	K
4/0	5320/.0063	.645	M

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
250	259/.0311	.650	G
250	427/.0242	.653	H
250	637/.0201	.682	I
250	2499/.010	.682	K
250	6384/.0063	.713	M
300	259/.0340	.714	G
300	427/.0265	.716	H
300	735/.0201	.737	I
300	2989/.010	.768	K
300	7581/.0063	.768	M
350	259/.0368	.773	G
350	427/.0286	.772	H
350	882/.0201	.800	I
350	3458/.010	.809	K
350	8806/.0063	.825	M
400	259/.0393	.825	G
400	427/.0306	.826	H
400	980/.0201	.831	I
400	3990/.010	.878	K
400	10101/.0063	.901	M
450	259/.0417	.876	G
450	427/.0325	.878	H
450	1127/.0201	.894	I
450	4522/.010	.933	K
450	11396/.0063	.940	M
500	259/.0439	.922	G
500	427/.0342	.923	H
500	1225/.0201	.941	I
500	5054/.010	.988	K
500	12691/.0063	.997	M
600	427/.0375	1.013	G
600	703/.0292	1.022	H
600	1470/.0201	1.027	I
600	5985/.010	1.125	K
600	14945/.0063	1.084	M
700	427/.0405	1.094	G
700	703/.0316	1.106	H
700	1729/.0201	1.194	I
700	6916/.010	1.207	K
700	17507/.0063	1.183	M
800	427/.0433	1.169	G
800	703/.0337	1.180	H
800	1995/.0201	1.290	I
800	7980/.010	1.305	K
800	20069/.0063	1.256	M
900	427/.0459	1.239	G
900	703/.0358	1.253	H
900	2261/.0201	1.372	I
900	9065/.010	1.323	K
900	22631/.0063	1.331	M
1000	427/.0484	1.307	G
1000	703/.0377	1.320	H
1000	2527/.0201	1.427	I
1000	10101/.010	1.419	K
1000	25193/.0063	1.404	M

CABLE DATA (Continued)

FLEXIBLE COPPER STRANDED CABLE

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
8	41/.0201	.156	I
8	49/.0184	.166	G
8	133/.0111	.167	H
8	168/.010	.157	K
8	420/.0063	.162	M
7	49/.0206	.185	G
7	52/.0201	.185	I
7	133/.0125	.188	H
7	210/.010	.179	K
7	532/.0063	.196	M
6	49/.0231	.208	G
6	63/.0201	.207	I
6	133/.0140	.210	H
6	266/.010	.210	K
6	665/.0063	.215	M
5	49/.0260	.234	G
5	84/.0201	.235	I
5	133/.0158	.237	H
5	336/.010	.235	K
5	836/.0063	.240	M
4	49/.0292	.263	G
4	105/.0201	.263	I
4	133/.0177	.266	H
4	420/.010	.272	K
4	1064/.0063	.269	M
3	49/.0328	.295	G
3	133/.0199	.299	H
3	133/.0201	.291	I
3	532/.010	.304	K
3	1323/.0063	.305	M
2	49/.0368	.331	G
2	133/.0223	.335	H
2	161/.0201	.319	I
2	665/.010	.338	K
2	1666/.0063	.337	M
1	133/.0251	.377	G
1	210/.0201	.367	I
1	259/.018	.378	H
1	836/.010	.397	K
1	2107/.0063	.376	M
1/0	133/.0282	.423	G
1/0	259/.0202	.424	H
1/0	266/.0201	.441	I
1/0	1064/.010	.451	K
1/0	2646/.0063	.423	M
2/0	133/.0316	.474	G
2/0	259/.0227	.477	H
2/0	342/.0201	.500	I
2/0	1323/.010	.470	K
2/0	3325/.0063	.508	M
3/0	133/.0355	.533	G
3/0	259/.0255	.536	H
3/0	418/.0201	.549	I
3/0	1666/.010	.533	K
3/0	4256/.0063	.576	M
4/0	133/.0399	.599	G
4/0	259/.0286	.601	H
4/0	532/.0201	.613	I
4/0	2107/.010	.627	K
4/0	5320/.0063	.645	M

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
250	259/.0311	.650	G
250	427/.0242	.653	H
250	637/.0201	.682	I
250	2499/.010	.682	K
250	6384/.0063	.713	M
300	259/.0340	.714	G
300	427/.0265	.716	H
300	735/.0201	.737	I
300	2989/.010	.768	K
300	7581/.0063	.768	M
350	259/.0368	.773	G
350	427/.0286	.772	H
350	882/.0201	.800	I
350	3458/.010	.809	K
350	8806/.0063	.825	M
400	259/.0393	.825	G
400	427/.0306	.826	H
400	980/.0201	.831	I
400	3990/.010	.878	K
400	10101/.0063	.901	M
450	259/.0417	.876	G
450	427/.0325	.878	H
450	1127/.0201	.894	I
450	4522/.010	.933	K
450	11396/.0063	.940	M
500	259/.0439	.922	G
500	427/.0342	.923	H
500	1225/.0201	.941	I
500	5054/.010	.988	K
500	12691/.0063	.997	M
600	427/.0375	1.013	G
600	703/.0292	1.022	H
600	1470/.0201	1.027	I
600	5985/.010	1.125	K
600	14945/.0063	1.084	M
700	427/.0405	1.094	G
700	703/.0316	1.106	H
700	1729/.0201	1.194	I
700	6916/.010	1.207	K
700	17507/.0063	1.183	M
800	427/.0433	1.169	G
800	703/.0337	1.180	H
800	1995/.0201	1.290	I
800	7980/.010	1.305	K
800	20069/.0063	1.256	M
900	427/.0459	1.239	G
900	703/.0358	1.253	H
900	2261/.0201	1.372	I
900	9065/.010	1.323	K
900	22631/.0063	1.331	M
1000	427/.0484	1.307	G
1000	703/.0377	1.320	H
1000	2527/.0201	1.427	I
1000	10101/.010	1.419	K
1000	25193/.0063	1.404	M

CABLE DATA (Continued)

COMPACT ALUMINUM 1350 CABLE
(ASTM B400) EXTRA HARD

Conductor Size		Class	Number of Wire	Conductor Diameter Inches	Breaking Strength Lbs.
KCMIL	AWG				
1000		B	61 ¹	1.060	17,700
900		B	61 ¹	0.999	15,900
800		B	61 ¹	0.938	14,400
750		B	61 ¹	0.908	13,500
700		B	61 ¹	0.877	12,900
650		B	61 ¹	0.845	11,900
600		B	61 ¹	0.813	11,500
556		AA	19 ³	0.780	9,750
550		B	61 ¹	0.775	10,500
500		B	37 ²	0.736	9,110
500		AA	19 ³	0.736	8,760
477		AA	19 ³	0.722	8,360
450		B	37 ²	0.700	8,200
400		B	37 ²	0.659	7,440
397		AA, A	19 ³	0.659	7,110
350		B	37 ²	0.616	6,760
350		A	19 ³	0.616	6,390
336		A	19 ³	0.603	6,150
336		AA	7	0.603	5,960
300		B	37 ²	0.570	5,890
300		A	19 ³	0.570	5,480
300		AA	7	0.570	5,430
266		A	19 ³	0.537	4,970
266		AA	7	0.537	4,830
250		B	37 ²	0.520	4,910
250		A	19 ³	0.520	4,660
250		AA	7	0.520	4,520
	4/0	B	19 ³	0.475	4,020
	4/0	AA, A	7	0.475	3,830
	3/0	B	19 ³	0.423	3,310
	3/0	AA, A	7	0.423	3,040
	2/0	B	19 ³	0.376	2,670
	2/0	AA, A	7	0.376	2,510
	1/0	B	19 ³	0.336	2,160
	1/0	AA, A	7	0.336	1,990
	1	B	19 ³	0.299	1,740
	1	AA, A	7	0.299	1,640
	2	AA, A, B	7	0.268	1,350
	3	A, B	7	0.238	1,090
	4	A, B	7	0.213	.881
	6	A, B	7	0.169	.563
	8	A, B	7	0.134	.312

¹ 58 wires minimum² 35 wires minimum³ 18 wires minimumALUMINUM ALLOY 5005 CABLE
(ASTM B397)

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength Lbs.
		cmil	AWG	cmil	AWG	Stranding	
927,200	37	795,000	—	795,000	—	26/7	23,900
740,800	37	636,000	—	636,000	—	26/7	19,300
652,400	19	556,500	—	556,500	—	26/7	16,200
587,200	19	506,500	—	556,500	—	18/1	14,600
559,500	19	477,000	—	477,000	—	26/7	13,900
503,600	19	435,500	—	477,500	—	18/1	12,500
465,400	19	397,500	—	397,500	—	26/7	12,200
419,400	19	362,000	—	397,500	—	18/1	11,200
394,500	19	336,400	—	336,400	—	26/7	10,500
355,100	19	306,400	—	336,400	—	18/1	9,600
312,800	19	266,800	—	266,800	—	26/7	8,450
281,400	19	242,900	—	266,800	—	18/1	7,610
246,900	7	211,600	4/0	211,600	4/0	6/1	6,330
195,700	7	167,800	3/0	167,800	3/0	6/1	5,020
155,400	7	133,100	2/0	133,100	2/0	6/1	4,280
123,300	7	105,600	1/0	105,600	1/0	6/1	3,440
77,470	7	66,360	2	66,360	2	6/1	2,200
48,690	7	41,740	4	41,740	4	6/1	1,430
30,580	7	26,240	6	26,240	6	6/1	922

ALUMINUM ALLOY 6201 CABLE
(ASTM B399)

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength Lbs.
		cmil	AWG	cmil	AWG	Stranding	
1439,200	61	1272,000	—	1272,000	—	54/7	46,800
1348,800	61	1192,500	—	1192,500	—	54/7	43,900
1259,600	61	1113,000	—	1113,000	—	54/7	41,000
1165,100	61	1033,500	—	1033,500	—	54/7	37,900
1077,400	61	954,000	—	954,000	—	54/7	35,000
927,200	37	795,000	—	795,000	—	26/7	30,500
740,800	37	636,000	—	636,000	—	26/7	24,400
652,400	19	556,500	—	556,500	—	26/7	21,900
559,500	19	477,000	—	477,000	—	26/7	18,800
465,400	19	397,500	—	397,500	—	26/7	15,600
394,500	19	336,400	—	336,400	—	26/7	13,300
312,800	19	266,800	—	266,800	—	26/7	11,000
246,900	7	211,600	4/0	211,600	4/0	6/1	8,560
195,700	7	167,800	3/0	167,800	3/0	6/1	6,790
155,400	7	133,100	2/0	133,100	2/0	6/1	5,390
123,300	7	105,600	1/0	105,600	1/0	6/1	4,460
77,470	7	66,360	2	66,360	2	6/1	2,800
48,690	7	41,740	4	41,740	4	6/1	1,760
30,580	7	26,240	6	26,240	6	6/1	1,110

CABLE DATA (Continued)**ALUMINUM ALLOY 8000 SERIES “O” TEMPER CABLE
(ASTM B801)**

CONDUCTOR SIZE		NUMBER OF WIRES†	CLASS	CONDUCTOR DIAMETER			MIN. BREAKING STRENGTH LBS.
KCMIL	AWG			Conventional In.	Compressed In.	Compact In.	
1000		127	D	1.153	1.119	1.060	6010
1000		91	C	1.153	1.118	1.060	6010
1000		61	B, A	1.152	1.117	1.060	6010
900		127	D	1.095	1.062	0.999	5400
900		91	C	1.093	1.060	0.999	5400
900		61	B, A	1.093	1.060	0.999	5400
800		127	D	1.032	1.001	0.938	4800
800		91	C	1.032	1.001	0.938	4800
800		61	B, A	1.031	1.000	0.938	4800
750		127	D	0.998	0.968	0.908	4500
750		91	C	0.999	0.969	0.908	4500
750		61	B, A	0.998	0.968	0.908	4500
700		127	D	0.965	0.936	0.877	4200
700		91	C	0.965	0.936	0.877	4200
700		61	B, A	0.964	0.935	0.877	4200
650		127	D	0.930	0.902	0.845	3900
650		91	C	0.930	0.902	0.845	3900
650		61	B	0.929	0.901	0.845	3900
650		37	A	0.928	0.900	0.845	3950
600		127	D	0.893	0.866	0.813	3600
600		91	C	0.893	0.866	0.813	3600
600		61	B	0.893	0.866	0.813	3600
600		37	A	0.891	0.864	0.813	3640
556		127	D	0.861	0.835	0.780	3340
556		91	C	0.860	0.834	0.780	3340
556		61	B	0.860	0.834	0.780	3340
556		37	A	0.858	0.832	0.780	3380
550		127	D	0.855	0.829	0.775	3300
550		91	C	0.855	0.829	0.775	3300
550		61	B	0.855	0.829	0.775	3300
550		37	A	0.853	0.827	0.775	3340
500		91	D	0.815	0.791	0.736	3000
500		61	C	0.815	0.791	0.736	3000
500		37	B, A	0.813	0.789	0.736	3040
477		91	D	0.796	0.772	0.722	2860
477		61	C	0.796	0.772	0.722	2860
477		37	B, A	0.795	0.771	0.722	2900
450		91	D	0.773	0.750	0.700	2700
450		61	C	0.773	0.750	0.700	2700
450		37	B, A	0.772	0.749	0.700	2730
400		91	D	0.729	0.707	0.659	2400
400		61	C	0.729	0.707	0.659	2400
400		37	B, A	0.728	0.706	0.659	2430
397		91	D	0.727	0.705	0.659	2390
397		61	C	0.726	0.704	0.659	2390
397		37	B	0.725	0.703	0.659	2410
397		19	A	0.724	0.702	0.659	2470
350		91	D	0.682	0.661	0.616	2100
350		61	C	0.681	0.661	0.616	2100
350		37	B	0.681	0.661	0.616	2130
350		19	A	0.679	0.659	0.616	2170
336		61	C	0.669	0.649	0.603	2020
336		37	B	0.668	0.648	0.603	2040
336		19	A	0.666	0.646	0.603	2090
300		61	C	0.631	0.612	0.570	1800
300		37	B	0.630	0.611	0.570	1820
300		19	A	0.629	0.610	0.576	1860
266		61	C	0.595	0.577	0.537	1600
266		37	B	0.594	0.576	0.537	1620
266		19	A	0.593	0.575	0.537	1660
250		61	C	0.576	0.559	0.520	1500

CABLE DATA (Continued)

ALUMINUM ALLOY 8000 SERIES "O" TEMPER CABLE (Continued)

CONDUCTOR SIZE		NUMBER OF WIRES†	CLASS	CONDUCTOR DIAMETER			MIN. BREAKING STRENGTH LBS.
KCMIL	AWG			Conventional In.	Compressed In.	Compact In.	
250		37	B	0.575	0.558	0.520	1520
250		19	A	0.574	0.557	0.520	1550
	4/0	37	C	0.529	0.513	0.475	1280
	4/0	19	B	0.528	0.512	0.475	1310
	4/0	7	A	0.522	0.506	0.475	1360
	3/0	37	C	0.471	0.457	0.423	1020
	3/0	19	B	0.470	0.456	0.423	1040
	3/0	7	A	0.464	0.450	0.423	1070
	2/0	19	B	0.419	0.406	0.376	826
	2/0	7	A	0.414	0.402	0.376	853
	1/0	19	B	0.373	0.362	0.336	655
	1/0	7	A	0.368	0.357	0.336	676
	1	19	B	0.332	0.322	0.229	519
	2	7	B, A	0.292	0.283	0.268	425
	3	7	B, A	0.260	0.252	0.238	337
	4	7	B, A	0.232	0.225	0.213	267
	6	7	B, A	0.184	0.178	0.169	168
	8	7	B, A	0.146	0.142	0.134	106

† For compact-stranded constructions, the number of wires may be reduced as follows:
 19-Wire Constructions - 18 Wires Minimum
 37-Wire Constructions - 35 Wires Minimum
 61-Wire Constructions - 58 Wires Minimum
 91-Wire Constructions - 87 Wires Minimum
 127-Wire Constructions - 122 Wires Minimum

COMPACT ACSR
(ASTM B401)

CONDUCTOR SIZE		CONDUCTOR DIAMETER (IN.)	BREAKING STRENGTH (LB)
KCMIL	AWG		
336.4		0.628	8,260
266.8		0.559	6,540
	4/0	0.517	7,420
	3/0	0.461	5,880
	2/0	0.410	4,880
	1/0	0.365	3,980
	1	0.326	3,290
	2	0.298	3,260
	2	0.290	2,640
	3	0.258	2,130
	4	0.236	2,160
	4	0.229	1,760
	6	0.182	1,120

ACSR/TW (TRAP WIRE) CABLE
(ASTM B779)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
336.4	14	1	0.63	8,600
477.0	18	7	0.78	17,200
477.0	18	7	0.79	19,400
556.5	18	7	0.84	20,000
556.5	20	7	0.85	22,600
636.0	27	1	0.85	13,500
636.0	18	7	0.89	22,900
636.0	20	7	0.91	25,400
795.0	17	7	0.96	21,000
795.0	18	7	0.98	25,900

ACSR/TW (TRAP WIRE) CABLE (Continued)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
405.1	14	1	0.68	10,200
571.7	18	7	0.85	20,600
565.3	20	7	0.86	22,900
664.8	20	7	0.93	26,600
666.6	20	7	0.91	24,000
762.8	20	7	0.99	30,500
768.2	20	7	0.98	27,700
768.9	27	1	0.93	16,400
795.0	20	7	0.99	28,200
795.0	20	7	1.01	31,800
946.7	35	7	1.08	29,600
954.0	30	7	1.05	23,700
954.0	32	7	1.06	25,900
954.0	20	7	1.08	33,500
957.2	32	7	1.06	26,000
1033.5	30	7	1.09	25,700
1033.5	32	7	1.10	28,100
1033.5	21	7	1.13	36,300
1113.0	30	7	1.13	27,500
1113.0	33	7	1.14	30,000
1113.0	38	19	1.19	39,100
1192.5	30	7	1.17	29,500
1192.5	33	7	1.18	32,400
1192.5	38	19	1.22	41,900
1272.0	30	7	1.20	31,400
1272.0	35	7	1.22	34,600
1272.0	39	19	1.26	44,100
1351.5	35	7	1.26	36,700
1351.5	39	19	1.30	46,800
1431.0	36	7	1.29	38,900
1431.0	39	19	1.34	49,600
1590.0	36	7	1.36	42,200
1590.0	42	19	1.41	55,100
1780.0	37	19	1.45	50,700
2156.0	64	19	1.61	61,100

CABLE DATA (Continued)**ACSR/TW (TRAP WIRE) CABLE** (Continued)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
959.6	22	7	1.11	37,000
966.2	21	7	1.09	34,000
1158.0	33	7	1.17	31,600
1158.4	25	7	1.20	39,600
1168.1	30	7	1.16	28,900
1233.6	38	19	1.25	42,900
1257.1	35	7	1.21	34,200
1272.0	30	7	1.20	31,400
1334.6	39	19	1.29	46,300
1359.7	36	7	1.26	36,900
1372.5	30	7	1.25	33,400
1433.6	39	19	1.34	49,700
1455.3	36	7	1.30	39,200
1467.8	33	7	1.29	35,800
1533.3	39	19	1.38	53,200
1557.4	36	7	1.35	41,900
1569.0	33	7	1.33	38,200
1622.0	39	19	1.42	57,500
1657.4	36	7	1.39	44,000
1730.6	39	19	1.47	59,400
1758.6	37	19	7.14	34,600
1926.9	42	19	1.55	65,300
1949.6	42	7	1.50	51,900
2153.8	64	19	1.60	61,100
2627.3	64	19	1.76	74,500

AAC/TW (ALL ALUMINUM TRAP WIRE)
(ASTM B778)

CONDUCTOR SIZE, KCMIL	NOMINAL DIAMETER, IN.	NUMBER OF WIRES	RATED STRENGTH, LBF
336.4	0.612	17	6,220
397.5	0.661	17	7,230
477.0	0.720	17	8,530
500.0	0.736	17	8,940
556.5	0.775	17	9,950
600.0	0.803	17	10,700
636.0	0.825	17	11,400
700.0	0.864	17	12,500
750.0	0.893	17	13,400
795.0	0.919	17	13,900
900.0	0.990	31	15,800
954.0	1.018	31	16,700
1000.0	1.041	31	17,500
1033.5	1.057	31	18,100
1113.0	1.095	31	19,500
1192.5	1.132	31	20,900
1272.0	1.168	31	22,300
1351.5	1.202	31	23,700
1431.0	1.236	31	24,600
1590.0	1.315	49	27,300
1750.0	1.377	49	30,000
2000.0	1.468	49	34,300

ACAR CABLE‡
(ASTM B524)

CONDUCTOR SIZE		NUMBER OF WIRES	NOMINAL OUTSIDE DIAMETER
KCMIL	AWG		
2000		91	1.630
2000		61	1.630
1900		61	1.588
1800		61	1.546
1750		61	1.525
1700		61	1.502
1600		61	1.458
1500		61	1.411
1400		61	1.364
1300		61	1.314
1300		37	1.312
1250		61	1.288
1250		37	1.287
1200		61	1.263
1200		37	1.261
1100		61	1.209
1100		37	1.207
1000		61	1.152
1000		37	1.151
950		37	1.121
900		37	1.092
850		37	1.061
800		37	1.029
750		37	0.997
700		37	0.962
650		37	0.928
600		37	0.891
600		19	0.888
550		37	0.853
550		19	0.850
500		37	0.813
500		19	0.811
450		19	0.770
400		19	0.726
350		19	0.678
300		19	0.628
250		19	0.574
246.9		7	0.563
195.7	4/0	7	0.522
		7	0.502
155.4	3/0	7	0.464
		7	0.447
123.3	2/0	7	0.414
		7	0.398
	1/0	7	0.368
77.4		7	0.316
	2	7	0.292
48.6		7	0.250
	4	7	0.232
30.5		7	0.198

CABLE DATA (Continued)

SSAC CABLE

SIZE AWG OR KCMIL	STRANDING		CONDUCTOR DIAMETER	RATED STRENGTH POUNDS
	ALUMINUM	STEEL		
266.8	22	7	.622	6030
266.8	24	7	.633	7410
266.8	26	7	.642	8880
266.8	30	7	.660	11700
300.0	26	7	.680	9970
336.4	20	7	.692	5990
336.4	22	7	.701	7610
336.4	24	7	.710	9340
336.4	26	7	.720	11200
336.4	30	7	.741	14800
397.5	20	7	.752	7090
397.5	22	7	.762	8990
397.5	24	7	.772	11000
397.5	26	7	.783	13000
397.5	30	7	.806	17500
477.0	20	7	.823	8490
477.0	22	7	.834	10800
477.0	24	7	.846	13000
477.0	26	7	.858	15600
477.0	30	7	.883	21000
500.0	30	7	.904	22000
556.5	20	7	.890	9910
556.5	22	7	.901	12600
556.5	24	7	.914	15200
556.5	26	7	.927	18200
556.5	30	7	.953	24500
605.0	24	7	.953	16500
605.0	26	7	.966	19700
605.0	30	7	.994	26000
605.0	30	19	.994	26600
636.0	20	7	.951	11300
636.0	22	7	.963	14100
636.0	24	7	.977	17300
636.0	26	7	.990	20700
636.0	30	7	1.019	27400
636.0	30	19	1.019	28000
666.6	24	7	1.000	18200
666.6	26	7	1.104	21700
715.5	24	7	1.036	19500
715.5	26	7	1.051	23300
715.5	30	19	1.081	30800
795.0	42	7	1.055	11800
795.0	20	7	1.063	14200
795.0	45	7	1.063	14200
795.0	22	7	1.077	17700
795.0	24	7	1.092	21700
795.0	54	7	1.092	21700
795.0	26	7	1.108	25900
795.0	30	19	1.140	34300
900.0	45	7	1.131	15800
900.0	54	7	1.162	24600
954.0	42	7	1.155	14200
954.0	20	7	1.185	16700
954.0	45	7	1.165	16700
954.0	48	7	1.175	19700
954.0	24	7	1.196	26000
954.0	54	7	1.196	26000
954.0	30	19	1.248	41100

SSAC CABLE (Continued)

SIZE AWG OR KCMIL	STRANDING		CONDUCTOR DIAMETER	RATED STRENGTH POUNDS
	ALUMINUM	STEEL		
1033.5	42	7	1.203	15400
1033.5	45	7	1.212	18100
1033.5	48	7	1.222	21300
1033.5	54	7	1.245	28200
1113.0	42	7	1.248	16300
1113.0	45	7	1.259	19500
1113.0	48	7	1.269	23000
1113.0	54	19	1.293	30400
1192.5	42	7	1.292	17500
1192.5	45	7	1.302	20900
1192.5	48	7	1.313	24600
1192.5	54	19	1.338	32600
1272.0	42	7	1.334	18700
1272.0	45	7	1.345	22300
1272.0	48	7	1.357	26200
1272.0	54	19	1.382	34100
1351.5	42	7	1.376	19900
1351.5	45	7	1.386	23700
1351.5	48	7	1.398	27900
1351.5	54	19	1.424	36200
1431.0	42	7	1.415	21000
1431.0	45	7	1.427	25100
1431.0	48	7	1.439	29500
1431.0	54	19	1.465	38400
1510.5	45	7	1.466	26500
1510.5	54	19	1.505	40500
1590.0	42	7	1.492	23400
1590.0	45	7	1.504	27900
1590.0	48	7	1.517	32200
1590.0	54	19	1.545	42600
1780.0	84	19	1.602	35400
1869.0	68	7	1.603	21500
2034.5	72	7	1.681	27200

CABLE DATA


SOLID COPPERWELD CABLE
(ASTM B227)

Conductor Size (AWG)	Nominal Diameter (Inches)	Circular Mils	Minimum Breaking Load (lbs.)			
			Grade 40 HS	Grade 40 EHS	Grade 30 HS	Grade 30 EHS
4	0.2043	41,740	3,540	—	3,934	4,671
5	0.1819	33,090	2,937	—	3,249	3,911
—	0.1650*	27,230	2,779	—	2,779	3,367
6	0.1620	26,240	2,679	—	2,679	3,246
7	0.1443	20,820	2,207	—	2,207	2,681
8	0.1285	16,510	1,816	—	1,816	2,205
—	0.1280*	16,380	1,802	—	1,802	2,188
9	0.1144	13,090	1,491	—	1,491	1,790
—	0.1040*	10,820	1,283	1,325	1,283	1,487
10	0.1019	10,380	1,231	—	1,231	1,460
12	0.0808	6,530	774	—	774	918
—	0.0800*	6,400	759	—	759	900
—	0.0640*	4,096	485	—	485	576
18	0.0403	1,624	193	—	193	228
—	0.0390*	1,521	180	—	180	214
20	0.0320	1,024	121	—	121	144

* These diameters are often employed by purchasers for communication lines BUT are not in the American Wire Gauge (B & S Wire Gauge) series, as are the other diameters listed.

COPPERWELD-COPPER CABLE
(ASTM B229)

Conductor Size Hard Drawn Copper Equivalent cmil	AWG	TYPE	Nominal Diameter of Conductor (inches)	Minimum Breaking Load (pounds)
350,000	—	E	0.788	32,420
350,000	—	EK	0.735	23,850
350,000	—	V	0.754	23,480
300,000	—	E	0.729	27,770
300,000	—	EK	0.680	20,960
300,000	211,600	V	0.698	20,730
250,000	—	E	0.666	23,920
250,000	—	EK	0.621	17,840
250,000	—	V	0.637	17,420
211,600	4/0	E	0.613	20,730
211,600	4/0	EK	0.583	15,640
211,600	4/0	V	0.571	15,370
211,600	4/0	F	0.586	15,000
211,600	4/0	F	0.550	12,290
167,800	3/0	E	0.545	16,800
167,800	3/0	J	0.555	16,170
167,800	3/0	G	0.519	12,860
167,800	3/0	EK	0.509	12,370
167,800	3/0	V	0.522	12,200
167,800	3/0	F	0.490	9,980
133,100	2/0	K	0.534	17,600
133,100	2/0	J	0.494	13,430
133,100	2/0	G	0.463	10,510
133,100	2/0	V	0.465	9,846
133,100	2/0	F	0.436	8,094
105,600	1/0	K	0.475	14,490
105,600	1/0	J	0.440	10,970
105,600	1/0	G	0.412	8,563
105,600	1/0	F	0.388	6,536
83,690	1	N	0.464	15,410
83,690	1	K	0.423	11,900
83,690	1	J	0.392	9,000
83,690	1	G	0.367	6,956
83,690	1	F	0.346	5,266
66,360	2	P	0.462	16,870
66,360	2	N	0.413	12,680
66,360	2	K	0.377	9,730
66,360	2	J	0.349	7,322
66,360	2	A	0.366	5,876
66,360	2	G	0.327	5,626
66,360	2	F	0.308	4,233
55,620	3	P	0.411	13,910
52,620	3	N	0.368	10,390
52,620	3	K	0.336	7,910
52,620	3	J	0.311	5,955
52,620	3	A	0.326	4,810
41,740	4	P	0.366	11,420
41,740	4	N	0.328	8,460
41,740	4	D	0.346	7,340
41,740	4	A	0.290	3,938
33,090	5	P	0.326	9,311
33,090	5	D	0.310	6,035
33,090	5	A	0.258	3,193
26,240	6	D	0.276	4,942
26,240	6	A	0.230	2,585
26,240	6	C	0.225	2,143
20,820	7	D	0.246	4,022
20,820	7	A	0.223	2,754
16,510	8	D	0.219	3,256
16,510	8	A	0.199	2,233
16,510	8	C	0.179	1,362
11,750	9	D	0.174	1,743

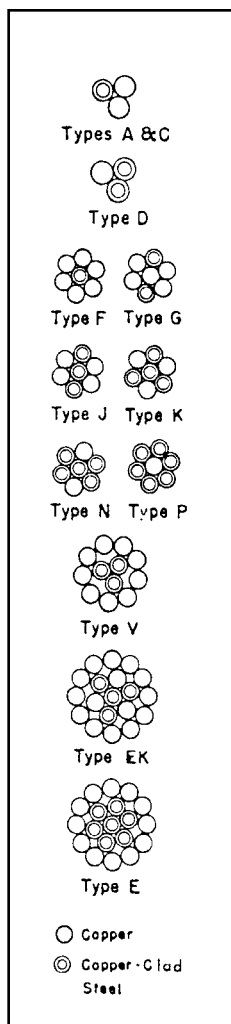STRANDED COPPERWELD CABLE
(ASTM B228)

Nominal Diameter† (Inch) Size A.W.G.‡	Circular Mils	Diameter* (Inch)	Breaking Load Lbs.**		
			High Strength		Extra High Strength
			40% Cond.	30% Cond.	30% Cond.
7/8 (19 No. 5)	628,900	.910	50,240	55,570	66,910
13/16 (19 No. 6)	498,800	.810	41,600	45,830	55,530
23/32 (19 No. 7)	395,500	.721	34,390	37,740	45,850
27/32 (19 No. 8)	313,700	.642	28,380	31,040	37,690
9/16 (19 No. 9)	248,800	.572	23,390	25,500	30,610
5/8 (7 No. 4)	292,200	.613	22,310	24,780	29,430
9/16 (7 No. 5)	231,700	.546	18,510	20,470	24,650
1/2 (7 No. 6)	183,800	.486	15,330	16,890	20,460
7/16 (7 No. 7)	145,700	.433	12,670	13,910	16,890
3/8 (7 No. 8)	115,600	.385	10,460	11,440	13,890
11/32 (7 No. 9)	91,650	.343	8,616	9,393	11,280
5/16 (7 No. 10)	72,680	.306	7,121	7,758	9,196
3 No. 5	99,310	.392	8,373	9,262	11,860
3 No. 6	78,750	.349	6,934	7,639	9,754
3 No. 7	62,450	.311	5,732	6,291	7,922
3 No. 8	49,530	.277	4,730	5,174	6,282
3 No. 9	39,280	.247	3,898	4,250	5,129
3 No. 10	31,150	.220	3,221	3,509	4,160
3 No. 12	19,590	.174	2,236	—	—

† The designation "Inch" is the approximate diameter in proper fraction of an inch.

‡ The designation of "AWG" is a combination of the number of wires each of the American Wire Gauge size indicated by "No."

* Diameter of circumscribing.

** Breaking loads of 7-wire and 19-wire conductors are taken as 90% of the sum of the breaking loads of individual wires; breaking load of 3-wire conductors is taken as 95% of the sum of the breaking loads of the individual wires.

GALVANIZED STEEL CABLE
(ASTM A475)

Inches	Nominal Diameter of Strand (mm)	Number of Wires in Strand	Minimum Breaking Load (lbs.)				
			Utilities Grade	Common Grade	Siemens- Martin Grade	High- Strength Grade	Extra High- Strength Grade
1/8	(3.18)	7	—	540	910	1,330	1,830
5/32	(3.97)	7	—	870	1,470	2,140	2,940
3/16	(4.76)	7	—	1,150	1,900	2,850	3,990
3/16	(4.76)	7	2,400	—	—	—	—
7/32	(5.56)	3	—	1,400	2,340	3,500	4,900
7/32	(5.56)	7	—	1,540	2,560	3,850	5,400
1/4	(6.35)	3	3,150	1,860	3,040	4,730	6,740
1/4	(6.35)	3	4,500	—	—	—	—
1/4	(6.35)	7	—	1,900	3,150	4,750	6,650
9/32	(7.14)	3	—	2,080	3,380	5,260	7,500
9/32	(7.14)	7	4,600	2,570	4,250	6,400	8,950
5/16	(7.94)	3	6,500	2,490	4,090	6,350	9,100
5/16	(7.94)	7	—	3,200	5,350	8,000	11,200
5/16	(7.94)	7	6,000	—	—	—	—
3/8	(9.52)	3	8,500	3,330	5,560	8,360	11,800
3/8	(9.52)	7	11,500	4,250	6,950	10,800	15,400
7/16	(11.11)	7	18,000	5,700	9,350	14,500	20,800
1/2	(12.70)	7	25,000	7,400	12,100	18,800	26,900
1/2	(12.70)	19	—	7,620	12,700	19,100	26,700
9/16	(14.29)	7	—	9,600	15,700	24,500	35,000
9/16	(14.29)	19	—	9,640	16,100	24,100	33,700
5/8	(15.88)	7	—	11,600	19,100	29,600	42,400
5/8	(15.88)	19	—	11,000	18,100	28,100	40,200
3/4	(19.05)	19	—	16,000	26,200	40,800	58,300
7/8	(22.22)	19	—	21,900	35,900	55,800	79,700
1	(25.40)	9	—	28,700	47,000	73,200	104,500
1	(25.40)	37	—	28,300	46,200	71,900	102,700
1-1/8	(28.58)	37	—	36,000	58,900	91,600	130,800
1-1/4	(31.75)	37	—	44,600	73,000	113,600	162,200

CABLE DATA

ALUMINUM-COATED STEEL CABLE
(ASTM A474)

NOMINAL DIAMETER OF STRAND (IN.)	NUMBER OF WIRES IN STRAND	MINIMUM BREAKING STRENGTH, lbf				
		UTILITIES GRADE*	COMMON GRADE	SIEMANS-MARTIN GRADE	HIGH-STRENGTH GRADE	EXTRA HIGH- STRENGTH GRADE
3/16	7		1,150	1,900	2,850	
3/16	7	2,400				
1/4	3	3,150				
1/4	3	4,500				
1/4	7		1,900	3,150	4,750	6,650
9/32	7	4,600				
5/16	3	6,500				
5/16	7		3,200	5,350	8,000	11,200
5/16	7	6,000				
3/8	3	8,500				
3/8	7	11,500	4,250	6,950	10,800	15,400
7/16	7	18,000	5,350	9,350	14,500	20,800
1/2	7	25,000	7,400	12,100	18,800	26,900

* The Utilities Grade is used principally by communications and power and light industries.

AWG VS. METRIC WIRE SIZES

CIRC. MILS	EQUIV- ALENT CIRC. MILS	AWG. SIZE	METRIC WIRE SIZE MM	STRANDING/WIRE DIAMETER PER STRAND		APPROXIMATE OVERALL DIAMETER		CIRC. MILS	EQUIV- ALENT CIRC. MILS	AWG. SIZE	METRIC WIRE SIZE MM	STRANDING/WIRE DIAMETER PER STRAND		APPROXIMATE OVERALL DIAMETER	
				IN.	MM	IN.	MM					IN.	MM	IN.	MM
—	937	—	0.50	1/.032	1/.813	.032	.061	83690	—	1	—	19/.0064	19/1.50	.332	8.43
1020	—	20	—	7/.0121	1/.307	.036	0.91	—	98680	—	50	19/.073	19/1.85	.365	9.27
—	1480	—	.75	1/.039	1/.091	.039	0.99	10500	—	1/0	—	19/.0745	19/1.59	.373	9.46
1620	—	18	—	1/.0103	1/1.02	.040	1.02	133100	—	2/0	—	19/.0837	19/2.13	.419	10.6
1620	—	18	—	7/.0152	7/.386	.046	1.16	—	138100	—	70	19/.086	19/2.18	.430	10.9
—	1974	—	1.0	1/.045	1/1.14	.045	1.14	167800	—	3/0	—	19/.094	19/2.59	.470	11.9
—	1974	—	1.0	7/.017	7/.422	.061	1.30	167800	—	3/0	—	36/.0673	37/1.71	.471	12.0
2580	—	16	—	1/.0503	1/1.29	.051	1.29	—	187500	—	95	19/.101	19/2.57	.505	12.8
2580	—	16	—	7/.0192	7/.468	.058	1.46	—	187500	—	95	37/.072	37/1.83	.504	12.5
—	2960	—	1.5	1/.055	1/1.40	.055	1.40	211600	—	4/0	—	19/.1055	19/2.89	.528	13.4
—	2960	—	1.5	7/.021	7/5.33	.063	1.60	—	237.8 kcmil	—	120	37/.081	37/2.06	.567	14.4
4110	—	14	—	1/.0641	1/1.63	.064	1.63	250 kcmil	—	—	—	37/.0822	37/2.07	.575	14.6
4110	—	14	—	7/.0242	7/.615	.073	1.84	300 kcmil	—	—	150	37/.090	37/2.29	.630	16.0
—	4934	—	2.5	1/.071	1/1.80	.071	1.80	350 kcmil	—	—	—	37/.0973	37/2.47	.681	17.3
—	4934	—	2.5	7/.027	7/6.66	.081	2.06	—	365.1 kcmil	—	185	37/.100	37/2.54	.700	17.8
6530	—	12	—	1/.0308	1/2.05	.081	2.05	400 kcmil	—	—	—	37/104	37/2.64	.728	18.5
6530	—	12	—	7/.0305	7/.775	.092	2.32	—	473.6 kcmil	—	240	37/.114	37/2.90	.798	20.3
—	7894	—	4	1/.089	1/2.26	.089	2.26	—	473.6 kcmil	—	240	61/.089	61/2.26	.801	20.3
—	7894	—	4	7/.034	7/.864	.102	2.59	500 kcmil	—	—	—	37/.1162	37/2.95	.813	20.7
10380	—	10	—	1/.1019	1/2.59	.102	2.59	500 kcmil	—	—	—	61/.0905	61/2.30	.814	20.7
10380	—	10	—	7/.0355	7/.978	.116	2.93	—	592.1 kcmil	—	300	61/.099	61/2.51	.891	22.6
—	11840	—	6	1/.109	1/2.77	.109	2.77	600 kcmil	—	—	—	61/.0992	61/2.52	.893	22.7
—	11840	—	6	7/.042	7/.107	.126	3.21	700 kcmil	—	—	—	61/.1071	61/2.72	.964	24.5
13000	—	9	—	1/.1144	1/2.91	.114	2.91	750 kcmil	—	—	—	61/.1109	61/2.82	.998	25.4
13090	—	9	—	7/.0432	7/1.10	.130	3.30	750 kcmil	—	—	—	91/.0908	91/2.31	.998	25.4
16510	—	8	—	1/.1285	1/3.26	.128	3.25	—	789.4 kcmil	—	400	61/.114	61/2.90	1.026	26.1
16510	—	8	—	7/.0486	7/1.23	.146	3.70	800 kcmil	—	—	—	61/.1145	61/2.91	1.031	26.2
—	19740	—	10	1/.141	1/3.58	.141	3.58	800 kcmil	—	—	—	91/.0938	91/2.38	1.032	26.2
—	19740	—	10	7/.054	7/1.37	.162	4.12	1000 kcmil	986.8 kcmil	—	500	61/.1280	61/3.25	1.152	28.3
20520	—	7	—	1/.1443	1/3.67	.144	3.67	1000 kcmil	—	—	—	91/.1048	91/2.66	1.153	29.3
20520	—	7	—	7/.0545	7/1.38	.164	4.15	—	1233.7 kcmil	—	625	91/.117	91/2.97	1.287	32.7
26240	—	6	—	1/.162	1/4.11	.162	4.11	1250 kcmil	—	—	—	91/.1172	91/2.93	1.289	32.7
26240	—	6	—	7/.0612	7/1.55	.184	4.66	1250 kcmil	—	—	—	127/.0992	127/2.52	1.200	32.8
—	31580	—	16	7/.008	7/1.73	.204	5.13	1500 kcmil	—	—	—	91/.1284	91/3.26	1.412	36.9
33090	—	5	—	7/.0688	7/1.75	.206	5.24	1500 kcmil	—	—	—	127/.1087	127/2.76	1.413	36.9
41740	—	4	—	7/.0772	7/1.96	.232	5.88	—	1578.8 kcmil	—	800	91/.132	91/3.35	1.452	36.9
—	49340	—	25	7/.085	7/2.16	.255	6.48	—	1973.5 kcmil	—	1000	91/.147	91/3.73	1.617	41.1
—	49340	—	25	19/.052	10/1.32	.260	6.60	2000 kcmil	—	—	—	127/.1255	127/3.19	1.632	41.5
52620	—	3	—	7/.0867	7/2.20	.260	6.61	2000 kcmil	—	—	—	169/.1088	169/2.76	1.632	41.5
66300	—	2	—	7/.0974	7/2.47	.292	7.42	—	—	—	—	—	—	—	—
—	69070	—	35	7/.100	7/2.54	.300	7.62	—	—	—	—	—	—	—	—
—	69070	—	35	19/.001	19/1.55	.305	7.75	—	—	—	—	—	—	—	—

INCHES & MILLIMETERS CONVERSION CHART




INCHES	MILLIMETERS	INCHES	MILLIMETERS	MM	INCHES	MM	INCHES
$\frac{1}{64}$	.015625 — 0.397	$\frac{33}{64}$	.515625 — 13.097	.1	— .0039	46	— 1.8110
$\frac{1}{32}$	.03125 — 0.794	$\frac{17}{32}$	.53125 — 13.494	.2	— .0079	47	— 1.8504
$\frac{3}{64}$	.046875 — 1.191	$\frac{35}{64}$	.546875 — 13.891	.3	— .0118	48	— 1.8898
$\frac{1}{16}$	.0625 — 1.588	$\frac{9}{16}$	.5625 — 14.288	.4	— .0157	48	— 1.9291
$\frac{5}{64}$	.078125 — 1.984	$\frac{37}{64}$	.578125 — 14.684	.5	— .0197	50	— 1.9685
$\frac{3}{32}$	.09375 — 2.381	$\frac{19}{32}$	.59375 — 15.081	.6	— .0236	51	— 2.0079
$\frac{7}{64}$	.109375 — 2.778	$\frac{39}{64}$	.609375 — 15.478	.7	— .0276	52	— 2.0472
$\frac{1}{8}$	.1250 — 3.175	$\frac{5}{8}$	.6250 — 15.875	.8	— .0315	53	— 2.0866
$\frac{9}{64}$	.140625 — 3.572	$\frac{41}{64}$	.640625 — 16.272	.9	— .0354	54	— 2.1260
$\frac{5}{32}$	.15625 — 3.969	$\frac{21}{32}$	.65625 — 16.669	1	— .0394	55	— 2.1654
$\frac{11}{64}$	.171875 — 4.366	$\frac{43}{64}$	.671875 — 17.066	2	— .0787	56	— 2.2047
$\frac{3}{16}$	.1875 — 4.763	$\frac{11}{16}$	.6875 — 17.463	3	— .1181	57	— 2.2441
$\frac{13}{64}$	.203125 — 5.159	$\frac{45}{64}$	.703125 — 17.859	4	— .1575	58	— 2.2835
$\frac{7}{32}$	.21875 — 5.556	$\frac{23}{32}$	.71875 — 18.256	5	— .1969	59	— 2.3228
$\frac{15}{64}$	.234375 — 5.953	$\frac{47}{64}$	.734375 — 18.653	6	— .2362	60	— 2.3622
$\frac{1}{4}$	.2500 — 6.350	$\frac{3}{4}$	.7500 — 19.050	7	— .2756	61	— 2.4016
$\frac{17}{64}$	.265625 — 6.747	$\frac{49}{64}$	.765625 — 19.447	8	— .3150	62	— 2.4409
$\frac{9}{32}$	.28125 — 7.144	$\frac{25}{32}$	.78125 — 19.844	9	— .3543	63	— 2.4803
$\frac{19}{64}$	.296875 — 7.541	$\frac{51}{64}$	.796875 — 20.241	10	— .3937	64	— 2.5197
$\frac{5}{16}$	.3125 — 7.938	$\frac{13}{16}$	.8125 — 20.638	11	— .4331	65	— 2.5591
$\frac{21}{64}$	.328125 — 8.334	$\frac{53}{64}$	.828125 — 21.034	12	— .4724	66	— 2.5984
$\frac{11}{32}$	.34375 — 8.731	$\frac{27}{32}$	.84375 — 21.431	13	— .5118	67	— 2.6378
$\frac{23}{64}$	.359375 — 9.128	$\frac{55}{64}$	.859375 — 21.828	14	— .5512	68	— 2.6772
$\frac{3}{8}$	.3750 — 9.525	$\frac{7}{8}$	.8750 — 22.225	15	— .5906	69	— 2.7165
$\frac{25}{64}$	.390625 — 9.922	$\frac{57}{64}$	.890625 — 22.622	16	— .6299	70	— 2.7559
$\frac{13}{32}$	.40625 — 10.319	$\frac{29}{32}$	.90625 — 23.019	17	— .6693	71	— 2.7953
$\frac{27}{64}$	.421875 — 10.716	$\frac{59}{64}$	.921875 — 23.416	18	— .7087	72	— 2.8346
$\frac{7}{16}$	.4375 — 11.113	$\frac{15}{16}$	.9375 — 23.813	19	— .7480	73	— 2.8740
$\frac{29}{64}$	.453125 — 11.509	$\frac{61}{64}$	.953125 — 24.209	20	— .7874	74	— 2.9134
$\frac{15}{32}$	.46875 — 11.906	$\frac{31}{32}$	.96875 — 24.606	21	— .8268	75	— 2.9528
$\frac{31}{64}$	.484375 — 12.303	$\frac{63}{64}$	.984375 — 25.003	22	— .8661	76	— 2.9921
$\frac{1}{2}$	.5000 — 12.700	$\frac{1}{1}$	1.000 — 25.400	23	— .9055	77	— 3.0315
				24	— .9449	78	— 3.0709
				25	— .9843	79	— 3.1102
				26	— 1.0236	80	— 3.1496
				27	— 1.0630	81	— 3.1890
				28	— 1.1024	82	— 3.2283
				29	— 1.1417	83	— 3.2677
				30	— 1.1811	84	— 3.3071
				31	— 1.2205	85	— 3.3465
				32	— 1.2598	86	— 3.3858
				33	— 1.2992	87	— 3.4252
				34	— 1.3386	88	— 3.4646
				35	— 1.3780	89	— 3.5039
				36	— 1.4173	90	— 3.5433
				37	— 1.4567	91	— 3.5827
				38	— 1.4961	92	— 3.6220
				39	— 1.5354	93	— 3.6614
				40	— 1.5748	94	— 3.7008
				41	— 1.6142	95	— 3.7402
				42	— 1.6535	96	— 3.7795
				43	— 1.6929	97	— 3.8189
				44	— 1.7323	98	— 3.8583
				45	— 1.7717	99	— 3.8976
						100	— 3.9370

1mm = .03937"

.001" = .0254 mm.

TERMINAL STUD SIZE CHART*

STUD SIZE	#0	#1	#2	#3	#4	#5	#6	#8	#10	#12	#14	1/4"	5/16"	3/8"
Stud Diameter	.060	.073	.086	.090	.112	.125	.138	.164	.190	.216	.242	.250	.312	.375
														
Stud Hole	.067	.093	.119			.145		.171	.197	.223	.250	17/64	21/64	25/64

STUD SIZE	7/16"	1/2"	5/8"	3/4"	7/8"	1"
Stud Diameter	.437	.500	.625	.750	.875	1.000
						
Stud Hole	29/64	33/64	21/32	29/32	29/32	1 - 1/32

* Tolerance .003" on decimal and .005" on fractional dimensions

DIE SET CONVERSION CHART FOR OBSOLETE DIES AND TOOLS

This catalog uses the new, BURNDY® simplified overhead lines die set catalog numbering system, based on Die Index numbers and letters.

The Die Index numbers are marked on the connectors and die sets. Where a die set has more than one Die Index, the catalog number

will generally be the lowest number assigned or all indexes may be marked.

The Die Index numbers and letters in this conversion chart are arranged in numerical or alphabetical order.

To determine the new catalog number for old die sets, cross reference the Die Index on the

connector, or the old die set, with the Die Index shown on the chart. The new die set catalog number or letters appear for each tool in the previous table. **NOTE: Many "A" dies are available. Contact the factory.** The gage column lists quality control inspection gages for the corresponding die index.

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
A	OLD		A8YC	U8YCMT					
	NEW		A-A	U-A					
BG	OLD	MD5-3		U2YLCMT					UG-BG
	NEW	MD5-3		U-BG					UG-BG-YSU
C	OLD	MD5-3	A2YC	U2YCMT					
	NEW	MD5-3	A-C	U-C					
D	OLD		A26AYC	U26AYCT					
	NEW		A-D	U-D					
D3	OLD			U28YPT					
	NEW			U-D3					
E	OLD		A26YC	U26YCT					
	NEW		A-E	U-E					
F	OLD			U28YCT					
	NEW			U-F					
H	OLD			U28AYCT					
	NEW			U-H					
K	OLD	MD5-3							
	NEW	MD5-3							
K-840	OLD								
	NEW			U-K840					
L	OLD			U28YTT					
	NEW			U-L					
M	OLD			U33YTT					
	NEW			U-M					
N	OLD			U33YPCT	S33YPT				
	NEW			U-N	S-N				
O	OLD			U26YPT					
	NEW			U-O					
Q	OLD								
	NEW								
R	OLD			U33RYCT					
	NEW			U-R					
161	OLD	MD5-2	A6CYD	U6CYDMT					
	NEW	MD5-2	A161	U161					
162	OLD	MD5-2	A4CYD	U4CYDMT		C4CYD	F4CYD		UG4C
	NEW	MD5-2	A162	U162		C162	F162		
163 Same as 505	OLD	MD5-2	A2CYD	U2CYDMT		C2CYD	F2CYD		UG2C
	NEW	MD5-2	A163	U163		C163	F163		
164 Same as 275	OLD		A1CYD	U1CYDMT		C1CYD	F1CYD		UG1C
	NEW		A164	U164		C164	F164		

DIE SET CONVERSION CHART (Continued) FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
165 Same as 287	OLD		A25YD	U25YDT		C25YD	F25YD	L25YDT	UG25
	NEW		A165	U165		C165	F165	L165	
166 Same as 206	OLD		A26YD	U26YDT		C26YD	F26YD	L26YDT	UG26
	NEW		A166	U166		C166	F166	L166	
167 Same as 207, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
168 Same as 208	OLD		A28YD	U28YDT		C28YD	F28YD	L28YDT	UG28
	NEW		A168	U168		C168	F168	L168	
169	OLD		A29YD	U29YDT		C29YD	F29YD	L29YDT	UG29
	NEW		A169	U169		C169	F169	L169	
170 Same as 306	OLD		A30YD	U30YDT		C30YD	F30YD	L30YDT	UG30
	NEW		A170	U170		C170	F170	L170	
171	OLD	MD5-2	A8WYD	U8WYDMT					
	NEW	D5-2	A171	U171					
192	OLD		A31RYD						
	NEW		A192						
193	OLD		A33RYD	U33RYDT		C33RYD		L33RYDT	
	NEW		A193	U193		C193		L193	
202	OLD		A8KYD	U8KYDMT					
	NEW		A202	U202					
203	OLD		A6KYD	U6KYDMT					
	NEW		A203	U203					
204	OLD		A4KYD	U4KYDT					
	NEW		A204	U204					
205 Same as 339	OLD		A2KYD	U2KYDT					UG2K
	NEW		A205	U205					
206 Same as 166	OLD		A26YD	U26YDT		C26YD	F26YD	L26YDT	UG26
	NEW		A166	U166		C166	F166	L166	
207 Same as 167, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
208 Same as 168	OLD		A28YD	U28YDT		C28YD	F28YD	L28YDT	UG28
	NEW		A168	U168		C168	F168	L168	
209	OLD			U32YDT		C32YD	F32YD	L32YDT	
	NEW			U209		C209	F209	L209	
210	OLD			U34YDT		C34YD	F34YD	L34YDT	UG34
	NEW			U210		C210	F210	L210	
211 Same as 167, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
236	OLD		A4RSYF	U4RSYFT		C4RSYF			UG4RS
	NEW		A236	U236		C236			
237	OLD		A4RYF	U4RYFT		C4RYF			UG4R
	NEW		A237	U237		C237			
238	OLD	MD5-1	A2RSYF	U2RSYFT		C2RSYF			UG2RS
	NEW	MD5-1	A238	U238		C238			
239	OLD		A2RYF	U2RYFT		C2RYF			UG2R
	NEW		A239	U239		C239			
240	OLD		A1RSYF	U1RSYFT		C1RSYF			
	NEW		A240	U240		C240			

DIE SET CONVERSION CHART (Continued) FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
241	OLD		A1RYF	U1RYFT		C1RYF			UG1R
	NEW		A241	U241		C241			
24 Same as 244	OLD		A26RSYF	U26RSYFT		C26RSYF		L26RSYFT	UG26RS
	NEW		A242	U242		C242		L242	
243	OLD		A25RYF	U25RYFT		C25RYF		L25RYFT	UG25R
	NEW		A243	U243		C243		L243	
244 Same as 242	OLD		A26RSYF	U26RSYFT		C26RSYF		L26RSYFT	UG26RS
	NEW		A242	U242		C242		L242	
245	OLD		A26RYF	U26RYFT		C26RYF		L26RYFT	UG26R
	NEW		A245	U245		C245		L245	
246 Same as 248	OLD		A28RSYF	U28RSYFT		C28RSYF		L28RSYFT	UG28RS
	NEW		A248	U248		C248		L248	
247	OLD		A27RYF	U27RYFT		C27RYF		L27RYFT	UG27R
	NEW		A247	U247		C247		L247	
248 Same as 246	OLD		A28RSYF	U28RSYFT		C28RSYF		L28RSYFT	UG28RS
	NEW		A248	U248		C248		L248	
249	OLD		A28RYF	U28RYFT		C28RYF		L28RYFT	UG28R
	NEW		A249	U249		C249		L249	
250	OLD		A30RSYF	U30RSYFT		C30RSYF	F30RSYF	L30RSYFT	UG30RS
	NEW		A250	U250		C250	F250	L250	
251	OLD		A30RYF	U30RYFT		C30RYF	F30RYF	L30RYFT	UG30R
	NEW		A251	U251		C251	F251	L251	
252	OLD			U32RSYFT		C32RSYF	F32RSYF	L32RSYFT	UG32RS
	NEW			U252		C252	F252	L252	
253	OLD			U34RSYFT		C34RSYF	F34RSYF	L34RSYFT	UG34RS
	NEW			U253		C253	F253	L253	
254	OLD					C43RSYF	F34RSYF	L34RSYFT	
	NEW				S254	C254	F254	L254	
255	OLD			U44RSYFT		C44RSYF	F44RSYF	L44RSYFT	
	NEW			U255		C255	F255	L255	
256 Same as 167, 207, 211	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
257	OLD		A312HYD	U312HYDT		C312HYD		L312HYDT	
	NEW		A257	U257		C257		L257	
259	OLD			U3K5YDT		C3K5YD			UG3K5
	NEW			U259		C259			
260	OLD					C7K6YD	F7K6YD	L7K6YDT	
	NEW					C260	F260	L260	
261 Same as 318	OLD			U37RYFT		C37RYF	F37RYF	L37RYFT	UG37R
	NEW			U261		C261	F261	L261	
263	OLD		A26YD-1	U26YDT-1					
	NEW		A263	U263					
267	OLD			U31YDT		C31YD	F31YD	L31YDT	UG31
	NEW			U267		C267	F267	L267	
275 Same as 164	OLD		A1CYD	U1CYDMT		C1CYD	F1CYD		UG1C
	NEW		A164	U164		C164	F164		
276	OLD		A6WKYD	U6WKYDT					
	NEW		A276	U276					

DIE SET CONVERSION CHART (Continued)

FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
285	OLD		A8WKYD	U8WKYDMT					
	NEW		A285	U285					
287 Same as 165	OLD		A25YD	U25YDT		C25YD	F25YD	L25YDT	UG25
	NEW		A165	U165		C165	F165	L165	
292 Same as 578	OLD					C412RYF-1	F412RYF-1	L412RYFT-1	UG412R1
	NEW				S292	C292	F292	L292	
293	OLD					C412RSYF	F412RSYF	L412RSYFT	
	NEW					C293	F293	L293	
294 Same as 293	OLD					C412RSYF	F412RSYF	L412RSYFT	
	NEW				S293	C293	F293	L293	
304	OLD			U375HYDT		C375HYD		L375HYDT	UG375H
	NEW			U304		C304		L304	
305 Same as 341	OLD			U41RSYFT		C41RSYF	F41RSYF	L41RSYFT	
	NEW			U305		C305	F305	L305	
306 Same as 170	OLD		A30YD	U30YDT		C30YD	F30YD	L30YDT	UG30
	NEW		A170	U170		C170	F170	L170	
308	OLD		A3WYD	U3WYDT					
	NEW		A308	U308					
313	OLD			U47RSYFT		C47RSYF	F47RSYF	L47RSYFT	
	NEW			U313		C313	F313	L313	
314 Same as 376	OLD					C48RSYF	F48RSYF	L48RSYFT	
	NEW					C314	F314	L314	
316	OLD			U33RYFT		C33RYF	F33RYF	L33RYFT	UG33R
	NEW			U316		C316	F316	L316	
317 Same as 426	OLD			U35RYFT		C35RYF	F35RYF	L35RYFT	UG35R
	NEW			U317		C317	F317	L317	
318 Same as 261	OLD			U37RYFT		C37RYF	F37RYF	L37RYFT	UG37R
	NEW			U261		C261	F261	L261	
319	OLD					C43RYF	F43RYF	L43RYFT	
	NEW				S319	C319	F319	L319	
320	OLD					C45RSYF	F45RSYF	L45RSYFT	
	NEW				S320	C320	F320	L320	
321	OLD		A301AYD	U301AYDT		C301AYD			UG301A
	NEW		A321	U321		C321			
322	OLD		A30AYD	U30AYDT					
	NEW		A322	U322					
327	OLD			U361RYFT		C361RYF		L361RYFT	UG361R
	NEW			U327		C327		L327	
328	OLD					C7K7YD			
	NEW					C328			
329	OLD		A2FYD	U2FYDT					
	NEW		A329	U329					
331	OLD			U3K6YDT		C3K6YD			
	NEW			U331		C331			
339 Same as 205	OLD		A2KYD	U2KYDT					UG2K
	NEW		A205	U205					
341 Same as 205	OLD			U41RSYFT		C41RSYF	F41RSYF	L41RSYFT	
	NEW			U305		C305	F305	L305	

DIE SET CONVERSION CHART (Continued)

FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
342	OLD					C391AYD	F391AYD	L391AYDT	UG361A
	NEW				S342	C342	F342	L342	
344	OLD					C7K5YD			
	NEW					C344			
345	OLD					C44YD	F44YD	L44YDT	
	NEW					C345	F345	L345	
350	OLD			U36RSYFT		C36RSYF	F36RSYF	L36RSYFT	UG36RS
	NEW			U350		C350	F350	L350	
352	OLD					C45RYF	F45RYF	L45RYFT	
	NEW				S352	C352	F352	L352	
373	OLD		A25YD-1	U25YDT-1					
	NEW		A373	U373					
376 Same as 314	OLD					C48RSYF	F48RSYF	L48RSYFT	
	NEW					C314	F314	L314	
403	OLD		A1CYD-1	U1CYDT-1					
	NEW		A403	U403					
406	OLD		A26GYD						
	NEW		A406						
419	OLD					C49RSYF	F49RSYF	L49RSYFT	UG49RS
	NEW					C419	F419	L419	
422	OLD						F49RYF	L49RYFT	
	NEW						F422	L422	
426 Same as 317	OLD			U35RYFT		C35RYF		L35RYFT	UG35R
	NEW			U317		C317		L317	
459	OLD		A1CYD-3	U1CYDT-3					
	NEW		A459	U459					
468	OLD		A311AYD	U311AYDT					
	NEW		A468	U468					
469	OLD					C361AYD	F361AYD	L361AYDT	
	NEW				S469	C469	F469	L469	
490 Same as 547	OLD		A321RYF	U321RYFT		C321RYF	F321RYF	L321RYFT	UG321R
	NEW		A490	U490		C490	F490	L490	
495	OLD					C47RYF	R47RYF	L47RYFT	
	NEW					C495	F495	L495	
505 Same as 163	OLD	MD5-2	A2CYD	U2CYDMT		C2CYD	F2CYD	L2CYDT	UG2C
	NEW	MD5-2	A163	U163		C163	F163	L163	
547 Same as 490	OLD		A321RYF	U321YRFT		C321RYF	F321RYF	L321RYFT	UG321R
	NEW		A490	U490		C490	F490	L490	
552	OLD		A26FYD	U26FYDT					
	NEW		A552	U552					
568	OLD		A25FYD	U25FYDT					
	NEW		A568	U568					
575	OLD					C48RYF	F48RYF	L48RYFT	UG48R
	NEW					C575	F575	L575	
576	OLD					C36YD	F36YD	L36YDT	
	NEW					C576	F576	L576	
578 Same as 292	OLD					C412RYF-1	F412RYF-1	L412RYFT-1	UG412R1
	NEW				S292	C292	F292	L292	

DIE SET CONVERSION CHART (Continued)

FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
579	OLD					C451RYF	F451RYF	L451RYFT	
	NEW					C579	F579	L579	
607	OLD			U281UYDT					
	NEW			U607					
608	OLD			U39RYFT		C39RYF	F39RYF	L39RYFT	
	NEW			U608		C608	F608	L608	
609	OLD		A250EYD	U250EYDT		C250EYD			
	NEW		A609	U609		C609			
614	OLD					C38RYF			
	NEW					C614			
616	OLD		A29AYD						
	NEW		A616						
627	OLD					C39YD	F39YD	L39YDT	
	NEW					C627	F627	L627	
642	OLD			U32LYDT		C32LYD			
	NEW			U642		C642			
643	OLD			U32RLYDT					
	NEW			U643					
648	OLD						F49RYF-1	L49RYFT-1	UG49R
	NEW						F648	L648	
654	OLD		A28RLYR	U28RLYRT				L28RLYRT	
	NEW		A654	U654				L654	
655	OLD			U321RLYRT					
	NEW			U655					
657	OLD					C39LYR			
	NEW					C657			
658	OLD		A27RLYR	U27RLYRT					UG27RL
	NEW		A658	U658					
659	OLD		A26RLYR	U26RLYRT					UG26RL
	NEW		A659	U659					
660	OLD		A25RLYR	U25RLYRT					
	NEW		A660	U660					
667	OLD					C36RLYR-1			
	NEW					C667			
668	OLD			U7M8YRT					
	NEW			U668					
676	OLD			U7M10YRT					
	NEW			U676					
677	OLD			U7M9YRT					UG7M9
	NEW			U677					
678	OLD			U7M7YRT					
	NEW			U678					
679	OLD			U7M6YRT					
	NEW			U679					
684	OLD						F51RYR	L51RYRT	
	NEW						F684	L684	
687	OLD								
	NEW								

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
690	OLD			U1SET					
	NEW			U690					
691	OLD			U2SET					
	NEW			U691					
692	OLD			U4SET					
	NEW			U692					
693	OLD			U6AET					
	NEW			U693					
694	OLD			U10AET					
	NEW			U694					
702	OLD								
	NEW								

BURNDY CONDUCTOR NUMBERING SYSTEM

COPYRIGHT 1940 BY BURNDY ENGINEERING CO., INC.

OUTSIDE DIA. IN.	OUTSIDE DIA. MM.	STR. CABLE		SOL. WIRE		AREA MM ² Copper Cable	A.C.S.R.		PIPE SIZE CONDUCTOR				TUBE & ROD		SERVIT NO.
		Cat. No.	Size	Cat. No.	Size		Cat. No.	Cable Size	Cat. No.	ST D	Cat. No.	Ex Hvy	Cat. No.	Dia.	
.102	2.594			10W	10	5.261									KS90
.114	2.896			9W	9	6.634									
.116	2.946	10 C	10			5.261									
.125	3.175												60	1/8	
.129	3.277			8W	8	8.366									KS15
.130	3.302	9 C	9			6.634									
.144	3.658			7W	7	10.550									
.146	3.708	8 C	8			8.366									
.158	4.013						8R	8							
.162	4.115			6W	6	13.300									KS17
.164	4.166	7 C	7			10.550									
.176	4.470						7R	7							
.182	4.597			5W	5	16.770									
.184	4.648	6 C	6			13.300									
.198	5.029						6R	6							
.204	5.182			4W	4	21.150									KS20
.206	5.258	5 C	5			16.770									
.223	5.664						5R	5							
.229	5.817			3W	3	26.670									
.232	5.867	4 C	4			21.150									
.250	6.350						4R	4					61	1/4	
.258	6.553			2W	2	33.630									KS22
.260	6.629	3 C	3			2.6670									
.281	7.137						3R	3							
.289	7.344			1W	1	42.410									
.292	7.394	2 C	2			33.630									KS23
.316	8.026						2R	2							
.325	8.255			75	1/0	53.480									
.332	8.382	1 C	1			42.410									
.355	9.017						1R	1							
.365	9.274			76	2/0	67.430									
.372	9.474	25	1/0			53.480									KS25
.375	9.525												62	3/8	
.398	10.109						25R	1/0							
.405	10.287								10	1/8	50	1/8			
.410	10.414			77	3/0	85.030									
.419	10.617	26	2/0			67.430									KS26
.447	11.354						26R	2/0							
.460	11.684			78	4/0	107.20									
.470	11.938	27	3/0			85.03									
.500	12.700												63	1/2	
.502	12.725						27R	3/0							
.528	13.414	28	4/0			107.20									KS28
.540	13.716								11	1/4	51	1/4			
.563	14.326						28R	4/0							
.575	14.605	29	250			127.00									
.630	16.002	30	300			152.00									
.633	16.078						29R	266,800							
.642	16.307						30R	266,800							
.675	17.145								12	3/8	52	3/8			
.680	17.272						31R	300,000							
.681	17.297	31	350			177.00									KS31
.721	18.313						32R	336,400							
.728	18.494	32	400			203.00									
.741	18.824						33R	336,400							
.750	19.050												64	3/4	
.772	19.609	33	450			228.00									
.783	19.888						34R	397,500							
.806	20.472						35R	397,500							
.813	20.676	34	500			253.00									
.840	21.336								13	1/2	53	1/2			
.855	21.717	35	550			279.00									KS34
.858	21.742						36R	477,000							


BURNDY CONDUCTOR NUMBERING SYSTEM (Continued)

OUTSIDE DIA. IN.	OUTSIDE DIA. MM.	STR. CABLE		SOL. WIRE		AREA MM ² Copper Cable	A.C.S.R.		PIPE SIZE CONDUCTOR				TUBE & ROD		SERVIT NO.
		Cat. No.	Size	Cat. No.	Size		Cat. No.	Cable Size	Cat. No.	ST D	Cat. No.	Ex Hvy	Cat. No.	Dia.	
.883	22.428						37R	477,000							
.893	22.682	36	600			304.00									
.904	22.962						38R	500,000							
.927	23.546						39R	556,500							
.929	23.597	37	650			329.00									
.953	24.206						40R	556,500							
.953	24.206						41R	605,000							
.964	24.486	38	700			355.00									
.977	24.714						42R	636,000							
.998	25.349	39	750			380.00									KS39
1.000	25.400						43R	666,600					65	1	
1.031	26.187	40	800			405.00									
1.036	26.314						44R	715,500							
1.050	26.670								14		54				
1.062	26.975	41	850			431.00									
1.094	27.762	42	900			456.00	45R	795,000							
1.123	28.524	43	950			481.00									
1.146	29.108						46R	874,500							
1.152	29.264	44	1000			507.00									KS44
1.162	29.515						47R	900,000							
1.196	30.378						48R	954,000							
1.209	30.709	444	1100			557.00									
1.246	31.648						49R	1,033,500							
1.250	31.750												66	1	
1.263	32.080	448	1200			608.00									
1.289	32.744	45	1250			633.00									
1.293	32.817						50R	1,113,000							
1.315	33.404	452	1300			659.00			15	1	55	1			
1.338	33.960						51R	1,192,500							
1.364	34.646	456	1400			709.00									
1.382	35.103						52R	1,272,000							
1.412	35.865	46	1500			760.00									
1.424	36.170						53R	1,351,500							
1.459	37.059	464	1600			811.00									
1.465	37.214						54R	1,431,000							
1.500	38.100												67	1 1/2	
1.504	38.202	468	1700			861.00									
1.506	38.252						55R	1,510,500							
1.526	38.786	47	1750			886.00									
1.545	39.218						56R	1,590,000							
1.548	39.319	472	1800			912.00									
1.590	40.386	476	1900			963.00									
1.632	41.427	48	2000			1013.00									
1.660	42.164								16	1	56	1			
1.729	43.917	483	2250			1140.00									
1.824	46.330	486	2500			1267.00									
1.900	48.260								17	1 1/2	57	1 1/2			
1.914	48.616	490	2750			1393.00									
1.988	50.495	493	3000			1520.00									
2.000	50.800												68	2	
2.375	60.325								18	2	58	2			
2.500	63.500												69	2 1/2	
2.875	73.025								19	2 1/2	59	2 1/2			
3.000	76.200												70	3	
3.500	88.900								20	3	90	3	71	3 1/2	
4.000	101.600								21	3 1/2	91	3 1/2	72	4	
4.500	114.300								22	4	92	4	73	4 1/2	
5.000	127.000								23	4 1/2	93	4 1/2	74	5	
5.563	141.300								24	5	94	5			
6.063	154.000								85	5 1/2	95	5 1/2			
6.625	168.275								86	6	96	6			
7.625	193.675								87	7	97	7			
8.625	219.075								88	8	98	8			

12-TON U DIES*

BURNDY® Die Sets

Fits Y35, Y39, Y750HS,
PAT750, PAT750XT-18V,
PAT46-18V, Y46
(with PUADP-1 Adapter)

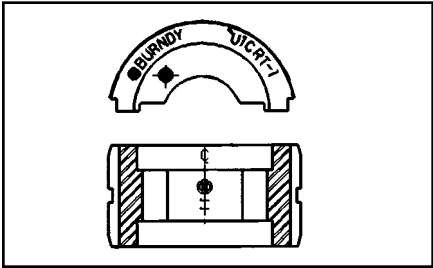

	Wire Size	Copper	Aluminum
Small	#8	U8CRT	U8CABT
	#6	U5CRT	U6CABT
	#4	U4CRT	U4CABT
	#3	U3CRT	N/A
	#2	U2CRT	U2CABT
	#1	U1CRT-1	U1CART
	1/0	U25RT	U25ART
	2/0	U26RT	U26ART
	3/0	U27RT	U27ART
	4/0	U28RT	U28ART
	250 MCM	U29RT	U29ART
	300 MCM	U30RT	U30ART
	350 MCM	U31RT	U31ART
	400 MCM	U32RT	U32ART
	500 MCM	U34RT	U34ART
	535 Flex MCM	U38XRT	N/A
Large	600 MCM	U36RT	U36ART
	750 MCM	U39RT	U39ART-2
	777 Flex	U44XRT	N/A

* Non-tension U-type 12-ton dies for YA, YS, YA-A, YS-A style connectors.
NOTE: N/A = not applicable.




U die case Part# PT29291, holds up to 15 dies

W DIES

BURNDY® Die Sets

Fits Tools MD6, MD7,
Y500CTHS, PAT600-18V, ,
PATMD6 Series

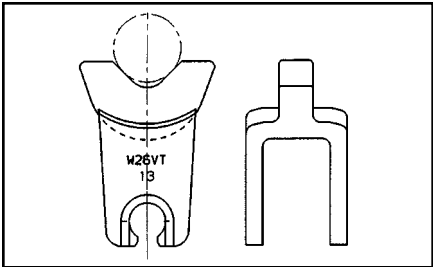

	Wire Size	Copper	Aluminum
Small	#8	W8CVT	X8CART
	#6	W5CVT	W161
	#4	W4CVT	W162
	#3	W3CRT	N/A
	#2	W2CVT	W239
	#1	W1CVT	W163
	1/0	W25VT	W241
	2/0	W26VT	W245
	3/0	W27VT	W166
	4/0	W28VT	W660
	250	*W29VT	N/A
	300	*W30VT	N/A
	350	*W31VT	*W31ART
	400	*W32VT	N/A
	500	*W34VT	N/A
Large	600	**W36RT	N/A



W die case Part# PT4946, holds up to 12 dies


* These sizes (250-500) for Y500CT, MD7-34(R), BCT500HS, PAT600-18V only.
** For PAT600-18V only.
NOTE: N/A = not applicable.
Suitable for use on YA, YS, YA-A, YS-A type non-tension connectors.

Throughout the catalog you will notice blue highlighted items. These are the most frequently ordered BURNDY® Products.

PRESENT INSTALLATION TOOL INDEX

This chart provides a cross-reference between die index numbers marked on **BURNDY® COMPRESSION CONNECTORS** and the **CORRESPONDING DIE SETS** used with the various **BURNDY® INSTALLATION TOOLS**. This is the only way to have a BURNDY® compression system.

A die index number has been assigned to each required groove configuration. A prefix letter is used to indicate the specific installation tool for which the die has been designed, as shown below.

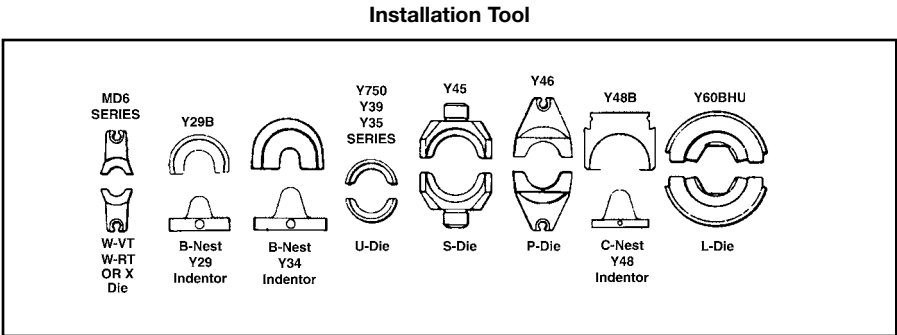

DIE IDENTIFICATION NUMBERING SYSTEM

U

34

ART

USE CHART (CHART III)

WIRE SIZE (CHART II) OR INDEX

TOOL TYPE (CHART I)

CHART I			
A - Y34A	E - Y44B	P - Y46	X - OUR840/MD-6
B - Y34BH	F - Y486RB	S - Y45	
C - Y48B	G - Y34C	U - Y35	
	L - Y60B	W - MD-6/OUR840	

CHART II			
12 - #12	4C - #4	26 - 2/0	31 - 350 MCM
10 - #10	3C - #3	27 - 3/0	32 - 400 MCM
8C - # 8	2C - #2	28 - 4/0	34 - 500 MCM
6C - # 6	1C - #1	29 - 250 MCM	36 - 600 MCM
5C - # 5	25 - 1/0	30 - 300 MCM	39 - 750 MCM
			44 - 1000 MCM

CHART III

A - ALUMINUM

B - INDENTOR NEST (USED WITH INDENTOR DIE # Y34P**)

R - ROUND DIE (CIRCUMFERENTIAL)

T - TWIN DIE (BOTH HALVES)

PRESENT INSTALLATION TOOL INDEX

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ^⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48B	Y60BHU
A				DIE SET						U-A	U-A	U-A	U-A	U-A		
BG				DIE SET		Perm GR W-BG	X-BG X-NBG			U-BG	U-BG	U-BG	U-BG	U-BG		
C				DIE SET	BROWN	W-C				U-C	U-C	U-C	U-C	U-C		
D				DIE SET						U-D	U-D	U-D	U-D	U-D		
D3				DIE SET	BLUE					U-YFD	U-YFD	U-YFD	U-YFD	U-YFD		
						Perm GR				U-D3	U-D3	U-D3	U-D3	U-D3		
E				DIE SET						U-E	U-E	U-E	U-E	U-E		
F				DIE SET						U-F	U-F	U-F	U-F	U-F		
H				DIE SET						U-H	U-H	U-H	U-H	U-H		
K-1/4				DIE SET		WK14										
K-5/16				DIE SET		WK516				UK516T	UK516T	UK516T	UK516T	UK516T		
K-3/8				DIE SET		WK38				UK38T	UK38T	UK38T	UK38T	UK38T		
K-1/2				DIE SET		WK12										
K-9/16				DIE SET		WK916				UK916T	UK916T	UK916T	UK916T	UK916T		
K-19/32				DIE SET		WK1932										
K-5/8-1				DIE SET						UK581T	UK581T	UK581T	UK581T	UK581T		
K-11/16				DIE SET		WK1116				UK1116T	UK1116T	UK1116T	UK1116T	UK1116T		
K-3/4				DIE SET						UK34T	UK34T	UK34T	UK34T	UK34T		
K-1				DIE SET						UK1T	UK1T	UK1T	UK1T	UK1T		
K-1-5/16				DIE SET						UK1516T	UK1516T	UK1516T	UK1516T	UK1516T		
K-635				DIE SET		WK737				UK737T	UK737T	UK737T	UK737T	UK737T		
K-747				DIE SET		WK747										
K-781				DIE SET		WK781										
K-840				DIE SET		W-K840				U-K840	U-K840	U-K840	U-K840	U-K840		
KB				DIE SET		WKB				UKBT	UKBT	UKBT	UKBT	UKBT		
KBKT				DIE SET						UKBKTT	UKBKTT	UKBKTT	UKBKTT	UKBKTT		
KC				DIE SET						UKCT	UKCT	UKCT	UKCT	UKCT		
KK				DIE SET		WKK										
KR				DIE SET	YELLOW									P-YFR		
													S-KR	P-KR		
KT				DIE SET		WKT										
KU				DIE SET						UKUT	UKUT	UKUT	UKUT	UKUT		
L				DIE SET		W-L				U-L	U-L	U-L	U-L	U-L		
L80				DIE SET	—					U32XRT	U32XRT	U32XRT	U32XRT	U32XRT		
L99				DIE SET	PINK					U38XRT	U38XRT	U38XRT	U38XRT	U38XRT		
L115				DIE SET	YELLOW					U44XRT	U44XRT	U44XRT	U44XRT	U44XRT		
M				DIE SET						U-M	U-M	U-M	U-M	U-M		
N				DIE SET	RED					U-YFN	U-YFN	U-YFN	U-YFN	P-YFN		
										U-N	U-N	U-N	S-N	P-N		
O				DIE SET	GREEN					U-YFO	U-YFO	U-YFO	U-YFO	U-YFO		
						Perm GR W-O				U-O	U-O	U-O	U-O	U-O		
Q				DIE SET		W-Q										

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series tools.

② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
R				DIE SET						U-R	U-R	U-R	U-R	U-R		
T				DIE SET									S-T			
Z				DIE SET									S-Z			
7		MR4C	1 CRIMP	DIE SET	BLUE	W5CRT				U5CRT	U5CRT	U5CRT	U5CRT	U5CRT		
94		MY29-3 MY29-11		NEST INDENTOR				D6CL	B6CD	U6CD-1	U6CD-1	U6CD-1	U6CD-1	U6CD-1		
8		MR4C	1 CRIMP	DIE SET	GRAY	W4CRT	W4CRT			U4CRT	U4CRT	U4CRT	U4CRT	U4CRT		
95		MY29-3 MY29-11		NEST INDENTOR				D4CL	B4CD	U4CD-1	U4CD-1	U4CD-1	U4CD-1	U4CD-1		
9		MY29-3	1 CRIMP	DIE SET	WHITE	W3CRT	W3CRT			U3CRT	U3CRT	U3CRT	U3CRT	U3CRT		
96		MY29-11		NEST INDENTOR				D3CL	B3CD	U3CD-1	U3CD-1	U3CD-1	U3CD-1	U3CD-1		
10		MY29-3	1 CRIMP	DIE SET	BROWN	W2CRT				U2CRT	U2CRT	U2CRT	U2CRT	U2CRT		
97		MY29-11		NEST INDENTOR				D2CL	B2CD	U2CD-1	U2CD-1	U2CD-1	U2CD-1	U2CD-1		
11		MY29-3	1 CRIMP	DIE SET	GREEN	W1CRT				U1CRT	U1CRT	U1CRT	U1CRT	U1CRT		
98		MY29-11		NEST INDENTOR				D1CL	B1CD	U1CD-1	U1CD-1	U1CD-1	U1CD-1	U1CD-1		
12		MY29-3	1 CRIMP	DIE SET	PINK	W25RT	W25RT			U25RT	U25RT	U25RT	U25RT	U25RT		
99		MY29-11		NEST INDENTOR				D25L	B25D	U25D-1	U25D-1	U25D-1	U25D-1	U25D-1		
13		MY29-3	1 CRIMP	DIE SET	BLACK	W26RT				U26RT	U26RT	U26RT	U26RT	U26RT		
100		MY29-11		NEST INDENTOR				D26CL	B26D	U26D-1	U26D-1	U26D-1	U26D-1	U26D-1		
14		MY29-3	1 CRIMP	DIE SET	ORANGE	W27RT				U27RT	U27RT	U27RT	U27RT	U27RT		
101		MY29-11		NEST INDENTOR				D27L	B27D	U27D-1	U27D-1	U27D-1	U27D-1	U27D-1		
15		MY29-3	1 CRIMP	DIE SET	PURPLE	W28RT				U28RT	U28RT	U28RT	U28RT	U28RT	C28R	
		MY29-11		NEST INDENTOR				D28L	B28D	U28D-1	U28D-1	U28D-1	U28D-1	U28D-1	C28D	
16		MY29-3	1 CRIMP	DIE SET	YELLOW	W29RT ④				U29RT	U29RT	U29RT	U29RT	U29RT	C29R	
		MY29-11		NEST INDENTOR				D29L	B29D		U29D-1	U29D-1	U29D-1	U29D-1	C29D	
17			1 CRIMP	DIE SET	WHITE	W30RT ④				U30RT	U30RT	U30RT	U30RT	U30RT	C30R	L30RT
				NEST INDENTOR					B30D		U30D-1	U30D-1	U30D-1	U30D-1	C30D	
18			1 CRIMP	DIE SET	RED	W31RT ④				U31RT	U31RT	U31RT	U31RT	U31RT	C31R	L31RT
				NEST INDENTOR					B31D		U31D-1	U31D-1	U31D-1	U31D-1	C31D	
19			1 CRIMP	DIE SET	BLUE	W32RT ④				U32RT	U32RT	U32RT	U32RT	U32RT	C32R	L32RT
				NEST INDENTOR					B32D		U32D-1	U32D-1	U32D-1	U32D-1	C32D	
20			1 CRIMP	DIE SET	BROWN	W34RT ④				U34RT	U34RT	U34RT	U34RT	U34RT	C34R	L34RT
				NEST INDENTOR					NO DIE		U34D-1	U34D-1	U34D-1	U34D-1	C34D	

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

⑥ Use U11T-1 for YH8C8C.

⑦ Hexagonal crimp.

⑧ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
21			1 CRIMP	DIE SET	YELLOW						U35RT	U35RT	U35RT	U35RT		
				NEST										C35D		
				INDENTOR										Y48PR		
22			1 CRIMP	DIE SET	GREEN						U36RT	U36RT	U36RT	U36RT	C36R	L36RT
				NEST									P36D	C36D		
				INDENTOR									P44PR	Y48PR		
23			1 CRIMP	DIE SET	ORANGE										C37R	
				NEST										C37D		
				INDENTOR										Y48PR		
24			1 CRIMP	DIE SET	BLACK						U39RT	U39RT	S39RT	P39RT	C39R	L39RT
				NEST										P39D	C39D	
				INDENTOR										P44PR	Y48PR	
25			1 CRIMP	DIE SET	ORANGE								S40RT	P40RT	C40R	L40RT
				NEST										P40D	C40D	
				INDENTOR										P44PR	Y48PR	
26			1 CRIMP	DIE SET	GOLD											
				NEST											C41D	
				INDENTOR											Y48PR	
27			1 CRIMP	DIE SET	WHITE								S44RT	P44RT	C44R	L44RT
				NEST										P44D	C44D	
				INDENTOR										P44PR	Y48PR	
28				DIE SET												
				NEST											C443D	
				INDENTOR											Y48PR	
29				DIE SET	YELLOW									P45RT	C45R	L45RT
				NEST											C45D	
				INDENTOR											Y48PR	
30				DIE SET	ORANGE											
				NEST											C453D	
				INDENTOR											Y48PR	
31				DIE SET	GREEN								S46RT	P46RT	C46R	L46RT
				NEST										No Nest	C46D	
				INDENTOR										Y44PR	Y48PR	
33				DIE SET	GRAY										C47R	L47RT
				NEST											C47D	
				INDENTOR											Y48PR	
34				DIE SET	BROWN											L48RT
				NEST											C48D	
				INDENTOR											Y48PR	
38		MR4C MR8G98 MR89Q MY28 Y8MRB-1		NEST INDENTOR			DV8L	BV8L	UV8L	UV8L	UV8L	UV8L	UV8L			
							Y29PL	Y34PL	Y34PL	Y34PL	Y34PL	Y34PL	Y34PL			
39		MR4C MY28		NEST INDENTOR			DV6L	BV6L	UV6L	UV6L	UV6L	UV6L	UV6L			
							Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA			

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE	EEI	MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY		MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
40		MR4C MY28		NEST INDENTOR				DV4L	BV4L	UV4L	UV4L	UV4L	UV4L	UV4L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
41		MY28		NEST INDENTOR				DV2L	BV2L	UV2L	UV2L	UV2L	UV2L	UV2L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
42		MY28		NEST INDENTOR				DV1L	BV1L	UV1L	UV1L	UV1L	UV1L	UV1L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
43		MY28		NEST INDENTOR				DV25L	BV25L	UV25L	UV25L	UV25L	UV25L	UV25L		
								Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
44		MY28		NEST INDENTOR				DV26L	BV26L	UV26L	UV26L	UV26L	UV26L	UV26L		
								Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
45		MY28		NEST INDENTOR					BV27L	UV27L	UV27L	UV27L	UV27L	UV27L		
									Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
46		MY28		NEST INDENTOR					BV28L	UV28L	UV28L	UV28L	UV28L	UV28L		
									Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
49				DIE SET	RED	W8CRT			*	U8CRT	U8CRT	U8CRT	U8CRT	U8CRT		
161				DIE SET		W161	X-161			U161	U161	U161	U161	U161		
162				DIE SET		W162	W162			U162	U162	U162	U162	U162	C162	
163 505				DIE SET		W163	W163			U163	U163	U163	U163	U163	C163	
164 275				DIE SET		W164				U164	U164	U164	U164	U164	C164	
165 205,287 339				DIE SET		W165	X-165			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	C165	L165
166 206,459				DIE SET		W166				U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459	C166	L166
167 207,211 256,568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
168 208				DIE SET						U168	U168	U168	U168	U168	C168	L168
169				DIE SET						U169	U169	U169	U169	U169	C169	L169
170 306				DIE SET						U170	U170	U170	U170	U170	C170	L170
171				DIE SET		W171				U171	U171	U171	U171	U171		
193				DIE SET						U193	U193	U193	U193	U193	C193	L193
202				DIE SET						U202	U202	U202	U202	U202		
203				DIE SET						U203	U203	U203	U203	U203		
204				DIE SET						U204	U204	U204	U204	U204		
205 165,287 339				DIE SET			X-165			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		
206 166 459				DIE SET	W166					U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459		L166
207 167,211 256,568				DIE SET	W167					U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
208 168				DIE SET						U168	U168	U168	U168	U168	C168	L168
209				DIE SET						U209	U209	U209	U209	U209	C209	L209
210				DIE SET						U210	U210	U210	U210	U210	C210	L210

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

⑤ Also pneumatic version Y29NC.

* Add Nest (BV8L) & Indenter (Y34PL) for Y34B.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y608HU
211 167, 211 256, 568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
236				DIE SET		W236				U236	U236	U236	U236	U236		
237				DIE SET		W237	X-237			U237	U237	U237	U237	U237		
238				DIE SET		W238				U238	U238	U238	U238	U238		
239				DIE SET		W239	X-239			U239	U239	U239	U239	U239		
240				DIE SET	RED	W240				U240	U240	U240	U240	U240		
241				DIE SET		W241	X-241			U241	U241	U241	U241	U241		
242 244	3S/ 4S			DIE SET		W242				U242	U242	U242	U242	U242	C242	L242
243	8A			DIE SET		W243				U243	U243	U243	U243	U243	C243	L243
244 242	3S			DIE SET		W242				U242	U242	U242	U242	U242	C242	L242
245	9A			DIE SET		W245	X-245			U245	U245	U245	U245	U245	C245	L245
246 248	5S			DIE SET		W248				U248	U248	U248	U248	U248	C248	L248
247				DIE SET		W247	X-247			U247	U247	U247	U247	U247	C247	L247
248 246	5S			DIE SET		W248				U248	U248	U248	U248	U248	C248	L248
249	11A			DIE SET		W249	X-249			U249	U249	U249	U249	U249	C249	L249
250				DIE SET						U250	U250	U250	U250	U250	C250	L250
251	12A			DIE SET	RED	W251				U251	U251	U251	U251	U251	C251	L251
252				DIE SET						U252	U252	U252	U252	U252	C252	L252
253				DIE SET						U253	U253	U253	U253	U253	C253	L253
254				DIE SET									S254	P254	C254	L254
255				DIE SET						U255	U255	U255	U255	U255	C255	L255
256 167, 207 211, 568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
257				DIE SET						U257	U257	U257	U257	U257	C257	L257
259				DIE SET						U259	U259	U259	U259	U259		
260				DIE SET											C260	L260
261 318	15A			DIE SET						U261	U261	U261	U261	U261	C261	L261
263				DIE SET						U263	U263	U263	U263	U263		
267				DIE SET						U267	U267	U267	U267	U267	C267	L267
275 164				DIE SET		W164				U164	U164	U164	U164	U164	C164	
276				DIE SET						U276	U276	U276	U276	U276		
285				DIE SET						U285	U285	U285	U285	U285		
287 165, 205 339				DIE SET		W165				U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		L165
292 578				DIE SET									S292	P292	C292	L292
293 294				DIE SET									S293	P293	C293	L293
296		MY29-3	1 CRIMP	DIE SET	TAN					U25ART	U25ART	U25ART	U25ART	U25ART	C25AR	
				NEST INDENTER									P27D			
297		MY29-3	1 CRIMP	DIE SET	OLIVE					U26ART	U26ART	U26ART	U26ART	U26ART	C26AR	
				NEST INDENTER									P29D			
														P34PR5		

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
298		MY29-3	1 Crimp	Die Set	White					U28ART	U28ART	U28ART	U28ART	U28ART	C28AR	L28ART
				Nest Indentor										P31D		
														Y34PR5		
299			1 Crimp	Die Set	Brown				W31ART	U31ART	U31ART	U31ART	U31ART	U31ART	C31AR	L31ART
				Nest Indentor										P35D	C35D	
														P48PR1	Y48PR1	
300			1 Crimp	Die Set	Pink					U34ART	U34ART	U34ART	U34ART	U34ART	C34AR	L34ART
				Nest Indentor										P39D	C39D	
														P48PR1	Y48PR1	
301			1 Crimp	Die Set	Red								S39ART	P39ART	C39AR ⑥	L39ART
				Nest Indentor										P45D	C45D	
														P48PR1	Y48PR1	
302			1 Crimp	Die Set	Brown								S44ART	P44ART	C44AR	L44ART
				Nest Indentor										No Nest	C46D	
														P48PR1	Y48PR1	
304				Die Set						U304	U304	U304	U304	U304	C304	L304
305 341				Die Set						U305	U305	U305	U305	U305	C305	L305
306 170				Die Set						U170	U170	U170	U170	U170	C170	L170
308				Die Set						U308	U308	U308	U308	U308		
313				Die Set						U313	U313	U313	U313	U313	C313	L313
314 376				Die Set											C314	L314
316				Die Set						U316	U316	U316	U316	U316	C316	L316
317 426				Die Set						U317	U317	U317	U317	U317	C317	L317
318 261				Die Set						U261	U261	U261	U261	U261	C261	L261
319				Die Set									S319	P319	C319	L319
320				Die Set									S320	P320	C320	L320
321				Die Set						U321	U321	U321	U321	U321	C321	L321
322				Die Set						U322	U322	U322	U322	U322		
324			1 Crimp	Die Set	Red					U29ART	U29ART	U29ART	U29ART	U29ART	C29AR	L29ART
				Nest Indentor										P32D		
														P34PR5		
326 538				Die Set						U33RT	U33RT	U33RT	U33RT	U33RT		
327	14A			Die Set						U327	U327	U327	U327	U327	C327	L327
328				Die Set											C328	L328
329				Die Set						U329	U329	U329	U329	U329		
331				Die Set						U331	U331	U331	U331	U331		
339 165, 205 287				Die Set			X-339			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		
341 305				Die Set						U305	U305	U305	U305	U305	C305	L305
342				Die Set									S342	P342	C342	L342
344				Die Set											C344	L344
345				Die Set											C345	L345
346 ⑦			1 Crimp	Die Set	Gray					U6CABT	U6CABT	U6CABT	U6CABT	U6CABT		

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indentor in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 Adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

⑥ Use C39AR round die 301 for 1.60 O.D. barrel. Use C39AR-2 hex die 936 for 1.46 O.D. barrel.

⑦ Hexagonal crimp.

⑧ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y608HU
348		1 CRIMP		DIE SET	PINK					U2CABT	U2CABT	U2CABT	U2CABT	U2CABT		
350				DIE SET						U350	U350	U350	U350	U350	C350	L350
352				DIE SET									S352	P352	C352	L352
373				DIE SET						U373	U373	U373	U373	U373		
374		MY29-3		DIE SET	BLUE					U8CABT	U8CABT	U8CABT	U8CABT	U8CABT		
375		MY29-3	1 CRIMP	DIE SET	GREEN					U4CABT	U4CABT	U4CABT	U4CABT	U4CABT		
376 314				DIE SET											C314	L314
403				DIE SET						U403	U403	U403	U403	U403		
419				DIE SET									S419	P419	C419	L419
422				DIE SET												L422
426 317				DIE SET						U317	U317	U317	U317	U317	U317	
459 166				DIE SET						U166/459	U166/459	U166/459	U166/459	U166/459		
467		MY29-3	1 CRIMP	DIE SET	RUBY					U27ART	A27ART	U27ART	U27ART	U27ART	C27AR	
				NEST INDENTOR								P30D				
											P34PR5					
468				DIE SET					U468	U468	U468	U468	U468			
469				DIE SET									S469	P469	C469	L469
470			1 CRIMP	DIE SET	BLUE					U30ART	U30ART	U30ART	U30ART	U30ART	C30AR	L30ART
				NEST INDENTOR								P34D	C34D			
											P48PR1	Y48PR1				
471		MY29-3	1 CRIMP	DIE SET	GOLD					U1CART	U1CART	U1CART	U1CART	U1CART		
				NEST INDENTOR												
472			1 CRIMP	DIE SET	GREEN					U32ART	U32ART	U32ART	U32ART	U32ART	C32AR	L32ART
				NEST INDENTOR									P35D	C35D		
												P48PR1	Y48PR1			
473			1 CRIMP	DIE SET	BLACK					U36ART	U36ART	U36ART	U36ART	U36ART	C36AR	L36ART
				NEST INDENTOR									P44D	C44D		
												P48PR1	Y48PR1			
474			1 CRIMP	DIE SET	GOLD								S40ART	P40ART	C40AR	L40ART
				NEST INDENTOR											C45D	
														Y48PR1		
478			1 CRIMP	DIE SET	BLUE										C46AR	L46ART
				NEST INDENTOR											C46AD	
													Y48PR11			
479				DIE SET	RED											L48ART
490 547				DIE SET						U490	U490	U490	U490	U490	C490	L490
495				DIE SET											C495	L495
505 163				DIE SET		W163				U163	U163	U163	U163	U163		L163
511		MY29-3		NEST INDENTOR					B6CD							
								Y34PA								
512		MY29-3		NEST INDENTOR					B4CD							
								Y34PA								
513		MY29-3		NEST INDENTOR					B1CD							
								Y34PA								
514		MY29-3		NEST INDENTOR					B26D							
								Y34PA								

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

⑥ Hexagonal crimp.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y608HU
515		MY29-3		NEST INDENTOR					B26D							
									Y34PR5							
516		MY29-3		NEST INDENTOR					B27D							
									Y34PR5							
517		MY29-3		NEST INDENTOR					B29D							
									Y34PR5							
518		MY29-3		NEST INDENTOR					B30D							
									Y34PR5							
519		MY29-3		NEST INDENTOR					B31D							
									Y34PR5							
520		MY29-3		NEST INDENTOR					B32D							
									Y34PR5							
521				NEST INDENTOR					No Nest						C34D	
									Y34PR11						Y48PR-1	
522				NEST INDENTOR											C35D	
															Y48PR-1	
523				NEST INDENTOR											C35D	
															Y48PR-1	
524				NEST INDENTOR											C39D	
															Y48PR-1	
525				NEST INDENTOR											C44D	
															Y48PR-1	
526				NEST INDENTOR											C45D	
															Y48PR-1	
527				NEST INDENTOR											C45D	
															Y48PR-1	
528				NEST INDENTOR											C46D	
															Y48PR-1	
529				NEST INDENTOR											C46AD	
															Y48PR-11	
538 326				DIE SET						U33RT	U33RT	U33RT	U33RT	U33RT		
547 490				DIE SET						U490	U490	U490	U490	U490	C490	L490
552				DIE SET						U552	U552	U552	U552	U552		
568 167, 207 211, 256				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568		
575				DIE SET											C575	L575
576				DIE SET											C576	L576
578 292				DIE SET									S292	P292	C292	L292
579				DIE SET									S579	P579	C579	L579
587				DIE SET												L47ART
607				DIE SET						U607	U607	U607	U607	U607		
608				DIE SET						U608	U608	U608	U608	U608	C608	L608
609				DIE SET						U609	U609	U609	U609	U609	C609	
627				DIE SET											C627	L627
642				DIE SET						U642	U642	U642	U642	U642	C642	L642
643				DIE SET						U643	U643	U643	U643	U643		
647 ⑤				DIE SET											C45AR	L45ART

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ Also pneumatic version Y29NC.

⑤ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
648				DIE SET												L648
654				DIE SET	PURPLE					U654	U654	U654	U654	P654		L654
655	13A			DIE SET						U655	U655	U655	U655	U655		
658				DIE SET						U658	U658	U658	U658	U658		
659				DIE SET		W659				U659	U659	U659	U659	U659		
660				DIE SET		W660	X-660			U660	U660	U660	U660	U660		
667				DIE SET											C667	L667
668				DIE SET						U668	U668	U668	U668	U668	C668	
676				DIE SET						U676	U676	U676	U676	U676		
677				DIE SET						U677	U677	U677	U677	U677		L677
678				DIE SET						U678	U678	U678	U678	U678		
679				DIE SET						U679	U679	U679	U679	U679		
684				DIE SET												L684
687				DIE SET		W687	X-687									
690	1S			DIE SET		W690				U690	U690	U690	U690	U690		
691	2S			DIE SET		W691				U691	U691	U691	U691	U691		
692	4S			DIE SET		W692				U692	U692	U692	U692	U692		
693	6A			DIE SET		W693				U693	U693	U693	U693	U693		
694	10A			DIE SET		W694				U694	U694	U694	U694	U694		
702				DIE SET		W702										
705				DIE SET						U705	U705	U705	U705	U705		
717 ⑦				DIE SET									S717	P717		L717
718 ⑦				DIE SET												L718
719 ⑦				DIE SET									S719	P719		L719
720 ⑦				DIE SET									S720	P720		L720
721 ⑦				DIE SET												L721
722 ⑦				DIE SET									S722	P722	C722	L722
723 ⑦				DIE SET											C723	L723
724 ⑦				DIE SET									S724	P724	C724	L724
725 ⑦				DIE SET									S725	P725	C725	L725
726 ⑦				DIE SET												L726
727 ⑦				DIE SET												L727
728 ⑦				DIE SET												L728
729 ⑦				DIE SET												L729
735 ⑦				DIE SET												L735
740 ⑦				DIE SET												L740
786				DIE SET						U786	U786	U786	U786	U786		
788				DIE SET						U788	U788	U788	U788	U788		
789				DIE SET												L789
936 ⑦			1 CRIMP	DIE SET	YELLOW					U39ART-2	U39ART-2	U39ART-2	U39ART-2	U39ART-2	C39ART-2	L39ART-2
997				DIE SET	ORANGE					U997	U997	U997	U997	U997		
998				DIE SET								PU998	S998	P998		
999				DIE SET									S999	P999		
1011				DIE SET								U1011	S1011	P1011		
1012				DIE SET									S1012			
1013		MY29-11		NEST INDENTOR						UV8L Y34PL	UV8L Y34PL	UV8L Y34PL	UV8L Y34PL	UV8L Y34PL		

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

⑥ Use C39AR round die 301 for 1.60 O.D. barrel. Use C39AR-2 hex die 936 for 1.46 O.D. barrel.

⑦ Hexagonal crimp.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ④	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48B	Y60BHU
1014		MY29-11		Nest Indentor						U6CD1	U6CD1	U6CD1	U6CD1	U6CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1015		MY29-11		Nest Indentor						U4CD1	U4CD1	U4CD1	U4CD1	U4CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1016		MY29-11		Nest Indentor						U3CD1	U3CD1	U3CD1	U3CD1	U3CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
1017		MY29-11		Nest Indentor						U2CD1	U2CD1	U2CD1	U2CD1	U2CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
1018		MY29-11		Nest Indentor						U1CD1	U1CD1	U1CD1	U1CD1	U1CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
1019		MY29-11		Nest Indentor						U25D1	U25D1	U25D1	U25D1	U25D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1020		MY29-11		Nest Indentor						U26D1	U26D1	U26D1	U26D1	U26D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1021		MY29-11		Nest Indentor						U27D1	U27D1	U27D1	U27D1	U27D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1022		MY29-11		Nest Indentor						U28D1	U28D1	U28D1	U28D1	U28D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1023		MY29-11		Nest Indentor						U29D1	U29D1	U29D1	U29D1	U29D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1024				Nest Indentor						U30D1	U30D1	U30D1	U30D1	U30D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1025				Nest Indentor						U31D1	U31D1	U31D1	U31D1	U31D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1026				Nest Indentor						U32D1	U32D1	U32D1	U32D1	U32D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1027				Nest Indentor						U34D1	U34D1	U34D1	U34D1	U34D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2	
1028				Nest Indentor										P36D	C36D	
															P48PR1	Y48PR1
1029				Nest Indentor										P38D	C38D	
															P48PR1	Y48PR1
1030				Nest Indentor										P39D	C39D	
															P48PR1	Y48PR1
1031				Nest Indentor										P40D	C40D	
															P48PR1	Y48PR1
1032				Nest Indentor										P44D	C44D	
															P48PR1	Y48PR1
1102				Die Set	White									P1102		
1103				Die Set	Blue									P1103		
1104				Die Set	Brown							U1104		P1104		
1105												U1105		P1105		
400				Die Set	Purple					U38RT	U38RT	U38RT	U38RT	U38RT		
				Nest Indentor												C38D
2000				Nest Indentor						U27B	U27B	U27B				
										Y34PR15	Y34PR15	Y34PR15				

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indentor in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ Also pneumatic version Y29NC. Available in PIPEAM KIT

CATALOG NUMBERS REQUIRING MSDS

POWERCELL	PENA13-3	PENE-8
PENA-3	PENA13-4	PENE-PT
PENA-4	PENA13-8	PENE QT
P8A	PENA13PT	PENE GAL
PENA 1LB	PENA13QT	PENE 5GAL
PENA PT	PENA13GAL	PENE 55GAL
PENA QT	PENA13 5GAL	ALFLUID QT
PENA GAL	PENA13 55GAL	ALFLUID GAL
PENA 5GAL	PENE-3	HYFLUID QT
PENA 55GAL	PENE-4	HYFLUID GAL

* All Wejtap catalog numbers ending in PB require MSDS for Power Cell.

COLOR CODING FOR OVERHEAD CONNECTORS

COLOR CODE	ALUMINUM & COPPER			
	STR	COMPACT	SOL	ASCR
BROWN	10		8	
GREEN	8		6	
BLUE	5, 6		4	6
ORANGE	3, 4	#2	2	4
RED	1-19, 2	1/0	1	2
YELLOW	1/0	2/0		1/0, 1
GRAY	2/0	3/0		2/0
BLACK	3/0	4/0		3/0
PINK	4/0	266, 300		4/0
RED	250			
WHITE	266			
BLUE	300	350		266.8 (26/7, 18/1)
BROWN	336			
GREEN	350, 397, 400			336.4 (26/7, 18/1)
GRAY	450			
PINK	500			477 (18/1)
GREEN	556			
PURPLE	600			
YELLOW				556.5 (24/7, 26/7)
BLUE	650			
RED	700			
YELLOW	750			
ORANGE	800			
WHITE	900			
BROWN	1000			

COLOR CODING FOR AL/CU CONNECTORS

COLOR CODE	STR	COLOR CODE	STR
BLUE	8	BLUE	300
GRAY	6	BROWN	350
GREEN	4	GREEN	400
PINK	2	PINK	500
GOLD	1	BLACK	600
TAN	1/0	YELLOW	700/750
OLIVE	2/0	RED	700/750
RUBY	3/0	BROWN	1000
WHITE	4/0	BLUE	1500
RED	250	RED	2000

NOTE: This chart is only intended as a guide. For specific applications refer to your catalog.

COLOR CODING FOR COPPER LUGS AND SPLICES

COLOR CODE	CODE SIZE		FLEX CABLE
	STR	SOL	
RED	8	6	8
BLUE	6		6
BLUE	5		
GRAY	4		4
WHITE	3	2	
BROWN	2		2
GREEN	1		1
PINK	1/0		1/0
BLACK	2/0		2/0
ORANGE	3/0		3/0
PURPLE	4/0		4/0
YELLOW	250		4/0 & 250
WHITE	300		250
RED	350		313.1
BLUE	400		373.7
BROWN	500		444.4
GREEN	600		
PINK	700		535.3
PURPLE			600
BLACK	750		646
YELLOW			777.7
ORANGE	800		
WHITE	1000		
YELLOW			1111
GREEN	1500		
BROWN	2000		

NOTE: This chart is only intended as a guide. For specific applications refer to your catalog.

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
115	E59	25x250 HEB BOX	D2	44 FW BOX	D3	62 HAN BOX	D6	AYP1/0	C97
115CI	E59	25x300 HEB BOX	D2	44 NW BOX	D3	62 HGSN	D5	AYP2	C97
115R	E59	25x50 HEB BOX	D2	44 SW BOX	D3	62 HSSN	D7	AYP250	C97
122EMT	N34	25x62 HEB BOX	D2	44C HEN BOX	D3	62 NW BOX	D3	AYP350	C97
122IMC	N34	25x75 HEB BOX	D2	44x150 HEB BOX	D2	62 NWGS	D5	AYP4	C97
122PVC	N34	31 FW BOX	D3	44x200 HEB BOX	D2	62 SW BOX	D3	AYP500	C97
122RIG	N34	31 NW BOX	D3	45	E59	62 SWAL BOX	D6	AYP6	C97
15	E59	31 SW BOX	D3	45CI	E59	62 SWSSMD	D7	AYP750	C97
150	E59	31C HEN BOX	D3	45CP	E59	62 X (*) HEB	A22, L14	AYPO2/0	C97
150R	E59	31CHGSN	D5	45R	E59	62C HEN BOX	D3	AYPO250	C97
15CI	E59	31x100 HEB BOX	D2	50 FW BOX	D3	62CHEN	A22, L14	AYPO3/0	C97
15CP	E59	31x125 HEB BOX	D2	50 FWA BOX	D6	62SW	A22, L14	AYPO300	C97
15R	E59	31x150 HEB BOX	D2	50 FWSS	D7	62x100 HEB BOX	D2	AYPO350	C97
1PBS1/0	A51	31x175 HEB BOX	D2	50 HAN BOX	D6	62x125 HEB BOX	D2	AYPO4/0	C97
1PBS2	A51	31x200 HEB BOX	D2	50 HGSN	D5	62x125 HGSB	D5	AYPO400	C97
1PBS250	A51	31x250 HEB BOX	D2	50 HSSN	D7	62x150 HEB BOX	D2	AYPO500	C97
1PBS350	A51	31x300 HEB BOX	D2	50 NW BOX	D3	62x175 HAB BOX	D6	AYPO600	C97
1PBS500	A51	31x50 HEB BOX	D2	50 NWGS	D5	62x175 HEB BOX	D2	AYPO750	C97
1PL2/02	A51	31x62 HEB BOX	D2	50 SW BOX	D3	62x175 HGSB	D5	B-106	E88
1PL2/03	A51	31x75 HEB BOX	D2	50 SWAL BOX	D6	62x200 HAB BOX	D6	B-107	E88
1PL2502	A51	32	E59	50 SWSSMD	D7	62x200 HEB BOX	D2	B-1208	E65
1PL2503	A51	32CI	E59	50 X (*) HEB	A22, L14	62x225 HAB BOX	D6	B-1212	E70
1PL3502	A51	32CP	E59	500	E59	62x225 HEB BOX	D2	B-1215	E76
1PL42	A51	32R	E59	500R	E59	62x250 HAB BOX	D6	B-1216	E76
1PL43	A51	38 FW BOX	D3	50C HEN BOX	D3	62x250 HEB BOX	D2	B-1218	E76
1PL44	A51	38 FWSS	D7	50CHEN	A22, L14	62x275 HEB BOX	D2	B-1219	E76
1PL6002	A51	38 HGSN	D5	50SW	A22, L14	62x300 HAB BOX	D6	B-1220	E76
1PLD2/02	A51	38 HGSN-009	D5	50x100 HEB BOX	D2	62x300 HEB BOX	D2	B-1221	E76
1PLD2/03	A51	38 HSSN	D7	50x100 HGSB	D5	62x300 HSSB	D7	B-1222	E76
1PLD2/04	A51	38 NW BOX	D3	50x106 BWSS	D7	62x31 FWGS	D5	B-1223	E76
1PLD2/06	A51	38 NWGS	D5	50x106 FWGS	D5	62x325 HEB BOX	D2	B-1224	E76
1PLD2502	A51	38 SW BOX	D3	50x125 HEB BOX	D2	62x350 HAB BOX	D6	B-1225-H	E76
1PLD2503	A51	38 SWSSMD	D7	50x150 HAB BOX	D6	62x350 HEB BOX	D2	B-1226-H	E76
1PLD2504	A51	38 X (*) HEB	A22, L14	50x150 HEB BOX	D2	62x400 HAB BOX	D6	B-1228-H	E76
1PLD2506	A51	38C HEN BOX	D3	50x150 HGSB	D5	62x400 HEB BOX	D2	B-1270	E64
1PLD3502	A51	38CHEN	A22, L12, L14	50x175 HAB BOX	D6	62x450 HAB BOX	D6	B-1271	E64
1PLD3503	A51	38FW	L12	50x175 HEB BOX	D2	62x450 HEB BOX	D2	B-1272	E64
1PLD3504	A51	38SW	A22, L12, L14	50x200 HAB BOX	D6	62x500 HAB BOX	D6	B-1273	E64
1PLD3506	A51	38x100 HEB BOX	D2	50x200 HEB BOX	D2	62x500 HEB BOX	D2	B-1274	E64
1PLD3508	A51	38x125 HEB BOX	D2	50x200 HGSB	D5	62x550 HAB BOX	D6	B-1275	E64
1PLD43	A51	38x125 HGSB	D5	50x200 HSSB	D7	62x600 HAB BOX	D6	B-1276	E64
1PLD44	A51	38X125 HSSB	D7	50x225 HAB BOX	D6	62x600 HEB BOX	D2	B-1277	E64
1PLD6002	A51	38X125HEB	L12	50x225 HEB BOX	D2	65	E59	B-1278	E64
1PLD6003	A51	38x150 HEB BOX	D2	50x250 HAB BOX	D6	65CI	E59	B-1279	E64
1PLD6004	A51	38x175 HEB BOX	D2	50x250 HEB BOX	D2	65CP	E59	B-1280	E64
1PLD6005	A51	38X175HEB	L12	50x250 HSSB	D7	65R	E59	B-1281	E64
1PLD6006	A51	38x200 HEB BOX	D2	50x275 HAB BOX	D6	75 FLATWASHER (VC)	D7	B-1282	E64
1PLD6008	A51	38x225 HEB BOX	D2	50x275 HEB BOX	D2	75 NWGS	D5	B-1283	E64
1PLO2/02	A51	38x225 HGSB	D5	50x300 HAB BOX	D6	75 X (*) HEB	A22, L14	B-1284	E64
1PLO2502	A51	38x225 HSSB	D7	50x300 HEB BOX	D2	75CHEN	A22, L14	B-1285	E64
1PLO42	A51	38X225HEB	L12	50x300 HSSB	D7	75SW	A22, L14	B-1286	E64
1PLO6002	A51	38x250 HEB BOX	D2	50x325 HAB BOX	D6	75x125 HGSB	D5	B-1287	E64
200	E59	38x250 HSSB	D7	50x325 HEB BOX	D2	90	E59	B-1288	E64
200R	E59	38X250HEB	L12	50x350 HAB BOX	D6	90CI	E59	B-1289	E64
25	E59	38x275 HEB BOX	D2	50x350 HEB BOX	D2	90R	E59	B-1290	E64
25 FW BOX	D3	38x275 HGSB	D5	50x375 HAB BOX	D6	AGSKIT2	A31	B-1291	E64
25 FWSS	D7	38x275 HSSB	D7	50x375 HEB BOX	D2	AGSKIT250	A31	B-1292	E64
25 HSSN	D7	38X275HEB	L12	50x400 HAB BOX	D6	ALFLUID™ GAL.	N76	B-1293	E64
25 NW BOX	D3	38x300 HEB BOX	D2	50x400 HEB BOX	D2	ALFLUID™ QT.	N76	B-1294	E64
25 SW BOX	D3	38x325 HEB BOX	D2	50x425 HAB BOX	D6	AMS-0	A30	B-1295	E64
25 SWSS LT	D7	38X325HEB	L12	50x450 HAB BOX	D6	AMS-1000	A30	B-1296	E64
250	E59	38x350 HEB BOX	D2	50x450 HEB BOX	D2	AMS-2	A30	B-1297	E64
250R	E59	38x400 HEB BOX	D2	50x500 HAB BOX	D6	AMS-250	A30	B-1298	E64
25C HEN BOX	D3	38x450 HEB BOX	D2	50x500 HEB BOX	D2	AMS-350	A30	B-1299	E64
25CI	E59	38x50 HEB BOX	D2	50x550 HAB BOX	D6	AMS-4/0	A30	B-1300	E64
25CP	E59	38x500 HEB BOX	D2	50x550 HEB BOX	D2	AMS-500	A30	B-1301	E64
25R	E59	38x62 HEB BOX	D2	50x600 HEB BOX	D2	AMS-750	A30	B-1302	E64
25x100 HEB BOX	D2	38x75 BWSS	D7	50x75 HEB BOX	D2	ASA1000U	C91	B-1303	E64
25x125 HEB BOX	D2	38x75 HEB BOX	D2	62 FW BOX	D3	ASA250U	C91	B-1304	E64
25x150 HEB BOX	D2	38x81 FWGS	D5	62 FWA BOX	D6	ASA800U	C91	B-1305	E64
25x200 HEB BOX	D2	38x88 HEB BOX	D2	62 FWSS	D7	AYP1	C97	B-1306	E64

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
B-1307	E64	B-1639	E77	B-2480-S	E74	B-2709	E63	B-457	E62
B-1308	E64	B-1640	E77	B-2482	E74	B-2710	E63	B-458	E62
B-1309	E64	B-1641	E77	B-2483	E74	B-2711	E63	B-459	E62
B-1310	E64	B-1642	E77	B-2484	E74	B-2712	E63	B-460	E62
B-1311	E65	B-1643	E77	B-2486	E74	B-2713	E63	B-461	E62
B-1313	E65	B-1644	E77	B-2487	E74	B-2714	E63	B-462	E62
B-1314	E65	B-1645	E77	B-2488	E74	B-2715	E63	B-463	E62
B-1315	E65	B-1646	E77	B-249	E61	B-2716	E63	B-464	E62
B-1316	E65	B-1648	E77	B-2490	E74	B-2717	E63	B-465	E62
B-1317	E65	B-1649	E77	B-2491	E74	B-2718	E63	B-466	E62
B-1318	E65	B-1650	E77	B-2493	E74	B-2719	E63	B-467	E62
B-1319	E65	B-205	E60	B-2494	E74	B-2747	E63	B-468	E62
B-1320	E65	B-206	E60	B-2495	E74	B-2751	E63	B-469	E62
B-1321	E65	B-207	E60	B-2497	E74	B-2752	E63	B-470	E62
B-1322	E65	B-208	E60	B-2498	E74	B-2753	E63	B-471	E62
B-1323	E65	B-2084	E70	B-250	E61	B-2754	E63	B-472	E62
B-1324	E65	B-209	E60	B-2506	E72	B-2755	E63	B-483	E62
B-1325	E65	B-210	E60	B-2507	E72	B-2756	E63	B-485	E62
B-1326	E65	B-211	E60	B-2509	E72	B-2757	E63	B-486	E62
B-1327	E65	B-213	E60	B-251	E61	B-2761	E77	B-487	E62
B-1328	E65	B-214	E60	B-2510	E70	B-2781	E75	B-488	E62
B-1329	E65	B-215	E60	B-2511	E72	B-280	E61	B-489	E62
B-1330	E65	B-2154	E68	B-252	E61	B-282	E61	B-490	E62
B-1331	E65	B-2155	E68	B-253	E61	B-283	E61	B-491	E62
B-1332	E65	B-2156	E68	B-254	E61	B-284	E61	B-492	E62
B-1333	E65	B-2157	E68	B-2540	E75	B-285	E61	B-493	E62
B-1334	E65	B-2158	E68	B-2542	E72	B-286	E61	B-495	E66
B-1335	E65	B-2159	E68	B-255	E61	B-287	E61	B-496	E66
B-1336	E65	B-2160	E68	B-2558	E70	B-288	E61	B-497	E66
B-1581	E68	B-2161	E68	B-256	E61	B-289	E61	B-498	E66
B-1582	E68	B-2162	E68	B-2566	E69	B-290	E61	B-499	E66
B-1583	E68	B-2163	E68	B-2567	E77	B-291	E61	B-500	E66
B-1584	E68	B-2164	E68	B-2568	E77	B-293	E61	B-501	E66
B-1586	E68	B-2165	E68	B-2569	E77	B-294	E61	B-502	E66
B-1587	E68	B-2189	E75	B-257	E61	B-295	E61	B-5021	E61
B-1588	E68	B-2199	E72	B-258	E61	B-296	E61	B-503	E66
B-1589	E68	B-2200	E72	B-2583	E74	B-297	E61	B-504	E66
B-1593	E68	B-221	E61	B-2583-S	E74	B-298	E61	B-505	E66
B-1594	E68	B-223	E61	B-259	E61	B-423	E62	B-506	E66
B-1595	E68	B-2235	E70	B-260	E61	B-424	E62	B-5065	E73
B-1596	E68	B-224	E61	B-261	E61	B-425	E62	B-507	E66
B-1597	E68	B-225	E61	B-262	E61	B-426	E62	B-508	E66
B-1601	E68	B-226	E61	B-263	E61	B-427	E62	B-509	E66
B-1602	E68	B-227	E61	B-264	E61	B-428	E62	B-510	E66
B-1603	E68	B-228	E61	B-265	E61	B-429	E62	B-511	E66
B-1604	E68	B-229	E61	B-266	E61	B-430	E62	B-513	E66
B-1605	E68	B-230	E61	B-267	E61	B-431	E62	B-514	E66
B-1606	E68	B-231	E61	B-268	E61	B-432	E62	B-515	E66
B-1610	E68	B-232	E61	B-2687	E63	B-433	E62	B-516	E66
B-1611	E68	B-2320	E70	B-2689	E63	B-434	E62	B-517	E66
B-1613	E78	B-233	E61	B-269	E61	B-435	E62	B-518	E66
B-1614	E78	B-234	E61	B-2690	E63	B-436	E62	B-519	E66
B-1615	E78	B-235	E61	B-2691	E63	B-437	E62	B-520	E66
B-1616	E78	B-236	E61	B-2692	E63	B-438	E62	B-521	E66
B-1617	E78	B-237	E61	B-2693	E63	B-439	E62	B-523	E66
B-1618	E78	B-238	E61	B-2694	E63	B-440	E62	B-524	E66
B-1619	E78	B-239	E61	B-2695	E63	B-441	E62	B-525	E66
B-1620	E78	B-240	E61	B-2696	E63	B-442	E62	B-526	E66
B-1626	E76	B-241	E61	B-2697	E63	B-443	E62	B-527	E66
B-1627	E76	B-242	E61	B-2698	E63	B-444	E62	B-528	E66
B-1628	E76	B-243	E61	B-2699	E63	B-445	E62	B-529	E66
B-1629	E76	B-244	E61	B-270	E61	B-447	E62	B-5294	E69
B-1630	E76	B-245	E61	B-2700	E63	B-448	E62	B-530	E66
B-1631	E76	B-2450	E70	B-2701	E63	B-449	E62	B-531	E66
B-1632	E76	B-246	E61	B-2702	E63	B-450	E62	B-532	E67
B-1633	E76	B-247	E61	B-2703	E63	B-451	E62	B-5321	E68
B-1634	E76	B-2476	E74	B-2704	E63	B-452	E62	B-533	E66
B-1635	E77	B-2477	E74	B-2705	E63	B-453	E62	B-5330	E70
B-1636	E77	B-2478	E74	B-2706	E63	B-454	E62	B-5331	E73
B-1637	E77	B-248	E61	B-2707	E63	B-455	E62	B-5332	E70
B-1638	E77	B-2480	E74	B-2708	E63	B-456	E62	B-5333	E70

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
B-5334	E70	B-5635	E65	B-5943	E65	B-7506	E79	B-7641	E81
B-5335	E70	B-5636	E65	B-595	E74	B-7507	E79	B-7642	E81
B-5336	E70	B-5637	E65	B-596	E74	B-7508	E79	B-7643	E81
B-5337	E70	B-5638	E65	B-5961	E69	B-7509	E79	B-7644	E81
B-5338	E70	B-5639	E65	B-5963	E69	B-7510	E79	B-7645	E81
B-534	E66	B-564	E67	B-5972	E69	B-7511	E79	B-7646	E81
B-5340	E65	B-5640	E70	B-598	E74	B-7512	E79	B-7647	E81
B-5341	E70	B-5642	E65	B-599	E74	B-7513	E79	B-7648	E81
B-5342	E65	B-5644	E65	B-5992	E69	B-7514	E79	B-7649	E81
B-535	E66	B-5645	E65	B-600	E74	B-7515	E79	B-7650	E81
B-5351	E70	B-5652	E65	B-6002	E70	B-7520	E79	B-7651	E81
B-5352	E70	B-5659	E65	B-6003	E69	B-7521	E79	B-7652	E81
B-5353	E70	B-566	E67	B-602	E73	B-7522	E79	B-7653	E81
B-5359	E75	B-5660	E68	B-6025	E69	B-7523	E79	B-7654	E81
B-5361	E75	B-5667	E70	B-603	E73	B-7528	E79	B-7656	E81
B-5362	E75	B-5668	E65	B-604	E73	B-7529	E79	B-7657	E81
B-5363	E75	B-567	E67	B-6046	E65	B-7530	E79	B-7658	E81
B-537	E67	B-5676	E65	B-6048	E69	B-7531	E79	B-7659	E81
B-538	E67	B-5677	E70	B-605	E73	B-7588	E80	B-7708	E82
B-5380	E69	B-5679	E65	B-6051	E70	B-7589	E80	B-7709	E82
B-5389	E75	B-5680	E65	B-6060	E77	B-7590	E80	B-7710	E82
B-539	E67	B-5682	E65	B-6061	E77	B-7591	E80	B-7711	E82
B-5390	E69	B-5684	E65	B-6067	E77	B-7592	E80	B-7712	E82
B-540	E67	B-5686	E65	B-6072	E77	B-7593	E80	B-7713	E82
B-541	E67	B-5688	E65	B-6114	E72	B-7594	E80	B-7714	E82
B-5416	E69	B-569	E67	B-616	E73	B-7595	E80	B-7715	E82
B-5419	E77	B-5698	E69	B-6165	E69	B-7596	E80	B-7716	E82
B-542	E67	B-5699	E69	B-617	E73	B-7597	E80	B-7717	E82
B-5428	E70	B-570	E67	B-618	E73	B-7598	E80	B-7718	E82
B-543	E67	B-5702	E70	B-619	E73	B-7599	E80	B-7719	E82
B-5432	E63	B-5709	E64	B-620	E73	B-7600	E80	B-7720	E82
B-544	E67	B-571	E67	B-6205	E86	B-7601	E80	B-7721	E82
B-545	E67	B-572	E67	B-6207	E86	B-7602	E80	B-7722	E82
B-546	E67	B-5722	E69	B-6208	E70	B-7603	E80	B-7723	E82
B-547	E67	B-573	E67	B-6209	E86	B-7604	E80	B-7724	E82
B-5475	E61	B-5732	E69	B-621	E73	B-7605	E80	B-7725	E82
B-548	E67	B-5734	E69	B-6210	E86	B-7606	E80	B-7726	E82
B-549	E67	B-5738	E69	B-6211	E86	B-7607	E80	B-7727	E82
B-550	E67	B-574	E67	B-6212	E86	B-7608	E80	B-7728	E82
B-551	E67	B-5746	E69	B-622	E73	B-7609	E80	B-7729	E82
B-5513	E69	B-575	E67	B-624	E73	B-7610	E80	B-7730	E82
B-5515	E69	B-5767	E70	B-625-H	E73	B-7611	E80	B-7731	E82
B-5517	E70	B-577	E67	B-626-H	E73	B-7612	E80	B-7732	E82
B-553	E67	B-5777	E69	B-628	E72	B-7613	E80	B-7733	E82
B-555	E67	B-578	E67	B-629	E72	B-7614	E80	B-7734	E82
B-5555	E69	B-5781	E66	B-6294	E70	B-7615	E80	B-7735	E82
B-5556	E69	B-579	E67	B-630	E72	B-7616	E80	B-7736	E82
B-556	E67	B-5803	E69	B-631	E72	B-7617	E80	B-7737	E82
B-5560	E70	B-5804	E69	B-644	E72	B-7618	E80	B-7738	E82
B-5561	E69	B-5820	E69	B-645	E72	B-7619	E80	B-7739	E82
B-557	E67	B-5821	E69	B-646	E72	B-7620	E81	B-7884	E83
B-5573	E70	B-5830	E69	B-647	E72	B-7621	E81	B-7885	E83
B-5574	E61	B-5833	E69	B-648	E72	B-7622	E81	B-7886	E83
B-558	E67	B-585	E74	B-649	E72	B-7623	E81	B-7887	E83
B-559	E67	B-5850	E69	B-650	E72	B-7624	E81	B-7888	E83
B-560	E67	B-5857	E69	B-652	E72	B-7625	E81	B-7889	E83
B-5604	E70	B-586	E74	B-653	E72	B-7626	E81	B-7890	E83
B-561	E67	B-587	E74	B-654	E72	B-7627	E81	B-7891	E83
B-5618	E64	B-5877	E69	B-6552	E65	B-7628	E81	B-7892	E83
B-562	E67	B-588	E74	B-6630	E68	B-7629	E81	B-7893	E83
B-5623	E60	B-588-S	E74	B-6766	E70	B-7630	E81	B-7894	E83
B-5624	E60	B-589	E74	B-6906	E68	B-7631	E81	B-7895	E83
B-5625	E60	B-590	E74	B-7075	E72	B-7632	E81	B-7896	E83
B-5626	E60	B-5904	E69	B-7146	E72	B-7633	E81	B-7897	E83
B-5627	E65	B-591	E74	B-7192	E73	B-7634	E81	B-7898	E83
B-5629	E65	B-5910	E77	B-7500	E79	B-7635	E81	B-7899	E83
B-563	E67	B-592	E74	B-7501	E79	B-7636	E81	B-7900	E83
B-5630	E65	B-593	E74	B-7502	E79	B-7637	E81	B-7901	E83
B-5631	E65	B-5935	E69	B-7503	E79	B-7638	E81	B-7902	E83
B-5632	E65	B-594	E74	B-7504	E79	B-7639	E81	B-7903	E83
B-5634	E65	B-5940	E69	B-7505	E79	B-7640	E81	B-7904	E83

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
B-7905	E83	B370320-03	E59	BA10E38M	B6, N79	BA16EF8	B31	BDB-16-500-3	A42, A44
B-7906	E83	B38-0101-00	E91	BA10E6	B6	BA16EF8M	B31, N79	BDB-162-500-1	A42, A45
B-7907	E83	B38-0101-01	E91	BA10E6M	B6, N79	BA16EL10	B34	BDB-162-500-2	A42, A45
B-7908	E83	B38-0135-00	E90	BA10E8	B6	BA16EL10M	B34, N79	BDB-162-500-3	A42, A45
B-7909	E83	B38-0135-01	E90	BA10E8M	B6, N79	BA16EL6	B34	BDB-212-500-1	A42, A44
B-7910	E83	B38-0302-00	E91	BA10EF10	B31	BA16EL6M	B34, N79	BDB-212-500-2	A42, A44
B-7911	E83	B38-0302-02	E91	BA10EF10M	B31, N79	BA16EL8	B34	BDB-212-500-3	A42, A44
B-7912	E83	B38-0303-00	E91	BA10EF6	B31	BA16EL8M	B34, N79	BDB-22-2/0-1	A43, A45
B-7913	E83	B38-0304-00	E91	BA10EF6M	B31, N79	BA16EZ10	B33	BDB-22-2/0-2	A43, A45
B-7914	E83	B38-0305-00	E91, F4	BA10EF8	B31	BA16EZ10M	N79	BDB-22-2/0-3	A43, A45
B-7915	E83	B38-0306-00	E90, E91	BA10EF8M	B31, N79	BA16EZ2	B33	BDB-22-350-1	A43, A44
B-7916	E83	B38-0307-00	E91	BA10EL10	B34	BA16EZ2M	N79	BDB-22-350-2	A43, A44
B-7917	E83	B38-0308-00	E91	BA10EL10M	B34, N79	BA16EZ6	B33	BDB-22-350-3	A43, A44
B-7918	E83	B38-0309-00	E91	BA10EL6	B34	BA16EZ6M	N79	BDB-22-500-1	A43, A44
B-7919	E83	B38-0309-01	E91	BA10EL6M	B34, N79	BA16EZ8	B33	BDB-22-500-2	A43, A44
B-7920	E83	B38-0330-00	E90	BA10EL8	B34	BAT14V	N49	BDB-22-500-3	A43, A44
B-7921	E83	B38-0904-00	E91	BA10EL8M	B34, N79	BAT18V	N44-N47, N50-N52	BDB-24-500-1	A42, A44
B-7922	E83	B38-3662-01	E92	BA10EZ10	B33	BATCHGR-18V	N45, N47	BDB-24-500-2	A42, A44
B-7923	E83	B38-3662-02	E92	BA10EZ6	B33	BATCHGR18V	N46	BDB-24-500-3	A42, A44
B-8011	E70	B38-3662-03	E92	BA10EZ8	B33	BC25	H66	BDB-26-2/0-1	A42, A45
B-8027	E70	B38-3662-04	E92	BA10EZ8M	N79	BC28	H66	BDB-26-2/0-2	A42, A45
B-8165	E75	B38-3662-05	E92	BA14E10	B6	BC2C	H66	BDB-26-2/0-3	A42, A45
B-8214	E70	B38-3662-06	E92	BA14E10M	B6, N79	BCC1000CUAL	N53	BDB-26-350-1	A42, A44
B-8359	E77	B38-3922-00	E90, E91	BA14E14	B6	BCCBAT12V	N53	BDB-26-350-2	A42, A44
B-8379	E73	B38-4129-00	E90	BA14E14M	B6, N79	BCCCASE	N53	BDB-26-350-3	A42, A44
B-8402	E66	B38-4129-05	E90	BA14E38	B6	BCCCHGR	N53	BDB-26-500-1	A42, A44
B-8403	E66	B3D12	E46, L11	BA14E4	B6	BCH1211	N31, N32	BDB-26-500-2	A42, A44
B-8410	E73	B3D12N	E46, L11	BA14E4M	B6, N79	BCM5	N31, N32	BDB-26-500-3	A42, A44
B-8413	E73	B3E12	E46, L11, L12	BA14E516	B6	BCT/PATDCCHGR		BDB-430-500-1	A44
B-8414	E66	B3E12N	E46, L11	BA14E516M	B6, N79		N44-N47, N49-N52	BDC-11-2/0-1	A43, A45
B-8415	E66	B3F12	E46, L11	BA14E6	B6	BD12	E45, L11	BDC-14-2/0-1	A43, A45
B-8422	E66	B3F12N	E46, L11	BA14E6M	B6, N79	BD12N	E45, L11	BE12	E45, L11
B-8423	E73	B3G12	E46, L11	BA14E8	B6	BD18	E45, L11	BE12N	E45, L11
B-8426	E66	B3G12N	E46, L11	BA14E8M	B6, N79	BD18N	E45, L11	BE18	E45, L11
B-8428	E70	B40-0106-27	E89	BA14EF10	B31	BD24	E45, L11	BE18N	E45, L11
B-8434	E67	B40-0106-75	E88	BA14EF10M	B31, N79	BD24N	E45, L11	BE24	E45, L11
B-8435	E67	B40-0106-76	E89	BA14EF2	B31	BDA-11-2/0-1	A43, A45	BE24N	E45, L11
B-8441	E67	B40-0106-77	E89	BA14EF6	B31	BDA-11-500	A41, A44	BEB122	N34
B-8442	E67	B40-0106-78	E89	BA14EF8	B31	BDA-112-350	A41, A44	BEB122EMT	N34
B-8451	E70	B40-0319-01	E90	BA14EF8M	B31, N79	BDA-14-2/0-1	A43, A45	BEB122PVC	N34
B-8452	E67	B40-0319-03	E90	BA14EL10	B34	BDA-16-350	A41, A44	BEB122RIG	N34
B-8454	E67	B40-3657-00	E88	BA14EL10M	B34, N79	BDA-16-500	A41, A44	BEBSHOECASE	N34
B-8461	E70	B40-4431-01	E89	BA14EL6	B34	BDA-212-500	A41, A44	BF12	E45, L11
B-8512	E75	B404431-00	E89	BA14EL6M	B34, N79	BDA-22-350	A41, A44	BF12N	E45, L11
B-8718	E75	B4D12	E46, L11	BA14EL8	B34	BDA-22-500	A41, A44	BF18	E45, L11
B-8726	E70	B4D12N	E46, L11	BA14EL8M	B34, N79	BDA-24-500	A41, A44	BF18N	E45, L11
B-8802	E70	B4E12	E46, L11	BA14EZ10	B33	BDA-26-350	A41, A44	BF24	E45, L11
B-8833	E74	B4E12N	E46, L11	BA14EZ10M	N79	BDA-26-500	A41, A44	BF24N	E45, L11
B-8882	E65	B4F12	E46, L11	BA14EZ2	B33	BDB-11-2/0-1	A43, A45	BG12	E45, L11, L12
B-9021	E74	B4F12N	E46, L11	BA14EZ6	B33	BDB-11-2/0-2	A43, A45	BG12N	E45, L11
B-9029	E75	B4G12N	E46, L11	BA14EZ6M	N79	BDB-11-2/0-3	A43, A45	BG18	E45, L11
B-9233	E74	BA-200	E92	BA14EZ8	B33	BDB-11-350-1	A43, A45	BG18N	E45, L11
B-9233-S	E74	BA-201	E92	BA14EZ8M	N79	BDB-11-350-2	A43, A45	BG24	E45, L11
B-9253	E77	BA-202	E92	BA16E10	B6	BDB-11-350-3	A43, A45	BG24N	E45, L11
B106-32	E89	BA-203	E92	BA16E10M	B6, N79	BDB-11-500-1	A43, A44	BGBL-1/0	A15
B106-37	E89	BA-204	E92	BA16E14	B6	BDB-11-500-2	A43, A44	BGBL-250	A15
B106-41	E89	BA-205	E92	BA16E14M	B6, N79	BDB-11-500-3	A43, A44	BGBL-4	A15
B107-32	E89	BA-207	E92	BA16E38	B6	BDB-112-350-1	A42, A44	BH864	N31, N32
B107-37	E89	BA-208	E92	BA16E38M	B6, N79	BDB-112-350-2	A42, A44	BHA12E	N33
B12E	N33	BA-209	E92	BA16E4	B6	BDB-112-350-3	A42, A44	BHA1E34R	N33
B1E34R	N33	BA-211	E92	BA16E4M	B6, N79	BDB-14-500-1	A42, A45	BHA34E12R	N33
B2D12	E46, L11	BA-212	E92	BA16E6	B6	BDB-14-500-2	A42, A45	BHSG1100	F14
B2D12N	E46, L11	BA-213	E92	BA16E6M	B6, N79	BDB-14-500-3	A42, A45	BIBD2/0-10	A48
B2E12	E46, L11, L12	BA-214	E92	BA16E8	B6	BDB-16-2/0-1	A42, A45	BIBD2/0-12	A48
B2E12N	E46, L11	BA-215	E92	BA16E8M	B6, N79	BDB-16-2/0-2	A42, A45	BIBD2/0-14	A48
B2F12	E46, L11	BA-240	E92	BA16EF10	B31	BDB-16-2/0-3	A42, A45	BIBD2/0-2	A48
B2F12N	E46, L11	BA10E10	B6	BA16EF10M	B31, N79	BDB-16-350-1	A42, A44	BIBD2/0-3	A48
B2G12N	E46, L11	BA10E10M	B6, N79	BA16EF2	B31	BDB-16-350-2	A42, A44	BIBD2/0-4	A48
B34E12R	N33	BA10E14	B6	BA16EF2M	B31, N79	BDB-16-350-3	A42, A44	BIBD2/0-5	A48
B370320-01	E59	BA10E14M	B6, N79	BA16EF6	B31	BDB-16-500-1	A42, A44	BIBD2/0-6	A48
B370320-02	E59	BA10E38	B6	BA16EF6M	B31, N79	BDB-16-500-2	A42, A44	BIBD2/0-8	A48

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
BIBD2/010MT	A49	BIBS2/04MT	A49	BISR2	A46	BPD-4-350	K19	C-4JPT	E34
BIBD2/012MT	A49	BIBS2/06MT	A49	BISR250	A46	BPD-4-500	K19	C-4LH-1	E38
BIBD2/04MT	A49	BIBS2/08MT	A49	BISR250-DB	A50	BPD-6-350	K19	C-4LH-2	E38
BIBD2/06MT	A49	BIBS250-10	A47	BISR3/0-DB	A50	BPD-6-500	K19	C-4LH-3	E38
BIBD2/08MT	A49	BIBS250-12	A47	BISR350	A46	BPD-8-350	K19	C-5 (Junior)	E34
BIBD250-10	A48	BIBS250-14	A47	BISR4-DB	A50	BPD-8-500	K19	C-6	E37
BIBD250-12	A48	BIBS250-3	A47	BISR500	A46	BPD2-4-750	K19	C-61	E38
BIBD250-14	A48	BIBS250-4	A47	BISR500	A46	BPD2-6-750	K19	C-66	E38
BIBD250-2	A48	BIBS250-5	A47	BIT2/0	A46	BPD2-8-750	K19	C-6D	E37
BIBD250-3	A48	BIBS250-6	A47	BIT350	A46	BPH20	N31, N32	C-7	E37
BIBD250-4	A48	BIBS250-8	A47	BIT4	A46	BS-2006	E71	C-8	E34
BIBD250-5	A48	BIBS25010MT	A49	BIT600	A46	BS-2007	E71	C11CSLH12	E39
BIBD250-6	A48	BIBS25012MT	A49	BIT750	A46	BS-2008	E71	C11HD4/ODB	E36
BIBD250-8	A48	BIBS2504MT	A49	BIT02/0	A46	BS-2009	E71	C11K16D	E35
BIBD25010MT	A49	BIBS2506MT	A49	BIT0250	A46	BS-2010	E71	C11K17D	E35
BIBD25012MT	A49	BIBS2508MT	A49	BIT0350	A46	BS-2011	E71	C22HD4/ODB	E36
BIBD2504MT	A49	BIBS350-10	A47	BIT04	A46	BS-2012	E71	CCD	H24
BIBD2506MT	A49	BIBS350-12	A47	BIT0600	A46	BS-2013	E71	CCFBG-FR	C84
BIBD2508MT	A49	BIBS350-14	A47	BIT0750	A46	BS-2014	E71	CCFD-FR	C80, C84
BIBD350-10	A48	BIBS350-3	A47	BK88001	N25	BS-2015	E71	CCFDX-FR	C84
BIBD350-12	A48	BIBS350-4	A47	BK88004	N24	BS-2016	E71	CCFDXFR	C80
BIBD350-14	A48	BIBS350-5	A47	BK88007	N27	BS-2017	E71	CCFN-FR	C80, C84
BIBD350-2	A48	BIBS350-6	A47	BK88008	N26	BS-2018	E71	CCFO-FR	C80, C84
BIBD350-3	A48	BIBS350-8	A47	BK88020	N28, N30	BS-2019	E71	CCFR-FR	C80, C84
BIBD350-4	A48	BIBS35010MT	A49	BK3540	N31, N32	BS-2020	E71	CCN	H24
BIBD350-5	A48	BIBS35012MT	A49	BKD1000B	N24, N27-N32	BS-2021	E71	CCNL	H24
BIBD350-6	A48	BIBS3504MT	A49	BKD1250B	N24, N27-N32	BS-2024	E71	CCO	H24
BIBD350-8	A48	BIBS3506MT	A49	BKD1500B	N25, N27-N32	BS-2025	E71	CFAD	C103
BIBD35010MT	A49	BIBS3508MT	A49	BKD2000B	N25, N27-N32	BS-2026	E71	CFAD-FR	C103
BIBD35012MT	A49	BIBS4-3	A47	BKD2500	N26, N30, N32	BS-2027	E71	CFAN	C103
BIBD3504MT	A49	BIBS4-4	A47	BKD3000	N26, N30, N32	BS-2028	E71	CFAN-FR	C103
BIBD3506MT	A49	BIBS4-5	A47	BKD3500	N26, N32	BS-2029	E71	CFANL	C103
BIBD3508MT	A49	BIBS4-6	A47	BKD4000	N26, N32	BS-2030	E71	CFANL-FR	C103
BIBD4-2	A48	BIBS4-8	A47	BKD500B	N24, N27-N32	BS-2031	E71	CFAO	C103
BIBD4-3	A48	BIBS600-10	A47	BKD750B	N24, N27-N32	BS-2032	E71	CFAO-FR	C103
BIBD4-4	A48	BIBS600-12	A47	BKLP2	N30	BS-2033	E71	CFAR	C103
BIBD4-5	A48	BIBS600-14	A47	BKLP2K1	N30	BS-2034	E71	CFAR-FR	C103
BIBD4-6	A48	BIBS600-3	A47	BKLP6	N29	BS-2068	E71	CFBG-FR	C84
BIBD4-8	A48	BIBS600-4	A47	BKLP6K1	N29	BS-2069	E71	CFD-FR	C80, C84
BIBD600-10	A48	BIBS600-5	A47	BKOH2540	N26	BS-2070	E71	CFN-FR	C80, C84
BIBD600-12	A48	BIBS600-6	A47	BKOH520A	N31	BS-2105	E71	CFO-FR	C80, C84
BIBD600-14	A48	BIBS600-8	A47	BKOH540A	N32	BS-2106	E71	CFR-FR	C80, C84
BIBD600-2	A48	BIBS60010MT	A49	BKOM152	N25	BS-2107	E71	CH10C	G13
BIBD600-3	A48	BIBS60012MT	A49	BKOM50125	N24	BS-2108	E71	CH10M	G13
BIBD600-4	A48	BIBS6004MT	A49	BKOR14	N28	BS-2109	E71	CH11C	G13
BIBD600-5	A48	BIBS6006MT	A49	BKOR152	N28	BS-2110	E71	CH11M	G13
BIBD600-6	A48	BIBS6008MT	A49	BKOR50	N28	BS10	B46	CH12C	G13
BIBD600-8	A48	BIBS750-10	A47	BKOR520	N28	BS14	B46	CH12M	G13
BIBD60010MT	A49	BIBS750-12	A47	BKOR75125	N28	BS16	B46	CH14C	G13
BIBD60012MT	A49	BIBS750-14	A47	BKOS520	N30	BURNDY® GROUNDMAX™		CH14M	G13
BIBD6004MT	A49	BIBS750-3	A47	BKOS5290	N29		E84, E85	CH16C	G13
BIBD6006MT	A49	BIBS750-4	A47	BKOW520	N27	C-11B	E34	CH16M	G13
BIBD6008MT	A49	BIBS750-6	A47	BKP1000B	N24, N27-N32	C-11CSH-1	E39	CH18C	G13
BIBD750-10	A48	BIBS750-8	A47	BKP1250B	N24, N27-N32	C-11CSH-2	E39	CH18M	G13
BIBD750-12	A48	BIC-4-350	K19	BKP1500B	N25, N27-N32	C-11CSH-3	E39	CH24C	G13
BIBD750-14	A48	BIC-4-500	K19	BKP2000B	N25, N27-N32	C-11D	E34	CH24L	G13
BIBD750-2	A48	BIC-6-350	K19	BKP2500	N26, N30, N32	C-11JA	E36	CH2C	G13
BIBD750-3	A48	BIC-6-500	K19	BKP3000	N26, N30, N32	C-11JPT	E34	CH2M	G13
BIBD750-4	A48	BIC-8-350	K19	BKP3500	N26, N32	C-11LH-1	E38	CH3C	G13
BIBD750-6	A48	BIC-8-500	K19	BKP4000	N26, N32	C-11LH-2	E38	CH3M	G13
BIBD750-8	A48	BIC2-4-750	K19	BKP500B	N24, N27-N32	C-11LH-3	E38	CH4C	G13
BIBS2/0-10	A47	BIC2-6-750	K19	BKP750B	N24, N27-N32	C-11N	E34	CH4M	G13
BIBS2/0-12	A47	BIC2-8-750	K19	BKPR7520	N29, N30	C-22	E34	CH5C	G13
BIBS2/0-14	A47	BIPC1/0-2	A36	BKPR7540	N31, N32	C-22D	E34	CH5M	G13
BIBS2/0-3	A47	BIPC350-350	A36	BKPS50	N29-N32	C-22JA	E36	CH6C	G13
BIBS2/0-4	A47	BIPC350-4/0	A36	BKS752B	N24, N25, N27	C-22JPT	E34	CH6M	G13
BIBS2/0-5	A47	BIPC4/0-1/0	A36	BKSA50	N29, N30	C-22LH-1	E38	CH7C	G13
BIBS2/0-6	A47	BIPC4/0-6	A36	BKSB50B	N24, N27	C-22LH-2	E38	CH7M	G13
BIBS2/0-8	A47	BIPC500-4/0	A36	BKW52	N27	C-22LH-3	E38	CH8C	G13
BIBS2/010MT	A49	BISR1-DB	A50	BMY-BCH-MT	N14	C-4	E34	CH8M	G13
BIBS2/012MT	A49	BISR1/0	A46	BP10PADKIT	N67, N68	C-4JA	E36	CH9C	G13

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
CH9M	G13	CT18075M00	G5	CT50250EPRC0	G8	E2C34G1	A20, H38, L25	FD68C8	L23
CKS4	A4	CT18075MH4C	G9	CT50300C	G5, G6	E3C34G1	A20, H38, L25	FD68D12	L23
CL50-1	A15, E27	CT18075MH4C0	G9	CT50300C0	G6	E4C34G1	A20, H38, L25	FD68D8	L23
CL50-1TN	A15, E27	CT18075MH4M	G9	CT50300C00	G5	EA25	A14	FD69C8	L23
CP2525	H12	CT18125C	G6	CT50300M	G5, G6	EA28	A14	FD69D12	L23
CP2626	H12	CT18125C0	G6	CT50300M0	G6	EA28-2N	A14	FD69D8	L23
CP26A26A	H10	CT18125M	G6	CT50300M00	G5	EA2C	A14	FD70D12	L23
CP27A27A	H10	CT18125M0	G6	CT50400C	G5, G6	EA34	A14	FD70D16	L23
CP2828	H12	CT18200C	G6	CT50400C0	G6	EA34-2N	A14	FL1025X03D	B40
CP28A28A	H10	CT18200C0	G6	CT50400C00	G5	EP10	N72	FL1425X03B	B40
CP2929	H12	CT18200M	G6	CT50400IDC	G5, G9	EP10-1HP	N73	FL1425X03D	B40
CP29A29A	H10	CT18200M0	G6	CT50400M	G5, G6	EP10-1HP-2	N73	FL1825X03B	B40
CP2C2C	H12	CT2501000Q	G7	CT50400M0	G6	EP10-2	N72	FL1825X03D	B40
CP30A30A	H10	CT2501000Q0	G7	CT50400M00	G5	EP6	N72	FN62T16	L25
CP31A31A	H10	CT2501000RQ	G8	CT50400MH10C	G9	EP6-1HP	N73	FN63T13	L25
CP32A32A	H10	CT2501000RQ0	G8	CT50400MH10C0	G9	EP6-2	N72	FN64T16	L25
CP3434	H12	CT2501200Q	G7	CT50400MH10M0	G9	EP8	N72	FN655T12	L25
CP34A34A	H10	CT2501200Q0	G7	CT50400RC	G8	EP8-1HP	N73	FN66T14	L25
CP37A37A	H10	CT2501200RQ0	G8	CT50400RC0	G8	EP8-2	N72	FN67T12	L25
CPB10	A39	CT250200RQ	G8	CTB075AA4C	G12	EPAC-6	N71	FP-10	N68
CPB12	A39	CT250200RQ0	G8	CTB075RA4C	G12	EPAC-8	N71	FP-6	N68
CPB16-5/8	A39	CT250500RQ	G8	CTB075RA4M	G12	EPAC10	N71	FP-8	N68
CPB21-1/4	A39	CT250500RQ0	G8	CTB075S4C	G12	EPAC10-2	N71	FQN10F25X03B	B39
CPB6	A39	CT250600Q	G7	CTB125AA4C	G12	EPP10	N70	FQN10F25X03D	B39
CPB8	A39	CT250600Q0	G7	CTB125RA2C	G12	EPP6	N70	FQN10M25X03B	B39
CPT10	A39	CT250600RQ	G8	CTB125RA4C	G12	EPPCASE-1	N70	FQN10M25X03D	B39
CPT12	A39	CT250600RQ0	G8	CTB125RA4D	G12	EQC632C	E26, H39	FQN14F25X03B	B39
CPT16	A39	CT250800Q	G7	CTB125RA4L	G12	ES25A25A	H43	FQN14F25X03D	B39
CPT6	A39	CT250800Q0	G7	CTB125S2C	G12	ES25A2W	H43	FQN14M25X03B	B39
CPT8	A39	CT250800RQ	G8	CTB125S4C	G12	ES25A4W	H43	FQN14M25X03D	B39
CT120200D	G7	CT250800RQ0	G8	CTB150AA4C	G12	ES25R25R	H43	FQN18F25X03B	B39
CT120200D0	G7	CT30125C	G5, G6	CTB150RA4B	G12	ES25R2R	H43	FQN18F25X03D	B39
CT120200L	G7	CT30125C0	G6	CTB150RA4C	G12	ES25R2W	H43	FQN18M25X03B	B39
CT120200L0	G7	CT30125C00	G5	CTB150S4B	G12	ES25R4W	H43	FQN18M25X03D	B39
CT120300D	G7	CT30125M	G5, G6	CTH120400L	G10	ES25R6W	H43	GA25H26	E53
CT120300D0	G7	CT30125M0	G6	CTH18075C	G10	ES2R2R	H43	GAR1126	E28
CT120300L	G7	CT30125M00	G5	CTH18075M	G10	ES2R2W	H43	GAR1129	E28
CT120300L0	G7	CT30125MH8C	G9	CTH30200C	G10	ES2R4W	H43	GAR114C	E28
CT120400D	G5, G7	CT30125MH8C0	G9	CTH50175C	G10	ES2R6W	H43	GAR1426	E28
CT120400D0	G7	CT40200C	G6	CTH50175M	G10	ES2R8W	H43	GAR1429	E28
CT120400D00	G5	CT40200C0	G6	CTSS1001000C	G14	ES2W2W	H43	GAR1434	E28
CT120400L	G5, G7	CT40200M	G6	CTSS100200C	G14	ES2W4W	H43	GAR144C	E28
CT120400L0	G7	CT40200M0	G6	CTSS100400C	G14	ES2W6W	H43	GAR1526	E28
CT120400L00	G5	CT40200RC	G8	CTSS100600C	G14	ES2W8W	H43	GAR1529	E28
CT120400MH14D0	G9	CT40200RC0	G8	CTSS100800C	G14	ES4W4W	H43	GAR1534	E28
CT120400MH14L	G9	CT40300C	G6	CTSS250200L	G14	ES4W6W	H43	GAR154C	E28
CT120400MH14L0	G9	CT40300C0	G6	CTSS250400L	G14	ES4W8W	H43	GAR1626	E28
CT120900D	G5	CT40300M	G6	CTSS250600L	G14	ES6W6W	H43	GAR1629	E28
CT120900D00	G5	CT40300M0	G6	CTSS250800L	G14	ES6W8W	H43	GAR1634	E28
CT120900L	G5, G7	CT40400C	G6	CTZ120400D	G10	ES8W8W	H43	GAR164C	E28
CT120900L0	G7	CT40400C0	G6	CTZ120400L	G10	F22A28	K18	GAR1726	E28
CT120900L00	G5	CT40400M	G6	CTZ18075C	G10	FCB63-2NP300	A34, L24	GAR1729	E28
CT1751100Q	G7	CT40400M0	G6	CTZ30200C	G10	FCB63-4N	A34, L24	GAR1734	E28
CT1751100Q0	G7	CT50137EPRC	G8	CTZ50175C	G10	FCB63-6N	A34, L24	GAR174C	E28
CT1751400Q	G7	CT50137EPRC0	G8	CUSA442NTC	C91	FCB64-44NP50	A34, L24	GAR1826	E28
CT1751400Q0	G7	CT50137RC	G8	CUSA442TC38	C91	FCB64-4N	A34, L24	GAR1829	E28
CT175400Q	G5, G7	CT50137RC0	G8	CUW26RE-1	H68	FCB64-6N	A34, L24	GAR1834	E28
CT175400Q0	G7	CT50175C	G5, G6	CUW30A-E	H68	FCB65-4N	A34, L24	GAR184C	E28
CT175600Q	G5, G7	CT50175C0	G6	CUW32R-E	H68	FD64C5T16	L23	GAR1926	E28
CT175600Q0	G7	CT50175C00	G5	CUW34-E	H67	FD655C6	L23	GAR1929	E28
CT175600Q00	G5	CT50175ID2L	G5, G9	CUW361R-E	H68	FD655D6	L23	GAR1934	E28
CT175900Q	G5, G7	CT50175ID3L	G5, G9	CUW391A-E	H68	FD65C6T14	L23	GAR194C	E28
CT175900Q0	G7	CT50175IDC	G5, G9	CUW44-E	H67	FD66C6	L23	GAR2026	E29
CT175900Q00	G5	CT50175M	G5, G6	CZ-11	E35	FD66D6	L23	GAR2029	E29
CT18075C	G5, G6	CT50175M0	G6	DUW28	H67	FD675C8	L23	GAR2034	E29
CT18075C0	G6	CT50175M00	G5	DUW28A	H68	FD675D8	L23	GAR204C	E29
CT18075C00	G5	CT50175MH10C	G9	DUW31	H67	FD67C6	L23	GAR2126	E29
CT18075FLC	G9	CT50175MH10C0	G9	DUW34	H67	FD67D8	L23	GAR2129	E29
CT18075IDC	G5, G9	CT50175MH10M	G9	DUW44	H67	FD685C8	L23	GAR2134	E29
CT18075M	G5, G6	CT50175MH10M0	G9	DUW44A	H68	FD685D12	L23	GAR214C	E29
CT18075M0	G6	CT50250EPRC	G8	DUW44A-E	H68	FD685D8	L23	GAR2226	E29

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
GAR2229	E29	GD1826	E32	GL2929	E48	HFB33-4N	A23, L15	HS_34FR	F11
GAR2234	E29	GD1829	E32	GL3434	E48	HFB33P1	A22, A23, L14	HS_34FR250	F11
GAR224C	E29	GD1834	E32	GL4C4C	E48	HFB42P1	A22	HS_34T300PF	F7
GAR2426	E29	GD184C	E32	GP10	N74	HFB44-4N	A23, L15	HS_34T48PF	F6
GAR2429	E29	GD1926	E32	GP1126	E33	HFB44P1	A22, A23, L14	HS_38FR	F11
GAR2434	E29	GD1929	E32	GP1129	E33	HFB63P1	A22, L14	HS_38FR250	F11
GAR244C	E29	GD1934	E32	GP114C	E33	HFB66-6N	A23, L15	HS_38T300PF	F7
GAR3902	E30	GD194C	E32	GP1426	E33	HFB66P1	A22, A23, L14	HS_38T48PF	F6
GAR3902-BU	E30	GD2026	E32	GP1429	E33	HFB88P1	A22, L14	HSB100T6PF7	F5
GAR3902TC	E31	GD2029	E32	GP1434	E33	HFBW42T10CG1	L13	HSB110H48PF5	F8
GAR3903	E30	GD2034	E32	GP144C	E33	HFBW43T10CG1	L13	HSB110H6PF5	F8
GAR3903-BU	E30	GD204C	E32	GP1526G1	E55	HFBW44T17CG1	L13	HSB110H9PF5	F8
GAR3903TC	E31	GD2126	E32	GP1629	E33	HFBW64T17CG1	L13	HSB11612T6PF14	F5
GAR3904	E30	GD2129	E32	GP164C	E33	HFBW66T16CG1	L13	HSB116T6PF26	F5
GAR3904-BU	E30	GD2134	E32	GP1726	E33	HFBW86T20CG1	L13	HSB12T6PF10	F5
GAR3904TC	E31	GD214C	E32	GP1726RT	E55	HHS-RL48	N37	HSB14T6PF14	F5
GAR3905	E30	GD2226	E32	GP1826	E33	HHS-O/C-B11	N86	HSB150H12PF3	F8
GAR3905-BU	E30	GD2229	E32	GP184C	E33	HHS-O/C-B16	N86	HSB150H48PF5	F8
GAR3905TC	E31	GD2234	E32	GP2026	E33	HHS-O/C-B20	N86	HSB150H9PF3	F8
GAR3906	E30	GD224C	E32	GP2226	E33	HHS-O/CB13	N86	HSB18T6PF20	F5
GAR3906-BU	E30	GG15-1	E41	GP6	N74	HIW-716R1	N82	HSB200H12PF2	F8
GAR3906TC	E31	GG16-1	E41	GP6426	E33	HIW12SOCSET	N88	HSB200H48PF2	F8
GAR3907	E30	GG17-1	E41	GP6429	E33	HIW71612TGKIT	N82, N88	HSB200H9PF2	F8
GAR3907-BU	E30	GG17-15	E41	GP6434	E33	HIW716VTR1	N82	HSB316T6PF18	F5
GAR3907TC	E31	GG18-1	E41	GP644C	E33	HP10	N67	HSB332T6PF24	F5
GAR3908	E30	GG18-15	E41	GP64526G1	E55	HP2HV	N84	HSB34H48PF5	F8
GAR3908-BU	E30	GG18-2	E41	GP654CG1	E55	HP3	N84	HSB34H6PF10	F8
GAR3908TC	E31	GG19-2	E41	GP8	N74	HP6	N67	HSB34H9PF10	F8
GAR3909	E30	GG19-25	E41	GQ26-1	E42	HP8	N67	HSB34T6PF8	F5
GAR3909-BU	E30	GG20-2	E41	GQ2626	E42	HPP18	N87	HSB35H3PF25	F8
GAR3909TC	E31	GG20-25	E41	GQ29-1	E42	HPP18-2	N87	HSB35H48PF5	F8
GAR6426	E28	GG20-3	E41	GQ2929	E42	HPP5	N87	HSB35H6PF25	F8
GAR6429	E28	GG21-2	E41	GRC12	E44	HPS-O/C-4-B11	N86	HSB38100T6PF8	F5
GAR6434	E28	GG21-25	E41	GRC34	E44	HPS-O/C-4-B13	N86	HSB38T6PF12	F5
GAR644C	E28	GG21-3	E41	GRC58	E44	HPS-O/C-5-B11	N86	HSC100FR	F10
GAR644C-RB	E30	GG21-35	E41	GRF4C-3	E54	HPS-O/C-5-B13	N86	HSC100FR100	F10
GAR8629	E29	GG22-2	E41	GRF4C-4	E54	HPT-59-RI	N85	HSC112FR	F10
GB26	E47	GG22-25	E41	GRL3	E44	HPT-60-RI	N85	HSC112FR100	F10
GB29	E47	GG22-3	E41	GRL4	E44	HPT-71-RI	N85	HSC12FR	F10
GB34	E47	GG22-4	E41	GRL5	E44	HPT-72-RI	N85	HSC12FR250	F10
GB4C	E47	GG24-2	E41	GRL6	E44	HPT-83-RI	N85	HSC14FR	F10
GBL30	E47	GIE2CG3	E51	GSTUD14HY	E22	HPT-84-RI	N85	HSC14FR250	F10
GBM26	E47	GIE4CG3	E51	GSTUD34HY	E22	HPT-96-RI	N85	HSC18FR	F10
GBM29	E47	GIE4CG3P5	E51	GSTUD38HY	E22	HS_100FR	F11	HSC18FR250	F10
GBM34	E47	GIE4CG3P7	E51	GSTUD916HY	E22	HS_100FR100	F11	HSC200FR	F10
GBM4C	E47	GIE4CG4	E51	GTCTAC34RA	E50	HS_100T300PF	F7	HSC200FR100	F10
GC15A	E40	GIE4CG4P5	E51	GX2626	E43	HS_100T48PF	F6	HSC34FR	F10
GC18A	E40	GIE4CG4P7	E51	GX264C	E43	HS_112FR	F11	HSC34FR250	F10
GC22A	E40	GK1126	E33	GX2926	E43	HS_112FR100	F11	HSC38FR	F10
GC2525CT	E49	GK1129	E33	GX2929	E43	HS_116T300PF	F7	HSC38FR250	F10
GC2626	E47	GK114C	E33	GX294C	E43	HS_116T48PF	F6	HSIC10-500FR	F9
GC2626CT	E49	GK1426	E33	GX3426	E43	HS_12FR	F11	HSIC200FR	F9
GC2929	E47	GK1429	E33	GX3429	E43	HS_12FR250	F11	HSIC269FR	F9
GC2929CT	E49	GK1434	E33	GX3434	E43	HS_12T300PF	F7	HSIC30-1000FR	F9
GC3434	E47	GK1526	E33	GX344C	E43	HS_12T48PF	F6	HSIC350FR	F9
GC4C4C	E47	GK1529	E33	GX4C4C	E43	HS_14FR	F11	HSIC4-40FR	F9
GCL30	E47	GK1626	E33	GZ26-12	E48	HS_14FR250	F11	HSIC8-1FR	F9
GCM26	E47	GK1629	E33	GZ26-38	E48	HS_14T300PF	F7	HSM100T6PF7	F5
GCM29	E47	GK1726	E33	GZ26-58	E48	HS_14T48PF	F6	HSM116T6PF26	F5
GCM30	E47	GK1729	E33	GZ29-12	E48	HS_150T48PF	F6	HSM12T6PF10	F5
GCM34	E47	GK1826	E33	GZ29-38	E48	HS_18FR	F11	HSM14T6PF14	F5
GCM4C	E47	GK1829	E33	GZ29-58	E48	HS_18FR250	F11	HSM18T6PF20	F5
GCRT1/0	E44	GK1926	E33	GZ4C-12	E48	HS_18T300PF	F7	HSM316T6PF18	F5
GD1526	E32	GK1929	E33	GZ4C-38	E48	HS_18T48PF	F6	HSM332T6PF24	F5
GD1529	E32	GK6426	E33	GZ4C-58	E48	HS_200FR	F11	HSM34T6PF8	F5
GD1626	E32	GK6429	E33	H12E	N33	HS_200FR100	F11	HSM38T6PF12	F5
GD1629	E32	GK6434	E33	H1E34R	N33	HS_200T48PF	F6	HTP3	N84
GD1726	E32	GK644C	E33	H34E12R	N33	HS_316T300PF	F7	HYFLUID™ GAL.	N76
GD1729	E32	GKA4C	E27	HBR40	N83	HS_316T48PF	F6	HYFLUID™ QT.	N76
GD1734	E32	GKA8C	E27	HBR55	N83	HS_332T300PF	F7	J1207	K10
GD174C	E32	GL2626	E48	HFB22P1	A22	HS_332T48PF	F6	J1252	H36

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
J1592	K10	KA25-2TC 38	A14	KPA28	A11	KVSW44	A8, H6	LPHTSOC12588PT	N88
J278	E52	KA25U	A24	KPA34	A11	LB13A	L33	LPHTSOC1278	N88
J279	E52	KA26U	A24	KPA4C	A11	LB14A	L33	LPHTSOC12788PT	N88
J280	E52	KA28	A14	KPA4CUP	A12	LB15A	L33	LPHTSOC12916	N88
J295	E52	KA29U	A24, A29	KPA8C	A11	LB16A	L33	LPHTWHP-BCS66606-18	N85
J990	H36	KA2U	A24, A29	KPA8CUP	A12	LB17A	L33	LPHY46	N81
K-PC28	K16	KA30U	A24	KPB4CG1	E27	LB18A	L33	LPHY750	N80
K11A30U	A28	KA31U	A24	KPU29A26AC	A35	LB19A	L33	LSC1/0	H17
K11A34U-2	A28	KA34	A14	KPU29A29AC	A35	LB20A	L33	LSC1/0-1	H17
K11A36U-2	A28	KA34U	A24	KPU34A26AC	A35	LB21A	L33	LSC556	H17
K11A39U-2	A28	KA36U	A24	KPU34A34AC	A35	LB22A	L33	LSC556-1	H17
K21A36U-2	A28	KA36U-2N	A24	KPU39A26AC	A35	LB24A	L33	M20	H66
K22A36U-2	A28	KA40U	A24	KPU39A39AC	A35	LB86A	L33	M30	H66
K22A39U-2	A28	KA40U-2N	A24	KS15	A4, E26, H4	LH28-3	L21	M40	H66
K2A25U	A25	KA44U	A24	KS17	A4, E26, H4	LH34-3	L21	M50	H66
K2A26U	A25	KA44U-2N	A24	KS17-3	A4, H4	LHR29-3	L21	M60	H66
K2A29U	A25	KA4C	A14	KS20	A4, E26, H4	LPC12S	N88	M70	H66
K2A31U	A25, A29	KA6U	A24	KS20-3	A4, H4	LPC38S	N88	M80	H66
K2A31U-2N	A25	KA8C	A14	KS22	A4, E26, H4	LPHT3CHISEL11418	N88	M8ND	N12
K2A36U	A25	KAU-KIT1	A29	KS22-3	A4, H4	LPHTADPMM71612	N88	M90	H66
K2A36U-2N	A25	KAU-KIT2	A29	KS23	A4, E26, H4	LPHTADPMMOP66	N88	MCC1000	N5
K2A40U	A25, A29	KAU-KIT3	A29	KS25	A4, E26, H4	LPHTADPSMFOP66	N80, N81	MCC1000BLADESET	N5
K2A40U-2N	A25	KAU-KIT4	A29	KS26	A4, E26, H4	LPHTASPHALTCUT118	N88	MCC20	N5
K2A44U	A25	KC15	E25	KS27	A4, E26, H4	LPHTBIT111618D	N88	MCC500	N5
K2A44U-2N	A25	KC15B1	E25	KS29	A4, E26, H4	LPHTBIT111624D	N88	MCC500BLADESET	N5
K2C15	E25	KC17	E25	KS31	A4, E26, H4	LPHTBIT131618D	N88	MD6	N17
K2C15B1	E25	KC17B1	E25	KS34	A4, E26, H4	LPHTBIT131624D	N88	MD6-12	N17
K2C17	E25	KC20	E25	KS39	A4, H4	LPHTBIT151618D	N88	MD6-14	N17
K2C17B1	E25	KC20B1	E25	KS44	A4, H4	LPHTBIT151624D	N88	MD6-37	N17
K2C20	E25	KC22	E25	KS90	A4, H4	LPHTCLAYSPADE118	N88	MD6-38	N17
K2C20B1	E25	KC22B1	E25	KSA 1/0	A6	LPHTDRIPBODY66	N88	MD6-4	N17
K2C22	E25	KC22J12T13	E26, H39	KSA 2/0	A6	LPHTDRIPBODY88	N88	MD6-6	N17
K2C22B1	E25	KC23	E25	KSA 350	A6	LPHTDRIPNOSE66	N88	MD6-6HS60	N22
K2C23	E25	KC23B1	E25	KSA 4/0	A6	LPHTDRIPNOSE88	N88	MD6-6HS72	N22
K2C23B1	E25	KC25	E25	KSA 500	A6	LPHTGRDVR11458	N88	MD6-6R	N21
K2C25	E25	KC25B1	E25	KSA2	A6	LPHTGRDVR11858	N88	MD6-6R-2	N21
K2C25B1	E25	KC26	E25, E26, H39	KSA4	A6	LPHTHOSNCR666610	N80, N81, N88	MD6-8AH48	N22
K2C26	E25	KC26B1	E25	KSA6	A6	LPHTHOSNCR6666100P	N80, N81, N88	MD6-8HS60	N22
K2C26B1	E25	KC28	E25	KSU17	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6-8HS72	N22
K2C28	E25	KC28B1	E25	KSU20	A5, H5	LPHTHOSNCR66668	N80, N81, N88	MD6-8R	N21
K2C28B1	E25	KC31	E25	KSU22	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6-AH48	N22
K2C31	E25	KC31B1	E25	KSU23	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6-CP1	N20
K2C31B1	E25	KC34	E25	KSU25	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6HS60	N22
K2C34	E25	KC34B1	E25	KSU26	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6HS72	N22
K2C34B1	E25	KC34J12T13	E26, H39	KSU27	A5, H5	LPHTHOSNCR666680P	N80, N81, N88	MD6R	N21
K33B34-4N	K17	KK3A36U-2N	A26	KSU29	A5, H5	LPHTHTMABODY66	N80, N81	MD7	N18
K3A25U-2	A26	KK3A36U-4N	A27	KSU31	A5, H5	LPHTHTMADUSTCAPF	N88	MD7-34	N19
K3A25U-4	A27	KK3A40U-2N	A26	KSU34	A5, H5	LPHTHTMADUSTCAPM	N88	MD7-34-KIT1	N19
K3A26U-2N	A26	KK3A40U-4N	A27	KVS26	A7, H5, H7	LPHTHTMANOSE66	N80, N81	MD7-34R	N19
K3A27U-2N	A26	KK3A44U-2N	A26	KVS26A	A8, H8	LPHTMOILPT118	N88	MD7-34R-KIT 1	N19
K3A27U-4N	A27	KK3A44U-4N	A27	KVS28	A7, H5, H7	LPHTNARCHISEL11814	N88	MD7-6	N18
K3A29U-2N	A26	KK4A36U-4N	A28	KVS28A	A8, H8	LPHTSOC121	N88	MD7-8	N18
K3A29U-4N	A27	KK4A40U-4N	A28	KVS31	A7, H5, H7	LPHTSOC121/118	N88	MK7	G15
K3A2U-2	A26	KK4A31U-2N	A24	KVS31A	A8, H8	LPHTSOC121116	N88	MK9	G15
K3A2U-4	A27	KLU125	A13	KVS34	A7, H5, H7	LPHTSOC12112	N88	MR10-D2	N8
K3A31U-2N	A26	KLU125TP	A13	KVS34A	A8, H8	LPHTSOC12114	N88	MR10-D3	N8
K3A31U-4N	A27	KLU175	A13	KVS40	A7, H5, H7	LPHTSOC12118	N88	MR10-D4	N8
K3A36U-2N	A26	KLU175TP	A13	KVS40A	A8, H8	LPHTSOC121188PT	N88	MR10-G6	N8
K3A36U-4N	A27	KLU225	A13	KVS44	A7, H5, H7	LPHTSOC1212	N88	MR15	N9
K3A40U-4N	A27	KLU225TP	A13	KVS44A	A8, H8	LPHTSOC12128PT	N88	MR18	N9
K4A29U-4N	A28	KLU25	A13	KVSU26	A7, H7	LPHTSOC121316	N88	MR20	N9
K4A31U-4N	A28	KLU25TP	A13	KVSU28	A7, H7	LPHTSOC121316/1516	N88	MR4C	N10
K6A34U-6N	K18	KLU300	A13	KVSU31	A7, H7	LPHTSOC1213168PT	N88	MR8-1A	N8
K6B28-4N	K17	KLU300TP	A13	KVSU34	A7, H7	LPHTSOC12138	N88	MR8-33S-1	N8
K6B2826-2N	K17	KLU35	A13	KVSU40	A7, H7	LPHTSOC1215168PT	N88	MR8-92	N8
K6P28	K16	KLU35TP	A13	KVSU44	A7, H7	LPHTSOC121716	N88	MR8-9Q	N8
K6P28C	K16	KLU400	A13	KVSW26	A8, H6	LPHTSOC1217168PT	N88	MR8-G96	N8
K6P34U	K18	KLU400TP	A13	KVSW28	A8, H6	LPHTSOC1218PT	N88	MR8-G98	N8
K6P34UC	K18	KLU70	A13	KVSW31	A8, H6	LPHTSOC1234	N88	MRC840	N13
K6PC34U	K18	KLU70TP	A13	KVSW34	A8, H6	LPHTSOC12348PT	N88	MY28	N14
KA25	A14	KPA25	A11	KVSW40	A8, H6	LPHTSOC1258	N88	MY28-4	N14

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
MY28-6	N14	NBC15A-34N	L30	NNT18A18A	L27	NYT3929	C87	PQ18R256M	N79
MY29 UNIVERSAL KIT	N14	NBC16A-2N	L30	NNT19A19A	L27	NYT3934	C87	PQ18R257M	N79
MY29-11	N14	NBC17A-2N	L30	NNT20A20A	L27	NYT4429	C87	PQ18R258M	N79
MY29-11C	N14	NBC17A-34N	L30	NNTR14A29A	L27	NYT4431	C87	PT 10128	N76
MY29-3	N14	NBC17A-44N	L30	NNTR14A36A	L27	NYT4434	C87	PT 11018	N76
MY29-3C	N14	NBC18A-2N	L30	NNTR15A36A	L27	NYT4444	C87	PT 29074-1	N75, N76
MY29-3CF	N14	NBC18A-34N	L30	NNTR15A42A	L27	NYT4646	C87	PT 29075	N76
N2AH34-34N	L18	NBC18A-44N	L30	NNTR16A29A	L27	OH25	N15	PT 29091	N76
N2AH40-34N	L18	NBC19A-34N	L30	NNTR16A32A	L27	OUR840	N16	PT 29214-1	N76
N2AH44-34N	L18	NBC19A-44N	L30	NNTR16A42A	L27	OUR840-WC	N16	PT 29279-2	N37
N2AH44-44N	L18	NBC20A-44N	L30	NNTR17A29A	L27	OUR840-WH	N16	PT 29291	N76
N2AH46-44N	L18	NBC22A-34N	L30	NNTR18A29A	L27	P15K	N46, N63, N81	PT 29402-1	N76
NA13-2N	L16	NBC22A-44N	L30	NNTR19A42A	L27	P8A	F4	PT 29900-10	N75
NA14-2N	L16	NBC24A-34N	L30	NNTR20A32A	L27	PAT46-18V	N46	PT 29900-15	N75
NA15-2N	L16	NDR6328T13	L22	NNTR29A29A	L28	PAT46C-18V	N46	PT 29900-25	N75
NA15-4N	L16	NDR6428T16	L22	NNTR32A25A	L28	PAT4PC834-18V	N48	PT 29901-10	N75
NA15A-2N	L29	NDR6434T16	L22	NNTR32A32A	L28	PAT600-18V	N50	PT 29901-15	N75
NA15A-4N	L29	NDR6444T16	L22	NNTR36A29A	L28	PAT644XT-18V	N45	PT 29901-25	N75
NA16-2N	L16	NDR6528T14	L22	NNTR36A36A	L28	PAT750XT-18V	N44	PT 29902-10	N75
NA16-4N	L16	NDR6534T14	L22	NNTR42A32A	L28	PAT81KFT-18V	N47	PT 29902-15	N75
NA16A-4N	L29	NDR6544T14	L22	NNTR42A36A	L28	PATCHGR-18V	N44	PT 29902-25	N75
NA17-2N	L16	NDR65528T12	L22	NNTR42A42A	L28	PATCHGR18V	N49-N52	PT 6545	N76
NA17-4N	L16	NDR65534T12	L22	NNTR45A45A	L28	PATCHGR250V	N44-N46, N49-N52	PT 6547-2	N76
NA17A-2N	L29	NDR65544T12	L22	NNTR46A42A	L28			PT 76	N75
NA17A-4N	L29	NDR6644T12	L22	NNTR46A46A	L28	PATCUT129ACSR-18V	N51	PT 91	N75
NA18-4N	L16	NDR6728T12	L22	NNTR48A48A	L28	PATCUT245CUAL-18V	N52	PT 93	N76
NA18A-2N	L29	NDR6734T12	L22	NS1313	L7	PATJAWSMD6	N49	PT 94	N76
NA18A-4N	L29	NDR6744T12	L22	NS1414HC	L7	PATJAWSMD6-6	N49	PT10024162	N43
NA19-4N	L16	NDR6748T12	L22	NS14A14A	L28	PATJAWSMD6-8	N49	PT10037384	N43, N51, N65
NA19A-4N	L29	NDR6844T12	L22	NS1515	L7	PATMD6-14V	N49	PT10037388	N43, N51, N65
NA20A-4N	L29	NDR6848T12	L22	NS15A15A	L28	PATMD6-6-14V	N49	PT10038657	N52, N66
NA21-4N	L16	NHNT1329	L5	NS1616HC	L7	PATMD6-8-14V	N49	PT10040663	N52, N66
NAH29-2N	L17	NHNT1429	L5	NS1717	L7	PEN A-4	F4	PT10043890	N65
NAH34-2N	L17	NHNT1434	L5	NS17A17A	L28	PEN A-55GAL	F4	PT10044980	N52
NAH34-34N	L17	NHNT1529	L5	NS1818	L7	PEN A-5GAL	F4	PT10054094	N66
NAH40-2N	L17	NHNT1534	L5	NS18A18A	L28	PEN A-GAL	F4	PT10121	N63
NAH40-34N	L17	NHNT1540	L5	NS1919	L7	PEN A-QT	F4	PT10128	N63
NAH40-44N	L17	NHNT1629	L5	NS19A19A	L28	PEN A13-4	F4	PT17188	N21
NAH44-2N	L17	NHNT1634	L5	NS2020	L7	PEN A13-55GAL	F4	PT208620	
NAH44-34N	L17	NHNT1640	L5	NS20A20A	L28	PEN A13-5GAL	F4		N44, N45, N47, N50-N52
NAH44-44N	L17	NHNT1644	L5	NS2121	L7	PEN A13-8	F4	PT29279-2	N39, N58
NAH46-2N	L17	NHNT1729	L5	NS21A21A	L28	PEN A13-GAL	F4	PT29291	C9, N37, N39, N58
NAH46-34N	L17	NHNT1734	L5	NS2222	L7	PEN A13-QT	F4	PT29360	N37
NAH46-44N	L17	NHNT1740	L5	NS22A22A	L28	PEN E-4	F4	PT29402-1	N58
NAH48-2N	L17	NHNT1744	L5	NS24A24A	L28	PEN E-55GAL	F4	PT2972	N37
NAH48-34N	L17	NHNT1829	L5	NSNT1329	L5	PEN E-5GAL	F4	PT30540	N59
NAH48-44N	L17	NHNT1834	L5	NSNT1429	L5	PEN E-8	F4	PT30541	N59
NAR25A-2N	L31	NHNT1840	L5	NSNT1434	L5	PEN E-GAL	F4	PT4583	N15
NAR29A-2N	L31	NHNT1844	L5	NSNT1529	L5	PEN E-QT	F4	PT4925	N20, N21
NAR29A-4N	L31	NHNT1846	L5	NSNT1629	L5	PENA 1/2	F4	PT4931-1	N20
NAR32A-2N	L31	NHNT1929	L5	NSNT2929	L6	PENA13CARTRIDGE	F4	PT4946	C9, N20
NAR32A-4N	L31	NHNT1934	L5	NSNT3429	L6	PENACARTRIDGE	F3, F4	PT4952-1	N20
NAR36A-2N	L31	NHNT1940	L5	NSNT3434	L6	PENETROX A	F3	PT6515	N62
NAR36A-4N	L31	NHNT1944	L5	NT1414	L4	PENETROX A-13	F3	PT6545	N62
NAR42A-2N	L31	NHNT1946	L5	NT1514	L4	PENETROX E	F3	PT6547-2	N62
NAR42A-4N	L31	NHNT2044	L5	NT1515	L4	PGN1425X03B	B38	PT6581	N62
NAR45A-2N	L31	NHNT2929	L6	NT1614	L4	PGN1425X03D	B38	PT6733	N20, N37
NAR45A-4N	L31	NHNT3429	L6	NT1615	L4	PGN1825X03B	B38	PT6744	N20
NAR46A-2N	L31	NHNT3434	L6	NT1616	L4	PGN1825X03D	B38	PT8504	N15
NAR46A-4N	L31	NHNT4429	L6	NT1714	L4	PGP1425X03B	B38	PUADP-1	N46, N63, N81
NAR48A-2N	L31	NHNT4434	L6	NT1717	L4	PGP1425X03D	B38	Q14F11X02B	B35
NAR48A-4N	L31	NHNT4440	L6	NT1818	L4	PGP1825X03B	B38	Q14F11X02D	B35
NAS29-2N	L17	NHNT4444	L6	NT2020	L4	PGP1825X03D	B38	Q14F18X02B	B35
NAS29-34N	L17	NHNT4834	L6	NT2222	L4	PQ10R258M	N79	Q14F18X02D	B35
NAS29-N	L17	NHNT4840	L6	NYT2828	C87	PQ14R187M	N79	Q14F25X03B	B35
NAS34-2N	L17	NHNT4844	L6	NYT2925	C87	PQ14R188M	N79	Q14F25X03D	B35
NAS34-34N	L17	NHNT4846	L6	NYT2929	C87	PQ14R256M	N79	Q14M18X02B	B36
NAS34-N	L17	NHNT4848	L6	NYT3426	C87	PQ14R257M	N79	Q14M18X02D	B36
NAS40-2N	L17	NNT15A15A	L27	NYT3428	C87	PQ14R258M	N79	Q14M25X03B	B36
NAS40-34N	L17	NNT16A16A	L27	NYT3429	C87	PQ18R187M	N79	Q14M25X03D	B36
NBC15A-2N	L30	NNT17A17A	L27	NYT3434	C87	PQ18R188M	N79	Q18F18X02B	B35

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
Q18F18X02D	B35	QGFL1CB1T6	A33, E53, L24	QQA31	A16	RK241-2	F13	SWA92A-44N	M9
Q18F25X03B	B35	QGFL26B1	A33, E53, L24	QQA31-2N	A16	RK242-2	F13	SWAB19A-34N	M15
Q18F25X03D	B35	QGFL26B1T6	A33, E53, L24	QQA34	A16	RK257-2	F13	SWAB22A-34N	M15
Q18M18X02B	B36	QGFL26B2	A33, E53, L24	QQA34-2N	A16	RP50RP02	N53	SWAB22A-44N	M15
Q18M18X02D	B36	QGFL26B2T6	A33, E53, L24	QQA40-2N	A16	RP50RP03	N53	SWAB86A-44N	M15
Q18M25X03B	B36	QGFL29B1	A33, E53, L24	QQA40-4N	A16	RYA25UC	K8	SWAC18A-2N	M11
Q18M25X03D	B36	QGFL29B1T6	A33, E53, L24	QQA44-2N	A16	RYA25UCR	K8	SWAC18A-34N	M11
Q2A1C-2	A17	QGFL31B1	A33, E53, L24	QQA4C	A16	RYA26UC	K8	SWAC18A-44N	M11
Q2A26-2N	A17	QGFL31B1T6	A33, E53, L24	QQA4C-2	A16	RYA26UCR	K8	SWAC19A-34N	M11
Q2A28-2N	A17	QGFL34B1	A33, E53, L24	QR1C	A19	RYA27UC	K8	SWAC20A-34N	M11
Q2A28-4N	A17	QGFL34B1T6	A33, E53, L24	QR26	A19	RYA27UCR	K8	SWAC20A-44N	M11
Q2A31-2N	A17	QGFL39B1	A33, E53, L24	QR28	A19	RYA28UC	K8	SWAC21A-44N	M11
Q2A31-4N	A17	QGFL39B1T6	A33, E53, L24	QR31	A19	RYA28UCR	K8	SWAC22A-34N	M11
Q2A34-2N	A17	QGFL44B1	A33, E53, L24	QR34	A19	RYA29UC	K8	SWAC22A-44N	M11
Q2A34-4N	A17	QGFL44B1T6	A33, E53, L24	QR40	A19	RYA29UCR	K8	SWAC24A-44N	M11
Q2A40-2N	A17	QGFL46B1	A33, E53, L24	QR4C	A19	RYA2UC	K8	SWAC58A-34N	M11
Q2A40-4N	A17	QGFL46B1T6	A33, E53, L24	RA6UC-SL	K9	RYA2UCR	K8	SWAC90A-34N	M11
Q2A44-4N	A17	QGFL48B1	A33, E53, L24	RA6UCR-SL	K9	RYA2WAC	K8	SWAC92A-44N	M11
Q2A46-4N	A17	QN14F18X02D	B36	RCC1000	N6	RYA2WACR	K8	SWAT18A17A-30	M18
Q2B28-2N	A18	QN14F25X03B	B36	RCC556	N6	RYA31AC	K8	SWAT19A16A-30	M18
Q2B31-2N	A18	QN14F25X03D	B36	RCC600	N6	RYA31ACR	K8	SWAT19A17A-30	M18
Q2B40-4N	A18	QN14M18X02B	B37	RCC750HD	N6	RYA31C-2	K8	SWAT20A17A-30	M18
Q3A28-2N	A17	QN14M18X02D	B37	RCC954ACSR	N6	RYA31CR-2	K8	SWAT20A18A-30	M18
Q3A28-4N	A17	QN14M25X03B	B37	RDM4-28	K7	RYA34C-2	K8	SWAT21A18A-30	M18
Q3A31-2N	A17	QN14M25X03D	B37	RDM5-28T	K8	RYA34CR-2	K8	SWAT24A20A-30	M18
Q3A31-4N	A17	QN18F18X02B	B36	RDM6-28	K7	RYA4UC	K8	SWAT86A22A-30	M18
Q3A34-2N	A17	QN18F18X02D	B36	RDM7-28T	K8	RYA4UCR	K8	SWCB86A	M25
Q3A34-4N	A17	QN18F25X03B	B36	RDM8-28	K7	RYA75AC	K8	SWHRH18A-3CH	M21
Q3A40-4N	A17	QN18F25X03D	B36	RDM2-28CR	K7	RYA75ACR	K8	SWHRH19A-3CH	M21
Q3A44-4N	A17	QN18M18X02B	B37	RDMD4-2858D	K7	RYAC25	K8, K10	SWHRH19A-5CH	M21
Q3A46-4N	A17	QN18M18X02D	B37	RDMD4-28G3	K7	RYAC31	K8, K10	SWHRH20A-3CH	M21
QA1C-2B	A16	QN18M25X03D	B37	RDMD6-2858D	K7	RYAC31-1	K10	SWHRH21A-3CH	M21
QA1C-B	A16	QP14F18X02B	B35	RDMD6-28G3	K7	S2GBP44A12B2	M28	SWHRH21A-5CH	M21
QA26-2B	A16	QP14F18X02D	B35	RGC39G1	E52	S2GBP486A12B2	M28	SWHRH22A-3CH	M21
QA26-B	A16	QP14F25X03B	B35	RGC44G1	E52	S2GBPA44A12	M27	SWHRH86A-3CH	M21
QA28-2B	A16	QP14F25X03D	B35	RHCC129ACSR	N65	S2GBPA45A12B2	M28	SWL18A	M23
QA28-2N	A16	QP14M18X02B	B37	RHCC245CUAL	N66	S2GBPA46A12	M27	SWL19A	M23
QA28-B	A16	QP14M18X02D	B37	RHCCCHA	N65	S2GBPA486A12	M27	SWL20A	M23
QA31-2B	A16	QP14M25X03B	B37	RK 194-2	N23	S3GBP483A	M30	SWL21A	M23
QA31-2N	A16	QP14M25X03D	B37	RK141-2	B50	SC2	A4, H4	SWL22A	M23
QA31-B	A16	QP18F18X02B	B35	RK141ABOX100	B50	SC2/0	A4, H4	SWOH21A-3	M19
QA34-2B	A16	QP18F18X02D	B35	RK142-2	B50	SC4	A4, H4	SWSUH22A-3	M20
QA34-2N	A16	QP18F25X03B	B35	RK142ABOX100	B50	SCB21A	M24	SWSUH86A-5	M20
QA34-4B	A16	QP18F25X03D	B35	RK147-2	N23	SCB24A	M24	SWT17A17A	M16
QA34-B	A16	QP18M18X02B	B37	RK149-2	F12	SF2A44NL12EX	M31	SWT19A17A-75	M17
QA40-2N	A16	QP18M18X02D	B37	RK150-2	F12	SH2GBP44A5	M27	SWT19A18A-75	M17
QA40-B	A16	QP18M25X03B	B37	RK151-2	F12	SH2GBP45A5	M27	SWT19A19A	M16
QA44-2N	A16	QP18M25X03D	B37	RK152-2	F12	SH2GBP45A512	M27	SWT20A18A-75	M17
QA44-4N	A16	QPX2828	A9, H13	RK153-2	F12	SH2GBP46A512	M27	SWT21A16A-75	M17
QA44-B	A16	QPX2828-Y	A10	RK154-2	F13	SH2GBP486A5	M27	SWT21A17A	M16
QA46-2N	A16	QPX282C	A9, H13	RK155-2	F13	SH2GBP486A512B4	M29	SWT21A18A	M16
QA46-B	A16	QPX282C-Y	A10	RK160-2	F12	SH2GBP48A5	M27	SWT21A18A-75	M17
QA4C-2B	A16	QPX2C2C	A9, H13	RK161-2	F12	SN10	B47	SWT22A18A-75	M17
QA4C-B	A16	QPX2C2C-Y	A10	RK162-2	F12	SN14	B47	SWT22A19A	M16
QA8C-2B	A16	QPX3428	A9, H13	RK163-2	F12	SN18	B47	SWT22A19A-75	M17
QA8C-B	A16	QPX3428-Y	A10	RK164-2	F12	SNM14	B48	SWT22A20A-75	M17
QB1C	A18	QPX342C	A9, H13	RK165-2	F12	SNM18	B48	SWT22A22A	M16
QB26	A18	QPX342C-Y	A10	RK191-2	F14	SP10	B46	SWT24A20A-75	M17
QB28	A18	QPX3434	A9, H13	RK225-2	F12	SP14	B46	SWT86A22A-75	M17
QB31-2N	A18	QPX3434-Y	A10	RK226-2	F12	SP16	B46	SWVH22A-5	M22
QB4C	A18	QPX4428	A9, H13	RK227-2	F12	STS33A-4N	I3, M26	SWVH22A-7	M22
QB8C	A18	QPX442C	A9, H13	RK228-2	F14	STS43A-4N	I3, M26	SWVH24A-7	M22
QDA1C	A19	QPX4434	A9, H13	RK229-2	F13	STS44A-4N	I3, M26	SWXP92A92A	M14
QDA26	A19	QPX4444	A9, H13	RK230-2	F12	STS44A-4NCG2	M26	T10-10	B5
QDA28	A19	QPX4444-Y	A10	RK231-2	F12	SWA18A-34N	M9	T10-10F	B26
QDA31	A19	QQA1C	A16	RK232-2	F12	SWA20A-2N	M9	T10-14	B5
QDA34	A19	QQA1C-2	A16	RK236-2	F12	SWA21A-44N	M9	T10-14F	B26
QDA40	A19	QQA26	A16	RK237-2	F12	SWA444A-44N	M10	T10-38	B5
QDA4C	A19	QQA26-2	A16	RK238-2	F12	SWA454A-4N	M10	T10-516	B5
QDA8C	A19	QQA28	A16	RK239-2	F13	SWA486A-44N	M10	T10-6	B5
QGFL1CB1	A33, E53, L24	QQA28-2N	A16	RK240-2	F13	SWA90A-34N	M9	T10-6F	B26

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
T10-8	B5	TN10-6	B8	TP16-6LF	B34	UB244	D8	UCG25R2RS	H15
T10-8F	B26	TN10-6F	B29	TP16-6Z	B33	UB249	D8	UCG25RS	H15
T14-10	B5	TN10-8	B8	TP16-8	B6	UB254	D8	UCG28R	H15
T14-10F	B26	TN10-8F	B29	TP16-8F	B31	UB256	D8	UCG28RS	H15
T14-14	B5	TN14-10	B8	TP16-8LF	B34	UB257	D8	UCG32R	H15
T14-14F	B26	TN14-10F	B29	TP16-8Z	B33	UB258	D8	UCG32RS	H15
T14-38	B5	TN14-14	B8	TS-KD	N85	UB260	D8	UCK-1UL	H9
T14-4	B5	TN14-14F	B29	TS-RD	N85	UB261	D8	UCK-2UL	H9
T14-516	B5	TN14-38	B8	TS-RT	N85	UB262	D8	UCK-3UL	H9
T14-6	B5	TN14-4	B8	TS-SQ	N85	UB263	D8	UCU28AC	A35
T14-6F	B26	TN14-516	B8	TWT1	G15	UB264	D8	UGS350ULDB	A32
T14-8	B5	TN14-6	B8	TWT2	G15	UB266	D8	UGSKIT2	A31
T14-8F	B26	TN14-6F	B29	U1CART	C9, 031	UB267	D8	UGSKIT250	A31
T18-10	B5	TN14-8	B8	U1CRT-1	C9, 031	UB268	D8	UGSKIT8	A32
T18-10F	B26	TN14-8F	B29	U25ART	C9, 031	UB269	D8	UH14-3	L20
T18-14	B5	TN18-10	B8	U25RT	C9, 031	UB271	D8	UH15-3	L20
T18-14F	B26	TN18-10F	B29	U26ART	C9, 031	UB275	D8	UH15-5	L20
T18-38	B5	TN18-14	B8	U26RT	C9, 031	UB282	D8	UH16-3	L20
T18-4	B5	TN18-14F	B29	U27ART	C9, 031	UB291	D8	UH16-5	L20
T18-516	B5	TN18-38	B8	U27RT	C9, 031	UB293	D8	UH17-3	L20
T18-6	B5	TN18-4	B8	U28ART	C9, 031	UB294	D8	UH17-5	L20
T18-6F	B26	TN18-516	B8	U28RT	C9, 031	UB300	D8	UH18-3	L20
T18-8	B5	TN18-6	B8	U29ART	C9, 031	UB302	D8	UH18-5	L20
T18-8F	B26	TN18-6F	B29	U29RT	C9, 031	UB306	D8	UH19-3	L20
TAD10-14M	N79	TN18-8	B8	U2CABT	C9, 031	UB310	D8	UH19-5	L20
TFM1D5R	N78	TN18-8F	B29	U2CRT	C9, 031	UB311	D8	UH20-3	L20
TFV3B12V2	G11	TN20-2F	B29	U30ART	C9, 031	UB314	D8	UH20-5	L20
TFV3B18V2	G11	TN20-6F	B29	U30RT	C9, 031	UB315	D8	UH22-5	L20
TFV3B6V2	G11	TP10-10	B6	U31ART	C9, 031	UB317	D8	UHG14A-3	L32
TFV3BLU12	G11	TP10-10F	B31	U31RT	C9, 031	UB318	D8	UHG15A-3	L32
TFV3BLU18	G11	TP10-10LF	B34	U32ART	C9, 031	UB319	D8	UHG15A-5	L32
TMH261	D4	TP10-10Z	B33	U32RT	C9, 031	UB328	D8	UHG17A-3	L32
TMH261SS	D4	TP10-14	B6	U34ART	C9, 031	UB336	D8	UHG17A-5	L32
TMH262	D4	TP10-38	B6	U34RT	C9, 031	UB337	D8	UHG18A-3	L32
TMH262SS	D4	TP10-6	B6	U36ART	C9, 031	UB344	D8	UHG18A-5	L32
TMH263	D4	TP10-6F	B31	U36RT	C9, 031	UB354	D8	UHG19A-3	L32
TMH263SS	D4	TP10-6LF	B34	U38XRT	C9, 031	UB357	D8	UHG20A-3	L32
TMH264	D4	TP10-6Z	B33	U39ART-2	C9, 031	UB358	D8	UHG20A-5	L32
TMH264SS	D4	TP10-8	B6	U39RT	C9, 031	UB383	D8	UHG21A-3	L32
TMH265	D4	TP10-8F	B31	U3CRT	C9, 031	UB384	D8	UHG22A-5	L32
TMH265SS	D4	TP10-8LF	B34	U44XRT	C9, 031	UB390	D8	UHG24A-3	L32
TMH266	D4	TP10-8Z	B33	U4CABT	C9, 031	UB392	D8	UHG24A-5	L32
TMH267	D4	TP14-10	B6	U4CRT	C9, 031	UB399	D8	UHKR11A-3	L32
TMH267SS	D4	TP14-10F	B31	U5CRT	C9, 031	UB400	D8	UHKR11A-5	L32
TMH268	D4	TP14-10LF	B34	U6CABT	C9, 031	UB416	D8	UHKR13A-3	L32
TMH268SS	D4	TP14-10Z	B33	U8CABT	C9, 031	UB422	D8	UHKR13A-5	L32
TMH269	D4	TP14-14	B6	U8CRT	C9, 031	UB425	D8	UHKR14A-3	L32
TMH269SS	D4	TP14-2F	B31	UB101	D8	UB436	D8	UHKR14A-5	L32
TMH270	D4	TP14-2Z	B33	UB1027	D8	UB437	D8	UHKR16A-3	L32
TMH270SS	D4	TP14-38	B6	UB1028	D8	UB464	D8	UHKR16A-5	L32
TMH271	D4	TP14-4	B6	UB1029	D8	UB540	D8	UHR13-3	L20
TMH271SS	D4	TP14-516	B6	UB1030	D8	UC25R2R	H15	UHR13-5	L20
TMH272	D4	TP14-6	B6	UB1031	D8	UC25R2RS	H15	UHR15-3	L20
TMH272SS	D4	TP14-6F	B31	UB1032	D8	UC2834	H12	UHR15-5	L20
TMH289	D4	TP14-6LF	B34	UB1033	D8	UC28R	H15	UHR17-3	L20
TMH294	D4	TP14-6Z	B33	UB104	D8	UC28RS	H15	UHR17-5	L20
TMH294SS	D4	TP14-8	B6	UB105	D8	UC2W28-L	H9	UP34R	H65
TMH295	D4	TP14-8F	B31	UB106	D8	UC2W30	H12	UP45R	H65
TMH295SS	D4	TP14-8LF	B34	UB107	D8	UC3040	H12	UP45R36R	H65
TMH322SS	D4	TP14-8Z	B33	UB124	D8	UC32R	H15	UW25R	H11
TMH332	C91, D4	TP16-10	B6	UB178	D8	UC32RS	H15	UW2R	H11
TMH69	D4	TP16-10F	B31	UB187	D8	UC33R	H15	VA25	A21, L19
TMH69SS	D4	TP16-10LF	B34	UB199	D8	UC3444	H12	VA28	A21, L19
TMHG-42	E20	TP16-10Z	B33	UB204	D8	UC4W28	H12	VA28-2N	A21, L19
TMHG-92	E20	TP16-14	B6	UB222	D8	UC4W28CONKIT	H16	VA2C	A21, L19
TN10-10	B8	TP16-2F	B31	UB224	D8	UC6W25	H12	VA30	A21, L19
TN10-10F	B29	TP16-2Z	B33	UB226	D8	UC6W25CONKIT	H16	VA30-2N	A21, L19
TN10-14	B8	TP16-38	B6	UB230	D8	UC8W26-L	H9	VA34	A21, L19
TN10-14F	B29	TP16-4	B6	UB232	D8	UCCOVER1	H16	VA34-2N	A21, L19
TN10-38	B8	TP16-6	B6	UB236	D8	UCG25R	H15	VA34-4N	A21
TN10-516	B8	TP16-6F	B31	UB242	D8	UCG25R2R	H15	VA40	A21, L19

Reference

BURNDY® Products

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
VA40-2N	A21, L19	WAD477-15	J27	WCB26	J14	WCY138	J15	WLB15A	M24
VA40-4N	A21, L19	WAD477-29	J27	WCB27	J14	WCY139	J15	WLB16A	M24
VP2828	H11	WAD477-35	J27	WCB28	J14	WCY140	J24, J25	WLB17A	M24
VP3030	H11	WAD477S	J27	WCB40	J14	WCY142	J24	WLB18A	M24
VP3430	H11	WAD556-15	J27	WCB41	J14	WCY145	J24, J25	WLB19A	M24
VP3434	H11	WAD556-29	J27	WCB42	J14	WCY48	J15	WLB20A	M24
VP4030	H11	WAD556-35	J27	WCB43	J14	WCY49	J15	WLB21A	M24
VP4040	H11	WAD556S	J27	WCB44	J14	WCY50	J15	WLB22A	M24
VP4440	H11	WAS14A-2N	L34	WCB45	J14	WCY51	J15	WLB24A	M24
VP4646	H11	WAS15A-2N	L34	WCB46	J14	WCY52	J15	WLB55A	M24
VT2525	A20, H14, L7	WAS15A-34N	L34	WCB47	J14	WCY53	J15	WLB56A	M24
VT2825	A20, H14, L7	WAS16A-2N	L34	WCB30R-4N	J7	WCY54	J15	WLB86A	M24
VT2828	A20, H14, L7	WAS17A-2N	L34	WCBY39R-4N	J7	WCY55	J15	WLB90A	M24
VT2C2C	A20, H14, L7	WAS17A-34N	L34	WCBY49R-4N	J7	WCY56	J15	WLB91A	M24
VT3025	A20, H14, L7	WAS18A-2N	L34	WCCB	J26	WCY57	J15	WLB92A	M24
VT3030	A20, H14, L7	WAS18A-34N	L34	WCCLY	J26	WCY58	J16	WLB94A	M24
VT3425	A20, H14, L7	WAS19A-2N	L34	WCCR	J26	WCY59	J16	WLB96A	M24
VT3428	A20, H14, L7	WAS19A-34N	L34	WCCSY	J26	WCY60	J16	WPBBN Box 25	J8
VT3430	A20, H14, L7	WAS19A-44N	L34	WCHAWAS	J31	WCY61	J16	WPBRN Box 25	J8
VT3434	A20, H14, L7	WAS20A-2N	L34	WCR29	J14	WCY62	J16	WPBYN Box 25	J8
VT4040	A20, H14, L7	WAS20A-34N	L34	WCR30	J14	WCY63	J16	WS14A	M13
VT4425	A20, H14, L7	WAS20A-44N	L34	WCR31	J14	WCY64	J16	WS15A	M13
VT4428	A20, H14, L7	WAS21A-44N	L34	WCR32	J14	WCY65	J16	WS16A	M13
VT4834	A20, H14, L7	WAS22A-44N	L34	WCR33	J14	WCY66	J16	WS17A	M13
VWA2	A21	WAS24A-44N	L34	WCR34	J14	WCY67	J16	WS18A	M13
VWA25	A21	WASC14A2N	L35	WCR35	J14	WCY68	J16	WS19A	M13
VWA28	A21, L19	WASC15A2N	L35	WCR36	J14	WCY69	J16	WS20A	M13
VWA28-2N	A21, L19	WASC15A34N	L35	WCR37	J14	WCY70	J16	WS21A	M13
VWA30	A21, L19	WASC16A2N	L35	WCY 53 PB	J7	WCY71	J16	WS22A	M13
VWA30-2N	A21, L19	WASC16A34N	L35	WCY 54 PB	J7	WCY72	J16	WS24A	M13
VWA34	A21, L19	WASC17A34N	L35	WCY 63 PB	J7	WCY73	J16	WS59A	M13
VWA34-2N	A21, L19	WASC18A34N	L35	WCY 64 PB	J7	WCY74	J16	WS86A	M13
VWA34-4N	A21, L19	WASC18A44N	L35	WCY 65 PB	J7	WCY75	J16	WS90A	M13
VWA40	A21, L19	WASC19A2N	L35	WCY100	J14	WCY76	J16	WS91A	M13
VWA40-2N	A21, L19	WASC19A34N	L35	WCY101	J14	WCY77	J16	WS92A	M13
VWA40-4N	A21, L19	WASC19A44N	L35	WCY102	J14	WCY78	J16	WS94A	M13
W-28K	N20	WASC20A2N	L35	WCY103	J14	WCY79	J16	WS96A	M13
W-687	N20	WASC20A34N	L35	WCY104	J15	WCY80	J16	WSA21A-34N	L34
W-702	N20	WASC20A44N	L35	WCY105	J15	WCY81	J16	WSL1	J17, J20, J23
W-BG	N20	WASC21A2N	L35	WCY106	J15, J24, J25	WCY82	J16	WSL10	J17, J21, J23
W161	C9, 031	WASC21A34N	L35	WCY107	J15, J24, J25	WCY83	J16	WSL11	J17, J21, J23
W162	C9, 031	WASC21A44N	L35	WCY108	J15, J24, J25	WCY84	J16	WSL12	J17, J22, J23
W163	C9, 031	WASC22A2N	L35	WCY109	J15, J24, J25	WCY85	J16	WSL13	J17, J22, J23
W166	C9, 031	WASC22A34N	L35	WCY110	J15, J24, J25	WCY86	J16	WSL14	J17, J22, J23
W1CVT	C9, 031	WASC22A44N	L35	WCY111	J15, J24, J25	WCY87	J16	WSL2	J17, J20, J23
W239	C9, 031	WASC24A34N	L35	WCY112	J15, J24, J25	WCY88	J16	WSL3	J17, J20, J23
W241	C9, 031	WASC24A44N	L35	WCY113	J15, J24, J25	WCY89	J16	WSL4	J17, J20, J23
W245	C9, 031	WASC86A44N	L35	WCY114	J15, J24, J25	WCY90	J16	WSL5	J17, J20, J23
W25VT	C9, 031	WCAB30R-2N	J7	WCY115	J15	WCY91	J16	WSL6	J17, J20, J23
W26VT	C9, 031	WCAB30R-4N	J7	WCY116	J15	WCY92	J16	WSL7	J17, J21, J23
W27VT	C9, 031	WCAY39R-2N	J7	WCY117	J15	WCY93	J16	WSL8	J17, J21, J23
W28K	N49	WCAY39R-4N	J7	WCY118	J15	WCY94	J16	WSL9	J17, J21, J23
W28VT	C9, 031	WCAY49R-2N	J7	WCY119	J15	WCY95	J16	WSLB17A	M12
W29VT	C9, 031	WCAY49R-4N	J7	WCY120	J15	WCY96	J16	WSLB18A	M12
W2CVT	C9, 031	WCB 11 PB	J7	WCY121	J15, J24, J25	WCY97	J16	WSLB19A	M12
W30VT	C9, 031	WCB10	J14	WCY122	J15, J24, J25	WCY98	J16	WSLB20A	M12
W31ART	C9, 031	WCB11	J14	WCY123	J15	WCY99	J16	WSLB24A	M12
W31VT	C9, 031	WCB12	J14	WCY124	J15	WDA8300	N35	WSLB92A	M12
W32VT	C9, 031	WCB13	J14	WCY125	J15, J24, J25	WDC4500	N35	WSLB96A	M12
W34VT	C9, 031	WCB14	J14	WCY126	J15	WDIETREE	N20, N50	WSM1	J17, J19, J23
W36RT	C9, 031	WCB15	J14	WCY127	J15	WG19A	L36	WSM10	J23
W3CRT	C9, 031	WCB16	J14	WCY128	J15	WG86A	L36	WSM11	J17
W4CVT	C9, 031	WCB17	J14	WCY129	J15	WHHWB	J32	WSM2	J17, J19, J23
W5CVT	C9, 031	WCB18	J14	WCY130	J15, J24, J25	WHSCWH	J30	WSM3	J17, J19, J23
W660	C9, 031	WCB19	J14	WCY131	J15, J24, J25	WHSGB	J32	WSM4	J17, J19, J23
W8CVT	C9, 031	WCB20	J14	WCY132	J15	WHSPBC	J30	WSM5	J17, J19, J23
WABAG	J33	WCB21	J14	WCY133	J15	WHSSADP	J31	WSM6	J17, J19, J23
WAD336-15	J27	WCB22	J14	WCY134	J15	WHSTA	J31	WSM7	J17, J19, J23
WAD336-29	J27	WCB23	J14	WCY135	J15	WHSWB	J31	WSM8	J23
WAD336-35	J27	WCB24	J14	WCY136	J15	WHSWADP	J31	WSM9	J23
WAD336S	J27	WCB25	J14	WCY137	J15	WIREMIKE	N39, N40	WSS1	J17, J18, J23

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
WSS2	J17, J18, J23	Y3425R	C70	YA1CTC10	C21	YA27A1	C93	YA2CA5	C93
WT2B2RBY	J33	Y3426R	C70	YA25	C21	YA27A10S76T516E	C67	YA2CA9	C94
WT2B2RBYK	J33	Y3427R	C70	YA25-2L	C28	YA27A3	C93	YA2CL-2TC14	C28
WT2BRBY	J33	Y3428R	C70	YA25-2LN	C28	YA27A5	C94	YA2CL-2TC14E1	C28
WT2BRBYK	J33	Y3429R	C70	YA25-LB	C43	YA27A7	C94	YA2CL-2TC14E2	C28
WTB	J28, J33	Y342CR	C70	YA252N	C33	YA27L-2TC14E2	C28	YA2CL-2TC38	C28
WTBGBW	J28, J30, J33	Y3430R	C70	YA252NTC38	C33	YA27L-2TC38	C28	YA2CL-2TC516	C28
WTCC	J33	Y3431R	C70	YA252NU	C13	YA27L-BOX	C15	YA2CL-BOX	C15
WTCK	J29, J33	Y3432R	C70	YA252TC14	C33	YA27L3	C15	YA2CL2-BOX	C15
WTHRB-1S	J33	Y34A	N37	YA252TC14E2	C33	YA27L4-BOX	C15	YA2CL2NT14	C31
WTHRB1S	J28	Y34BH	N56	YA252TC38	C33	YA27LNT38	C15, C19	YA2CL2NT14E1	C31
WTHY1S	J28, J33	Y35	N36	YA252TC516	C33	YA28	C22	YA2CL2NT14E2	C31
WTOCBR	J29, J33	Y35-16	N37	YA25A1	C93	YA28-2L516	C29	YA2CL4-BOX	C15
WTOCY	J29, J33	Y35-2	N36	YA25A1S60T516E	C67	YA28-2LH114	H39	YA2CL6-BOX	C15
WTRB	J28, J33	Y35/Y39 REP KIT A	N37	YA25A3	C93	YA28-2LH115	H39	YA2CLNT10	C18
WTRBK	J33	Y35B	N54	YA25A3N69T38E	C67	YA28-2LN	C29	YA2CLNT14	C18
WTRBY	J33	Y35BH	N54	YA25A5	C94	YA28-LB	C43	YA2CLNT516	C18
WTRBYK	J33	Y35BH-4	N54	YA25A7	C94	YA282N	C33	YA2CN	C21
WTY	J28, J33	Y35H	N54	YA25A9	C93	YA282NTC38	C33	YA2CTC10	C21
WTYK	J33	Y35P3	N37	YA25L-2TC14	C28	YA282NU	C13	YA2CTC14	C21
X161	N16	Y39	N38	YA25L-2TC14E1	C28	YA282TC14E2	C33	YA30	C23
X241	N16	Y3934R	C70	YA25L-2TC14E2	C28	YA282TC38	C33	YA30-2LH85	H39
X245	N16	Y3936R	C70	YA25L-2TC38	C28	YA28A1	C93	YA30-2LN	C29
X247	N16	Y39BH	N55	YA25L-BOX	C15	YA28A3	C93	YA30-L2NTC-FX	C50
X249	N16	Y4439R	C70	YA25L2-BOX	C15	YA28A5	C94	YA30-L2TC12-FX	C50
X660	N16	Y45	N62	YA25L2NT14E1	C31	YA28A7	C94	YA30-L2TC38-FX	C50
X840	N16	Y46	N63	YA25L4-BOX	C15	YA28L-2TC14E1	C29	YA30-LB	C43
X8CART	C9, O31	Y46-2	N63	YA25L6-BOX	C15	YA28L-2TC14E2	C29	YA30-TC12-FXB	C47
XA15A-4N	L29	Y46C	N63	YA25LN50T14E	C67	YA28L-2TC38	C29	YA302N	C34
XA16A-4N	L29	Y4PC834	N42	YA25LN64T516E	C67	YA28L-2TC38E2	C29	YA302N-FXB	C54
XA18-4N	L16	Y4PC834MBH	N61	YA25LNT10	C18	YA28L-BOX	C15	YA302NU	C13
XA18A-4N	L29	Y500CT-HS	N35	YA25LNT516	C18	YA28L2-BOX	C15	YA302TC38	C34
XA19A-4N	L29	Y60BHU	N64	YA25N	C22	YA28L3	C15	YA30A1	C93
XA20A-4N	L29	Y60BHU-D	N64	YA25TC10	C21	YA28L4-BOX	C15	YA30A1N131T12E	C67
XA21A-4N	L29	Y644HSCASE	N40	YA25TC38	C21	YA28L56	C15	YA30A3	C94
XA22A-4N	L29	Y644HSXT	N40	YA26	C22	YA28LNT38	C15, C19	YA30A5	C94
XA24A-4N	L29	Y644MBHXT	N59	YA26-2L	C28	YA28TC38	C22	YA30A6	C93
XBG	N16	Y750BHXT	N58	YA26-2LH89	H39	YA29	C22	YA30A6N100T38E	C67
XNBG	N16	Y750CBHXT	N58	YA26-2LN	C28	YA29-2LH91	H39	YA30A9N100T516E	C67
XOH25	N16	Y750CHSXT	N39	YA26-LB	C43	YA29-2LN	C29	YA30L	C16
XP1818	L8	Y750HSCASE	N39	YA262N	C33	YA29-LB	C43	YA30L-2TC-38	C29
XP2222	L80	Y750HSXT	N39	YA262NU	C13	YA292N	C33	YA30L-TC12-FX	C41
Y10-22	N4	Y81KFT	N41	YA262TC14	C33	YA292NU	C13	YA30L-TC34-FX	C41
Y106PSI	N76	Y81KFTMBH	N60	YA262TC14E2	C33	YA292TC38	C33	YA30L-TC38-FX	C41
Y108PSI	N76	Y8MRB-1	N7	YA262TC38	C33	YA29A1	C93	YA30L-TC516-FX	C41
Y10AC9	N69	YA-A-KIT1	C95	YA26A1	C93	YA29A3	C94	YA30L-TC58-FX	C41
Y10AC90EM	N69	YA-AKIT2	C95	YA26A3	C94	YA29A5	C94	YA30L1	C16
Y10D	N3	YA-AKIT3	C95	YA26A5	C94	YA29L-2TC38	C29	YA30L24	C16
Y1MRKIT	N11	YA10A-TN	C92	YA26A6	C93	YA29L-BOX	C16	YA30L24N100T38E	C67
Y1MRTC	N11	YA12A-TN	C92	YA26L-2TC14	C28	YA29L2	C16	YA30L27	C16
Y1MRTCKIT	N11	YA1C	C21	YA26L-2TC14E1	C28	YA29L4	C16	YA30L28	C16
Y281CR	C70	YA1C-2L	C28	YA26L-2TC14E2	C28	YA29L7	C16	YA30L7	C16
Y2825R	C70	YA1C-2LN	C28	YA26L-2TC38	C28	YA29LNT38	C19	YA30LNT38	C19
Y2826R	C70	YA1C-LB	C43	YA26L-BOX	C15	YA29LNT38	C16, C19	YA31	C23
Y2827R	C70	YA1C2N	C33	YA26L2-BOX	C15	YA29LTC78	C16	YA31-2LH90	H39
Y282CR	C70	YA1C2NU	C13	YA26L2NT14	C31	YA2C	C21	YA31-2LN	C29
Y284CR	C70	YA1C2TC14	C33	YA26L2NT14E1	C31	YA2C-2L	C28	YA31-L2NTC-FX	C50
Y284WR	C70	YA1C2TC14E2	C33	YA26L6-BOX	C15	YA2C-2LN	C28	YA31-L2NTC38-FX	C50
Y286CR	C70	YA1C2TC38	C33	YA26L60	C15	YA2C-LB	C43	YA31-L2TC12-FX	C50
Y2928R	C70	YA1CA1	C93	YA26LN50T14E	C67	YA2C2N	C33	YA31-L2TC38-FX	C50
Y29BH	N57	YA1CL-2TC14	C28	YA26LNT10	C18	YA2C2NTC38	C33	YA31-LB	C43
Y29NC	N77	YA1CL-2TC14E2	C28	YA26LNT38	C18	YA2C2NU	C12	YA31-TC12-FXB	C47
Y3025R	C70	YA1CL-2TC38	C28	YA26LNT516	C15, C18	YA2C2TC14	C33	YA312N	C34
Y3026R	C70	YA1CL-BOX	C15	YA26N	C22	YA2C2TC14E2	C33	YA312N-FXB	C54
Y3027R	C70	YA1CL2	C15	YA27	C22	YA2C2TC38	C33	YA312NU	C13
Y3028R	C70	YA1CL2NT14E2	C31	YA27-2LN	C28	YA2C2TC38E2	C33	YA312TC14E2	C34
Y302CR	C70	YA1CL4-BOX	C15	YA27-LB	C43	YA2C2TC38E6	C33	YA312TC38	C34
Y304CR	C70	YA1CL6-BOX	C15	YA272N	C33	YA2C2TC516E2	C33	YA312TC38-FXB	C54
Y3126R	C70	YA1CLNT10	C18	YA272NU	C13	YA2CA1	C93	YA31A1	C93
Y3128R	C70	YA1CLNT14	C18	YA272TC14E2	C33	YA2CA1S91T516E	C67	YA31A1N100T516E	C67
Y3129R	C70	YA1CN	C21	YA272TC38	C33	YA2CA3	C93	YA31A3	C94

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YA31A5	C94	YA34A1	C93	YA382-FXBG3	C54	YA40L-2TC38	C30	YA4C-2LN	C28
YA31A9N100T38E	C67	YA34A3	C94	YA382N	C34	YA40L-TC12-FX	C42	YA4C-LB	C43
YA31L	C16	YA34A3N131T12E	C67	YA382N-FXB	C54	YA40L-TC38-FX	C42	YA4C2N	C32
YA31L-2NTC516	C29	YA34A5	C94	YA382TC38	C34	YA40L-TC516-FX	C42	YA4C2NU	C12
YA31L-2TC12	C29	YA34A7N131T12E	C67	YA382TC38-FXB	C54	YA40L-TC58-FX	C42	YA4C2TC14	C32
YA31L-2TC14E2	C29	YA34A8N131T38E	C67	YA38L	C16	YA41	C23	YA4C2TC14E2	C32
YA31L-2TC38	C29	YA34L	C16	YA38L-2TC12	C30	YA41-2L	C30	YA4C2TC38	C32
YA31L-NT12-FX	C42	YA34L-2TC12	C29	YA38L-2TC38	C30	YA412N	C34	YA4CA1	C93
YA31L-TC12-FX	C42	YA34L-2TC14E2	C29	YA38L-TC12-FX	C42	YA41L	C17	YA4CA3	C93
YA31L-TC14-FX	C42	YA34L-2TC38	C29	YA38L-TC38-FX	C42	YA41N	C23	YA4CA6	C93
YA31L-TC34-FX	C42	YA34L-TC12-FX	C42	YA38L-TC516-FX	C42	YA44	C23	YA4CL-2TC14	C28
YA31L-TC38-FX	C42	YA34L-TC38-FX	C42	YA38L-TC58-FX	C42	YA44-2L	C30	YA4CL-2TC14E1	C28
YA31L-TC516-FX	C42	YA34L-TC516-FX	C42	YA38N	C23	YA44-2LN	C30	YA4CL-2TC14E2	C28
YA31L-TC58-FX	C42	YA34L-TC58-FX	C42	YA39	C23	YA44-L2NNT-FX	C50	YA4CL-2TC38	C28
YA31L11	C16	YA34L20	C16	YA39-2L	C30	YA44-L2NT38-FX	C50	YA4CL-2TC516	C28
YA31L2NT38	C31	YA34L2NT38	C31	YA39-2LN	C30	YA44-L2NTC-FX	C50	YA4CL-BOX	C15
YA31L36	C16	YA34L37	C16	YA39-L2NTC-FX	C50	YA44-L2TC12-FX	C50	YA4CL1-BOX	C15
YA31L7	C16	YA34L6	C16	YA39-LB	C43	YA44-L2TC12E3-FX	C50	YA4CL3-BOX	C15
YA31LNT38	C16, C19	YA34L6N131T12E	C67	YA392N	C34	YA44-L2TC38-FX	C50	YA4CL4-BOX	C15
YA32	C23	YA34L8	C16	YA392NT38	C34	YA44-L2TC58-FX	C50	YA4CL6-BOX	C15
YA32-2L	C29	YA34L9	C16	YA392NU	C13	YA44-LB	C43	YA4CLNT10	C18
YA32-2LN	C29	YA34LNT38	C19	YA392TC38	C34	YA44-TC58-FXB	C47	YA4CN	C21
YA32-L2NTC-FX	C50	YA34N	C23	YA39A1	C93	YA442N	C34	YA4CTC10	C20
YA32-L2TC38-FX	C50	YA35	C23	YA39A1N131TD12E	C67	YA442N-FXB	C54	YA4CTC38	C21
YA32-LB	C43	YA35-2L	C29	YA39A3	C93	YA442NU	C13	YA5C	C20
YA32-TC12-FXB	C47	YA35-2LN	C29	YA39A5	C94	YA442TC38	C34	YA5C-2L	C27
YA322N	C34	YA352N	C34	YA39A5N131TD12E	C67	YA442TC38-FXB	C54	YA5C-LB	C43
YA322N-FXB	C54	YA35L	C16	YA39A7	C94	YA444N	C39	YA5C2N	C32
YA322NU	C13	YA35N	C23	YA39AM2	C94	YA444NU	C13	YA5CL-BOX	C14
YA322TC38	C34	YA36	C23	YA39L	C16	YA44A1	C93	YA5CN	C20
YA322TC38-FXB	C54	YA36-2LN	C29	YA39L-2TC12E3	C30	YA44A3	C94	YA6C	C20
YA32A1	C93	YA36-L2NTC-FX	C50	YA39L-2TC38	C30	YA44L	C17	YA6C-2L	C27
YA32A5	C94	YA36-L2TC38-FX	C50	YA39L-2TC58	C30	YA44L-2TC12	C30	YA6C-2L51	C27
YA32A8N106T516E	C67	YA36-LB	C43	YA39L2	C16	YA44L-TC12-FX	C42	YA6C-2L52	C27
YA32L	C16	YA36-TC12-FXB	C47	YA39L2NT38	C31	YA44L-TC58-FX	C42	YA6C-2LN	C27
YA32L-2TC38	C29	YA36-TC58-FXB	C47	YA39L6	C16	YA44L2	C17	YA6C2N	C32
YA32L-2TC38E5	C29	YA362N	C34	YA39L6N131T12E	C67	YA44L23	C17	YA6C2NU	C12
YA32L-TC12-FX	C42	YA362NU	C13	YA39L9	C16	YA44N	C23	YA6C2TC14	C32
YA32L-TC38-FX	C42	YA362TC38	C34	YA39LNT38	C16, C19	YA45	C23	YA6C2TC14E1	C32
YA32L-TC58-FX	C42	YA36A1	C93	YA39N	C23	YA452N	C34	YA6C2TC14E2	C32
YA32L1	C16	YA36A3	C94	YA3C	C21	YA452NU	C13	YA6C2TC38	C32
YA32L14	C16	YA36A3N131TD12E	C67	YA3C-2L	C28	YA4532N	C34	YA6C2TC38E2	C32
YA32LNT38	C19	YA36A5	C94	YA3C-LB	C43	YA453L	C17	YA6C2TC38E6	C32
YA32LTC78	C16	YA36A9N131TD12E	C67	YA3C2N	C32	YA454N	C39	YA6CA1	C92
YA32N	C23	YA36L	C16	YA3C2N-FXB	C53	YA454NU	C13	YA6CA3	C92
YA33	C23	YA36L-2TC38	C29	YA3C2NU	C12	YA45A5	C94	YA6CL-2TC10	C27
YA33-2LN	C29	YA36L-TC12-FX	C42	YA3C2TC14	C32	YA45L	C17	YA6CL-2TC14	C27
YA332N	C34	YA36L-TC58-FX	C42	YA3C2TC14E2	C32	YA46	C23	YA6CL-2TC14E	C27
YA33L	C16	YA36L11	C16	YA3C2TC38	C32	YA46-TC58-FXB	C47	YA6CL-2TC14E1	C27
YA33N	C23	YA36LNT38	C19	YA3C2TC38-FXB	C53	YA462N	C34	YA6CL-2TC14E2	C27
YA34	C23	YA36LTC78	C16	YA3C2TC38E2	C32	YA462N-FXB	C54	YA6CL-2TC38	C27
YA34-2L	C29	YA36N	C23	YA3C2TC516-FXB	C53	YA462NU	C13	YA6CL-2TC516	C27
YA34-2LH110	H39	YA37	C23	YA3CL	C15	YA464N	C39	YA6CL-2TC516E2	C27
YA34-2LH111	H39	YA37-2L	C29	YA3CL-2TC14	C28	YA464NU	C13	YA6CL-BOX	C14
YA34-2LN	C29	YA37-2LN	C29	YA3CL-2TC38	C28	YA46A3	C94	YA6CL1-BOX	C14
YA34-L2NT38-FX	C50	YA372N	C34	YA3CLNT516	C18	YA46A5	C94	YA6CL3-BOX	C14
YA34-L2NTC-FX	C50	YA37L	C16	YA3CN	C21	YA46L	C17	YA6CL4-BOX	C14
YA34-L2NTC38-FX	C50	YA37L1	C16	YA3CTC14	C21	YA46N	C23	YA6CL6-BOX	C14
YA34-L2TC12-FX	C50	YA37N	C23	YA3CTC38	C21	YA47	C23	YA6CLNT6	C18
YA34-L2TC38-FX	C50	YA38	C23	YA40	C23	YA472N	C34	YA6CN	C20
YA34-L2TC516-FX	C50	YA38-2L	C30	YA40-2L	C30	YA472NU	C13	YA6CTC10	C20
YA34-LB	C43	YA38-2LN	C30	YA40-2LN	C30	YA47N	C23, C39	YA8C-2LN	C27
YA34-TC12-FXB	C47	YA38-L2NNT-FX	C50	YA40-L2NNT-FX	C50	YA48	C23	YA8C-L1-BOX	C40
YA342LNN119T12E	C67	YA38-L2NT38-FX	C50	YA40-L2NTC-FX	C50	YA482N	C34	YA8C-L2-BOX	C40
YA342LNN131T12E	C67	YA38-L2NTC-FX	C50	YA40-L2TC38-FX	C50	YA482NU	C13	YA8C-L2TC10	C48
YA342N	C34	YA38-L2TC12-FX	C50	YA40-LB	C43	YA484N	C39	YA8C-L2TC14	C48
YA342N-FXB	C54	YA38-L2TC38-FX	C50	YA40-TC58-FXB	C47	YA48A3	C94	YA8C-L2TC14E1	C48
YA342NU	C13	YA38-L2TC516-FX	C50	YA402N	C34	YA48L	C17, C66	YA8C-L2TC14E2	C48
YA342TC14E2	C34	YA38-LB	C43	YA402N-FXB	C54	YA48N	C23	YA8C-L2TC38	C48
YA342TC38	C34	YA38-TC58-FXB	C47	YA402NU	C13	YA4C	C20	YA8C-L3-BOX	C40
YA342TC38-FXB	C54	YA382-FXBG2	C54	YA40L	C17	YA4C-2L	C28	YA8C-L4-BOX	C40

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YA8C-LB	C43	YAD18-516	B5	YAE14N43M	B10, N79	YAE18Z1 BOX	B32	YAES14-N7	B4
YA8C-TC14-FXB	C46	YAD18-6	B5	YAE14N4M	B10, N79	YAE18Z1M	N79	YAES14-N8	B4
YA8C2NU	C12	YAD18-6F	B26	YAE14N52	B8	YAE18Z2	B32	YAES14-N9	B4
YA8C2TC14	C32	YAD18-6M	B5, N79	YAE14N76F	B30	YAE18Z2 BOX	B32	YAES14K-10	B12
YA8C2TC14E2	C32	YAD18-8	B5	YAE14N76FM	B30, N79	YAE18Z3	B32	YAES14K-53	B12
YA8C2TC14E2-FXB	C53	YAD18-8F	B26	YAE14N77F	B30	YAE18Z3 BOX	B32	YAES14K-54	B12
YA8C2TC38	C32	YAD18-8M	B5, N79	YAE14N77F BOX	B30	YAE18Z3M	N79	YAES14K-6	B12
YA8C2TC38-FXB	C53	YAE-18N24M	N79	YAE14N77FM	B30, N79	YAE18Z4	B32	YAES14K-7	B12
YA8CA1	C92	YAE10-N11	B4	YAE14N78F	B30	YAE18Z4 BOX	B32	YAES14K-8	B12
YA8CA3	C92	YAE10-N2	B4	YAE14N78F BOX	B30	YAE18Z4M	N79	YAES14K-9	B12
YA8CA3S56T14E	C67	YAE10-N3	B4	YAE14N78FM	B30, N79	YAE10N2M	B10	YAES14N53	B8
YA8CL-2TC10	C27	YAE10-N4	B4	YAE14NM	B10, N79	YAE22-G13	B4	YAES14N53F	B29
YA8CL-2TC10E2	C27	YAE10-N5	B4	YAE14Z2	B32	YAE22-G14	B4	YAES14N54	B8
YA8CL-2TC14	C27	YAE10N	B4, B10	YAE14Z2 BOX	B32	YAE22-G15	B4	YAES14N54F	B29
YA8CL-2TC14E1	C27	YAE10N BOX	B10	YAE14Z3	B32	YAE22-G16	B4	YAES14N6	B8
YA8CL-2TC14E2	C27	YAE10N11	B10	YAE14Z3 BOX	B32	YAE22-G18	B4	YAES14N6F	B29
YA8CL-2TC38	C27	YAE10N11 BOX	B10	YAE14Z3M	N79	YAE22G12	B9	YAES14N8	B8
YA8CL-BOX	C14, C40	YAE10N11M	B10, N79	YAE14Z4	B32	YAE22G12 BOX	B9	YAES14N8F	B29
YA8CL1-BOX	C14	YAE10N2	B10	YAE14Z4 BOX	B32	YAE22G13	B9	YAES14N9	B8
YA8CL2-BOX	C14	YAE10N2M	N79	YAE14Z4M	N79	YAE22G13 BOX	B9	YAES18-N1	B4
YA8CL3-BOX	C14	YAE10N3	B10	YAE18-G43	B4	YAE22G13M	B9, N79	YAES18-N2	B4
YA8CL4-BOX	C14	YAE10N3 BOX	B10	YAE18-N17	B4	YAE22G14	B9	YAES18-N3	B4
YA8CLNT6	C18	YAE10N3M	B10, N79	YAE18-N2	B4	YAE22G14 BOX	B9	YAES18-N4	B4
YA8CTC10	C20	YAE10N4	B10	YAE18-N21	B4	YAE22G15	B9	YAES18-N48	B4
YA8CTC14	C20	YAE10N4M	B10, N79	YAE18-N3	B4	YAE22G15 BOX	B9	YAES18-N49	B4
YA8CTC38	C20	YAE10N5	B10	YAE18-N7	B10	YAE22G16	B9	YAES18-N50	B4
YAB25-2LH70	H39	YAE10N5 BOX	B10	YAE18-N7M	B10, N79	YAE22G16 BOX	B9	YAES18K-1	B12
YAB25-2LH71	H39	YAE10N5M	B10, N79	YAE18G43	B10	YAE22G16M	B9, N79	YAES18K-2	B12
YAB2C-2LH74	H39	YAE10NM	B10, N79	YAE18G43 BOX	B10	YAE22G18	B9	YAES18K-3	B12
YAB2C2LH75	H39	YAE12N	B10	YAE18G43F	B30	YAE22G18 BOX	B9	YAES18K-4	B12
YAB344N	C39	YAE12N BOX	B10	YAE18G43F BOX	B30	YAE22G18M	B9, N79	YAES18K-49	B12
YAB394N	C39	YAE12N1	B10	YAE18G43FM	B30, N79	YAE22N65F	B30	YAES18K-5	B12
YAB4C-2LH72	H39	YAE12N1 BOX	B10	YAE18G43M	B10, N79	YAE22N65F BOX	B30	YAES18K-50	B12
YAC-CASE	N69	YAE12N1M	B10, N79	YAE18G60FM	B30	YAE22N65FM	B30, N79	YAES18K48	B12
YAD10-10	B5	YAE12N2	B10	YAE18N	B4, B10	YAE22N66F	B30	YAES18N1	B8
YAD10-10F	B26	YAE12N2 BOX	B10	YAE18N BOX	B10	YAE22N66F BOX	B30	YAES18N1F	B29
YAD10-14	B5	YAE12N2M	B10, N79	YAE18N1	B4, B10	YAE22N66FM	B30, N79	YAES18N3	B8
YAD10-14M	B5	YAE12N3M	N79	YAE18N1 BOX	B10	YAE22Z1 BOX	B32	YAES18N3F	B29
YAD10-38	B5	YAE12N7	B10	YAE18N17	B10	YAE22Z1M	N79	YAES18N4	B8
YAD10-38M	B5, N79	YAE12N9	B10	YAE18N1M	B10, N79	YAE22Z2	B32	YAES18N48	B8
YAD10-516	B5	YAE12N9 BOX	B10	YAE18N2	B10	YAE22Z2 BOX	B32	YAES18N49	B8
YAD10-516M	B5, N79	YAE12N9M	B10, N79	YAE18N2 BOX	B10	YAE22Z2M	N79	YAES18N50	B8
YAD10-6	B5	YAE12NM	B10, N79	YAE18N21	B10	YAE22Z3	B32	YAEV10	B19
YAD10-6F	B26	YAE12Z2	B32	YAE18N21 BOX	B10	YAE22Z3 BOX	B32	YAEV10 BOX	B19
YAD10-8	B5	YAE12Z2 BOX	B32	YAE18N21M	B10, N79	YAE22Z3M	N79	YAEV10-L36	B19
YAD10-8F	B26	YAE12Z2M	N79	YAE18N24	B10	YAES10-N11	B4	YAEV10-L36 BOX	B19
YAD10-8M	B5, N79	YAE12Z3	B32	YAE18N24 BOX	B10	YAES10-N12	B4	YAEV10-T11	B19
YAD14-10	B5	YAE12Z3 BOX	B32	YAE18N24M	B10	YAES10-N13	B4	YAEV10-T11 BOX	B19
YAD14-10F	B26	YAE12Z3M	N79	YAE18N25	B10	YAES10-N56	B4	YAEV10-T2	B19
YAD14-10M	B5, N79	YAE12Z4	B32	YAE18N25M	B10, N79	YAES10-N57	B4	YAEV10-T2 BOX	B19
YAD14-14F	B26	YAE12Z4 BOX	B32	YAE18N26	B10	YAES10K-11	B12	YAEV10-T3	B19
YAD14-14M	B5, N79	YAE14-N1	B4	YAE18N26M	B10, N79	YAES10K-11T1	B12	YAEV10-T3 BOX	B19
YAD14-38	B5	YAE14-N2	B4	YAE18N27	B10	YAES10K-12	B12	YAEV10-T4	B19
YAD14-38M	B5, N79	YAE14-N3	B4	YAE18N27 BOX	B10	YAES10K-13	B12	YAEV10-T4 BOX	B19
YAD14-4	B5	YAE14-N4	B4	YAE18N27M	B10, N79	YAES10K-14	B12	YAEV10-T7	B19
YAD14-4M	B5, N79	YAE14-N43	B4	YAE18N29	B10	YAES10K-56	B12	YAEV10-T7 BOX	B19
YAD14-516	B5	YAE14N	B4, B10	YAE18N29 BOX	B10	YAES10K-57	B12	YAEV14	B19
YAD14-6	B5	YAE14N BOX	B10	YAE18N29M	B10, N79	YAES10K-58	B12	YAEV14 BOX	B19
YAD14-6F	B26	YAE14N1	B10	YAE18N2M	B10, N79	YAES10N11	B8	YAEV18	B19
YAD14-6M	B5, N79	YAE14N1 BOX	B10	YAE18N3	B10	YAES10N11F	B29	YAEV18 BOX	B19
YAD14-8	B5	YAE14N1M	B10, N79	YAE18N3 BOX	B10	YAES10N12	B8	YAEV1C-H	B21
YAD14-8F	B26	YAE14N2	B10	YAE18N3M	B10, N79	YAES10N12F	B29	YAEV1C-H1	B21
YAD14-8M	B5, N79	YAE14N2 BOX	B10	YAE18N56F	B30	YAES10N13	B8	YAEV1C-H2	B21
YAD18-10	B5	YAE14N2M	B10, N79	YAE18N56FM	B30, N79	YAES10N56	B8	YAEV1C-H3	B21
YAD18-10M	B5, N79	YAE14N3	B10	YAE18N57F	B30	YAES10N56F	B29	YAEV1C-L	B4, B20
YAD18-14	B5	YAE14N3 BOX	B10	YAE18N57F BOX	B30	YAES10N57	B8	YAEV1C-L1	B4, B20
YAD18-14F	B26	YAE14N3M	B10, N79	YAE18N57FM	B30, N79	YAES10N57F	B29	YAEV1C-L2	B20
YAD18-14M	B5, N79	YAE14N4	B10	YAE18N60F	B30	YAES14-N52	B4	YAEV1C-L3	B4, B20
YAD18-38	B5	YAE14N4 BOX	B10	YAE18N60F BOX	B30	YAES14-N53	B4	YAEV1C-RH	B25
YAD18-4	B5	YAE14N43	B10	YAE18NM	B10, N79	YAES14-N54	B4	YAEV1C-RH2	B25
YAD18-4M	B5, N79	YAE14N43 BOX	B10	YAE18Z1	B32	YAES14-N6	B4	YAEV1C-RS	B24

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAEV1C-RS2	B24	YAEV8C-H1	B21	YAG28L-2TC14E2-LD	C59	YAG38L-2TC38-LD	C60	YAK31A-2G1	H74
YAEV25-H	B22	YAEV8C-H14	B21	YAG28L-2TC38-LD	C59	YAG38L-2TC516-LD	C60	YAK31A-2G2	H74
YAEV25-H1	B22	YAEV8C-H2	B21	YAG28L-2TC516-LD	C59	YAG38LTC12LD	C57	YAK34A-2G1	H74
YAEV25-H2	B22	YAEV8C-H3	B21	YAG28LTC12LD	C56	YAG38LTC38LD	C57	YAK34A-2G2	H74
YAEV25-H3	B22	YAEV8C-H4	B21	YAG28LTC14LD	C56	YAG38LTC516LD	C57	YAK39A-2G1	H74
YAEV25-H4	B22	YAEV8C-L	B4, B20	YAG28LTC38LD	C56	YAG38LTC58LD	C57	YAK39A-2G2	H74
YAEV25-L	B4, B20	YAEV8C-L BOX	B20	YAG28LTC516LD	C56	YAG39L-2NTC-LD	C60	YAK44A-2NG7	H74
YAEV25-L1	B4, B20	YAEV8C-L1	B4, B20	YAG28LTC516N66LD	C56	YAG40L-2NNT-LD	C60	YAK44A-2NG8	H74
YAEV25-L2	B20	YAEV8C-L1 BOX	B20	YAG28LTC58LD	C56	YAG40L-2NTC-LD	C60	YASG6CL-2TC14E2-FX	C61
YAEV25-L3	B4, B20	YAEV8C-L14	B20	YAG29L-2NT38-LD	C59	YAG40L-2TC38-LD	C60	YASV6CL-2TC14E2-FX	C61
YAEV25-L4	B20	YAEV8C-L14 BOX	B20	YAG29L-2NTC-LD	C60	YAG40LTC12LD	C57	YASV6CL-2TC14E2-FX-60	C61
YAEV25-RH	B25	YAEV8C-L2	B4, B20	YAG29L-2TC12-LD	C60	YAG40LTC38LD	C57	YAV025M6	C62
YAEV25-RS	B24	YAEV8C-L2 BOX	B20	YAG29L-2TC12E1-LD	C60	YAG40LTC516LD	C57	YAV04M6	C62
YAEV26-H	B22	YAEV8C-L3	B4, B20	YAG29L-2TC14-LD	C59	YAG40LTC58LD	C57	YAV06FM6	C62
YAEV26-H1	B22	YAEV8C-L3 BOX	B20	YAG29L-2TC14E2-LD	C59	YAG44L-2NTC-LD	C60	YAV06M35	C62
YAEV26-H12	B22	YAEV8C-L4	B20	YAG29L-2TC38-LD	C59	YAG44L-2TC12-LD	C60	YAV06M4	C62
YAEV26-H2	B22	YAEV8C-L4 BOX	B20	YAG29L-2TC516-LD	C59	YAG44L-2TC12E3-LD	C60	YAV06M5	C62
YAEV26-H3	B22	YAEV8C-RH	B25	YAG29LTC12LD	C56	YAG44L-2TC38-LD	C60	YAV06M6	C62
YAEV26-L	B4, B20	YAEV8C-RH1	B25	YAG29LTC34LD	C56	YAG44L-2TC58-LD	C60	YAV06M8	C62
YAEV26-L1	B20	YAEV8C-RS	B24	YAG29LTC38LD	C56	YAG44LTC12LD	C57	YAV10	B4, B14
YAEV26-L2	B4, B20	YAEV8C-RS1	B24	YAG29LTC516LD	C56	YAG44LTC58LD	C57	YAV10 BOX	B14
YAEV26-L3	B4, B20	YAG18TC516LD	C55	YAG2CL-2NTC-LD	C59	YAG4CL-2NT10-LD	C58	YAV10-21F	B27
YAEV26-RH	B25	YAG1CL-2NTC-LD	C59	YAG2CL-2TC14-LD	C58	YAG4CL-2NT10E1-LD	C58	YAV10-2TC10	C27
YAEV26-RS	B24	YAG1CL-2TC14-LD	C59	YAG2CL-2TC14E1-LD	C58	YAG4CL-2NTC-LD	C58	YAV10-2TC14	C27
YAEV2C-H	B21	YAG1CL-2TC14E1-LD	C59	YAG2CL-2TC14E2-LD	C58	YAG4CL-2TC14-LD	C58	YAV10-2TC14E1	C27
YAEV2C-H1	B21	YAG1CL-2TC14E2-LD	C59	YAG2CL-2TC38-LD	C58	YAG4CL-2TC14E1-LD	C58	YAV10-2TC14E2	C27
YAEV2C-H2	B21	YAG1CL-2TC38-LD	C59	YAG2CL-2TC516-LD	C59	YAG4CL-2TC14E2-LD	C58	YAV10-2TC38	C27
YAEV2C-H3	B21	YAG1CL-2TC516-LD	C59	YAG2CLTC10LD	C55	YAG4CL-2TC38-LD	C58	YAV10-BOX	C14
YAEV2C-H4	B21	YAG1CLTC10LD	C55	YAG2CLTC12LD	C55	YAG4CL-2TC516-LD	C58	YAV10-H	B17
YAEV2C-L	B4, B20	YAG1CLTC12LD	C55	YAG2CLTC14LD	C55	YAG4CLNT10LD	C55	YAV10-H BOX	B17
YAEV2C-L1	B4, B20	YAG1CLTC14LD	C55	YAG2CLTC38LD	C55	YAG4CLTC10LD	C55	YAV10-H25	B17
YAEV2C-L2	B20	YAG1CLTC38LD	C55	YAG2CLTC516LD	C55	YAG4CLTC12LD	C55	YAV10-H25 BOX	B17
YAEV2C-L3	B20	YAG1CLTC516LD	C55	YAG30L-2NTC-LD	C60	YAG4CLTC14LD	C55	YAV10-H3	B17
YAEV2C-L4	B4, B20	YAG25L-2NTC-LD	C59	YAG30L-2TC12-LD	C60	YAG4CLTC38LD	C55	YAV10-H3 BOX	B17
YAEV2C-RH	B25	YAG25L-2TC12E1-LD	C59	YAG30L-2TC38-LD	C60	YAG4CLTC516LD	C55	YAV10-HF	B28
YAEV2C-RH1	B25	YAG25L-2TC14-LD	C59	YAG30LTC34LD	C56	YAG6CL-2NTC-LD	C58	YAV10-HF BOX	B28
YAEV2C-RS	B24	YAG25L-2TC14E2-LD	C59	YAG30LTC58LD	C56	YAG6CL-2TC10-LD	C58	YAV10-L36	B14
YAEV2C-RS1	B24	YAG25L-2TC38-LD	C59	YAG31L-2NTC-LD	C60	YAG6CL-2TC10E-LD	C58	YAV10-L36 BOX	B14
YAEV4C-H	B21	YAG25L-2TC516-LD	C59	YAG31L-2NTC38-LD	C60	YAG6CL-2TC10E2-LD	C58	YAV10-R	B23
YAEV4C-H2	B21	YAG25L-2TC516E2-LD	C59	YAG31L-2TC12-LD	C60	YAG6CL-2TC10E4-LD	C58	YAV10-R3 BOX	B23
YAEV4C-H3	B21	YAG25LTC12LD	C56	YAG31L-2TC38-LD	C60	YAG6CL-2TC14-LD	C58	YAV10-T11	B14
YAEV4C-H4	B21	YAG25LTC14LD	C56	YAG31LNT12LD	C56	YAG6CL-2TC14E1-LD	C58	YAV10-T11 BOX	B14
YAEV4C-H5	B21	YAG25LTC38LD	C56	YAG31LTC12LD	C56	YAG6CL-2TC14E2-LD	C58	YAV10-T2	B4, B14
YAEV4C-L	B4, B20	YAG25LTC516LD	C56	YAG31LTC14LD	C56	YAG6CL-2TC38-LD	C58	YAV10-T2 BOX	B14
YAEV4C-L2	B4, B20	YAG26L-2NTC-LD	C59	YAG31LTC34LD	C56	YAG6CL-2TC516-LD	C58	YAV10-T21F BOX	B27
YAEV4C-L3	B20	YAG26L-2TC14-LD	C59	YAG31LTC38LD	C56	YAG6CLTC10LD	C55	YAV10-T23F BOX	B27
YAEV4C-L4	B4, B20	YAG26L-2TC14E2-LD	C59	YAG31LTC516LD	C56	YAG6CLTC12LD	C55	YAV10-T3	B14
YAEV4C-L5	B20	YAG26L-2TC38-LD	C59	YAG31LTC58LD	C56	YAG6CLTC14LD	C55	YAV10-T3 BOX	B14
YAEV4C-RH	B25	YAG26L-2TC516-LD	C59	YAG32L-2NTC-LD	C60	YAG6CLTC38LD	C55	YAV10-T4	B4, B14
YAEV4C-RH2	B25	YAG26LTC10LD	C56	YAG32L-2TC38-LD	C60	YAG6CLTC516LD	C55	YAV10-T4 BOX	B14
YAEV4C-RS	B24	YAG26LTC12LD	C56	YAG32LTC12LD	C56	YAG8CL-2TC10-LD	C58	YAV10-T7	B4, B14
YAEV4C-RS2	B24	YAG26LTC14LD	C56	YAG32LTC38LD	C56	YAG8CL-2TC14-LD	C58	YAV10-T7 BOX	B14
YAEV6C-H	B21	YAG26LTC34LD	C56	YAG32LTC58LD	C56	YAG8CL-2TC14E1-LD	C58	YAV10M10	C62
YAEV6C-H1	B21	YAG26LTC38LD	C56	YAG34L-2NT38-LD	C60	YAG8CL-2TC14E2-LD	C58	YAV10M12	C62
YAEV6C-H10	B21	YAG26LTC516LD	C56	YAG34L-2NTC-LD	C60	YAG8CL-2TC38-LD	C58	YAV10M6	C62
YAEV6C-H2	B21	YAG26LTC58LD	C56	YAG34L-2TC12-LD	C60	YAG8CLTC10LD	C55	YAV10M8	C62
YAEV6C-H4	B21	YAG27L-2NTC-LD	C59	YAG34L-2TC38-LD	C60	YAG8CLTC12LD	C55	YAV10R-BOX	C14
YAEV6C-L	B20	YAG27L-2TC14-LD	C59	YAG34L-2TC516-LD	C60	YAG8CLTC14LD	C55	YAV10R3-BOX	C14
YAEV6C-L1	B20	YAG27L-2TC14E2-LD	C59	YAG34LNT516N66LD	C57	YAG8CLTC38LD	C55	YAV10T2-BOX	C14
YAEV6C-L10	B20	YAG27L-2TC38-LD	C59	YAG34LTC12LD	C57	YAG8CLTC516LD	C55	YAV10T23F	B27
YAEV6C-L1M	B4	YAG27L-2TC516-LD	C59	YAG34LTC38LD	C57	YAK-361A-2G1	H74	YAV10T3-BOX	C14
YAEV6C-L2	B20	YAG27LTC10LD	C56	YAG34LTC516LD	C57	YAK-361A-2G2	H74	YAV10T38	C62
YAEV6C-L2M	B4	YAG27LTC12LD	C56	YAG34LTC516N66LD	C57	YAK25A-2G1	H74	YAV10T4-BOX	C14
YAEV6C-L4	B20	YAG27LTC14LD	C56	YAG34LTC58LD	C57	YAK25A-2G2	H74	YAV12-G2	B14
YAEV6C-L4M	B4	YAG27LTC38LD	C56	YAG36L-2NTC-LD	C60	YAK28A-2G1	H74	YAV12-G2 BOX	B14
YAEV6C-LM	B4	YAG27LTC516LD	C56	YAG36L-2TC38-LD	C60	YAK28A-2G2	H74	YAV12-G3	B14
YAEV6C-RH	B25	YAG28L-2NT38-LD	C59	YAG36LTC12LD	C57	YAK29A-2G1	H74	YAV12-G3 BOX	B14
YAEV6C-RH1	B25	YAG28L-2NTC-LD	C59	YAG36LTC58LD	C57	YAK2CA2G1	H74	YAV120FM10	C64
YAEV6C-RS	B24	YAG28L-2TC12-LD	C59	YAG38L-2NT38-LD	C60	YAK2CA2G2	H74	YAV120FM12	C64
YAEV6C-RS1	B24	YAG28L-2TC12E1-LD	C59	YAG38L-2NTC-LD	C60	YAK311A-2G1	H74	YAV120FM16	C64
YAEV8C-H	B21	YAG28L-2TC14-LD	C59	YAG38L-2TC12-LD	C60	YAK311A-2G2	H74	YAV120M10	C64

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAV120M12	C64	YAV18-T21F	B27	YAV25-TC38-FXB	C47	YAV28-L12 BOX	B16	YAV2C2N-FXB	C53
YAV120M14	C64	YAV18-T21F BOX	B27	YAV25-TC516-FXB	C47	YAV28-L13	B4, B16	YAV2C2TC14-FXB	C53
YAV120M16	C64	YAV18-T4	B14	YAV252N-FXB	C54	YAV28-L13 BOX	B16	YAV2C2TC14E1-FXB	C53
YAV120M20	C64	YAV18-T4 BOX	B14	YAV252TC14-FXB	C54	YAV28-L14	B4, B16	YAV2C2TC14E2-FXB	C53
YAV120M8	C64	YAV18-T5	B14	YAV252TC14E2-FXB	C54	YAV28-L14 BOX	B16	YAV2C2TC38-FXB	C53
YAV14	B14	YAV18-T5 BOX	B14	YAV252TC38-FXB	C54	YAV28-L2NTC38-FX	C49	YAV2C2TC516-FXB	C53
YAV14 BOX	B14	YAV185FM10	C65	YAV25L-TC12-FX	C41	YAV28-L2NTC-FX	C49	YAV2CL-TC10-FX	C40
YAV14-H	B17	YAV185M10	C65	YAV25L-TC14-FX	C41	YAV28-L2TC12-FX	C49	YAV2CL-TC12-FX	C40
YAV14-H BOX	B17	YAV185M12	C65	YAV25L-TC38-FX	C41	YAV28-L2TC14-FX	C49	YAV2CL-TC14-FX	C40
YAV14-H1	B17	YAV185M14	C65	YAV25L-TC516-FX	C41	YAV28-L2TC14E2	C49	YAV2CL-TC38-FX	C40
YAV14-H1 BOX	B17	YAV185M16	C65	YAV25M10	C62	YAV28-L2TC14E2-FX	C49	YAV2CL-TC516-FX	C40
YAV14-H2	B17	YAV185M20	C65	YAV25M12	C62	YAV28-L2TC38-FX	C49	YAV300FM14	C65
YAV14-H2 BOX	B17	YAV18T1	C62	YAV25M6	C62	YAV28-L2TC516-FX	C49	YAV300M12	C65
YAV14-H32F	B28	YAV18T4	C62	YAV25M8	C62	YAV28-L54	B4	YAV300M14	C65
YAV14-H32F BOX	B28	YAV18T5	C62	YAV26-L	B4, B16	YAV28-L56	B4	YAV300M16	C65
YAV14-H34F	B28	YAV1C-L	B16	YAV26-L BOX	B16	YAV28-L60	B4	YAV300M20	C65
YAV14-H34F BOX	B28	YAV1C-L BOX	B16	YAV26-L1	B4, B16	YAV28-LTC12E1-FX	C49	YAV35M10	C63
YAV14-H56F	B28	YAV1C-L1	B4, B16	YAV26-L1 BOX	B16	YAV28-RS	B23	YAV35M12	C63
YAV14-H56F BOX	B28	YAV1C-L1 BOX	B16	YAV26-L12	B16	YAV28-TC12-FXB	C47	YAV35M5	C63
YAV14-HF	B28	YAV1C-L2	B4, B16	YAV26-L12 BOX	B16	YAV28-TC38-FXB	C47	YAV35M6	C63
YAV14-HF BOX	B28	YAV1C-L2 BOX	B16	YAV26-L16	B4	YAV282N-FXB	C54	YAV35M8	C63
YAV14-L33	B14	YAV1C-L2NTC-FX	C49	YAV26-L2	B4, B16	YAV282NT38-FXB	C54	YAV375M12	C66
YAV14-L33 BOX	B14	YAV1C-L2TC14-FX	C49	YAV26-L2 BOX	B16	YAV282NTC38-FXB	C54	YAV375M16	C66
YAV14-L36	B14	YAV1C-L2TC14E1-FX	C49	YAV26-L2NTC-FX	C49	YAV282TC14E2-FXB	C54	YAV375M20	C66
YAV14-L36 BOX	B14	YAV1C-L2TC14E2-FX	C49	YAV26-L2NTC-FX	C49	YAV282TC38-FXB	C54	YAV4C-L	B4, B15
YAV14-R	B23	YAV1C-L2TC38-FX	C49	YAV26-L2TC14-FX	C49	YAV28L-TC12-FX	C41	YAV4C-L BOX	B15
YAV14-RL33	B23	YAV1C-L2TC516-FX	C49	YAV26-L2TC14E2-FX	C49	YAV28L-TC14-FX	C41	YAV4C-L2	B4, B15
YAV14-T1	B14	YAV1C-L3	B4, B16	YAV26-L2TC38-FX	C49	YAV28L-TC34-FX	C41	YAV4C-L2 BOX	B15
YAV14-T1 BOX	B14	YAV1C-L3 BOX	B16	YAV26-L2TC516-FX	C49	YAV28L-TC38-FX	C41	YAV4C-L2NT10-FX	C48
YAV14-T2	B14	YAV1C-L4	B4	YAV26-L3	B4, B16	YAV28L-TC516-FX	C41	YAV4C-L2NT10E1-FX	C48
YAV14-T2 BOX	B14	YAV1C-L6	B16	YAV26-L3 BOX	B16	YAV28L-TC58-FX	C41	YAV4C-L2NTC-FX	C48
YAV14-T3	B14	YAV1C-RS1	B23	YAV26-RS	B23	YAV29-L2NT38-FX	C50	YAV4C-L2TC14-FX	C48
YAV14-T3 BOX	B14	YAV1C-RS2	B23	YAV26-RS3	B23	YAV29-L2NTC-FX	C50	YAV4C-L2TC14E1-FX	C48
YAV14-T32F	B27	YAV1C-TC10-FXB	C46	YAV26-TC12-FXB	C47	YAV29-L2TC12-FX	C50	YAV4C-L2TC14E2-FX	C48
YAV14-T32F BOX	B27	YAV1C-TC516-FXB	C46	YAV26-TC38-FXB	C47	YAV29-L2TC14-FX	C50	YAV4C-L2TC38-FX	C48
YAV14-T34F	B27	YAV1C2N-FXB	C53	YAV262N-FXB	C54	YAV29-L2TC14E2-FX	C50	YAV4C-L2TC516-FX	C48
YAV14-T34F BOX	B27	YAV1C2TC38-FXB	C53	YAV262NTC38-FXB	C54	YAV29-L2TC38-FX	C50	YAV4C-L3	B4, B15
YAV14-T4	B14	YAV1CL-TC10-FX	C41	YAV262TC14-FXB	C54	YAV29-L2TC516-FX	C50	YAV4C-L3 BOX	B15
YAV14-T5 BOX	B14	YAV1CL-TC12-FX	C41	YAV262TC14E2-FXB	C54	YAV29-LTC12E1-FX	C50	YAV4C-L4	B4, B15
YAV14-Z5	B28	YAV1CL-TC14-FX	C41	YAV262TC38-FXB	C54	YAV29N-FXB	C54	YAV4C-L4 BOX	B15
YAV14-Z5 BOX	B28	YAV1CL-TC38-FX	C41	YAV26L-TC10-FX	C41	YAV292N38-FXB	C54	YAV4C-L5	B4, B15
YAV14-H6F	B28	YAV1CL-TC516-FX	C41	YAV26L-TC12-FX	C41	YAV292NTC38-FXB	C54	YAV4C-L5 BOX	B15
YAV14-Z6 BOX	B28	YAV240FM10	C65	YAV26L-TC14-FX	C41	YAV292TC14E2-FXB	C54	YAV4C-RS	B23
YAV14T3	C62	YAV240FM12	C65	YAV26L-TC34-FX	C41	YAV292TC38-FXB	C54	YAV4C-RS2	B23
YAV150FM12	C65	YAV240M10	C65	YAV26L-TC38-FX	C41	YAV29L-TC12-FX	C41	YAV4C-RS3	B23
YAV150M10	C65	YAV240M12	C65	YAV26L-TC516-FX	C41	YAV29L-TC14-FX	C41	YAV4C-RS4	B23
YAV150M12	C65	YAV240M14	C65	YAV26L-TC58-FX	C41	YAV29L-TC34-FX	C41	YAV4C-TC10-FXB	C46
YAV150M14	C65	YAV240M16	C65	YAV27-L	B4, B16	YAV29L-TC38-FX	C41	YAV4C-TC14-FXB	C46
YAV150M16	C65	YAV240M20	C65	YAV27-L BOX	B16	YAV29L-TC516-FX	C41	YAV4C-TC516-FXB	C46
YAV150M20	C65	YAV25-L	B4, B16	YAV27-L1	B4, B16	YAV29L-TC58-FX	C41	YAV4C2N-FXB	C53
YAV16M10	C62	YAV25-L BOX	B16	YAV27-L1 BOX	B16	YAV2C-L	B4, B15	YAV4C2TC14-FXB	C53
YAV16M12	C62	YAV25-L1	B4, B16	YAV27-L15	B16	YAV2C-L BOX	B15	YAV4C2TC14E2-FXB	C53
YAV16M6	C62	YAV25-L1 BOX	B16	YAV27-L15 BOX	B16	YAV2C-L1	B4, B15	YAV4C2TC38-FXB	C53
YAV16M8	C62	YAV25-L16	B4	YAV27-L18	B4	YAV2C-L1 BOX	B15	YAV4C2TC516-FXB	C53
YAV18	B14, C62	YAV25-L2	B4, B16	YAV27-L20	B4	YAV2C-L11	B4	YAV4CL-TC10-FX	C40
YAV18 BOX	B14	YAV25-L2 BOX	B16	YAV27-L2TC-FX	C49	YAV2C-L2	B4, B15	YAV4CL-TC12-FX	C40
YAV18-H	B17	YAV25-L2NTC-FX	C49	YAV27-L2TC14-FX	C49	YAV2C-L2 BOX	B15	YAV4CL-TC14-FX	C40
YAV18-H BOX	B17	YAV25-L2TC12E1-FX	C49	YAV27-L2TC38-FX	C49	YAV2C-L2NTC-FX	C49	YAV4CL-TC38-FX	C40
YAV18-H19 BOX	B28	YAV25-L2TC14-FX	C49	YAV27-RS	B23	YAV2C-L2TC14-FX	C49	YAV4CL-TC516-FX	C40
YAV18-H19F	B28	YAV25-L2TC14E2-FX	C49	YAV27-TC12-FXB	C47	YAV2C-L2TC14E1-FX	C49	YAV500M12	C66
YAV18-H21F	B28	YAV25-L2TC38-FX	C49	YAV272N-FXB	C54	YAV2C-L2TC14E2-FX	C49	YAV500M14	C66
YAV18-H21F BOX	B28	YAV25-L2TC516-FX	C49	YAV272TC14E2-FXB	C54	YAV2C-L2TC38-FX	C49	YAV500M20	C66
YAV18-H6F	B28	YAV25-L2TC516E2-FX	C49	YAV272TC38-FXB	C54	YAV2C-L2TC516-FX	C49	YAV50FM12	C63
YAV18-H6F BOX	B28	YAV25-L3	B4, B16	YAV27L-TC10-FX	C41	YAV2C-L3	B4, B15	YAV50FM14	C63
YAV18-L33	B14	YAV25-L3 BOX	B16	YAV27L-TC12-FX	C41	YAV2C-L4	B4, B15	YAV50M10	C63
YAV18-L33 BOX	B14	YAV25-L4	B16	YAV27L-TC14-FX	C41	YAV2C-L4 BOX	B15	YAV50M12	C63
YAV18-R	B23	YAV25-L4 BOX	B16	YAV27L-TC38-FX	C41	YAV2C-RS	B23	YAV50M14	C63
YAV18-T1	B14	YAV25-RS	B23	YAV27L-TC516-FX	C41	YAV2C-RS1	B23	YAV50M16	C63
YAV18-T1 BOX	B14	YAV25-RS3	B23	YAV28-L	B4, B16	YAV2C-RS2	B23	YAV50M5	C63
YAV18-T19F	B27	YAV25-TC10-FXB	C47	YAV28-L BOX	B16	YAV2C-TC10-FXB	C46	YAV50M6	C63
YAV18-T19F BOX	B27	YAV25-TC12-FXB	C47	YAV28-L12	B4, B16	YAV2C-TC516-FXB	C46	YAV50M8	C63

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAV5C-TC14-FXB	C46	YAZ1C-2N	C36	YAZ32TC12	C26	YAZ48TC12	C26	YAZV28TC12FX	C45
YAV5C2TC14-FXB	C53	YAZ1C-2TC14	C36	YAZ32TC38	C26	YAZ4C-2N	C36	YAZV28TC38FX	C45
YAV630FM20	C66	YAZ1C-2TC14E2	C36	YAZ32TC38FX	C45	YAZ4C-2TC10-E2	C36	YAZV29NT516FX	C52
YAV6C-L	B4, B15	YAZ1C-2TC38	C36	YAZ33-2N	C37	YAZ4C-2TC14	C36	YAZV29NT516FX	C45
YAV6C-L BOX	B15	YAZ1CTC12	C25	YAZ33TC12	C26	YAZ4C-2TC14E2	C36	YAZV2C2NTCFX	C51
YAV6C-L1	B4, B15	YAZ1CTC14	C25	YAZ34-2N	C37	YAZ4C-2TC38	C36	YAZV2C2TC14E2FX	C51
YAV6C-L1 BOX	B15	YAZ1CTC38	C25	YAZ34-2TC14E2	C37	YAZ4CTC12	C24	YAZV2C2TC14FX	C51
YAV6C-L10	B4, B15	YAZ25-2N	C36	YAZ34-2TC38	C37	YAZ4CTC14	C24	YAZV2C2TC38FX	C51
YAV6C-L10 BOX	B15	YAZ25-2NTC38	C36	YAZ342NT38FX	C52	YAZ4CTC38	C24	YAZV2CTC12FX	C44
YAV6C-L2	B4, B15	YAZ25-2TC14	C36	YAZ342NTCFX	C52	YAZ5C-2N	C35	YAZV2CTC14FX	C44
YAV6C-L2 BOX	B15	YAZ25-2TC14E1	C36	YAZ342TC14E2FX	C52	YAZ5CTC12	C24	YAZV2CTC38FX	C44
YAV6C-L2NTC-FX	C48	YAZ25-2TC14E2	C36	YAZ342TC38FX	C52	YAZ6C-2N	C35	YAZV4C2TC14E2FX	C51
YAV6C-L2TC10-FX	C48	YAZ25-2TC38	C36	YAZ34NT38FX	C45	YAZ6C-2TC10E2	C35	YAZV4C2TC38E2-FX	C51
YAV6C-L2TC10E2-FX	C48	YAZ25-2TC516	C36	YAZ34TC12	C26	YAZ6C-2TC14	C35	YAZV4C2TC38FX	C51
YAV6C-L2TC10E4-FX	C48	YAZ25-2TC516E6	C36	YAZ34TC12FX	C45	YAZ6C-2TC14E1	C35	YAZV4CTC14FX	C44
YAV6C-L2TC10E9-FX	C48	YAZ25TC12	C25	YAZ34TC38	C26	YAZ6C-2TC14E2	C35	YAZV4CTC38FX	C44
YAV6C-L2TC14-FX	C48	YAZ25TC14	C25	YAZ34TC38FX	C45	YAZ6C-2TC38	C35	YAZV6C2TC10E2FX	C51
YAV6C-L2TC14E1-FX	C48	YAZ25TC38	C25	YAZ35-2N	C37	YAZ6C-2TC38E2	C35	YAZV6C2TC14E1FX	C51
YAV6C-L2TC14E2-FX	C48	YAZ25TC516	C25	YAZ35TC12	C26	YAZ6C-2TC38E6	C35	YAZV6C2TC14E2FX	C51
YAV6C-L2TC38-FX	C48	YAZ26-2N	C37	YAZ36-2N	C37	YAZ6CTC12	C24	YAZV6C2TC14FX	C51
YAV6C-L2TC516-FX	C48	YAZ26-2TC14	C37	YAZ36-2TC38	C37	YAZ6CTC14	C24	YAZV6C2TC38E2FX	C51
YAV6C-L4	B4, B15	YAZ26-2TC14E2	C37	YAZ362TC38FX	C52	YAZ6CTC38	C24	YAZV6C2TC38E6FX	C51
YAV6C-L4 BOX	B15	YAZ26-2TC38	C37	YAZ36TC12	C26	YAZ8C-2TC10	C35	YAZV6C2TC38FX	C51
YAV6C-RS	B23	YAZ26TC12	C25	YAZ36TC38	C26	YAZ8C-2TC10E2	C35	YAZV6CTC14FX	C44
YAV6C-RS1	B23	YAZ26TC14	C25	YAZ36TC38FX	C45	YAZ8C-2TC14	C35	YAZV6CTC38FX	C44
YAV6C-RS2	B23	YAZ26TC38	C25	YAZ37-2N	C37	YAZ8C-2TC14E1	C35	YBA28A	C11
YAV6C-RS4	B23	YAZ27-2N	C37	YAZ37TC12	C26	YAZ8C-2TC14E2	C35	YBA29	C11
YAV6C-TC10-FXB	C46	YAZ27-2TC14E2	C37	YAZ38-2N	C37	YAZ8C-2TC38	C35	YBA29A	C11
YAV6C-TC14-FXB	C46	YAZ27-2TC38	C37	YAZ382NNTFX	C52	YAZ8C2TC10E2FX	C51	YBA38FX	C11
YAV6C2N-FXB	C53	YAZ27TC12	C25	YAZ382NT38FX	C52	YAZ8C2TC10FX	C51	YBA39	C11
YAV6C2TC14-FXB	C53	YAZ27TC38	C25	YAZ382NTCFX	C52	YAZ8C2TC14E1FX	C51	YBA39A	C11
YAV6C2TC14E2-FXB	C53	YAZ28-2N	C37	YAZ382TC38FX	C52	YAZ8C2TC14E2FX	C51	YBA44A	C11
YAV6C2TC38-FXB	C53	YAZ28-2NTC38	C37	YAZ38NT12FX	C45	YAZ8C2TC14FX	C51	YBA44FX	C11
YAV6CL-TC10-FX	C40	YAZ28-2TC14E2	C37	YAZ38NT38FX	C45	YAZ8C2TC38FX	C51	YBAV28FX	C11
YAV6CL-TC12-FX	C40	YAZ28-2TC38	C37	YAZ38TC12	C26	YAZ8CTC10	C24, C44	YBM1C-L	B18
YAV6CL-TC14-FX	C40	YAZ28TC12	C25	YAZ38TC12FX	C45	YAZ8CTC14	C24, C44	YBM1C-L3	B18
YAV6CL-TC34-FX	C40	YAZ28TC38	C25	YAZ38TC38FX	C45	YAZ8CTC38	C24, C44	YBM25-L	B18
YAV6CL-TC38-FX	C40	YAZ29-2N	C37	YAZ39-2N	C38	YAZV10-2TC14	C35	YBM25-L1	B18
YAV6CL-TC516-FX	C40	YAZ29-2TC38	C37	YAZ39-2NNT	C38	YAZV10-2TC14E2	C35	YBM25-L2	B18
YAV70FM10	C63	YAZ29TC12	C25	YAZ39-2NT38	C38	YAZV10TC14	C24	YBM26-L	B18
YAV70FM12	C63	YAZ29TC38	C25	YAZ39-2TC38	C38	YAZV1C2TC14E1FX	C51	YBM28-1/4	B18
YAV70M10	C63	YAZ2C-2N	C36	YAZ39NT12	C26	YAZV1C2TC14E2FX	C51	YBM2C-L	B18
YAV70M12	C63	YAZ2C-2NTC38	C36	YAZ39TC12	C26	YAZV1C2TC14FX	C51	YBM2C-L1	B18
YAV70M14	C63	YAZ2C-2TC10E2	C36	YAZ39TC38	C26	YAZV1C2TC38FX	C51	YBM2C-L2	B18
YAV70M16	C63	YAZ2C-2TC14	C36	YAZ3C-2N	C36	YAZV1C2TC516E6FX	C51	YBM4C-L	B18
YAV70M5	C63	YAZ2C-2TC14E1	C36	YAZ3C-2TC14	C36	YAZV1C2TC516FX	C51	YBM4C-L1	B18
YAV70M6	C63	YAZ2C-2TC14E2	C36	YAZ3C-2TC14E2	C36	YAZV1CTC14FX	C44	YBM4C-L2	B18
YAV70M8	C63	YAZ2C-2TC38	C36	YAZ3C-2TC38	C36	YAZV1CTC38FX	C45	YBM4C-L4	B18
YAV800M20	C66	YAZ2C-2TC38E2	C36	YAZ3C-2TC38E2	C36	YAZV1CTC516FX	C45	YBM6C-L	B18
YAV8C-L	B4, B15	YAZ2C-2TC38E6	C36	YAZ3CTC12	C25	YAZV252NTCFX	C52	YBM6C-L2	B18
YAV8C-L BOX	B15	YAZ2C-2TC516E2	C36	YAZ3CTC14	C25	YAZV252TC14E2FX	C52	YBM6C-L3	B18
YAV8C-L1	B4, B15	YAZ2CTC12	C25	YAZ3CTC38	C25	YAZV252TC14FX	C52	YBM6C-L9	B18
YAV8C-L1 BOX	B15	YAZ2CTC14	C25	YAZ40-2N	C38	YAZV252TC38FX	C52	YBM8C	B18
YAV8C-L14	B4, B15	YAZ2CTC38	C25	YAZ402NTCFX	C52	YAZV25TC12FX	C45	YBM8C-T2	B18
YAV8C-L2	B4, B15	YAZ30-2N	C37	YAZ40TC12	C26	YAZV25TC14FX	C45	YBM8CT4	B18
YAV8C-L2 BOX	B15	YAZ30-2TC38	C37	YAZ41-2N	C38	YAZV25TC38FX	C45	YC10C10	C79, H19
YAV8C-L3	B4, B15	YAZ302TC38FX	C52	YAZ41TC12	C26	YAZV262NTCFX	C52	YC10L12	C78, N11
YAV8C-L3 BOX	B15	YAZ30TC12	C26	YAZ44-2N	C38	YAZV262TC14E2FX	C52	YC1L12	C78
YAV8C-L4	B4, B15	YAZ30TC38	C26	YAZ44-2TC38	C38	YAZV262TC14FX	C52	YC1U1	H23
YAV8C-L4 BOX	B15	YAZ30TC38FX	C45	YAZ442NT38FX	C52	YAZV262TC38FX	C52	YC25A2	H20
YAV8C-RS	B23	YAZ31-2N	C37	YAZ44TC12	C26	YAZV26TC12FX	C45	YC25A25	H20
YAV8C-RS1	B23	YAZ31-2TC14E2	C37	YAZ44TC38	C26	YAZV26TC14FX	C45	YC25A4	H20
YAV8C-RS3	B23	YAZ31-2TC38	C37	YAZ45-2N	C38	YAZV26TC38FX	C45	YC25L12	C78
YAV95FM12	C64	YAZ312TC14E2FX	C52	YAZ453-2N	C38	YAZV272TC14E2FX	C52	YC26A25	H20
YAV95M10	C63	YAZ312TC38FX	C52	YAZ453TC12	C26	YAZV272TC38FX	C52	YC26A26	H20
YAV95M12	C63	YAZ31TC12	C26	YAZ45TC12	C26	YAZV27TC38FX	C45	YC26C2	C79, H19
YAV9C-L36	B14	YAZ31TC38	C26	YAZ46-2N	C38	YAZV282NT38FX	C52	YC26C26	C79, H19
YAV9C-L36 BOX	B14	YAZ31TC38FX	C45	YAZ46TC12	C26	YAZV282NTCFX	C52	YC26L12	C78
YAV9C-T4 BOX	B14	YAZ32-2N	C37	YAZ47-2N	C38	YAZV282TC14E2FX	C52	YC27L12	C78
YAV9C-T9	B14	YAZ32-2TC38	C37	YAZ47TC12	C26	YAZV282TC38FX	C52	YC28A2	H20
YAV9C-T9 BOX	B14	YAZ322TC38FX	C52	YAZ48-2N	C38	YAZV28NT38FX	C45	YC28A25	H20

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YC28A26	H20	YCAK31A-2G1	H75	YCS25RL	H48	YDS250E	H61	YDS326R	H56
YC28A28	H20	YCAK31AG1	H75	YCS26	H51	YDS251R	H57	YDS32LT	H60
YC28C2	C79, H19	YCAK321R-4N	H72	YCS26A	H49	YDS251RP1	H57	YDS32R	H56
YC28C26	C79, H19	YCAK33R-4N	H72	YCS26R	H47	YDS25AT	H46, H53, H60	YDS32RP2	H56
YC28C28	C79, H19	YCAK34A-2G3	H75	YCS26RL	H48	YDS25F	H63	YDS331AT	H53, H60
YC28U26	H23	YCAK35R-4N	H72	YCS27	H51	YDS25R	H56	YDS33R	H56
YC2A2	H20	YCAK361A-4N	H72	YCS27R	H47	YDS25REP2	H61	YDS33RP1	H56
YC2A4	H20	YCAK361R-4N	H72	YCS28	H51	YDS25RL	H59	YDS34	H54
YC2C2	C79, H19	YCAK36A-2G1	H75	YCS28A	H49	YDS25RLY	H58	YDS341RL	H60
YC2C4	C79, H19	YCAK37R-4N	H72	YCS28R	H47	YDS25RP1	H56, H61	YDS34R	H56
YC2L12	C78	YCAK391A-4N	H73	YCS28RL	H48	YDS25RP2	H56	YDS34RP2	H56, H57
YC33R26	H20	YCAK39A-2G2	H75	YCS29	H51	YDS26	H54	YDS351AT	H53
YC33R26U	H23	YCAK39R-4N	H72	YCS2R	H47	YDS261R	H57	YDS35R	H56
YC3L12	C78	YCAK43R-4N	H73	YCS30	H51	YDS261RP1	H57	YDS35RP1	H56
YCA4A	H20	YCAK44A-2G2	H75	YCS301A	H49	YDS26AT	H53	YDS361AT	H53
YCA46	H20	YCAK453R-4N	H73	YCS30R	H47	YDS26F	H63	YDS361R	H56, H61
YCA4C	C79, H19	YCAK45R-4N	H73	YCS31	H51	YDS26R	H56	YDS361RL	H60
YCA4C6	C79, H19	YCB1U1	H36	YCS311A	H49	YDS26RL	H59	YDS361RP1	H56, H61
YCA4C8	C79, H19	YCB25R	H35	YCS32	H51	YDS26RLY	H58	YDS36LT	H60
YCA4L12	C78, N11	YCB26R	H35	YCS321R	H47	YDS26RP1	H56, H61	YDS36R	H56
YCA4U1	H23	YCB27R	H35	YCS321RL	H48	YDS26RP2	H56	YDS36RP2	H56, H57
YCA6L12	C78, N11	YCB28R	H35	YCS331A	H49	YDS27	H54	YDS375H	H61
YCB8C	C79, H19	YCB28U26	H36	YCS33R	H47	YDS271R	H57	YDS37RP1	H56
YCB8L12	C78, N11	YCB2R	H35	YCS34	H51	YDS271RP1	H57	YDS39	H54
YCA25R-2N	H70	YCB321R	H35	YCS341RL	H48	YDS27AT	H53, H60	YDS391AT	H53
YCA25R-2N	H72	YCB33R	H35	YCS351A	H49	YDS27R	H56	YDS392R	H57
YCA25RL-2N	H71	YCB33R26U	H36	YCS35R	H47	YDS27RE	H61	YDS39RP1	H57
YCA26-2N	H70	YCB35R	H35	YCS361A	H49	YDS27RL	H59	YDS3C-3	H54
YCA26R-2N	H72	YCB361R	H35	YCS361R	H47	YDS27RLY	H58	YDS3K10	H62
YCA26RL-2N	H71	YCB38R26U	H36	YCS37R	H47	YDS27RP1	H56, H61	YDS3K5	H62
YCA27-2N	H70	YCB4U1	H36	YCS39	H51	YDS27RP2	H56, H57, H61	YDS3K6	H62, H63
YCA27R-2N	H72	YCD453R	H47	YCS391A	H49	YDS28	H54	YDS3K7	H62
YCA27RL-2N	H71	YCHC29TC2	C80	YCS39R	H47	YDS28AT	H53, H60	YDS3K8	H62
YCA28-2N	H70	YCHC29TC29	C80	YCS43R	H47	YDS28F	H63	YDS3W	H55
YCA28R-2N	H72	YCHC2TC2	C80	YCS44	H51	YDS28R	H56	YDS41RP2	H56, H57
YCA28RL-2N	H71	YCHC34TC2	C80	YCS45R	H47	YDS28RE	H61	YDS431AT	H53
YCA29-2N	H70	YCHC34TC29	C80	YCS4R	H47	YDS28RL	H59	YDS43R43RS	H57
YCA2R-2N	H72	YCHC34TC34	C80	YCT2626	H29	YDS28RLY	H58	YDS43R45RS	H57
YCA2RL-2N	H71	YCHC39TC2	C80	YCT2828	H29	YDS28RP1	H56, H61	YDS43RP1	H57
YCA30-2N	H70	YCHC39TC31	C80	YCU25A	H51	YDS28RP2	H56	YDS43RP2	H57
YCA30R-2N	H72	YCHC39TC39	C80	YCU25R	H52	YDS29	H54	YDS44	H54
YCA31-2N	H70	YCHC44TC44	C80	YCU26R	H52	YDS291AT	H53	YDS44RP2	H56, H57
YCA32-2N	H70	YCHC8TC8	C80	YCU27R	H52	YDS291RP1	H56	YDS451R34RS	H57
YCA321R-2N	H72	YCR25RG6	H50	YCU28A	H51	YDS29AT	H53	YDS451R49RS	H57
YCA321RL-2N	H71	YCR2625	H49	YCU28R	H52	YDS2C	H51, H54	YDS451RP1	H57
YCA33R-2N	H72	YCR26RG2	H50	YCU291A	H51	YDS2C-3	H54	YDS45R45RS	H57
YCA34-2N	H70	YCR26RG3	H50	YCU2CA	H51	YDS2CA	H53, H60	YDS45RP1	H57
YCA35R-2N	H72	YCR2725	H49	YCU2R	H52	YDS2F	H63	YDS45RP2	H57
YCA361R-2N	H72	YCR27RG5	H50	YCU301A	H51	YDS2KT	H63	YDS49RP1	H57
YCA37R-2N	H72	YCR27RG6	H50	YCU30R	H52	YDS2RE	H61	YDS49RP2	H57
YCA39-2N	H70	YCR2825	H49	YCU321R	H52	YDS2REP2	H61	YDS4C	H51, H54
YCA391A-2N	H73	YCR28RG5	H50	YCU4R	H52	YDS2RL	H59	YDS4CA	H46, H53
YCA39R-2N	H72	YCR28RG6	H50	YCU4RG1	H52	YDS2RLY	H58	YDS4KT	H63
YCA43R-2N	H73	YCR28RG7	H50	YCU4129ACSR	N43	YDS2W	H51, H55	YDS4RL	H59
YCA441A-4N	H73	YCR28RG8	H50	YD14-14	B5	YDS2WA	H53	YDS4RLY	H58
YCA44A2NG2	H73	YCR291RG2	H50	YD28REP2	H61	YDS30	H54	YDS4W	H51, H55
YCA451A-4N	H73	YCR291RG3	H50	YDS011R	H57	YDS301AT	H53	YDS4WA	H46, H53
YCA45R-2N	H73	YCR291RG4	H50	YDS011RP1	H57	YDS30LT	H60	YDS500H	H61
YCA48R-4N	H73	YCR291RG5	H50	YDS021R	H56	YDS30R	H56	YDS6C	H51, H54
YCA4R-2N	H72	YCR30RG4	H50	YDS021RE	H61	YDS30RP1	H56	YDS6CA	H53
YCA4RL-2N	H71	YCR30RG6	H50	YDS021REP1	H61	YDS30RP2	H56	YDS6KT	H63
YCA6B2-4N	H70	YCR30RG7	H50	YDS021RL	H59	YDS31	H54	YDS6W	H51, H55
YCA6B32-4N	H70	YCR32RG1	H50	YDS021RLY	H58	YDS311AT	H53, H60	YDS6WA	H53
YCA6B34-4N	H70	YCR32RG2	H50	YDS021RP1	H56	YDS312E	H61	YDS6WK	H62
YCA6B39-4N	H70	YCR32RG3	H50	YDS1C	H51, H54	YDS312H	H61	YDS75	H55
YCA6B44-4N	H70	YCR32RG4	H50	YDS1C-3	H54	YDS31AT	H53	YDS76	H55
YCAK25R-4N	H72	YCR32RG5	H50	YDS1R	H56	YDS32	H54	YDS78	H55
YCAK28A-2G1	H75	YCR32RG6	H50	YDS1RP1	H56	YDS321R	H56	YDS7K5	H62
YCAK28R-4N	H72	YCR32RG7	H50	YDS1RP2	H56	YDS321RL	H59	YDS7K6	H62
YCAK29A-2G1	H75	YCS25	H51	YDS1W	H55	YDS321RLY	H58	YDS7K7	H62
YCAK30R-4N	H72	YCS25R	H46, H47	YDS25	H54	YDS321RP1	H56	YDS7M10T	H63

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YDS7M6T	H63	YEV1CP23X75FX	C90	YGHP2C6W6W	E9	YGS8C	E18	YH0150J1444	H37
YDS7M7T	H63	YEV1CP26X75FX	C89	YGHP34C2	E9	YGT275	E23	YHR-700	H27
YDS7M8T	H63	YEV1CP29X75FX	C88	YGHP34C26	E9	YH2929	C81-C83	YHR-750	H27
YDS7M9T	H63	YEV25P26X75FX	C90	YGHP34C29	E9	YH2929WCC	C81, C83	YHR-800	H27
YDS8KT	H63	YEV25P29X75FX	C89	YGHP34C34	E9	YH2929WCC	C81, C83	YHR-850	H27
YDS8W	H51, H55	YEV25P33X75FX	C88	YGHP58C2W-2	E10	YH292C	C81-C83	YHR-900	H27
YDS8WG1	H55	YEV26P29X75FX	C90	YGHP58C2W-2TN	E10	YH292CWC	C81, C83	YHR-950	H27
YDS8WK	H62	YEV26P33X75FX	C89	YGHR26C100	E14	YH292CWCC	C81, C83	YKA25R-2N	H32
YE1WAG1	H40	YEV26P37X75FX	C88	YGHR26C12	E14	YH298C	C81-C83	YKA26-2N	H34
YE25-LH97	H40	YEV27P33X75FX	C90	YGHR26C34	E14	YH298CWC	C81, C83	YKA26R-2N	H32
YE25R-25	H40	YEV27P37X75FX	C89	YGHR26C58	E14	YH298CWCC	C81, C83	YKA27R-2N	H32
YE26-LH88	H40	YEV27P41X82FX	C88	YGHR29C100	E14	YH2C2C	C81-C83	YKA28-2N	H34
YE26-LH89	H40	YEV28P37X75FX	C90	YGHR29C12	E14	YH2C2CWC	C81, C83	YKA28R-2N	H32
YE26R-60	H40	YEV28P41X75FX	C89	YGHR29C34	E14	YH2C2CWCC	C81, C83	YKA2C-2N	H34
YE27R-60	H40	YEV28P46X92FX	C88	YGHR29C58	E14	YH3429	C81-C83	YKA2R-2N	H32
YE28-LH128	H40	YEV2CP20X75FX	C90	YGHR34C100	E14	YH3429WC	C81, C83	YKA30-2N	H34
YE28R-60	H40	YEV2CP23X75FX	C89	YGHR34C34	E14	YH3429WCC	C81, C83	YKA30R-2N	H32
YE29P31X109	C90	YEV2CP26X75FX	C88	YGHR34C58	E14	YH3434	C81-C83	YKA321R-2N	H32
YE29P41X82	C90	YEV4CP16X75FX	C90	YGHR58C2W-3	E15	YH3434WC	C81, C83	YKA33R-2N	H32
YE29P46X92	C89	YEV4CP20X75FX	C88	YGHS25	E16	YH3434WCC	C81, C83	YKA34-2N	H34
YE29P50X100	C88	YFD-365	C102	YGHS26	E16	YH3931	C81-C83	YKA34CA-2N	H32
YE2C-LH128	H40	YFN-540	C102	YGHS27	E16	YH3931WC	C81, C83	YKA361R-2N	H32
YE2C-LH129	H40	YFO-140	C102	YGHS28	E16	YH3931WCC	C81, C83	YKA37R-2N	H32
YE2R-25	H40	YFR-865	C102	YGHS29	E16	YH3939	C81, C83	YKA391A-2N	H32
YE2WAG5	H40	YG14B2TC2C2C	E24	YGHS2C	E16	YH3939WC	C81, C83	YKA44-2N	H34
YE30P46X92	C90	YG14B2TC2C6C	E24	YGHS31	E16	YH3939WCC	C81, C83	YKA6C-2N	H34
YE30P46X92FX	C89	YG14B2TC28	E24	YGHS34	E16	YH4429	C81-C83	YNA32R	19
YE30P50X100	C89	YGA25-2N	E17	YGIBS28-338-2N	E21	YH4429WC	C81, C83	YNA32R15	19
YE30P50X100FX	C88	YGA26-2N	E17	YGIBS28-400-2N	E21	YH4429WCC	C81, C83	YNA34R	19
YE30P55X110	C88	YGA28-2N	E17	YGIBS28-462-2N	E21	YH4434	C81-C83	YNA34R15	19
YE30R-60	H40	YGA29-2N	E17	YGIBS28-550-2N	E21	YH4434WC	C81, C83	YNA36R	19
YE31-LH96	H40	YGA2C-2N	E17	YGIBS28-613-2N	E21	YH4434WCC	C81, C83	YNA36R15	19
YE31P41X82FX	C90	YGA2C-2TC38	E17	YGIBS28-675-2N	E21	YH4444	C81-C83	YNA39R	19
YE31P50X100	C90	YGA34-2N	E17	YGIBS34-338-2N	E21	YH4444WC	C83	YNA39R15	19
YE31P51X102FX	C88	YGA6C-2N	E17	YGIBS34-400-2N	E21	YH4444WCC	C81, C83	YNA43R	19
YE31P55X110	C89	YGA6C-2TC38E2G1	E17	YGIBS34-462-2N	E21	YH444WC	C81	YNA43R15	19
YE31P59X118	C88	YGA6C-TC10	E17	YGIBS34-550-2N	E21	YH6C6C	C81-C83	YNA451R-T	19
YE32P51X102FX	C89	YGA6C-TC14	E17	YGIBS34-675-2N	E21	YH6C6CWC	C81, C83	YNA451R15	19
YE32P55X110	C90	YGA6C-TC516	E17	YGBW28-338-2N	E21	YH6C6CWCC	C81, C83	YNA49R-T	19
YE32P55X110FX	C88	YGA8C-2N	E17	YGBW28-400-2N	E21	YH8C8C	C81-C83	YNA49R15	19
YE32P59X118	C89	YGA8C-TC10	E17	YGBW28-462-2N	E21	YH8C8CWC	C81, C83	YNA52R-T	19
YE32P63X126	C88	YGA8C-TC14	E17	YGBW28-550-2N	E21	YH8C8CWCC	C81, C83	YNA52R15	19
YE32R-60	H40	YGA8C-TC516	E17	YGBW28-613-2N	E21	YHD-10	H28	YNA54R-T	19
YE34-LH119	H40	YGC6C6	E12	YGBW28-675-2N	E21	YHD-200	H26, H36	YNA56R-T	19
YE34-LH120	H40	YGC6C8	E12	YGBW34-338-2N	E21	YHD-250	H26, H36	YNA56R15	19
YE34P51X102FX	C90	YGC8C8	E12	YGBW34-400-2N	E21	YHD-3	H28	YNA594R-T	19
YE34P55X110FX	C89	YGF29-2N	E19	YGBW34-462-2N	E21	YHD-300	H26, H36	YNA594R15	19
YE34P59X118	C90	YGF29-4N	E19	YGBW34-550-2N	E21	YHD-350	H26	YNA7M10T	18
YE34P59X118FX	C88	YGF34-2N	E19	YGBW34-613-2N	E21	YHD-4	H28	YNA7M6T	18
YE34P63X126	C89	YGF34-4N	E19	YGBW34-675-2N	E21	YHD-400	H26	YNA7M7T	18
YE34P71X142	C88	YGHA25-2N	E16	YGL29C2	E7	YHD-5	H28	YNA7M8T	18
YE361R-60	H40	YGHA26-2N	E16	YGL29C29	E7	YHD-6	H28	YNS43R	14
YE36P59X118FX	C89	YGHA27-2N	E16	YGL2C2	E7	YHD-7	H28	YNS451R	14
YE36P63X126	C90	YGHA28-2N	E16	YGL34C2	E7	YHD200J1444	H37	YNS49R	14
YE36P67X134FX	C88	YGHA29-2N	E16	YGL34C29	E7	YHD250J1444	H37	YNS59R	14
YE36P71X142	C89	YGHA2C-2N	E16	YGL34C34	E7	YHD300J1496	H37	YNT451R451R	12
YE36P78X156	C88	YGHA31-2N	E16	YGLR29C100	E8	YHD350	H36	YNT49R49R	12
YE38P59X118FX	C90	YGHA34-2N	E16	YGLR29C12	E8	YHD350J1496	H37	YNTA32R	13
YE38P67X134FX	C89	YGHC26C2	E11	YGLR29C34	E8	YHN-450	H27	YNTA39R	13
YE38P71X142FX	C88	YGHC26C26	E11	YGLR29C58	E8	YHN-500	H27, H36	YNTA43R	13
YE39P71X142	C90	YGHC29C26	E11	YGLR34C100	E8	YHN-525	H27	YNTA451R	13
YE39P78X156	C89	YGHC29C29	E11	YGLR34C12	E8	YHN-550	H27	YNTA49R	13
YE39P87X174	C88	YGHC2C2	E11	YGLR34C34	E8	YHN-600	H27	YNTA58R	13
YE39R-60	H40	YGHC34C26	E11	YGLR34C58	E8	YHN500J1496	H37	YNU43R	14
YE40P67X134FX	C90	YGHC34C29	E11	YGS25	E18	YHO-1	H28	YNU451R	14
YE40P71X142FX	C89	YGHC34C34	E11	YGS26	E18	YHO-10	H28	YNU49R	14
YE40P78X156FX	C88	YGHP29C2	E9	YGS28	E18	YHO-100	H26, H36	YOT3434	H29
YE44P78X156FX	C89	YGHP29C26	E9	YGS29	E18	YHO-125	H26	YOT361R361R	12
YE44P87X174FX	C88	YGHP29C29	E9	YGS2C	E18	YHO-150	H26, H36	YOT37R37R	12
YE4R-25	H40	YGHP29C6W6W	E9	YGS34	E18	YHO-2	H28	YOU32R	H52
YE6R-25	H40	YGHP2C2	E9	YGS6C	E18	YHO100J1444	H37	YOU33R	H52

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YOU35R	H52	YRB31U25TW	K11	YS29-T	C73	YS4C-L BOX	C68	YSHG3931	E13
YOU361R	H52	YRB31U28	C101	YS29A1	C99	YS4C-LB	C71, C72	YSHG4429	E13
YOU37R	H52	YRB31U28TW	K11	YS29AT	C100	YS4C-T	C73	YSM10	B43
YOU39R	H52	YRB31U29	C101	YS29FSLTCKITC	C75	YS4CA1	C98	YSM14	B43
YOU41R	H52	YRB31U31TW	K11	YS2C	C69	YS5C	C69	YSM18	B43
YOU421R	H52	YRB3428T	K14, K15	YS2C-L BOX	C68	YS5C-L BOX	C68	YSM1C	B43
YOU43R	H52	YRB34U25TW	K12	YS2C-LB	C71, C72	YS5C-LB	C71, C72	YSM25	B43
YOU44R	H52	YRB34U28TW	K12	YS2C-T	C73	YS6C	C69	YSM26	B43
YOU453R	H52	YRB34U29TW	K12	YS2CA1	C98	YS6C-L BOX	C68	YSM27	B43
YOU45R	H52	YRB34U30TW	K12	YS2CAT	C100	YS6C-T	C73	YSM28	B43
YOU48R	H52	YRB34U31	C101	YS2CFSLTCKITC	C75	YS6CA1	C98	YSM2C	B43
YOU49R	H52	YRB34U31TW	K12	YS2UCGI	K10	YS8C	C69	YSM4C	B43
YP25U25	H21	YRB34U34TW	K12	YS30	C69	YS8C-FXB	C74	YSM6C	B43
YP26AU2	H21, H36	YRB36U31	C101	YS30-FXB	C74	YS8C-L-BOX	C68	YSM8C	B43
YP27AU2	H21	YRB36U34	C101	YS30-L	C68	YS8CA1	C98	YSP-T	C73
YP27AU26	H21, H36	YRB39U31TW	K12	YS30-LB	C71, C72	YSA25R-2N	H33	YSP1C-T	C73
YP27AU4	H21, H36	YRB39U34	C101	YS30-T	C73	YSA26R-2N	H33	YSP25-T	C73
YP28C28	H19	YRB39U34TW	K12	YS30A1	C99	YSA28R-2N	H33	YSP26-T	C73
YP28U2	H21	YRB39U36	C101	YS30AT	C100	YSA2R-2N	H33	YSP28-T	C73
YP28U26	H21, H36	YRB39U39TW	K12	YS31	C69	YSA30R-2N	H33	YSP29-T	C73
YP29C26	H19	YRB44U31TW	K12	YS31-FXB	C74	YSA321R-2N	H33	YSP2C-T	C73
YP2C2	H19	YRB44U34TW	K12	YS31-L	C68	YSA37R-2N	H33	YSP30-T	C73
YP2U3	H21, H36	YRB44U39TW	K12	YS31-T	C73	YSCM104	B44	YSP31-T	C73
YPC26R8U	H23	YRB44U44TW	K12	YS31A1	C99	YSCM133	B44	YSP34-T	C73
YPC28R28A	H22	YRV2CV6C-L	B49	YS31ACGI	K10	YSCM167	B44	YSP39-T	C73
YPC28U26	H22, H36	YRV4CV6C-L	B49	YS31AT	C100	YSCM17	B44	YSP4C-T	C73
YPC28U28	H21, H22	YRV6CV10-L	B49	YS31LTCKITC	C75	YSCM212	B44	YSR25FX6CFSLTCKITC	C77
YPC28U4	H22, H36	YRV6CV8C-L	B49	YS32	C69	YSCM231	B44	YSR26FX6CFSLTCKITC	C77
YPC29C26	K16	YRV8CV10-L	B49	YS32-FXB	C74	YSCM27	B44	YSR2825FXLTCKITC	C77
YPC2A8U	H23	YRV8CV14-L	B49	YS32-L	C68	YSCM42	B44	YSR282CFSLTCKITC	C77
YPC33R26U	H22, H36	YS-T	C73	YS32A1	C99	YSCM66	B44	YSR286CFSLTCKITC	C77
YPC33R28R	H22	YS10WAG1	C98	YS34	C69	YSCM80	B44	YSR29FX25FXLTCKITC	C77
YPC33R33R	H22	YS12AG1	C98	YS34-FXB	C74	YSD25R25R	H45	YSR29FX2CFSLTCKITC	C77
YPC36A32	H22	YS1C	C69	YS34-L	C68	YSD26R25R	H45	YSR2CFX6CFSLTCKITC	C77
YPC36A36	H22	YS1C-L BOX	C68	YS34-T	C73	YSD26R26R	H45	YSR3125FXLTCKITC	C77
YPC38R26U	H22	YS1C-LB	C71, C72	YS34A1	C99	YSD26R2R	H45	YSR3128LTCKITC	C77
YPC40A32	H22	YS1C-T	C73	YS34AT	C100	YSD26R2W	H45	YSR3129FXLTCKITC	C77
YPC40A36	H22	YS1CA1	C98	YS34FXLTCKITC	C75	YSD27R25R	H45	YSR312CFXLTCKITC	C77
YPC40A40	H22	YS25	C69	YS34LTCKITC	C75	YSD27R26R	H45	YSR32FX29FXLTCKITC	C77
YQE-91	B50	YS25-L BOX	C68	YS36	C69	YSD27R27R	H45	YSR3425FXLTCKITC	C77
YR2C2WT	C69	YS25-LB	C71, C72	YS36-FXB	C74	YSD27R2R	H45	YSR3428LTCKITC	C76
YRA1CU-1	H75	YS25-T	C73	YS36-L	C68	YSD27R2W	H45	YSR3429FXLTCKITC	C77
YRA25A-1	H75	YS25A1	C98	YS36A1	C99	YSD28R25R	H45	YSR3431LTCKITC	C76
YRA25U	H75	YS25AT	C100	YS38-FXB	C74	YSD28R26R	H45	YSR3434FXLTCKITC	C76
YRA26U	H75	YS25FXLTCKITC	C75	YS38-L	C68	YSD28R27R	H45	YSR34FX25FXLTCKITC	C77
YRA27U	H75	YS25UCGI	K10	YS38FXLTCKITC	C75	YSD28R28R	H45	YSR34FX28FXLTCKITC	C77
YRA28U	H75	YS26	C69	YS39	C69	YSD28R2R	H45	YSR34FX28LTCKITC	C77
YRA4CU-1	H75	YS26-L BOX	C68	YS39-L	C68	YSD28R2W	H45	YSR34FX29FXLTCKITC	C77
YRA6CU-1	H75	YS26-LB	C71, C72	YS39-T	C73	YSE10	B48	YSR38FX28LTCKITC	C76
YRA8CU-1	H75	YS26-T	C73	YS39A1	C99	YSE10-BOX	B48	YSR38FX29FXLTCKITC	C76
YRAL1CU	H75	YS26A1	C99	YS39AM1	C99	YSE10HN	B47	YSR38FX31LTCKITC	C76
YRAL4CU	H75	YS26AT	C100	YS39AT	C100	YSE14H	B48	YSR38FX34FXLTCKITC	C76
YRB1CU1TTN	K11	YS26FSLTCKITC	C75	YS39LTCKITC	C75	YSE14H-BOX	B48	YSR3928LTCKITC	C76
YRB1CU2TTN	K11	YS26UCGI	K10	YS3C	C69	YSE14HN	B47	YSR3929FXLTCKITC	C76
YRB25U2	C101	YS27	C69	YS3C-L	C68	YSE18H	B48	YSR3931LTCKITC	C76
YRB25U25TTN	K11	YS27-L BOX	C68	YS3C-LB	C71, C72	YSE18H-BOX	B48	YSR3934FXLTCKITC	C76
YRB25U2TTN	K11	YS27-LB	C71, C72	YS40-FXB	C74	YSE18HN	B47	YSR3938FXLTCKITC	C76
YRB25U3TTN	K11	YS27A1	C99	YS44	C69	YSES10K	B45	YSR44FX29FXLTCKITC	C76
YRB27U25	C101	YS27AT	C100	YS44-FXB	C74	YSES14-2	B48	YSR44FX31LTCKITC	C76
YRB27U25TW	K11	YS27UCGI	K10	YS44-L	C68	YSES14K	B45	YSR44FX34FXLTCKITC	C76
YRB27U26	C101	YS28	C69	YS44A1	C99	YSES18-1	B48	YSR44FX34LTCKITC	C76
YRB2825T	K14, K15	YS28-L BOX	C68	YS44AT	C100	YSES18K	B45	YSR44FX38FXLTCKITC	C76
YRB28U1TW	K11	YS28-LB	C71, C72	YS44FXLTCKITC	C75	YSH-2925-E	C85	YSR44FX39LTCKITC	C76
YRB28U25TW	K11	YS28-T	C73	YS45A1	C99	YSH-292C-E	C85	YSR4CFX6CFSLTCKITC	C77
YRB28U26	C101	YS28A1	C99	YS46	C69	YSH2929	C85	YSS2R	H46
YRB28U26TW	K11	YS28AT	C100	YS46A1	C99	YSH3429	C85	YSS4R	H46
YRB28U28TW	K11	YS28LTCKITC	C75	YS47A1	C99	YSH3434	C85	YSS6R	H46
YRB28U3TW	K11	YS28UCGI	K10	YS48	C69	YSH3931	C85	YSS6RG2	H46
YRB29U28	C101	YS29	C69	YS483A1	C99	YSH3939	C85	YST2525	C86
YRB2U3TTN	K11	YS29-L BOX	C68	YS48A1	C99	YSHG3429	E13	YST2626	C86
YRB2U4	C101	YS29-LB	C71, C72	YS4C	C69	YSHG3434	E13	YST2825	C86

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YST2828	C86	YSV1C-L	B42	YTS32R	I6	YTU321R321R	H30	YTW484AE	I12
YST282C	C86	YSV1C-L BOX	B42	YTS331A	I5	YTU33R26R	H30	YTW484AM	I12
YST2929	C86	YSV25-FXB	C74	YTS34R	I6	YTU33R28R	H30	YTW486AE	I12
YST2C2C	C86	YSV25-L	B42	YTS34RS	I6	YTU33R33R	H30	YTW486AM	I12
YST3131	C86	YSV25-L BOX	B42	YTS362RS	I6	YTW331AE	I12	YTW48RC	I11
YST3428	C86	YSV26-FXB	C74	YTS36R	I6	YTW331AM	I12	YTW48RE	I11
YST3434	C86	YSV26-L	B42	YTS36RS	I6	YTW33RC	I11	YTW48RM	I11
YST3939	C86	YSV26-L BOX	B42	YTS375E	H62	YTW33RE	I11	YTW50RC	I11
YST4C4C	C86	YSV27-FXB	C74	YTS391A	I5	YTW33RM	I11	YTW50RE	I11
YSU25A25A	H44	YSV27-L	B42	YTS39A	I5	YTW34R	I10	YTW50RM	I11
YSU25R25R	H44	YSV27-L BOX	B42	YTS39AR	I7	YTW34RC	I11	YTW521RC	I11
YSU25R2R	H44	YSV28-FXB	C74	YTS39AR	I6	YTW34RE	I11	YTW521RE	I11
YSU25R2W	H44	YSV28-L	B42	YTS40R	I6	YTW34RM	I11	YTW521RM	I11
YSU25R4W	H44	YSV28-L BOX	B42	YTS431A	I5	YTW351AE	I12	YTW52R	I10
YSU25R6W	H44	YSV2C-FXB	C74	YTS438E	H62	YTW351AM	I12	YTW549RC	I11
YSU2R2R	H44	YSV2C-L	B42	YTS43R	I6	YTW362RC	I11	YTW549RE	I11
YSU2R2W	H44	YSV2C-L BOX	B42	YTS43RS	I6	YTW362RE	I11	YTW549RM	I11
YSU2R4W	H44	YSV4C-FXB	C74	YTS449RS	I6	YTW362RM	I11	YTW56RC	I11
YSU2R6W	H44	YSV4C-L	B42	YTS451AR	I7	YTW36R	I10	YTW56RE	I11
YSU2R8W	H44	YSV4C-L BOX	B42	YTS451R	I6	YTW36RC	I11	YTW56RM	I11
YSU2W2W	H44	YSV6C-FXB	C74	YTS463A	I5	YTW36RE	I11	YTW585R	I10
YSU2W4W	H44	YSV6C-L	B42	YTS481RS	I6	YTW36RM	I11	YTW58R	I10
YSU2W6W	H44	YSV6C-L BOX	B42	YTS483RS	I6	YTW39AE	I12	YTW58RC	I11
YSU2W8W	H44	YSV8C-L	B41, B42	YTS48AR	I7	YTW39AM	I12	YTW58RE	I11
YSU4W4W	H44	YSV8C-L BOX	B41, B42	YTS48RS	I6	YTW39R	I10	YTW58RM	I11
YSU4W6W	H44	YSV9C-L	B41	YTS49R	I6	YTW431AE	I12	YTW590RC	I11
YSU4W8W	H44	YSV9C-L BOX	B41	YTS521RS	I6	YTW431AM	I12	YTW590RE	I11
YSU6W6W	H44	YTA25R-2N	H31	YTS52R	I6	YTW43R	I10	YTW590RM	I11
YSV10	B41	YTA26-2N	H33	YTS549RS	I6	YTW43RE	I11	YTW591RC	I11
YSV10 BOX	B41	YTA26R-2N	H31	YTS56R	I6	YTW43RM	I11	YTW591RE	I11
YSV10-H	B41	YTA27R-2N	H31	YTS58R	I6	YTW449RC	I11	YTW591RM	I11
YSV10-H BOX	B41	YTA28-2N	H33	YTS59R	I6	YTW449RE	I11	YTW594R	I10
YSV1014-G2	B49	YTA28R-2N	H31	YTS59RS	I6	YTW449RM	I11	YTW594RC	I11
YSV1214-G1	B49	YTA2C-2N	H33	YTTAG388	E23	YTW451R	I10	YTW594RE	I11
YSV14	B41	YTA2R-2N	H31	YTU25R25R	H30	YTW45RC	I11	YTW594RM	I11
YSV14 BOX	B41	YTA321R-2N	H31	YTU25R4W	H30	YTW45RE	I11	YTW59RC	I11
YSV14-H	B41	YTA33R-2N	H31	YTU26R26R	H30	YTW45RM	I11	YTW59RM	I11
YSV14-H BOX	B41	YTA34-2N	H33	YTU27R27R	H30	YTW463AM	I12	YTW549R	I10
YSV1418	B49	YTA361R-2N	H31	YTU28R28R	H30	YTW47AE	I12	YTAZV4C2TC14FX	C51
YSV18	B41	YTA37R-2N	H31	YTU30R30R	H30	YTW47AM	I12		
YSV18 BOX	B41	YTA391A-2N	H31	YTU321R26R	H30	YTW481RC	I11		
YSV18-H	B41	YTA39R-2N	H31	YTU321R27R	H30	YTW483RC	I11		
YSV18-H BOX	B41	YTA43R-2N	H31	YTU321R28R	H30	YTW483RE	I11		
YSV1C-FXB	C74	YTS32AR	I7	YTU321R2R	H30	YTW483RM	I11		

PRODUCT/TRADE NAME INDEX

PRODUCT/TRADE NAME	CATALOG SECTION	PRODUCT/TRADE NAME	CATALOG SECTION	PRODUCT/TRADE NAME	CATALOG SECTION
ALFLUID™	N	HYDRAULIC FLUID	N	REFERENCE DATA	O
AUTOMATIC CRIMP	N	HYDRAULIC HOSE	N	REMOTE HEADS	N
BARTAP™	A, G	HYFLUID™	N	REVOLVER	N
BATOOL™	N	HYGRID™	D	RISERTAP	A
BATTERY CHARGER	N	HYGROUND™	D	SCRULINK™	A
BATTERY CRIMPER	N	HYLINK™	C	SCRULUG™	A
BATTERY TOOLS	N	HYLUG™	C	SERVIT™	A, E
BOLTS	L	HYPLUG™	C	SERVIT™ POST	D
BOOSTERS	F, N	HYPRESS™	N	SILCON BRONZE	L
BRAID	D, G	HYRACK™	B	SPANTAP	E
BURNDY®		HYREDUCER™	C	SPEC-BLOK™	A
BURNDYWELD™	D	HYSEALPLUG™	E	SPLICE	
B-CRIMP	B	HYSEALUG™	E	SPLICE KITS	J
C COPPER CRIMPIT™	C, E	HYSPLICE™	C, E, J	SPLICE-BLOK	A
CABELOK™	E	HYSTACK™	C, E	SPLICIT	B
CABLE CLAMP		HYTAIL™	D	SPLIT BOLT	A, E
CABLE CUTTERS	N	HYTAP™	C, E	STAINLESS HARDWARE	L
CABLE TIES	M	HYTEE™	C, E	STEP-TAP™	J
CABLE TRAY CLAMP	D	HYTOOL™	N	STIRRUP	E
CALIPERS	M	I-BEAM CLAMP	D	STRIPPERS	N
CABLE STRIPPERS	N	INSULINK™	E	STUD MOLE™	I, J
CIRCUIT TESTER	M	INSULUG™	B	SUBSTATION	G, H
CLIPIT™	E	INTENSIFIERS	N	TAPIT™	E
COAXIAL	K	KA-LUG™	A	TERMINAL	
COMPRESSION CONNECTOR	B, C	KITS		TERMINAL BLOCKS	M, A
COUPLINGS	N	LIGHTNING	D	TEST LEADS	M
CRIMPERS	N	LINKIT™	E	TOOL BAGS	F, N
CRIMPIT™	E	L'IL CRIMP	N	TOOL CASES	N
CRIMPS		LOCK WASHERS	L	TOOL KITS	B, N, C
CUTTERS	M, N	LOKTAP™	E	TOOLS	N, M
DIE INDEX	O	LUG		TRITAP™	A
DIES	N	MOLE™	I, J	TRITAP™ SERVIT™	A
DURICOMP™	I	MOLIMETER™	I	TUBING	M, J
DURIUM™	L	MOUNTING BASES	M	UNIGROUND™	D
ELECTRO-RAIL™	A	NOTAPE™	I	UNIRAP™	M
E-LINE™ HYLUG™	C	NUTS	L	UNITAP™	A
FINGRIP™	B	NYLOCLIP™	M	UNISPLICE™	E
FINLINK™	B	OKLIP™	A	URD	J
FLAGLOK™	B	OXIDE INHIBITOR	M	U-BLOK™	A
FLEXI-TAP™	A	PATOOLS™	N	U-TAPS™	A
FORKLOK	B	PATRIOT™	N	VARILINK™	A
GRIDLOK™	D	PENETROX™	M	VARITAP™	A
GROUNDDEM	D	POLYTAP™	A	VERSILUG™	A
GROUNDING	D	POPPER	N	VERSITAP™	A
GROUNDIT™	D	POSI-PRESS	N	VINYLINK™	B
GUAGES	N	POWERLINK™	I	VINYLUG™	B
GUTTER TAP	A	POWERLUG™	F	VISI-SHRINK	M
H-CRIMPIT™	E, C	PRESSES	N	WASHERS	L
H COPPER CRIMPIT™	C	PRESSURE GAUGES	N	WEJIT™	E
HARDWARE	L	PUMPS	N	WEJTAP™	F
HEAT SHRINK	M, J	NETWORK UNDGRD	I	WIRE BRUSH	M
HOSES	N	QIKLINK™	A	WIRE CONNECTOR	
HOT LINE TOOLS	F, N	QIKLUG™	A	WIRE CUTTERS	N
HYBOOST™	N	QIKPWR™	C	WIRE MARKERS	M
HYBUTIN™	B	QIKSLEEVE™	E	WIRE NUTS	M
HYCRAB™	I	QIKSTOCK™	B, C	WIRE STRIPPERS	N
HYCRIMP™	E, C	QIKSTOP™	B, C	Y-LOK™	B
HYDENT™	C	QIKTAP™	A		
HYDRAULIC COUPLING	N	RAISED FLOOR	D		
HYDRAULIC FITTINGS	N	REDUCERS	B, C, E		