

EIKO  [®]

CERTIFIED GREEN

selection. solutions. simplicity.

eiko.com



Important Notice:

This catalog contains data accumulated up to the last update. Additional information is constantly being uncovered through research and testing, which may modify the data given herein. This is particularly true of newer lamps. Accordingly, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The data and suggested applications contained in this catalog, as well as any additional information our representatives may be able to furnish, are for general information only and are not intended and should not be taken as representations or warranties as to the suitability of a lamp for any particular application or use in any particular equipment, nor are our representatives authorized to make any such representations or give any such warranties. Applications and conditions of use are many and varied, and beyond our control. We cannot have the same degree of knowledge that the purchaser has with respect to the design of his equipment and the conditions of its use. Therefore, it is up to the purchaser to determine the suitability of a lamp for his intended application or use and to assume the responsibility for that determination.

EiKO Global, LLC. desires to supply the best possible products at all times. For this reason, EiKO reserves the right to make changes in its products and to introduce new products or discontinue existing products without notice.

The specifications and information in this catalog are believed to be accurate. However, no warranty is made or implied as to the accuracy of this information. EiKO Global, LLC does not accept or assume responsibility of liability for errors, changes, omissions, or for harm resulting therefrom.

In order to insure that you have the latest information and product specifications, please visit us on the web at:

eiko.com

Contents

| | | |
|-----|------------------------|--|
| 4 | Lighting Information | 4 Cross-Referencing 6 Common Base Types |
| 8 | LED | 8 LitespanLED® Fixtures 20 LitespanLED® Replacement Lamps |
| 28 | Fluorescent | 28 Compact Fluorescent 24 Linear Fluorescent 40 PowerMaster® Ballasts |
| 42 | HID | 42 ColorMaster PRO™ Ceramic Metal Halide 43 Metal Halide 46 HPS 47 Mercury Vapor |
| 48 | Halogen | 48 EIKON™ Energy Efficient 49 MR 52 Single & Double Ended 54 Bi-Pin 55 SoLux® |
| 56 | Incandescent | 56 A-Shaped 57 C-Shaped 57 R & BR 57 S-Shaped 58 T-Shaped |
| 60 | Automotive & Miniature | 60 Forward Lighting 66 HID-OE 67 Mo/Sno 67 Sealed Beam 71 Miniature |
| 88 | Specialty | 88 ArcMaster™ SSTV 88 ColorMaster™ Digital Imaging 89 SSTV 91 Healthcare 95 ANSI |
| 100 | Index/Additional Info | 100 Index 112 Terms & Conditions 113 Limited Warranty |



Cross Referencing

for General Lighting & Automotive/Miniature

Cross referencing a lamp can be done in two ways:


- By matching the known part number of your lamp to a part number of another manufacturer known to have the same specifications.
- By matching the specifications of your lamp to the specifications of a known part number.

Step 1: What is the lamp family and sub-family? (For General Lighting lamps)

Use the chart opposite to determine to which family and sub-family your lamp belongs.

Step 2: What is the bulb shape?

“Bulb” refers to the glass portion of the lamp. Refer to the diagram to the right for common bulb shapes.

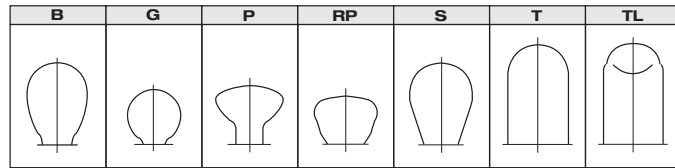

Step 3: What is the base type?

The base supports the lamp in the socket and conducts electricity to the filament. Refer to the charts on pages 6-7 for common General Lighting and Automotive Miniature base types.

Step 4: What is the voltage and wattage?

This information can usually be found stamped on the base of the bulb. If only given amps, remember this conversion: **Amps x Volts = Watts**.

Step 4: What is the color temperature? (For General Lighting lamps)

Color temperature is usually represented in one of three ways:

- Descriptive
“Warm White” (WW), “Cool White” (CW), “Daylight” (D), etc.
- Degrees Kelvin (by hundreds)
27, 41, 65, etc. (27=2700° Kelvin)
- Color Rendering Index (CRI) + Degrees Kelvin
735, 841, etc. (735 = a CRI of approx. 75% and a color temp of 3500° Kelvin)

Step 5: What is the beam spread (light pattern)? (For PAR and MR Type lamps)


- | | |
|--------------------------|--------------------------|
| Narrow Spot (NSP) = 10° | Spot (SP) = 17° |
| Narrow Flood (NFL) = 24° | Medium Flood (MFL) = 26° |
| Flood (FL) = 36° | Wide Flood (WFL) = 55° |

Finding EIKO’s Part Number

Visit us at eiko.com and hover over “Search” on the quick link bar at the top of the page, then select “Advanced Search” from the dropdown menu. Enter as much information as you have and click “Search.”

If you have another manufacturer’s part number, select “Basic Search,” enter the part number and check “Cross Reference Part Number.” If a match is not returned, look up the part number in the manufacturer’s catalog and find the specifications. Then cross the lamp to an EIKO part number using the “Advanced Search” option.

General Lighting

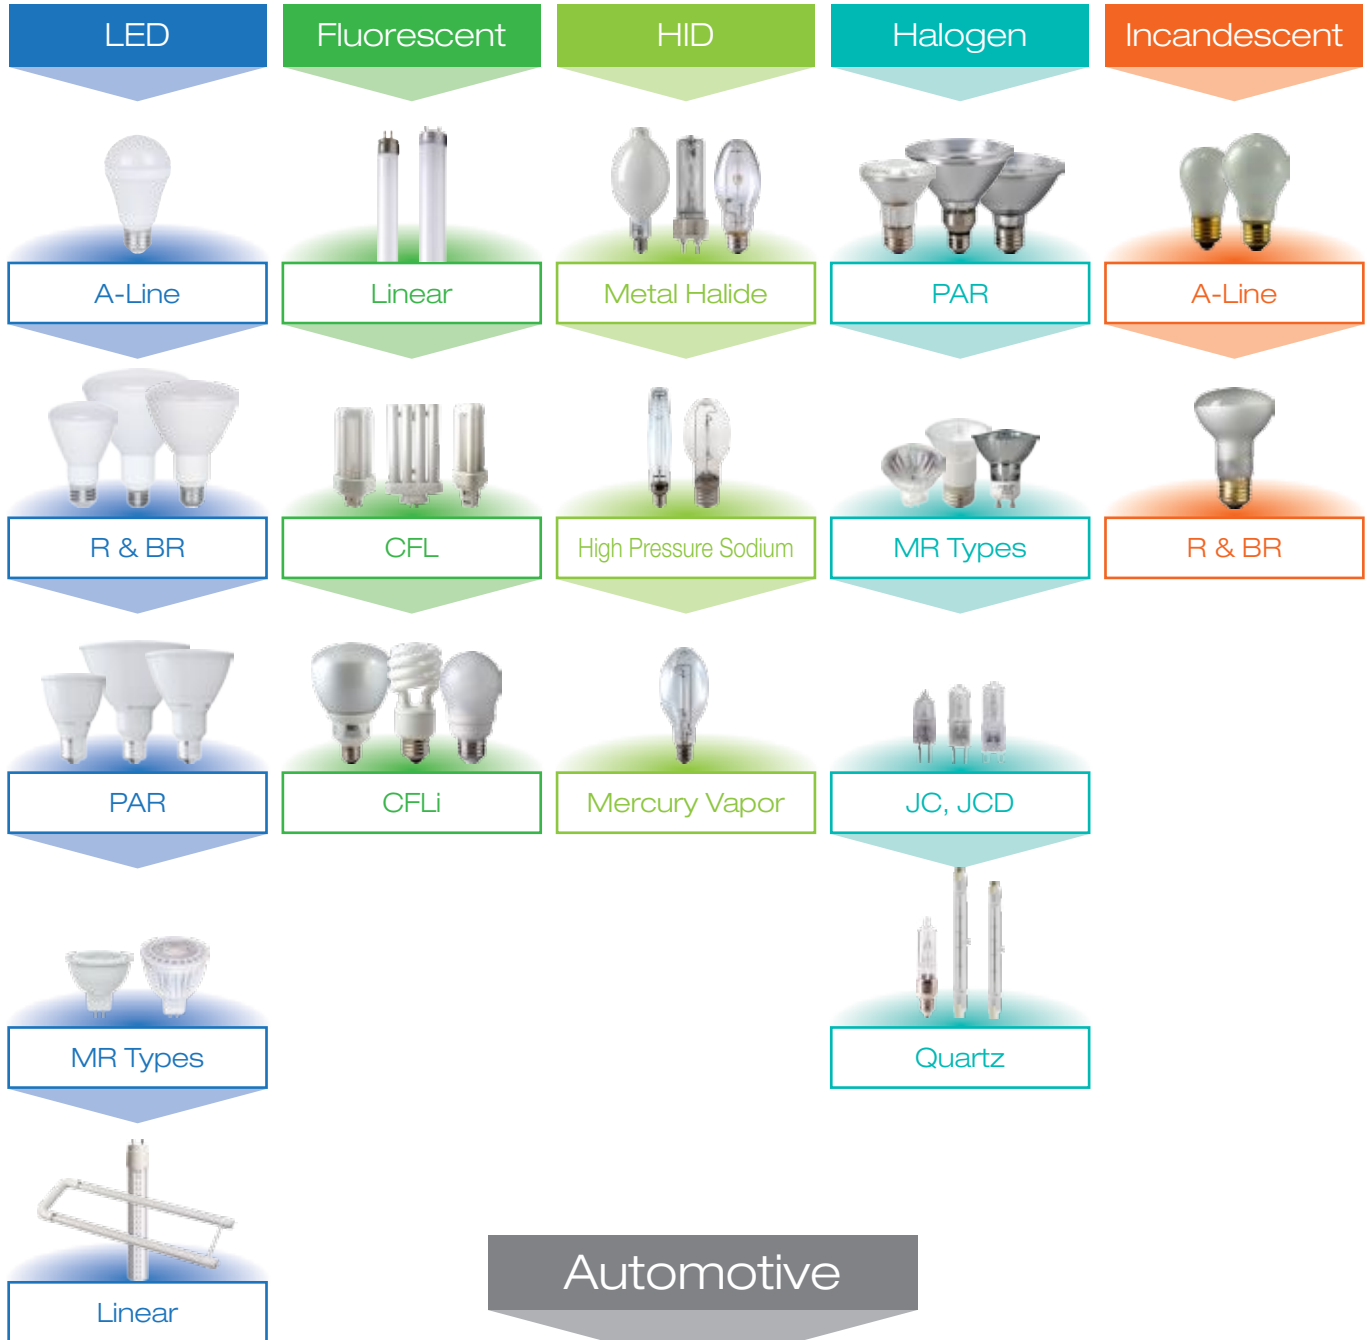
































Automotive






General Lighting > Common Base Types

| | | | | | | |
|---|--|---|--|---|--|---|
|  2G11 4-Pin, Twin Tube |  BA15d DC Bayonet |  BA15s SC Bayonet |  BAY15d DC Index Bayonet |  E10 Miniature Screw |  E11 Mini. Candelabra Screw |  E12 Candelabra Screw |
|  E17 Intermediate Screw |  E26 Medium Screw |  E39/E40 Mogul Screw |  EX39 Mogul Screw w/ Long Prong |  G4 Sub-Mini 2-Pin |  G5 Bi-Pin Cap |  G6.35 Bi-Pin Base |
|  G9.5 Bi-Pin Cap |  G12 12mm Bi-Pin |  G13 1/2" Bi-Pin |  G23 Bi-Pin Cap |  G24d-1 2-Pin |  G24d-2 2-Pin |  G24d-3 2-Pin |
|  G24q-1 4-Pin |  G24q-2 4-Pin |  G24q-3 4-Pin |  GU4 Bi-Pin |  GU5.3 Bi-Pin |  GU10 Bi-Pin |  GU24 Bi-Pin |
|  GX5.3 Bi-Pin |  GX23 Bi-Pin Cap |  GX23-2 Bi-Pin |  GX24q-2 4-Pin |  GX24q-3 4-Pin |  GX24q-4 4-Pin |  GY5.3 Bi-Pin |
|  GY9.5 Bi-Pin |  GZ4 Bi-Pin |  GZ6.35 Bi-Pin |  RGLP Rigid Loop |  Rx7s Recessed Single Contact |  SV8.5mm Festoon |  T5 Miniature Bi-Pin |
|  T8 Medium Bi-Pin |  T9 Circular |  T12 Medium Bi-Pin |  TS5 Slide Base #5 |  W2x4.6d Sub-Miniature Wedge |  W2.1x9.5d Miniature Wedge |  Wedge Glass Wedge T5 |



Automotive & Miniature > Common Base Types

| | | | | | | |
|--|--|---|--|--|--|---|
|  B10d Printed Circuit Socket |  BA7s European Bayonet |  BA9s Miniature Bayonet |  BA15d DC Bayonet |  BA15s SC Bayonet |  BAU15s SC Bayonet Offset |  BAY15d DC Index Bayonet |
|  BAZ15d DC Index Bayonet Offset |  E10 Miniature Screw |  Mini Cap Miniature Cap |  P14.5s H1 Type |  P20d Axial Prefocus |  P22d Axial Prefocus |  P28s Medium Prefocus Flanged Single Contact |
|  P29t Axial Prefocus |  P32d-2 P32d-2 |  P32d-3 P32d-3 |  P40s Single Contact Mogul Prefocus Flanged |  P43t Axial Prefocus |  P45t Axial Prefocus |  PG13 Axial Prefocus |
|  PGJ13 Right Angle Prefocus |  PGJ19 Right Angle Prefocus |  PK22s Prefocus Flanged, H3 |  PK32d-2 PK32d-2 |  PK32d-3 PK32d-3 |  PX26d Axial Prefocus |  PY20d Right Angle Prefocus |
|  R7s Recessed Single Contact |  RGLP Rigid Loop |  SV8.5mm Festoon |  T1 Sub-Midget Flanged |  TS5 Slide Base #5 |  W2x4.6d Sub-Miniature Wedge |  W2.1x9.5d Miniature Wedge |
|  W2.5x16d Plastic Wedge Single Filament |  W2.5x16q Plastic Wedge Double Filament |  W3x16d Maxi Wedge Single Filament |  W3x16q Maxi Wedge Double Filament |  Wedge Glass Wedge T5 |  X511 H2 Prefocus Type |  WL Wire Leads |
|  2ST 2 Screw Terminals |  Slip-On Slip-On Terminals |  2 Contact Lugs |  3 Contact Lugs |  2 Right Angle Lugs |  Right Angle, Plastic |  2 Lugs 2 Lugs |



LED Based Fixtures

Our LitespanLED® line offers the most efficient LED fixtures on the market at 95-105 LPW. The individual LED heatsink provides unrivaled thermal control, and the innovative modular design allows for scalability. Precision optics target light to the task. Our fixtures are IP65 rated for weather protection, and DesignLights Consortium™ (DLC) qualified for high quality and energy efficiency.

Advantages include directional light emission, superior optical controls, instant-on capabilities, rapid on/off cycling, cold temperature operation, extended lifetime, and superior lumen-per-watt efficacy.

LitespanLED® 2x2 Direct Panel

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|---------------------------------|---------|--------|-------------|--------|------|-------------------|--------|---------|
| LS-DP22-46W-35K-L1-W-N-U | 08069 | Max 46 | 120-277 VAC | 3000 | 3500 | Satin White Poly. | White | None |
| LS-DP22-46W-41K-L1-W-N-U | 08070 | Max 46 | 120-277 VAC | 3500 | 4100 | Satin White Poly. | White | None |
| LS-DP22-46W-50K-L1-W-N-U | 08071 | Max 46 | 120-277 VAC | 3500 | 5000 | Satin White Poly. | White | None |

LitespanLED® 2x2 Slim Panel

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|---------------------------------|---------|-------|---------|--------|------|-------------|--------|---------|
| LS-SP22-45W-35K-L1-W-N-U | 08072 | 45 | 120-277 | 3000 | 3500 | Satin White | White | None |
| LS-SP22-45W-41K-L1-W-N-U | 08073 | 45 | 120-277 | 3500 | 4100 | Satin White | White | None |
| LS-SP22-45W-50K-L1-W-N-U | 08074 | 45 | 120-277 | 3500 | 5000 | Satin White | White | None |

LitespanLED® Area Street Light - 2-3/8" Aimable Slipfitter

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|-------|---------------|--------|---------|
| C0820-CR-240W-50K-N18-W-N-U | 08262 | 240 | 120-277 VAC | | 5000K | Type V (Wide) | White | None |



Direct Panel



Slim Panel



Area Street Light

LitespanLED® Area Street Light - 2-3/8" Aimable Slipfitter Vertical Orientation

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|--------------------------------------|---------|-------|-------------|--------|------|------------------|--------|-----------------------|
| C0820-BR-50W-50K-N18-BR-N-N | 08063 | 50 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-50W-50K-N31-BR-N-U | 08121 | 50 | 120-277 VAC | | 5000 | Type II (Short) | Bronze | None |
| C0820-BR-70W-50K-N27-W-N-U | 08085 | 70 | 120-277 VAC | | 5000 | Type III | White | None |
| C0820-BR-90W-50K-N18-BR-N-N | 08014 | 90 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-90W-50K-N18-W-N-U | 08066 | 90 | 120-277 VAC | | 5000 | Type V (Wide) | White | None |
| C0820-BR-90W-50K-N27-BR-P-U | 08197 | 90 | 120-277 VAC | | 5000 | Type III | Bronze | Button Type Photocell |
| C0820-BR-90W-50K-N31-BR-N-N | 08013 | 90 | 120-277 VAC | | 5000 | Type II (Short) | Bronze | None |
| C0820-BR-90W-50K-N31-W-N-N | 08012 | 90 | 120-277 VAC | | 5000 | Type II (Short) | White | None |
| C0820-BR-120W-40K-N18-BR-N-U | 08297 | 120 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-120W-50K-N18-BR-N-U | 08093 | 120 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-120W-50K-N27-BR-N-U | 08150 | 120 | 120-277 VAC | | 5000 | Type III | Bronze | None |
| C0820-BR-120W-50K-N27-BR-P-U | 08198 | 120 | 120-277 VAC | | 5000 | Type III | Bronze | Button Type Photocell |
| C0820-BR-120W-50K-N27-BR-TL-U | 08294 | 120 | 120-277 VAC | | 5000 | Type III | Bronze | Twist Lock Photocell |
| C0820-BR-120W-50K-N31-BR-N-U | 08122 | 120 | 120-277 VAC | | 5000 | Type II (Short) | Bronze | None |
| C0820-BR-120W-50K-N34-BR-N-U | 08225 | 120 | 120-277 VAC | | 5000 | Type II (Medium) | Bronze | None |
| C0820-BR-120W-50K-N34-BR-P-U | 08199 | 120 | 120-277 VAC | | 5000 | Type II (Medium) | Bronze | Button Type Photocell |
| C0820-BR-160W-50K-N18-BR-N-U | 08257 | 160 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-160W-50K-N18-BR-TL-U | 08239 | 160 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | Twist Lock Photocell |
| C0820-BR-160W-50K-N27-W-N-U | 08194 | 160 | 120-277 VAC | | 5000 | Type III | White | None |
| C0820-BR-160W-50K-N34-BR-P-U | 08200 | 160 | 120-277 VAC | | 5000 | Type II (Medium) | Bronze | Button Type Photocell |
| C0820-BR-200W-50K-N27-BR-TL-U | 08285 | 200 | 120-277 VAC | | 5000 | Type III | Bronze | Twist Lock Photocell |
| C0820-BR-240W-50K-N18-BR-N-U | 08258 | 240 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-BR-240W-50K-N18-S-N-U | 08111 | 240 | 120-277 VAC | | 5000 | Type V (Wide) | White | None |
| C0820-BR-240W-50K-N18-W-N-U | 08259 | 240 | 120-277 VAC | | 5000 | Type V (Wide) | White | None |
| C0820-BR-240W-50K-N27-BR-N-U | 08196 | 240 | 120-277 VAC | | 5000 | Type III | Bronze | None |
| C0820-BR-240W-50K-N27-W-N-N | 08030 | 240 | 120-277 VAC | | 5000 | Type III | White | None |
| C0820-BR-240W-50K-N31-BR-N-U | 08123 | 240 | 120-277 VAC | | 5000 | Type II (Short) | Bronze | None |
| C0820-BR-240W-50K-N31-W-N-U | 08129 | 240 | 120-277 VAC | | 5000 | Type II (Short) | White | None |
| C0820-BR-240W-50K-N34-BL-N-U | 08177 | 240 | 120-277 VAC | | 5000 | Type II (Medium) | White | None |

LitespanLED® Area Street Light - Arm Mount for Square or Round Pole

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|--------------------------------------|---------|-------|-------------|--------|------|---------------|--------|----------------------|
| C0820-DR-F-50W-50K-N18-BR-N-N | 08016 | 50 | 120-277 VAC | 5000 | 5000 | Type V (Wide) | Bronze | None |
| C0820-DR-F-90W-50K-N18-BR-N-N | 08017 | 90 | 120-277 VAC | 9000 | 5000 | Type V (Wide) | Bronze | None |
| C0820-DR-120W-50K-N18-BR-N-U | 08241 | 120 | 120-277 VAC | | 5000 | Type V (Wide) | Bronze | None |
| C0820-DR-160W-50K-N27-BR-N-U | 08260 | 160 | 120-277 VAC | | 5000 | Type III | Bronze | None |
| C0820-DR-160W-50K-N27-BR-TL-U | 08283 | 160 | 120-277 VAC | | 5000 | Type III | Bronze | Twist Lock Photocell |
| C0820-DR-160W-50K-N27-W-N-U | 08261 | 160 | 120-277 VAC | | 5000 | Type III | White | None |
| C0820-DR-F-240W-40K-N27-W-N-N | 08015 | 240 | 120-277 VAC | | 4000 | Type III | White | None |

LitespanLED® Area Street Light - Spider Mount Bracket

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-----------------------------------|---------|-------|-------|--------|------|------|--------|---------|
| C0820-SPIDER MOUNT BRACKET | 08040 | | | | | | | |



Area Street Light

LitespanLED® Canopy Light - Scottsdale Design

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------------|--------|---------|
| C0820-HC-80W-40K-N38-W-N-N | 93205 | 80 | 120-277 VAC | 7083 | 4000 | | White | None |
| C0820-HC-80W-40K-N39-W-N-N | 93206 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Wide) | White | None |
| C0820-HC-80W-50K-N38-W-N-N | 93207 | 80 | 120-277 VAC | 7870 | 5000 | | White | None |
| C0820-HC-80W-50K-N39-W-N-N | 93208 | 80 | 120-277 VAC | 7872 | 5000 | Type V (Wide) | White | None |
| C0820-HC-100W-40K-N39-W-N-N | 93201 | 100 | 120-277 VAC | 8856 | 4000 | Type V (Wide) | White | None |
| C0820-HC-100W-50K-N39-W-N-N | 93202 | 100 | 120-277 VAC | 9840 | 5000 | Type V (Wide) | White | None |
| C0820-HC-120W-40K-N39-W-N-N | 93203 | 120 | 120-277 VAC | 10628 | 4000 | Type V (Wide) | White | None |
| C0820-HC-120W-50K-N39-W-N-N | 93204 | 120 | 120-277 VAC | 11808 | 5000 | Type V (Wide) | White | None |

LitespanLED® Canopy Light - Richmond Design

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------------|--------|---------|
| C0820-KC-80W-40K-N39-W-N-N | 93213 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Wide) | White | None |
| C0820-KC-80W-50K-N38-W-N-N | 93214 | 80 | 120-277 VAC | 7870 | 5000 | | White | None |
| C0820-KC-80W-50K-N39-W-N-N | 93215 | 80 | 120-277 VAC | 7872 | 5000 | Type V (Wide) | White | None |
| C0820-KC-100W-40K-N39-W-N-N | 93209 | 100 | 120-277 VAC | 8856 | 4000 | Type V (Wide) | White | None |
| C0820-KC-100W-50K-N39-W-N-N | 93210 | 100 | 120-277 VAC | 9840 | 5000 | Type V (Wide) | White | None |
| C0820-KC-120W-40K-N39-W-N-N | 93211 | 120 | 120-277 VAC | 10628 | 4000 | Type V (Wide) | White | None |
| C0820-KC-120W-50K-N39-W-N-N | 93212 | 120 | 120-277 VAC | 11808 | 5000 | Type V (Wide) | White | None |

LitespanLED® Canopy Light - Slim Design

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------------|--------|---------|
| C0820-RF-80W-40K-N39-W-N-N | 93255 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Wide) | White | None |
| C0820-RF-80W-50K-N39-W-N-N | 93256 | 80 | 120-277 VAC | 7872 | 5000 | Type V (Wide) | White | None |
| C0820-RF-100W-40K-N39-W-N-N | 93251 | 100 | 120-277 VAC | 8856 | 4000 | Type V (Wide) | White | None |
| C0820-RF-100W-50K-N39-W-N-N | 93252 | 100 | 120-277 VAC | 9840 | 5000 | Type V (Wide) | White | None |
| C0820-RF-120W-40K-N39-W-N-N | 93253 | 120 | 120-277 VAC | 10628 | 4000 | Type V (Wide) | White | None |
| C0820-RF-120W-50K-N39-W-N-N | 93254 | 120 | 120-277 VAC | 11808 | 5000 | Type V (Wide) | White | None |

LitespanLED® 4" Downlight Kit

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------|---------|-------|-------|--------|------|------|--------|---------|
| LED-DK6-12W827K-DIM-G4 | 90015 | 11 | 120 | 650 | 2700 | | | |
| LED-DK6-12W830K-DIM-G4 | 90014 | 11 | 120 | 650 | 3000 | | | |
| LED-DK6-12W840K-DIM-G4 | 90013 | 11 | 120 | 650 | 4000 | | | |
| LED-DK6-16W927K-DIM-G4 | 90012 | 12 | 120 | 600 | 2700 | | | |
| LED-DK6-16W930K-DIM-G4 | 90011 | 12 | 120 | 600 | 3000 | | | |
| LED-DK6-19W827K-DIM-G4 | 90010 | 15 | 120 | 850 | 2700 | | | |
| LED-DK6-19W830K-DIM-G4 | 90009 | 15 | 120 | 850 | 3000 | | | |
| LED-DK6-19W840K-DIM-G4 | 90008 | 15 | 120 | 850 | 4000 | | | |

LitespanLED® 6" Downlight Kit

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------|---------|-------|-------|--------|------|------|--------|---------|
| LED-DK6-12W827K-DIM-G4 | 90007 | 12 | 120 | 750 | 2700 | | | |
| LED-DK6-12W830K-DIM-G4 | 90006 | 12 | 120 | 750 | 3000 | | | |
| LED-DK6-12W840K-DIM-G4 | 90005 | 12 | 120 | 750 | 4000 | | | |
| LED-DK6-16W927K-DIM-G4 | 90004 | 16 | 120 | 800 | 2700 | | | |

>>Continued on page 11



Canopy Light



4" Downlight Kit



6" Downlight Kit

LitespanLED® 6" Downlight Kit

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------|---------|-------|-------|--------|------|------|--------|---------|
| LED-DK6-16W930K-DIM-G4 | 90003 | 16 | 120 | 800 | 3000 | | | |
| LED-DK6-19W827K-DIM-G4 | 90002 | 19 | 120 | 1200 | 2700 | | | |
| LED-DK6-19W830K-DIM-G4 | 90001 | 19 | 120 | 1200 | 3000 | | | |
| LED-DK6-19W840K-DIM-G4 | 90000 | 19 | 120 | 1200 | 4000 | | | |

LitespanLED® 30W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-30W-40K-N31-BL-N-N | 93081 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Black | None |
| C0820-FL-30W-40K-N31-BL-P-N | 93082 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Black | Photo Sensor |
| C0820-FL-30W-40K-N31-BR-N-N | 93083 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Bronze | None |
| C0820-FL-30W-40K-N31-BR-P-N | 93084 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Bronze | Photo Sensor |
| C0820-FL-30W-40K-N31-S-N-N | 93085 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Silver | None |
| C0820-FL-30W-40K-N31-S-P-N | 93086 | 30 | 120-277 VAC | 2970 | 4000 | Type II | Silver | Photo Sensor |
| C0820-FL-30W-40K-N31-W-N-N | 93087 | 30 | 120-277 VAC | 2970 | 4000 | Type II | White | None |
| C0820-FL-30W-40K-N31-W-P-N | 93088 | 30 | 120-277 VAC | 2970 | 4000 | Type II | White | Photo Sensor |
| C0820-FL-30W-50K-N31-BL-N-N | 93089 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Black | None |
| C0820-FL-30W-50K-N31-BL-P-N | 93090 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Black | Photo Sensor |
| C0820-FL-30W-50K-N31-BR-N-N | 93091 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Bronze | None |
| C0820-FL-30W-50K-N31-BR-P-N | 93092 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Bronze | Photo Sensor |
| C0820-FL-30W-50K-N31-S-N-N | 93093 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Silver | None |
| C0820-FL-30W-50K-N31-S-P-N | 93094 | 30 | 120-277 VAC | 3150 | 5000 | Type II | Silver | Photo Sensor |
| C0820-FL-30W-50K-N31-W-N-N | 93095 | 30 | 120-277 VAC | 3150 | 5000 | Type II | White | None |
| C0820-FL-30W-50K-N31-W-P-N | 93096 | 30 | 120-277 VAC | 3150 | 5000 | Type II | White | Photo Sensor |

LitespanLED® 50W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-50W-40K-N31-BL-N-N | 93097 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Black | None |
| C0820-FL-50W-40K-N31-BL-P-N | 93098 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Black | Photo Sensor |
| C0820-FL-50W-40K-N31-BR-N-N | 93099 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Bronze | None |
| C0820-FL-50W-40K-N31-BR-P-N | 93100 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Bronze | Photo Sensor |
| C0820-FL-50W-40K-N31-S-N-N | 93101 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Silver | None |
| C0820-FL-50W-40K-N31-S-P-N | 93102 | 50 | 120-277 VAC | 4950 | 4000 | Type II | Silver | Photo Sensor |
| C0820-FL-50W-40K-N31-W-N-N | 93103 | 50 | 120-277 VAC | 4950 | 4000 | Type II | White | None |
| C0820-FL-50W-40K-N31-W-P-N | 93104 | 50 | 120-277 VAC | 4950 | 4000 | Type II | White | Photo Sensor |
| C0820-FL-50W-50K-N31-BL-N-N | 93105 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Black | None |
| C0820-FL-50W-50K-N31-BL-P-N | 93106 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Black | Photo Sensor |
| C0820-FL-50W-50K-N31-BR-N-N | 93107 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Bronze | None |
| C0820-FL-50W-50K-N31-BR-P-N | 93108 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Bronze | Photo Sensor |
| C0820-FL-50W-50K-N31-S-N-N | 93109 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Silver | None |
| C0820-FL-50W-50K-N31-S-P-N | 93110 | 50 | 120-277 VAC | 5250 | 5000 | Type II | Silver | Photo Sensor |
| C0820-FL-50W-50K-N31-W-N-N | 93111 | 50 | 120-277 VAC | 5250 | 5000 | Type II | White | None |
| C0820-FL-50W-50K-N31-W-P-N | 93112 | 50 | 120-277 VAC | 5250 | 5000 | Type II | White | Photo Sensor |



Flood Light

LitespanLED® 80W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-----------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-80W-40K-N31-BL-N-N | 93113 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Black | None |
| C0820-FL-80W-40K-N31-BL-P-N | 93114 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-80W-40K-N31-BR-N-N | 93115 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Bronze | None |
| C0820-FL-80W-40K-N31-BR-P-N | 93116 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-80W-40K-N31-S-N-N | 93117 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Silver | None |
| C0820-FL-80W-40K-N31-S-P-N | 93118 | 80 | 120-277 VAC | 7920 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-80W-40K-N31-W-N-N | 93119 | 80 | 120-277 VAC | 7920 | 4000 | Type II | White | None |
| C0820-FL-80W-40K-N31-W-P-N | 93120 | 80 | 120-277 VAC | 7920 | 4000 | Type II | White | Photo Censor |
| C0820-FL-80W-50K-N31-BL-N-N | 93121 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Black | None |
| C0820-FL-80W-50K-N31-BL-P-N | 93122 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-80W-50K-N31-BR-N-N | 93123 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Bronze | None |
| C0820-FL-80W-50K-N31-BR-P-N | 93124 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-80W-50K-N31-S-N-N | 93125 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Silver | None |
| C0820-FL-80W-50K-N31-S-P-N | 93126 | 80 | 120-277 VAC | 8400 | 5000 | Type II | Silver | Photo Censor |
| C0820-FL-80W-50K-N31-W-N-N | 93127 | 80 | 120-277 VAC | 8400 | 5000 | Type II | White | None |
| C0820-FL-80W-50K-N31-W-P-N | 93128 | 80 | 120-277 VAC | 8400 | 5000 | Type II | White | Photo Censor |

LitespanLED® 100W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-100W-40K-N31-BL-N-N | 93001 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Black | None |
| C0820-FL-100W-40K-N31-BL-P-N | 93002 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-100W-40K-N31-BR-N-N | 93003 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Bronze | None |
| C0820-FL-100W-40K-N31-BR-P-N | 93004 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-100W-40K-N31-S-N-N | 93005 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Silver | None |
| C0820-FL-100W-40K-N31-S-P-N | 93006 | 100 | 120-277 VAC | 9900 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-100W-40K-N31-W-N-N | 93007 | 100 | 120-277 VAC | 9900 | 4000 | Type II | White | None |
| C0820-FL-100W-40K-N31-W-P-N | 93008 | 100 | 120-277 VAC | 9900 | 4000 | Type II | White | Photo Censor |
| C0820-FL-100W-50K-N31-BL-N-N | 93009 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Black | None |
| C0820-FL-100W-50K-N31-BL-P-N | 93010 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-100W-50K-N31-BR-N-N | 93011 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Bronze | None |
| C0820-FL-100W-50K-N31-BR-P-N | 93012 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-100W-50K-N31-S-N-N | 93013 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Silver | None |
| C0820-FL-100W-50K-N31-S-P-N | 93014 | 100 | 120-277 VAC | 10500 | 5000 | Type II | Silver | Photo Censor |
| C0820-FL-100W-50K-N31-W-N-N | 93015 | 100 | 120-277 VAC | 10500 | 5000 | Type II | White | None |
| C0820-FL-100W-50K-N31-W-P-N | 93016 | 100 | 120-277 VAC | 10500 | 5000 | Type II | White | Photo Censor |

LitespanLED® 120W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-120W-40K-N31-BL-N-N | 93017 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Black | None |
| C0820-FL-120W-40K-N31-BL-P-N | 93018 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-120W-40K-N31-BR-N-N | 93019 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Bronze | None |
| C0820-FL-120W-40K-N31-BR-P-N | 93020 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-120W-40K-N31-S-N-N | 93021 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Silver | None |
| C0820-FL-120W-40K-N31-S-P-N | 93022 | 120 | 120-277 VAC | 11340 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-120W-40K-N31-W-N-N | 93023 | 120 | 120-277 VAC | 11340 | 4000 | Type II | White | None |

>>Continued on page 13



Flood Light

LitespanLED® 120W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-120W-40K-N31-W-P-N | 93024 | 120 | 120-277 VAC | 11340 | 4000 | Type II | White | Photo Censor |
| C0820-FL-120W-50K-N31-BL-N-N | 93025 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Black | None |
| C0820-FL-120W-50K-N31-BL-P-N | 93026 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-120W-50K-N31-BR-N-N | 93027 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Bronze | None |
| C0820-FL-120W-50K-N31-BR-P-N | 93028 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-120W-50K-N31-S-N-N | 93029 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Silver | None |
| C0820-FL-120W-50K-N31-S-P-N | 93030 | 120 | 120-277 VAC | 12600 | 5000 | Type II | Silver | Photo Censor |
| C0820-FL-120W-50K-N31-W-N-N | 93031 | 120 | 120-277 VAC | 12600 | 5000 | Type II | White | None |
| C0820-FL-120W-50K-N31-W-P-N | 93032 | 120 | 120-277 VAC | 12600 | 5000 | Type II | White | Photo Censor |

LitespanLED® 160W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-160W-40K-N31-BL-N-N | 93033 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Black | None |
| C0820-FL-160W-40K-N31-BL-P-N | 93034 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-160W-40K-N31-BR-N-N | 93035 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Bronze | None |
| C0820-FL-160W-40K-N31-BR-P-N | 93036 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-160W-40K-N31-S-N-N | 93037 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Silver | None |
| C0820-FL-160W-40K-N31-S-P-N | 93038 | 160 | 120-277 VAC | 15840 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-160W-40K-N31-W-N-N | 93039 | 160 | 120-277 VAC | 15840 | 4000 | Type II | White | None |
| C0820-FL-160W-40K-N31-W-P-N | 93040 | 160 | 120-277 VAC | 15840 | 4000 | Type II | White | Photo Censor |
| C0820-FL-160W-50K-N31-BL-N-N | 93041 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Black | None |
| C0820-FL-160W-50K-N31-BL-P-N | 93042 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-160W-50K-N31-BR-N-N | 93043 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Bronze | None |
| C0820-FL-160W-50K-N31-BR-P-N | 93044 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-160W-50K-N31-S-N-N | 93045 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Silver | None |
| C0820-FL-160W-50K-N31-S-P-N | 93046 | 160 | 120-277 VAC | 16800 | 5000 | Type II | Silver | Photo Censor |
| C0820-FL-160W-50K-N31-W-N-N | 93047 | 160 | 120-277 VAC | 16800 | 5000 | Type II | White | None |
| C0820-FL-160W-50K-N31-W-P-N | 93048 | 160 | 120-277 VAC | 16800 | 5000 | Type II | White | Photo Censor |

LitespanLED® 200W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-200W-40K-N31-BL-N-N | 93049 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Black | None |
| C0820-FL-200W-40K-N31-BL-P-N | 93050 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-200W-40K-N31-BR-N-N | 93051 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Bronze | None |
| C0820-FL-200W-40K-N31-BR-P-N | 93052 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-200W-40K-N31-S-N-N | 93053 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Silver | None |
| C0820-FL-200W-40K-N31-S-P-N | 93054 | 200 | 120-277 VAC | 16193 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-200W-40K-N31-W-N-N | 93055 | 200 | 120-277 VAC | 16193 | 4000 | Type II | White | None |
| C0820-FL-200W-40K-N31-W-P-N | 93056 | 200 | 120-277 VAC | 16193 | 4000 | Type II | White | Photo Censor |
| C0820-FL-200W-50K-N31-BL-N-N | 93057 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Black | None |
| C0820-FL-200W-50K-N31-BL-P-N | 93058 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-200W-50K-N31-BR-N-N | 93059 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Bronze | None |
| C0820-FL-200W-50K-N31-BR-P-N | 93060 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-200W-50K-N31-S-N-N | 93061 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Silver | None |
| C0820-FL-200W-50K-N31-S-P-N | 93062 | 200 | 120-277 VAC | 21000 | 5000 | Type II | Silver | Photo Censor |

>>Continued on page 14



Flood Light

LitespanLED® 200W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-200W-50K-N31-W-N-N | 93063 | 200 | 120-277 VAC | 21000 | 5000 | Type II | White | None |
| C0820-FL-200W-50K-N31-W-P-N | 93064 | 200 | 120-277 VAC | 21000 | 5000 | Type II | White | Photo Censor |

LitespanLED® 240W Flood Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|---------|--------|--------------|
| C0820-FL-240W-40K-N31-BL-N-N | 93065 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Black | None |
| C0820-FL-240W-40K-N31-BL-P-N | 93066 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Black | Photo Censor |
| C0820-FL-240W-40K-N31-BR-N-N | 93067 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Bronze | None |
| C0820-FL-240W-40K-N31-BR-P-N | 93068 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Bronze | Photo Censor |
| C0820-FL-240W-40K-N31-S-N-N | 93069 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Silver | None |
| C0820-FL-240W-40K-N31-S-P-N | 93070 | 240 | 120-277 VAC | 22680 | 4000 | Type II | Silver | Photo Censor |
| C0820-FL-240W-40K-N31-W-N-N | 93071 | 240 | 120-277 VAC | 22680 | 4000 | Type II | White | None |
| C0820-FL-240W-40K-N31-W-P-N | 93072 | 240 | 120-277 VAC | 22680 | 4000 | Type II | White | Photo Censor |
| C0820-FL-240W-50K-N31-BL-N-N | 93073 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Black | None |
| C0820-FL-240W-50K-N31-BL-P-N | 93074 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Black | Photo Censor |
| C0820-FL-240W-50K-N31-BR-N-N | 93075 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Bronze | None |
| C0820-FL-240W-50K-N31-BR-P-N | 93076 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Bronze | Photo Censor |
| C0820-FL-240W-50K-N31-S-N-N | 93077 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Silver | None |
| C0820-FL-240W-50K-N31-S-P-N | 93078 | 240 | 120-277 VAC | 25200 | 5000 | Type II | Silver | Photo Censor |
| C0820-FL-240W-50K-N31-W-N-N | 93079 | 240 | 120-277 VAC | 25200 | 5000 | Type II | White | None |
| C0820-FL-240W-50K-N31-W-P-N | 93080 | 240 | 120-277 VAC | 25200 | 5000 | Type II | White | Photo Censor |

LitespanLED® 90W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-90W-40K-N39-BR-N-N | 93189 | 90 | 120-277 VAC | 7882 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-90W-40K-N39-S-N-N | 93190 | 90 | 120-277 VAC | 7882 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-90W-40K-N39-W-N-N | 93191 | 90 | 120-277 VAC | 7882 | 4000 | Type V (Wide) | White | None |
| C0820-HB-90W-40K-N40-BR-N-N | 93192 | 90 | 120-277 VAC | 7872 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-90W-40K-N40-S-N-N | 93193 | 90 | 120-277 VAC | 7872 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-90W-40K-N40-W-N-N | 93194 | 90 | 120-277 VAC | 7872 | 4000 | Type V (Narrow) | White | None |
| C0820-HB-90W-50K-N39-BR-N-N | 93195 | 90 | 120-277 VAC | 8475 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-90W-50K-N39-S-N-N | 93196 | 90 | 120-277 VAC | 8475 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-90W-50K-N39-W-N-N | 93197 | 90 | 120-277 VAC | 8475 | 5000 | Type V (Wide) | White | None |
| C0820-HB-90W-50K-N40-BR-N-N | 93198 | 90 | 120-277 VAC | 8464 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-90W-50K-N40-S-N-N | 93199 | 90 | 120-277 VAC | 8464 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-90W-50K-N40-W-N-N | 93200 | 90 | 120-277 VAC | 8464 | 5000 | Type V (Narrow) | White | None |

LitespanLED® 120W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-120W-40K-N39-BR-N-N | 93129 | 120 | 120-277 VAC | 10170 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-120W-40K-N39-S-N-N | 93130 | 120 | 120-277 VAC | 10170 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-120W-40K-N39-W-N-N | 93131 | 120 | 120-277 VAC | 10170 | 4000 | Type V (Wide) | White | None |
| C0820-HB-120W-40K-N40-BR-N-N | 93132 | 120 | 120-277 VAC | 10162 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-120W-40K-N40-S-N-N | 93133 | 120 | 120-277 VAC | 10162 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-120W-40K-N40-W-N-N | 93134 | 120 | 120-277 VAC | 10162 | 4000 | Type V (Narrow) | White | None |

>>Continued on page 15



Flood Light



High Bay

LitespanLED® 120W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-120W-50K-N39-BR-N-N | 93135 | 120 | 120-277 VAC | 10936 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-120W-50K-N39-S-N-N | 93136 | 120 | 120-277 VAC | 10936 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-120W-50K-N39-W-N-N | 93137 | 120 | 120-277 VAC | 10936 | 5000 | Type V (Wide) | White | None |
| C0820-HB-120W-50K-N40-BR-N-N | 93138 | 120 | 120-277 VAC | 10927 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-120W-50K-N40-S-N-N | 93139 | 120 | 120-277 VAC | 10927 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-120W-50K-N40-W-N-N | 93140 | 120 | 120-277 VAC | 10927 | 5000 | Type V (Narrow) | White | None |

LitespanLED® 130W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-130W-40K-N39-BR-N-N | 93141 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-130W-40K-N39-S-N-N | 93142 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-130W-40K-N39-W-N-N | 93143 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Wide) | White | None |
| C0820-HB-130W-40K-N40-BR-N-N | 93144 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-130W-40K-N40-S-N-N | 93145 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-130W-40K-N40-W-N-N | 93146 | 130 | 120-277 VAC | 12870 | 4000 | Type V (Narrow) | White | None |
| C0820-HB-130W-50K-N39-BR-N-N | 93147 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-130W-50K-N39-S-N-N | 93148 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-130W-50K-N39-W-N-N | 93149 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Wide) | White | None |
| C0820-HB-130W-50K-N40-BR-N-N | 93150 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-130W-50K-N40-S-N-N | 93151 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-130W-50K-N40-W-N-N | 93152 | 130 | 120-277 VAC | 13650 | 5000 | Type V (Narrow) | White | None |

LitespanLED® 150W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------------|
| C0820-HB-150W-27K-N39-BL-D-U | 08277 | 150 | 120-277 VAC | | 2700 | Type V (Wide) | Black | 0-10V Dimming |
| C0820-HB-150W-50K-N31-W-N-U | 08216 | 150 | 120-277 VAC | | 5000 | Type V (Narrow) | White | None |

LitespanLED® 160W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|---------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------------|
| C0820-HB-160W-27K-N39-BL-D-U | 08281 | 160 | 120-277 VAC | | 2700 | Type V (Wide) | Black | 0-10V Dimming |
| C0820-HB-160W-27K-N39-BL-DMX-U | 08278 | 160 | 120-277 VAC | | 2700 | Type V (Wide) | Black | |
| C0820-HB-160W-40K-N39-BR-N-N | 93153 | 160 | 120-277 VAC | 13484 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-160W-40K-N39-S-N-N | 93154 | 160 | 120-277 VAC | 13484 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-160W-40K-N39-W-N-N | 93155 | 160 | 120-277 VAC | 13484 | 4000 | Type V (Wide) | White | None |
| C0820-HB-160W-40K-N40-BR-N-N | 93156 | 160 | 120-277 VAC | 13474 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-160W-40K-N40-S-N-N | 93157 | 160 | 120-277 VAC | 13474 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-160W-40K-N40-W-N-N | 93158 | 160 | 120-277 VAC | 13474 | 4000 | Type V (Narrow) | White | None |
| C0820-HB-160W-50K-N39-BR-N-N | 93159 | 160 | 120-277 VAC | 14499 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-160W-50K-N39-S-N-N | 93160 | 160 | 120-277 VAC | 14499 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-160W-50K-N39-W-N-N | 93161 | 160 | 120-277 VAC | 14499 | 5000 | Type V (Wide) | White | None |
| C0820-HB-160W-50K-N40-BR-N-N | 93162 | 160 | 120-277 VAC | 14488 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-160W-50K-N40-S-N-N | 93163 | 160 | 120-277 VAC | 14488 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-160W-50K-N40-W-N-N | 93164 | 160 | 120-277 VAC | 14488 | 5000 | Type V (Narrow) | White | None |



High Bay

LitespanLED® 180W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-180W-40K-N39-BR-N-N | 93165 | 180 | 120-277 VAC | 15887 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-180W-40K-N39-S-N-N | 93166 | 180 | 120-277 VAC | 15887 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-180W-40K-N39-W-N-N | 93167 | 180 | 120-277 VAC | 15887 | 4000 | Type V (Wide) | White | None |
| C0820-HB-180W-40K-N40-BR-N-N | 93168 | 180 | 120-277 VAC | 15865 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-180W-40K-N40-S-N-N | 93169 | 180 | 120-277 VAC | 15865 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-180W-40K-N40-W-N-N | 93170 | 180 | 120-277 VAC | 15865 | 4000 | Type V (Narrow) | White | None |
| C0820-HB-180W-50K-N39-BR-N-N | 93171 | 180 | 120-277 VAC | 17083 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-180W-50K-N39-S-N-N | 93172 | 180 | 120-277 VAC | 17083 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-180W-50K-N39-W-N-N | 93173 | 180 | 120-277 VAC | 17083 | 5000 | Type V (Wide) | White | None |
| C0820-HB-180W-50K-N40-BR-N-N | 93174 | 180 | 120-277 VAC | 17060 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-180W-50K-N40-S-N-N | 93175 | 180 | 120-277 VAC | 17060 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-180W-50K-N40-W-N-N | 93176 | 180 | 120-277 VAC | 17060 | 5000 | Type V (Narrow) | White | None |

LitespanLED® 240W High Bay

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-HB-240W-40K-N39-BR-N-N | 93177 | 240 | 120-277 VAC | 20400 | 4000 | Type V (Wide) | Bronze | None |
| C0820-HB-240W-40K-N39-S-N-N | 93178 | 240 | 120-277 VAC | 20400 | 4000 | Type V (Wide) | Silver | None |
| C0820-HB-240W-40K-N39-W-N-N | 93179 | 240 | 120-277 VAC | 20400 | 4000 | Type V (Wide) | White | None |
| C0820-HB-240W-40K-N40-BR-N-N | 93180 | 240 | 120-277 VAC | 20376 | 4000 | Type V (Narrow) | Bronze | None |
| C0820-HB-240W-40K-N40-S-N-N | 93181 | 240 | 120-277 VAC | 20376 | 4000 | Type V (Narrow) | Silver | None |
| C0820-HB-240W-40K-N40-W-N-N | 93182 | 240 | 120-277 VAC | 20376 | 4000 | Type V (Narrow) | White | None |
| C0820-HB-240W-50K-N39-BR-N-N | 93183 | 240 | 120-277 VAC | 21935 | 5000 | Type V (Wide) | Bronze | None |
| C0820-HB-240W-50K-N39-S-N-N | 93184 | 240 | 120-277 VAC | 21935 | 5000 | Type V (Wide) | Silver | None |
| C0820-HB-240W-50K-N39-W-N-N | 93185 | 240 | 120-277 VAC | 21935 | 5000 | Type V (Wide) | White | None |
| C0820-HB-240W-50K-N40-BR-N-N | 93186 | 240 | 120-277 VAC | 21910 | 5000 | Type V (Narrow) | Bronze | None |
| C0820-HB-240W-50K-N40-S-N-N | 93187 | 240 | 120-277 VAC | 21910 | 5000 | Type V (Narrow) | Silver | None |
| C0820-HB-240W-50K-N40-W-N-N | 93188 | 240 | 120-277 VAC | 21910 | 5000 | Type V (Narrow) | White | None |

LitespanLED® 40W Parkade Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-PK-40W-27K-N18-BR-N-N | 93216 | 40 | 120-277 VAC | 3640 | 2700 | Type V (Square) | Bronze | None |
| C0820-PK-40W-27K-N18-S-N-N | 93217 | 40 | 120-277 VAC | 3640 | 2700 | Type V (Square) | Silver | None |
| C0820-PK-40W-27K-N18-W-N-N | 93218 | 40 | 120-277 VAC | 3640 | 2700 | Type V (Square) | White | None |
| C0820-PK-40W-40K-N18-BR-N-N | 93219 | 40 | 120-277 VAC | 3960 | 4000 | Type V (Square) | Bronze | None |
| C0820-PK-40W-40K-N18-S-N-N | 93220 | 40 | 120-277 VAC | 3960 | 4000 | Type V (Square) | Silver | None |
| C0820-PK-40W-40K-N18-W-N-N | 93221 | 40 | 120-277 VAC | 3960 | 4000 | Type V (Square) | White | None |
| C0820-PK-40W-50K-N18-BR-N-N | 93222 | 40 | 120-277 VAC | 4200 | 5000 | Type V (Square) | Bronze | None |
| C0820-PK-40W-50K-N18-S-N-N | 93223 | 40 | 120-277 VAC | 4200 | 5000 | Type V (Square) | Silver | None |
| C0820-PK-40W-50K-N18-W-N-N | 93224 | 40 | 120-277 VAC | 4200 | 5000 | Type V (Square) | White | None |

LitespanLED® 50W Parkade Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-PK-50W-27K-N18-BR-N-N | 93225 | 50 | 120-277 VAC | 4550 | 2700 | Type V (Square) | Bronze | None |
| C0820-PK-50W-27K-N18-S-N-N | 93226 | 50 | 120-277 VAC | 4550 | 2700 | Type V (Square) | Silver | None |
| C0820-PK-50W-27K-N18-W-N-N | 93227 | 50 | 120-277 VAC | 4550 | 2700 | Type V (Square) | White | None |

>>Continued on page 17



High Bay



Parkade Light

LitespanLED® 50W Parkade Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-PK-50W-40K-N18-BR-N-N | 93228 | 50 | 120-277 VAC | 4428 | 4000 | Type V (Square) | Bronze | None |
| C0820-PK-50W-40K-N18-S-N-N | 93229 | 50 | 120-277 VAC | 4428 | 4000 | Type V (Square) | Silver | None |
| C0820-PK-50W-40K-N18-W-N-N | 93230 | 50 | 120-277 VAC | 4428 | 4000 | Type V (Square) | White | None |
| C0820-PK-50W-50K-N18-BR-N-N | 93231 | 50 | 120-277 VAC | 5250 | 5000 | Type V (Square) | Bronze | None |
| C0820-PK-50W-50K-N18-S-N-N | 93232 | 50 | 120-277 VAC | 5250 | 5000 | Type V (Square) | Silver | None |
| C0820-PK-50W-50K-N18-W-N-N | 93233 | 50 | 120-277 VAC | 5250 | 5000 | Type V (Square) | White | None |

LitespanLED® 80W Parkade Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------|
| C0820-PK-80W-27K-N18-BR-N-N | 93234 | 80 | 120-277 VAC | 7820 | 2700 | Type V (Square) | Bronze | None |
| C0820-PK-80W-27K-N18-S-N-N | 93235 | 80 | 120-277 VAC | 7820 | 2700 | Type V (Square) | Silver | None |
| C0820-PK-80W-27K-N18-W-N-N | 93236 | 80 | 120-277 VAC | 7820 | 2700 | Type V (Square) | White | None |
| C0820-PK-80W-40K-N18-BR-N-N | 93237 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Square) | Bronze | None |
| C0820-PK-80W-40K-N18-S-N-N | 93238 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Square) | Silver | None |
| C0820-PK-80W-40K-N18-W-N-N | 93239 | 80 | 120-277 VAC | 7085 | 4000 | Type V (Square) | White | None |
| C0820-PK-80W-50K-N18-BR-N-N | 93240 | 80 | 120-277 VAC | 8400 | 5000 | Type V (Square) | Bronze | None |
| C0820-PK-80W-50K-N18-S-N-N | 93241 | 80 | 120-277 VAC | 8400 | 5000 | Type V (Square) | Silver | None |
| C0820-PK-80W-50K-N18-W-N-N | 93242 | 80 | 120-277 VAC | 8400 | 5000 | Type V (Square) | White | None |

LitespanLED® Plate Downlight

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-------------------------------------|---------|-------|-------------|--------|------|-----------------|--------|---------------|
| C0820-LP1-50W-27K-N40-W-D-U | 08079 | 50 | 120-277 VAC | | 2700 | Type V (Narrow) | White | 0-10V Dimming |
| C0820-LP1-50W-35K-N40-W-D-U | 08078 | 50 | 120-277 VAC | | 3500 | Type V (Narrow) | White | 0-10V Dimming |
| C0820-LP1-50W-40K-N39-W-N-U | 08184 | 50 | 120-277 VAC | | 4000 | Type V | White | None |
| C0820-LP1-50W-40K-N40-W-D-U | 08077 | 50 | 120-277 VAC | | 4000 | Type V (Narrow) | White | 0-10V Dimming |
| C0820-LP1-50W-50K-N40-W-D-U | 08076 | 50 | 120-277 VAC | | 5000 | Type V (Narrow) | White | 0-10V Dimming |
| C0820-LP3-100W-50K-N39-W-N-U | 08120 | 100 | 120-277 VAC | | 5000 | Type V | White | None |
| C0820-LP3-120W-40K-N39-W-N-U | 08188 | 120 | 120-277 VAC | | 4000 | Type V | White | None |
| C0820-LP3-120W-40K-N40-W-D-U | 08087 | 120 | 120-277 VAC | | 4000 | Type V (Narrow) | White | 0-10V Dimming |
| C0820-LP3-120W-50K-N18-W-N-U | 08098 | 120 | 120-277 VAC | | 5000 | Type V (Wide) | White | None |
| C0820-LP3-120W-50K-N39-W-N-U | 08103 | 120 | 120-277 VAC | | 5000 | Type V | White | None |
| C0820-LP3-120W-50K-N40-W-N-U | 08104 | 120 | 120-277 VAC | | 5000 | Type V (Narrow) | White | None |

LitespanLED® 30W Post-Top LED Replacement Lamp

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|---------------------------|---------|-------|-------------|--------|------|------|--------|---------|
| C0820-PT-30W-27K-W | 93243 | 30 | 120-277 VAC | 2730 | 2700 | Cone | White | |
| C0820-PT-30W-30K-W | 93244 | 30 | 120-277 VAC | 2775 | 3000 | Cone | White | |
| C0820-PT-30W-40K-W | 93245 | 30 | 120-277 VAC | 2970 | 4000 | Cone | White | |
| C0820-PT-30W-50K-W | 93246 | 30 | 120-277 VAC | 3150 | 5000 | Cone | White | |

LitespanLED® 45W Post-Top LED Replacement Lamp

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|---------------------------|---------|-------|-------------|--------|------|------|--------|---------|
| C0820-PT-45W-27K-W | 93247 | 45 | 120-277 VAC | 4095 | 2700 | Cone | White | |
| C0820-PT-45W-30K-W | 93248 | 45 | 120-277 VAC | 4275 | 3000 | Cone | White | |
| C0820-PT-45W-40K-W | 93249 | 45 | 120-277 VAC | 4455 | 4000 | Cone | White | |
| C0820-PT-45W-50K-W | 93250 | 45 | 120-277 VAC | 4725 | 5000 | Cone | White | |





Plate Downlight



Post-Top



Wallpack Light

LitespanLED® 20W Wallpack Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-----------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-20W-40K-N19-BL-N-N | 93257 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Black | None |
| C0820-WP-20W-40K-N19-BL-P-N | 93258 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Black | Photo Censor |
| C0820-WP-20W-40K-N19-BR-N-N | 93259 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Bronze | None |
| C0820-WP-20W-40K-N19-BR-P-N | 93260 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-20W-40K-N19-S-N-N | 93261 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Silver | None |
| C0820-WP-20W-40K-N19-S-P-N | 93262 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-20W-40K-N19-W-N-N | 93263 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | White | None |
| C0820-WP-20W-40K-N19-W-P-N | 93264 | 20 | 120-277 VAC | 1980 | 4000 | Asymmetric | White | Photo Censor |
| C0820-WP-20W-50K-N19-BL-N-N | 93265 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Black | None |
| C0820-WP-20W-50K-N19-BL-P-N | 93266 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Black | Photo Censor |
| C0820-WP-20W-50K-N19-BR-N-N | 93267 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Bronze | None |
| C0820-WP-20W-50K-N19-BR-P-N | 93268 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-20W-50K-N19-S-N-N | 93269 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Silver | None |
| C0820-WP-20W-50K-N19-S-P-N | 93270 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-20W-50K-N19-W-N-N | 93271 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | White | None |
| C0820-WP-20W-50K-N19-W-P-N | 93272 | 20 | 120-277 VAC | 2100 | 5000 | Asymmetric | White | Photo Censor |

LitespanLED® 30W Wallpack Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-----------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-30W-40K-N19-BL-N-N | 93273 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Black | None |
| C0820-WP-30W-40K-N19-BL-P-N | 93274 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Black | Photo Censor |
| C0820-WP-30W-40K-N19-BR-N-N | 93275 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Bronze | None |
| C0820-WP-30W-40K-N19-BR-P-N | 93276 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-30W-40K-N19-S-N-N | 93277 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Silver | None |
| C0820-WP-30W-40K-N19-S-P-N | 93278 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-30W-40K-N19-W-N-N | 93279 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | White | None |
| C0820-WP-30W-40K-N19-W-P-N | 93280 | 30 | 120-277 VAC | 2657 | 4000 | Asymmetric | White | Photo Censor |
| C0820-WP-30W-50K-N19-BL-N-N | 93281 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Black | None |
| C0820-WP-30W-50K-N19-BL-P-N | 93282 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Black | Photo Censor |
| C0820-WP-30W-50K-N19-BR-N-N | 93283 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Bronze | None |
| C0820-WP-30W-50K-N19-BR-P-N | 93284 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-30W-50K-N19-S-N-N | 93285 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Silver | None |
| C0820-WP-30W-50K-N19-S-P-N | 93286 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-30W-50K-N19-W-N-N | 93287 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | White | None |
| C0820-WP-30W-50K-N19-W-P-N | 93288 | 30 | 120-277 VAC | 2952 | 5000 | Asymmetric | White | Photo Censor |

LitespanLED® 40W Wallpack Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|-----------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-40W-40K-N19-BL-N-N | 93289 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Black | None |
| C0820-WP-40W-40K-N19-BL-P-N | 93290 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Black | Photo Censor |
| C0820-WP-40W-40K-N19-BR-N-N | 93291 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Bronze | None |
| C0820-WP-40W-40K-N19-BR-P-N | 93292 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-40W-40K-N19-S-N-N | 93293 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Silver | None |
| C0820-WP-40W-40K-N19-S-P-N | 93294 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-40W-40K-N19-W-N-N | 93295 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | White | None |

>>Continued on page 19



Wallpack Light

LitespanLED® 40W Wallpack Light


| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-40W-40K-N19-W-P-N | 93296 | 40 | 120-277 VAC | 3283 | 4000 | Asymmetric | White | Photo Censor |
| C0820-WP-40W-50K-N19-BL-N-N | 93297 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Black | None |
| C0820-WP-40W-50K-N19-BL-P-N | 93298 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Black | Photo Censor |
| C0820-WP-40W-50K-N19-BR-N-N | 93299 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Bronze | None |
| C0820-WP-40W-50K-N19-BR-P-N | 93300 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-40W-50K-N19-S-N-N | 93301 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Silver | None |
| C0820-WP-40W-50K-N19-S-P-N | 93302 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-40W-50K-N19-W-N-N | 93303 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | White | None |
| C0820-WP-40W-50K-N19-W-P-N | 93304 | 40 | 120-277 VAC | 3936 | 5000 | Asymmetric | White | Photo Censor |

LitespanLED® 48W Wallpack Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-48W-40K-N19-BL-N-N | 93305 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Black | None |
| C0820-WP-48W-40K-N19-BL-P-N | 93306 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Black | Photo Censor |
| C0820-WP-48W-40K-N19-BR-N-N | 93307 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Bronze | None |
| C0820-WP-48W-40K-N19-BR-P-N | 93308 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-48W-40K-N19-S-N-N | 93309 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Silver | None |
| C0820-WP-48W-40K-N19-S-P-N | 93310 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-48W-40K-N19-W-N-N | 93311 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | White | None |
| C0820-WP-48W-40K-N19-W-P-N | 93312 | 48 | 120-277 VAC | 4250 | 4000 | Asymmetric | White | Photo Censor |
| C0820-WP-48W-50K-N19-BL-N-N | 93313 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Black | None |
| C0820-WP-48W-50K-N19-BL-P-N | 93314 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Black | Photo Censor |
| C0820-WP-48W-50K-N19-BR-N-N | 93315 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Bronze | None |
| C0820-WP-48W-50K-N19-BR-P-N | 93316 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-48W-50K-N19-S-N-N | 93317 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Silver | None |
| C0820-WP-48W-50K-N19-S-P-N | 93318 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-48W-50K-N19-W-N-N | 93319 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | White | None |
| C0820-WP-48W-50K-N19-W-P-N | 93320 | 48 | 120-277 VAC | 4723 | 5000 | Asymmetric | White | Photo Censor |

LitespanLED® 60W Wallpack Light

| Ordering Code | Barcode | Watts | Volts | Lumens | CT°K | Lens | Finish | Options |
|------------------------------------|---------|-------|-------------|--------|------|------------|--------|--------------|
| C0820-WP-60W-40K-N19-BL-N-N | 93321 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Black | None |
| C0820-WP-60W-40K-N19-BL-P-N | 93322 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Black | Photo Censor |
| C0820-WP-60W-40K-N19-BR-N-N | 93323 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Bronze | None |
| C0820-WP-60W-40K-N19-BR-P-N | 93324 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-60W-40K-N19-S-N-N | 93325 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Silver | None |
| C0820-WP-60W-40K-N19-S-P-N | 93326 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-60W-40K-N19-W-N-N | 93327 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | White | None |
| C0820-WP-60W-40K-N19-W-P-N | 93328 | 60 | 120-277 VAC | 5224 | 4000 | Asymmetric | White | Photo Censor |
| C0820-WP-60W-50K-N19-BL-N-N | 93329 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Black | None |
| C0820-WP-60W-50K-N19-BL-P-N | 93330 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Black | Photo Censor |
| C0820-WP-60W-50K-N19-BR-N-N | 93331 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Bronze | None |
| C0820-WP-60W-50K-N19-BR-P-N | 93332 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Bronze | Photo Censor |
| C0820-WP-60W-50K-N19-S-N-N | 93333 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Silver | None |
| C0820-WP-60W-50K-N19-S-P-N | 93334 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | Silver | Photo Censor |
| C0820-WP-60W-50K-N19-W-N-N | 93335 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | White | None |
| C0820-WP-60W-50K-N19-W-P-N | 93336 | 60 | 120-277 VAC | 5804 | 5000 | Asymmetric | White | Photo Censor |

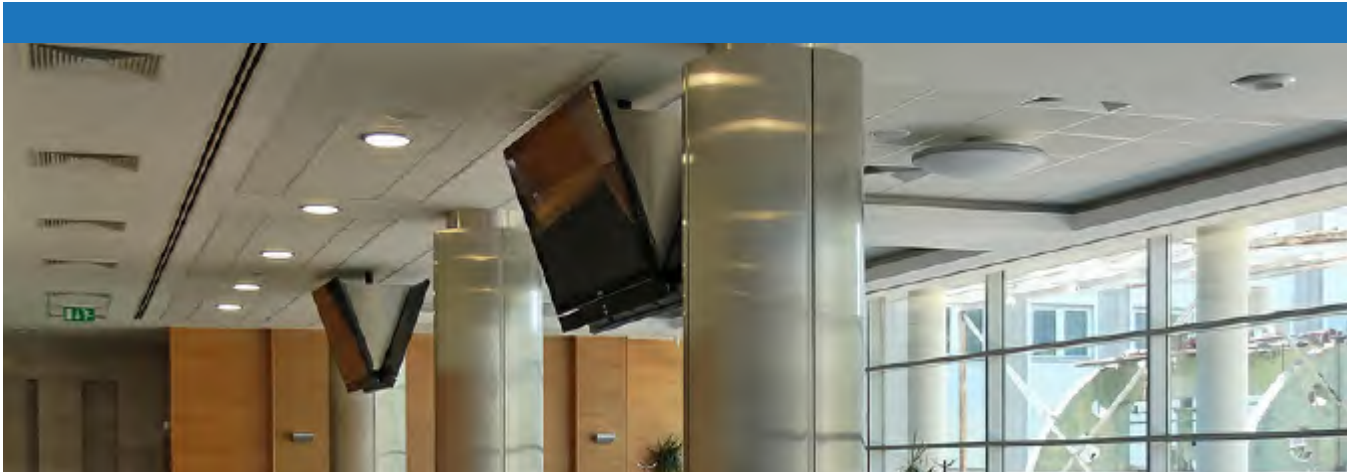

LED Replacement Lamps

EIKO's extended line of LitespanLED® Linear and Replacement Lamps truly represents the next generation in lighting, saving you time, money, and energy through the use of quality Cree chips for long life and superior lumen and color maintenance. Our lamps also feature instant, flicker-free start-up and no off-state power draw.

LitespanLED® GEN 4 A19 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED10WA19/300/840K-GU24-DIM-G4 | 90086 | 10 | 120 | A19 | GU24 | 800 | | | |
| LED10WA19/300/840K-DIM-G4 | 90087 | 10 | 120 | A19 | E26 | 800 | | | |
| LED10WA19/300/830K-GU24-DIM-G4 | 90088 | 10 | 120 | A19 | GU24 | 800 | | | |
| LED10WA19/300/830K-DIM-G4 | 90089 | 10 | 120 | A19 | E26 | 800 | | | |
| LED10WA19/300/827K-GU24-DIM-G4 | 90090 | 10 | 120 | A19 | GU24 | 800 | | | |
| LED10WA19/300/827K-DIM-G4 | 90091 | 10 | 120 | A19 | E26 | 800 | | | |
| LED12WA19/300/827K-DIM-G4 | 90082 | 12 | 120 | A19 | E26 | 1100 | | | 25,000 |
| LED12WA19/300/827K-GU24-DIM-G4 | 90081 | 12 | 120 | A19 | GU24 | 1100 | | | |
| LED12WA19/300/830K-DIM-G4 | 90080 | 12 | 120 | A19 | E26 | 1100 | | | |
| LED12WA19/300/830K-GU24-DIM-G4 | 90079 | 12 | 120 | A19 | GU24 | 1100 | | | |
| LED12WA19/300/840K-DIM-G4 | 90078 | 12 | 120 | A19 | E26 | 1100 | | | |
| LED12WA19/300/840K-GU24-DIM-G4 | 90077 | 12 | 120 | A19 | GU24 | 1100 | | | |
| LED12WA19/300/927K-DIM-G4 | 90076 | 12 | 120 | A19 | E26 | 800 | | | |
| LED12WA19/300/927K-GU24-DIM-G4 | 90075 | 12 | 120 | A19 | GU24 | 800 | | | |
| LED12WA19/300/930K-DIM-G4 | 90074 | 12 | 120 | A19 | E26 | 800 | | | |
| LED12WA19/300/930K-GU24-DIM-G4 | 90073 | 12 | 120 | A19 | GU24 | 800 | | | |



LitespanLED® GEN4 A19



Advantage™ GEN4 A19 Dimmable



Advantage™ GEN4 A19 Non-Dimmable

Advantage™ GEN 4 A19 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED7WA19/240/827K-DIM-G4A | 90035 | 7 | 120 | A19 | E26 | 400 | | | |
| LED7WA19/240/827K-G4A | 90034 | 7 | 120 | A19 | E26 | 400 | | | |
| LED7WA19/240/830K-DIM-G4A | 90033 | 7 | 120 | A19 | E26 | 420 | | | 25,000 |
| LED7WA19/240/830K-G4A | 90032 | 7 | 120 | A19 | E26 | 420 | | | |
| LED7WA19/240/840K-DIM-G4A | 90031 | 7 | 120 | A19 | E26 | 420 | | | |
| LED7WA19/240/840K-G4A | 90030 | 7 | 120 | A19 | E26 | 420 | | | |
| LED7WA19/240/850K-DIM-G4A | 90029 | 7 | 120 | A19 | E26 | 420 | | | |
| LED10WA19/240/827K-DIM-G4A | | 10 | 120 | A19 | E26 | 700 | | | |
| LED10WA19/240/830K-DIM-G4A | | 10 | 120 | A19 | E26 | 750 | | | |
| LED10WA19/240/840K-DIM-G4A | | 10 | 120 | A19 | E26 | 750 | | | |
| LED10WA19/240/850K-DIM-G4A | 90092 | 10 | 120 | A19 | E26 | 750 | | | |
| LED10WA19/240/827K-G4A | | 10 | 120 | A19 | E26 | 750 | | | |
| LED10WA19/240/830K-G4A | | 10 | 120 | A19 | E26 | 750 | | | |
| LED10WA19/240/840K-G4A | | 10 | 120 | A19 | E26 | 750 | | | |

LitespanLED® GEN 4 A21 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED17WA21/300/827K-DIM-G4 | 90053 | 17 | 120 | A21 | E26 | 1600 | | | 25,000 |
| LED17WA21/300/827K-GU24-DIM-G4 | 90052 | 17 | 120 | A21 | GU24 | 1600 | | | |
| LED17WA21/300/830K-DIM-G4 | 90051 | 17 | 120 | A21 | E26 | 1600 | | | |
| LED17WA21/300/830K-GU24-DIM-G4 | 90050 | 17 | 120 | A21 | GU24 | 1600 | | | |
| LED17WA21/300/840K-DIM-G4 | 90049 | 17 | 120 | A21 | E26 | 1600 | | | |
| LED17WA21/300/840K-GU24-DIM-G4 | 90048 | 17 | 120 | A21 | GU24 | 1600 | | | |

LitespanLED® GEN 4 BR30 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED11WBR30/827K-DIM-G4 | 90085 | 11 | 120 | BR-30 | E26 | 800 | | | 25,000 |
| LED11WBR30/830K-DIM-G4 | 90084 | 11 | 120 | BR-30 | E26 | 800 | | | |
| LED11WBR30/840K-DIM-G4 | 90083 | 11 | 120 | BR-30 | E26 | 800 | | | |
| LED14WBR30/927K-DIM-G4 | 90063 | 14 | 120 | BR-30 | E26 | 800 | | | |
| LED14WBR30/930K-DIM-G4 | 90062 | 14 | 120 | BR-30 | E26 | 800 | | | |

LitespanLED® GEN 4 BR40 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED13WBR40/827K-DIM-G4 | 90066 | 13 | 120 | BR-40 | E26 | 1000 | | | 25,000 |
| LED13WBR40/830K-DIM-G4 | 90065 | 13 | 120 | BR-40 | E26 | 1000 | | | |
| LED13WBR40/840K-DIM-G4 | 90064 | 13 | 120 | BR-40 | E26 | 1000 | | | |
| LED16WBR40/927K-DIM-G4 | 90055 | 16 | 120 | BR-40 | E26 | 1000 | | | |
| LED16WBR40/930K-DIM-G4 | 90054 | 16 | 120 | BR-40 | E26 | 1000 | | | |
| LED17WBR40/827K-DIM-G4 | 90047 | 17 | 120 | BR-40 | E26 | 1400 | | | 25,000 |
| LED17WBR40/830K-DIM-G4 | 90046 | 17 | 120 | BR-40 | E26 | 1400 | | | |
| LED17WBR40/840K-DIM-G4 | 90045 | 17 | 120 | BR-40 | E26 | 1400 | | | |



GEN4 BR30



GEN4 BR40

LitespanLED® GEN 4 G25 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED6WG25/827K-DIM-G4 | 90038 | 60 | 120 | G25 | E26 | 450 | | | 15,000 |
| LED6WG25/830K-DIM-G4 | 90037 | 60 | 120 | G25 | E26 | 450 | | | |
| LED6WG25/840K-DIM-G4 | 90036 | 60 | 120 | G25 | E26 | 450 | | | |

LitespanLED® GEN 4 MR-16 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------------------|---------|-------|----------|-------|-------|--------|-----------|-----------|------|
| LED7WMR16/20/830-DIM-G4 | 90026 | 7 | 12VAC/DC | MR-16 | GU5.3 | 450 | | | |
| LED7WMR16/40/830-DIM-G4 | 90025 | 7 | 12VAC/DC | MR-16 | GU5.3 | 450 | | | |
| LED7WGU10/20/830-DIM-G4 | 90028 | 7 | 120 | MR-16 | GU10 | 450 | | | |
| LED7WGU10/40/830-DIM-G4 | 90027 | 7 | 120 | MR-16 | GU10 | 450 | | | |

LitespanLED® GEN 4 PAR20 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|------|
| LED7WPAR20/FL/827K-DIM-G4A | 90024 | 7 | 120 | PAR20 | E26 | 500 | | | |
| LED7WPAR20/FL/830K-DIM-G4A | 90023 | 7 | 120 | PAR20 | E26 | 500 | | | |
| LED7WPAR20/FL/840K-DIM-G4A | 90022 | 7 | 120 | PAR20 | E26 | 500 | | | |

Advantage™ GEN 4 PAR20 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|------|
| LED7WPAR20/NFL/827K-DIM-G4A | 90021 | 7 | 120 | PAR20 | E26 | 500 | | | |
| LED7WPAR20/NFL/830K-DIM-G4A | 90020 | 7 | 120 | PAR20 | E26 | 500 | | | |
| LED7WPAR20/NFL/840K-DIM-G4A | 90019 | 7 | 120 | PAR20 | E26 | 500 | | | |

Advantage™ GEN 4 PAR30 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED12WPAR30/FL/827K-DIM-G4A | 90072 | 12 | 120 | PAR30 | E26 | 800 | | | |
| LED12WPAR30/FL/830K-DIM-G4A | 90071 | 12 | 120 | PAR30 | E26 | 800 | | | |
| LED12WPAR30/FL/840K-DIM-G4A | 90070 | 12 | 120 | PAR30 | E26 | 800 | | | |
| LED12WPAR30/NFL/827K-DIM-G4A | 90069 | 12 | 120 | PAR30 | E26 | 800 | | | 25,000 |
| LED12WPAR30/NFL/830K-DIM-G4A | 90068 | 12 | 120 | PAR30 | E26 | 800 | | | |
| LED12WPAR30/NFL/840K-DIM-G4A | 90067 | 12 | 120 | PAR30 | E26 | 800 | | | |

Advantage™ GEN 4 PAR30SN Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------------------|---------|-------|-------|---------|------|--------|-----------|-----------|------|
| LED12WPAR30S/FL/827-DIM-G4A | 08553 | 12 | 120 | PAR30SN | E26 | 800 | | | |
| LED12WPAR30S/FL/830-DIM-G4A | 08554 | 12 | 120 | PAR30SN | E26 | 800 | | | |
| LED12WPAR30S/FL/840-DIM-G4A | 08555 | 12 | 120 | PAR30SN | E26 | 800 | | | |
| LED12WPAR30S/NFL/827-DIM-G4A | 08556 | 12 | 120 | PAR30SN | E26 | 800 | | | |
| LED12WPAR30S/NFL/830-DIM-G4A | 08557 | 12 | 120 | PAR30SN | E26 | 800 | | | |
| LED12WPAR30S/NFL/840-DIM-G4A | 08558 | 12 | 120 | PAR30SN | E26 | 800 | | | |



GEN4 G25



GEN4 MR16



GEN4 PAR20



GEN4 PAR30

Advantage™ GEN 4 PAR38 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED14WPAR38/FL/827K-DIM-G4A | 90061 | 14 | 120 | PAR38 | E26 | 900 | | | |
| LED14WPAR38/FL/830K-DIM-G4A | 90060 | 14 | 120 | PAR38 | E26 | 900 | | | |
| LED14WPAR38/FL/840K-DIM-G4A | 90059 | 14 | 120 | PAR38 | E26 | 900 | | | |
| LED14WPAR38/NFL/827K-DIM-G4A | 90058 | 14 | 120 | PAR38 | E26 | 900 | | | 25,000 |
| LED14WPAR38/NFL/830K-DIM-G4A | 90057 | 14 | 120 | PAR38 | E26 | 900 | | | |
| LED14WPAR38/NFL/840K-DIM-G4A | 90056 | 14 | 120 | PAR38 | E26 | 900 | | | |
| LED17WPAR38/FL/827K-DIM-G4A | 90044 | 17 | 120 | PAR38 | E26 | 1300 | | | |
| LED17WPAR38/FL/830K-DIM-G4A | 90043 | 17 | 120 | PAR38 | E26 | 1300 | | | |
| LED17WPAR38/FL/840K-DIM-G4A | 90042 | 17 | 120 | PAR38 | E26 | 1300 | | | |
| LED17WPAR38/NFL/827K-DIM-G4A | 90041 | 17 | 120 | PAR38 | E26 | 1300 | | | |
| LED17WPAR38/NFL/830K-DIM-G4A | 90040 | 17 | 120 | PAR38 | E26 | 1300 | | | |
| LED17WPAR38/NFL/840K-DIM-G4A | 90039 | 17 | 120 | PAR38 | E26 | 1300 | | | |

LitespanLED® GEN 4 T8 Linear Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED9WT8F/24/835K-G4D | 08529 | 9 | 120 | T8 | G13 | 900 | | | 50,000 |
| LED9WT8F/24/840K-G4D | 08530 | 9 | 120 | T8 | G13 | 900 | | | 50,000 |
| LED9WT8F/24/850K-G4D | 08531 | 9 | 120 | T8 | G13 | 900 | | | 50,000 |
| LED18WT8F/48/835K-G4D | 08526 | 18 | 120 | T8 | G13 | 1800 | | | 50,000 |
| LED18WT8F/48/840K-G4D | 08527 | 18 | 120 | T8 | G13 | 1800 | | | 50,000 |
| LED18WT8F/48/850K-G4D | 08528 | 18 | 120 | T8 | G13 | 1800 | | | 50,000 |

Advantage™ GEN 4 T8 Linear Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LED9WT8F/24/835K-G4A | 08535 | 9 | 120 | T8 | G13 | 800 | | | 25,000 |
| LED9WT8F/24/840K-G4A | 08536 | 9 | 120 | T8 | G13 | 800 | | | 25,000 |
| LED9WT8F/24/850K-G4A | 08537 | 9 | 120 | T8 | G13 | 800 | | | 25,000 |
| LED18WT8F/48/835K-G4A | 08532 | 18 | 120 | T8 | G13 | 1600 | | | 25,000 |
| LED18WT8F/48/840K-G4A | 08533 | 18 | 120 | T8 | G13 | 1600 | | | 25,000 |
| LED18WT8F/48/850K-G4A | 08534 | 18 | 120 | T8 | G13 | 1600 | | | 25,000 |

LitespanLED® GEN 3 A19 Replacement Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LEDP-8WA19/827-DIM3 | 07964 | 8 | 120 | A-19 | E26 | 435 | 4.25/108 | 2.28/58 | 25,000 |
| LEDP-8WA19/830-DIM3 | 07965 | 8 | 120 | A-19 | E26 | 450 | 4.25/108 | 2.28/58 | 25,000 |
| LEDP-8WA19/841-DIM3 | 07966 | 8 | 120 | A-19 | E26 | 470 | 4.25/108 | 2.28/58 | 25,000 |
| LEDP-8WA19/850-DIM3 | 08174 | 8 | 120 | A-19 | E26 | 510 | 4.25/108 | 2.28/58 | 25,000 |
| LEDP-10WA19/827-DIM3 | 07988 | 10 | 120 | A-19 | E26 | 800 | 4.41/112 | 2.36/60 | 25,000 |
| LEDP-10WA19/830-DIM3 | 07989 | 10 | 120 | A-19 | E26 | 830 | 4.41/112 | 2.36/60 | 25,000 |
| LEDP-10WA19/841-DIM3 | 07990 | 10 | 120 | A-19 | E26 | 860 | 4.41/112 | 2.36/60 | 25,000 |
| LEDP-12WA19/827-DIM | 07917 | 12 | 120 | A-19 | E26 | 800 | 4.409/112 | 2.36/60 | 25,000 |
| LEDP-12WA19/830-DIM | 07918 | 12 | 120 | A-19 | E26 | 830 | 4.409/112 | 2.36/60 | 25,000 |
| LEDP-12WA19/841-DIM | 08128 | 12 | 120 | A-19 | E26 | 860 | 4.409/112 | 2.36/60 | 25,000 |



LitespanLED® GEN3 R20 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LEDP-8WR20/827-DIM3 | 07991 | 8 | 120 | R-20 | E26 | 500 | 3.94/100 | 2.48/63 | 25,000 |
| LEDP-8WR20/830-DIM3 | 07992 | 8 | 120 | R-20 | E26 | 520 | 3.94/100 | 2.48/63 | 35,000 |
| LEDP-8WR20/841-DIM3 | 07993 | 8 | 120 | R-20 | E26 | 540 | 3.94/100 | 2.48/63 | 35,000 |

LitespanLED® GEN 3 R30 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LEDP-11WR30/827-DIM | 07948 | 11 | 120 | R-30 | E26 | 750 | 5.12/130 | 3.74/95 | 35,000 |
| LEDP-11WR30/830-DIM | 07949 | 11 | 120 | R-30 | E26 | 750 | 5.12/130 | 3.74/95 | 35,000 |
| LEDP-11WR30/GU24/827-DIM | 07950 | 11 | 120 | R-30 | GJ24 | 730 | 4.49/114 | 3.74/95 | 35,000 |
| LEDP-11WR30/GU24/830-DIM | 07951 | 11 | 120 | R-30 | GJ24 | 750 | 4.49/114 | 3.74/95 | 35,000 |

LitespanLED® GEN 3 R40 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LEDP-13WR40/827-DIM3 | 07794 | 13 | 120 | R-40 | E26 | 850 | 6.46/164 | 5.00/127 | 25,000 |
| LEDP-13WR40/830-DIM3 | 07983 | 13 | 120 | R-40 | E26 | 880 | 6.46/164 | 5.00/127 | 35,000 |
| LEDP-13WR40/841-DIM3 | 07984 | 13 | 120 | R-40 | E26 | 920 | 6.46/164 | 5.00/127 | 35,000 |
| LEDP-18WR40/827-DIM3 | 07985 | 18 | 120 | R-40 | E26 | 1200 | 6.46/164 | 5.00/127 | 25,000 |
| LEDP-18WR40/830-DIM3 | 07986 | 18 | 120 | R-40 | E26 | 1230 | 6.46/164 | 5.00/127 | 35,000 |
| LEDP-18WR40/841-DIM3 | 07987 | 18 | 120 | R-40 | E26 | 1280 | 6.46/164 | 5.00/127 | 35,000 |

LitespanLED® GEN 3 B11 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------|---------|-------|-------|-------|------|--------|-----------|------------|--------|
| LEDP-3WB11/827-DIM | 08254 | 3 | 120 | B-11 | E12 | 160 | 3.78/96 | 1.374/34.9 | 25,000 |
| LEDP-3WB11/830-DIM | 08255 | 3 | 120 | B-11 | E12 | 165 | 3.78/96 | 1.374/34.9 | 25,000 |
| LEDP-5WB11/827-DIM | 07925 | 5 | 120 | B-11 | E12 | 300 | 4.21/107 | 1.38/35 | 25,000 |

LitespanLED® GEN 3 G25 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------|---------|-------|-------|-------|------|--------|-----------|-----------|--------|
| LEDP-8WG25/827-DIM | 07929 | 8 | 120 | G-25 | E26 | 450 | 4.25/108 | 3.15/80 | 35,000 |
| LEDP-8WG25/830-DIM | 07894 | 8 | 120 | G-25 | E26 | 450 | 4.25/108 | 3.15/80 | 35,000 |

LitespanLED® GEN 3 T-8 Linear Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------|---------|-------|------------|-------|------|--------|------------|-----------|--------|
| LEDP-9T8/24/41K | 07895 | 9 | 120-277VAC | T-8 | G13 | 850 | 23.81/605 | 1.10/28 | 50,000 |
| LEDP-9T8/24/50K | 07896 | 9 | 120-277VAC | T-8 | G13 | 850 | 23.81/605 | 1.10/28 | 50,000 |
| LEDP-14T8/36/41K | 07897 | 14 | 120-277VAC | T-8 | G13 | 1100 | 35.74/908 | 1.10/28 | 50,000 |
| LEDP-14T8/36/50K | 07898 | 14 | 120-277VAC | T-8 | G13 | 1100 | 35.74/908 | 1.10/28 | 50,000 |
| LEDP-18T8/48/30K | 07899 | 18 | 120-277VAC | T-8 | G13 | 1800 | 47.75/1213 | 1.10/28 | 50,000 |
| LEDP-18T8/48/41K | 07900 | 18 | 120-277VAC | T-8 | G13 | 1800 | 47.75/1213 | 1.10/28 | 50,000 |
| LEDP-18T8/48/50K | 07901 | 18 | 120-277VAC | T-8 | G13 | 1800 | 47.75/1213 | 1.10/28 | 50,000 |
| LEDP-22T8/60/41K | 07902 | 22 | 120-277VAC | T-8 | G13 | 2100 | 59.55/1513 | 1.10/28 | 50,000 |
| LEDP-22T8/60/50K | 07903 | 22 | 120-277VAC | T-8 | G13 | 2100 | 59.55/1513 | 1.10/28 | 50,000 |
| LEDP-24T8/72/41K | 07904 | 24 | 120-277VAC | T-8 | G13 | 2300 | 71.37/1813 | 1.10/28 | 50,000 |
| LEDP-24T8/72/50K | 07905 | 24 | 120-277VAC | T-8 | G13 | 2300 | 71.37/1813 | 1.10/28 | 50,000 |



LitespanLED® GEN 3 T-8 U-Bend Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|-------|------------|-------|------|--------|-----------|-----------|--------|
| LEDP-18T8U6/41K | 07906 | 18 | 120-277VAC | T-8 | G13 | 1800 | 22.00/560 | 1.10/28 | 50,000 |
| LEDP-18T8U6/50K | 07907 | 18 | 120-277VAC | T-8 | G13 | 1800 | 22.00/560 | 1.10/28 | 50,000 |

LitespanLED® GEN 3 MR16 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------------|---------|-------|-----------|-------|-------|--------|-----------|-----------|--------|
| LEDP-6WGU10/830-DIM | 07926 | 6 | 120 | MR16 | GU10 | 370 | 3.11/79 | 1.97/50 | 35,000 |
| LEDP-6WGU10/841-DIM | 08178 | 6 | 120 | MR16 | GU10 | 385 | 3.11/79 | 1.97/50 | 35,000 |
| LEDP-6WMR16/827-DIM | 07943 | 6 | 12V AC/DC | MR16 | GU5.3 | 340 | 2.40/61 | 1.97/50 | 35,000 |
| LEDP-6WMR16/830-DIM | 07927 | 6 | 12V AC/DC | MR16 | GU5.3 | 350 | 2.40/61 | 1.97/50 | 35,000 |
| LEDP-6WMR16/841-DIM | 08179 | 6 | 12V AC/DC | MR16 | GU5.3 | 365 | 2.40/61 | 1.97/50 | 35,000 |

LitespanLED® GEN 3 PAR16 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------------------|---------|-------|-------|--------|------|--------|-----------|-----------|--------|
| LEDP-6WPAR16/FL/830-DIM | 07908 | 6 | 120 | PAR 16 | E26 | 370 | 3.27/83 | 1.97/50 | 35,000 |
| LEDP-6WPAR16/FL/841-DIM | 07909 | 6 | 120 | PAR 16 | E26 | 385 | 3.27/83 | 1.97/50 | 35,000 |

LitespanLED® GEN 3 PAR20 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------------------|---------|-------|-------|--------|------|--------|-----------|-----------|--------|
| LEDP-7WPAR20/FL/841-DIM | 07911 | 7 | 120 | PAR 20 | E26 | 400 | 3.34/85 | 2.48/63 | 40,000 |
| LEDP-7WPAR20/NFL/827-DIM | 07912 | 7 | 120 | PAR 20 | E26 | 320 | 3.34/85 | 2.48/63 | 40,000 |
| LEDP-7WPAR20/NFL/841-DIM | 07913 | 7 | 120 | PAR 20 | E26 | 350 | 3.34/85 | 2.48/63 | 40,000 |
| LEDP-8WPAR20/FL/827-DIM | 07952 | 8 | 120 | PAR 20 | E26 | 365 | 3.42/87 | 2.48/63 | 35,000 |
| LEDP-8WPAR20/FL/830-DIM | 07953 | 8 | 120 | PAR 20 | E26 | 380 | 3.42/87 | 2.48/63 | 35,000 |
| LEDP-8WPAR20/FL/841-DIM | 07954 | 8 | 120 | PAR 20 | E26 | 395 | 3.42/87 | 2.48/63 | 35,000 |
| LEDP-8WPAR20/NFL/827-DIM | 07955 | 8 | 120 | PAR 20 | E26 | 365 | 3.42/87 | 2.48/63 | 35,000 |
| LEDP-8WPAR20/NFL/830-DIM | 07956 | 8 | 120 | PAR 20 | E26 | 380 | 3.42/87 | 2.48/63 | 35,000 |
| LEDP-8WPAR20/NFL/841-DIM | 07957 | 8 | 120 | PAR 20 | E26 | 395 | 3.42/87 | 2.48/63 | 35,000 |

LitespanLED® GEN 3 PAR30 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------------------|---------|-------|-------|--------|------|--------|-----------|-----------|--------|
| LEDP-13WPAR30/FL/827-DIM | 07958 | 13 | 120 | PAR 30 | E26 | 680 | 4.45/113 | 3.74/95 | 35,000 |
| LEDP-13WPAR30/FL/830-DIM | 07959 | 13 | 120 | PAR 30 | E26 | 700 | 4.45/113 | 3.74/95 | 25,000 |
| LEDP-13WPAR30/FL/841-DIM | 07960 | 13 | 120 | PAR 30 | E26 | 730 | 4.45/113 | 3.74/95 | 35,000 |
| LEDP-13WPAR30/NFL/827-DIM | 07961 | 13 | 120 | PAR 30 | E26 | 680 | 4.45/113 | 3.74/95 | 35,000 |
| LEDP-13WPAR30/NFL/830-DIM | 07962 | 13 | 120 | PAR 30 | E26 | 700 | 4.45/113 | 3.74/95 | 35,000 |
| LEDP-13WPAR30/NFL/841-DIM | 07963 | 13 | 120 | PAR 30 | E26 | 730 | 4.45/113 | 3.74/95 | 35,000 |
| LEDP-15WPAR30/NFL/827-DIM | 07914 | 15 | 120 | PAR 30 | E26 | 730 | 4.65/118 | 3.74/95 | 25,000 |
| LEDP-15WPAR30/NFL/830-DIM | 07888 | 15 | 120 | PAR 30 | E26 | 750 | 4.65/118 | 3.74/95 | 25,000 |
| LEDP-15WPAR30SN/FL/830-DIM | 08081 | 15 | 120 | PAR 30 | E26 | 800 | 3.74/95 | 3.74/95 | 25,000 |
| LEDP-15WPAR30SN/FL/841-DIM | 08075 | 15 | 120 | PAR 30 | E26 | 750 | 3.74/95 | 3.74/95 | 40,000 |
| LEDP-15WPAR30SN/NFL/830-DIM | 08083 | 15 | 120 | PAR 30 | E26 | 750 | 3.74/95 | 3.74/95 | 25,000 |
| LEDP-15WPAR30SN/NFL/841-DIM | 08084 | 15 | 120 | PAR 30 | E26 | 750 | 3.74/95 | 3.74/95 | 40,000 |



LitespanLED® GEN 3 PAR38 Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------------------|---------|-------|-------|--------|------|--------|-----------|-----------|--------|
| LEDP-20WPAR38/FL/827-DIM | 07921 | 20 | 120 | PAR 38 | E26 | 1150 | 5.00/127 | 4.76/121 | 35,000 |
| LEDP-20WPAR38/FL/830-DIM | 07891 | 20 | 120 | PAR 38 | E26 | 1200 | 5.00/127 | 4.76/121 | 25,000 |
| LEDP-20WPAR38/FL/841-DIM | 07922 | 20 | 120 | PAR 38 | E26 | 1250 | 5.00/127 | 4.76/121 | 35,000 |
| LEDP-20WPAR38/NFL/827-DIM | 07923 | 20 | 120 | PAR 38 | E26 | 1150 | 5.00/127 | 4.76/121 | 35,000 |
| LEDP-20WPAR38/NFL/830-DIM | 07890 | 20 | 120 | PAR 38 | E26 | 1200 | 5.00/127 | 4.76/121 | 35,000 |
| LEDP-20WPAR38/NFL/841-DIM | 07924 | 20 | 120 | PAR 38 | E26 | 1250 | 5.00/127 | 4.76/121 | 35,000 |



GEN3 PAR30



GEN3 PAR38

LED Replacement Lamps > Base Types



Miniature Replacement LED Lamps

| Ordering Code | Barcode | Shape | Base | Emitted Color | Life | Replaces |
|-----------------------------|---------|-----------------|-----------|---------------|--------|--|
| LED-12-DCBAY-R | 05378 | S-8 | BAY15d | Red | 10,000 | DC Index Bayonet Base 12V S8 Lamps |
| LED-12-DCBAY-W | 05379 | S-8 | BAY15d | White | 10,000 | DC Index Bayonet Base 12V S8 Lamps |
| LED-12-FESTOON-W | 05385 | Festoon 10mm | SV8.5mm | White | 30,000 | 10 x 44 Xenon Festoons |
| LED-12-SCBAY-R | 05391 | S-8 | BA15s | Red | 10,000 | SC Bayonet Base 12V S8 Lamps |
| LED-12-SCBAY-W | 05394 | S-8 | BA15s | White | 10,000 | SC Bayonet Base 12V S8 Lamps |
| LED-120-MB-G | 02678 | T-3 1/4 | BA9s | Green | 30,000 | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| LED-120-MB-R | 02679 | T-3 1/4 | BA9s | Red | 30,000 | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| LED-120-MB-W | 02681 | T-3 1/4 | BA9s | White | 30,000 | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| LED-120-MB-Y | 02682 | T-3 1/4 | BA9s | Yellow | 30,000 | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| LED-120-PSB-G | 02683 | T-2 | TS5 | Green | 30,000 | 120PSB5, 120PSB-Neon |
| LED-120-PSB-R | 02684 | T-2 | TS5 | Red | 30,000 | 120PSB5, 120PSB-Neon |
| LED-120-PSB-W | 02685 | T-2 | TS5 | White | 30,000 | 120PSB5, 120PSB-Neon |
| LED-120-PSB-Y | 02686 | T-2 | TS5 | Yellow | 30,000 | 120PSB5, 120PSB-Neon |
| LED-14-BA9S-G | 02687 | T-3 1/4 | BA9s | Green | 30,000 | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| LED-14-BA9S-R | 02688 | T-3 1/4 | BA9s | Red | 30,000 | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| LED-14-BA9S-W | 02689 | T-3 1/4 | BA9s | White | 30,000 | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| LED-14-T1.75 WEDGE-W | 02691 | T-1 3/4 | W2.1x4.6d | White | 30,000 | 18, 37, 70, 73, 74 |
| LED-194-R | 00346 | T-3 1/4 | W2.1x9.5d | Red | 30,000 | T3-1/4 Min Wedge Based Lamps 12/14V |
| LED-194-W | 00345 | T-3 1/4 | W2.1x9.5d | White | 30,000 | T3-1/4 Min Wedge Based Lamps 12/14V |
| LED-24-BA9S-G | 02693 | T-3 1/4 | BA9s | Green | 30,000 | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1829, 1843, 1864, 1873 |
| LED-24-BA9S-R | 02694 | T-3 1/4 | BA9s | Red | 30,000 | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1829, 1843, 1864, 1873 |
| LED-24-BA9S-W | 02695 | T-3 1/4 | BA9s | White | 30,000 | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1843, 1829, 1864, 1873 |
| LED-24-BA9S-Y | 02696 | T-3 1/4 | BA9s | Yellow | 30,000 | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1843, 1829, 1864, 1873 |
| LED-24-FESTOON-W | 05377 | Festoon 10mm | SV8.5mm | White | 30,000 | 10 x 44 Xenon Festoons |
| LED-24-MF-R | 02697 | T-1 3/4 | SX6s | Red | 30,000 | 327, 376, 385, 387, 7341 |
| LED-24-MF-W | 02698 | T-1 3/4 | SX6s | White | 30,000 | 327, 376, 385, 387, 7341 |
| LED-24-MF-Y | 02699 | T-1 3/4 | SX6s | Yellow | 30,000 | 327, 376, 385, 387, 7341 |
| LED-24-MG-R | 02701 | T-1 3/4 | S5.7s | Red | 30,000 | 276, 334, 388 |
| LED-24-MG-W | 02702 | T-1 3/4 | S5.7s | White | 30,000 | 276, 334, 388 |
| LED-24-MG-Y | 02703 | T-1 3/4 | S5.7s | Yellow | 30,000 | 276, 334, 388 |
| LED-24-PSB-G | 02704 | T-2 | TS5 | Green | 30,000 | 24PSB5, 28PSB5 |
| LED-24-PSB-R | 02705 | T-2 | TS5 | Red | 30,000 | 24PSB5, 28PSB5 |
| LED-24-PSB-W | 02706 | T-2 | TS5 | White | 30,000 | 24PSB5, 28PSB5 |
| LED-24-PSB-Y | 02707 | T-2 | TS5 | Yellow | 30,000 | 24PSB5, 28PSB5 |
| LED-24-T1.75 WEDGE-G | 02708 | T-1 3/4 | W2.1x4.6d | Green | 30,000 | 17, 85 |
| LED-24-T1.75 WEDGE-R | 02709 | T-1 3/4 | W2.1x4.6d | Red | 30,000 | 17, 85 |
| LED-24-T1.75 WEDGE-W | 02711 | T-1 3/4 | W2.1x4.6d | White | 30,000 | 17, 85 |
| LED-24-T1.75 WEDGE-Y | 02712 | T-1 3/4 | W2.1x4.6d | Yellow | 30,000 | 17, 85 |
| LED-6-BA9S-W | 05742 | T-3 1/4 | BA9s | White | 30,000 | 6MB, 44, 47, 238, 755, 1810, 1847, 1866 |
| LED-6-T1.75 WEDGE-W | 02715 | T-1 3/4 | W2.1x4.6d | White | 30,000 | 56, 79, 84, 86 |
| LED-6-T1.75 WEDGE-Y | 02716 | T-1 3/4 | W2.1x4.6d | Yellow | 30,000 | 56, 79, 84, 86 |
| LEDP-1383/30K | 07797 | MR11 | BA15s | Warm White | 30,000 | |
| LEDP-1383/41K | 07798 | MR11 | BA15s | Cool White | 30,000 | |



SC Bayonet



DC Bayonet



Festoon 10mm




T1 3/4 Midget Flange



T1 3/4 Midget Groove

Miniature LED Lamps > Base Types

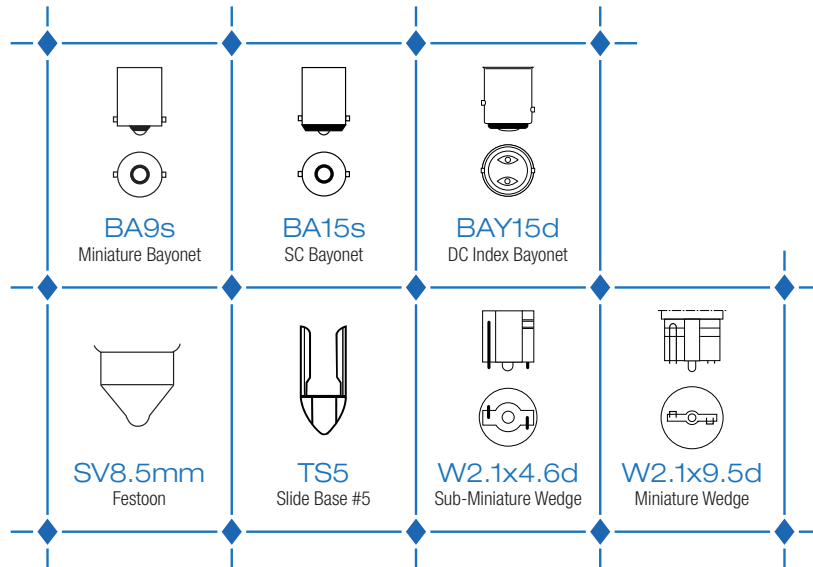



Compact Fluorescent Lamps

EIKO's selection of compact fluorescent (CFL) and self-ballasted compact fluorescent (CFLi) lamps features long life, high quality tri-phosphor blends, and many options with environmentally-friendly ratings such as TCLP, CEE, and ENERGY STAR. Our selection includes duo tube, triple tube, quad tube, FML, spiral, PAR, R and decorative shapes in various wattages and color temperatures.

A Shaped Decorative CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-----------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP9A19/27K | 06445 | 9 | 120 | E26 | 470 | 80 | 2700 | 4.213/107 | 1.6 | 10,000 | |
| SP9A19/41K | 06446 | 9 | 120 | E26 | 470 | 80 | 4100 | 4.213/107 | 1.6 | 10,000 | |
| SP11A/27K-GU24 | 07732 | 11 | 120 | GU24 | 600 | >80 | 2700 | 3.82/97 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP13A19/27K | 06447 | 13 | 120 | E26 | 800 | >80 | 2700 | 4.84/123 | 3 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP15A/27K-GU24 | 07710 | 13 | 120 | GU24 | 800 | >80 | 2700 | 4.45/113 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP13A19/41K | 06448 | 14 | 120 | E26 | 750 | >80 | 4100 | 4.88/123 | 3 | 10,000 | UL/CUL, TCLP Compliant |

B10 Decorative CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-----------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-----------|
| SP5B10/E12/27K | 06435 | 5 | 120 | E12 | 220 | 80 | 2700 | 4.331/110 | 1.6 | 10,000 | |
| SP5B10/E12/41K | 06437 | 5 | | E12 | 220 | 80 | 4100 | 4.331/110 | 1.6 | 10,000 | |
| SP7B10/E12/27K | 06442 | 7 | | E12 | 320 | 80 | 2700 | 4.685/119 | 1.6 | 10,000 | |
| SP7B10/E12/41K | 06449 | 7 | | E12 | 320 | 80 | 4100 | 4.685/119 | 1.6 | 10,000 | |



B13 Decorative CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-----------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-----------|
| SP5B13/E26/27K | 06452 | 5 | | E26 | 220 | 80 | 2700 | 4.449/113 | 1.6 | 10,000 | |
| SP5B13/E26/41K | 06453 | 5 | | E26 | 220 | 80 | 4100 | 4.449/113 | 1.6 | 10,000 | |

G25 Decorative CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP9G25/27K | 06550 | 9 | | E26 | 500 | 80 | 2700 | 4.331/110 | 1.6 | 10,000 | |
| SP9G25/41K | 06551 | 9 | | E26 | 500 | 80 | 4100 | 4.331/110 | 1.6 | 10,000 | |
| SP15G25/27K | 07870 | 15 | 120 | E26 | 820 | 80 | 2700 | 4.724/120 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP15G25/27K-GU24 | 07734 | 15 | 120 | GU24 | 740 | >80 | 2700 | 4.45/113 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP15G25/41K | 07871 | 15 | 120 | E26 | 820 | 80 | 4100 | 4.724/120 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |

High Watt CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|------------------------|
| SP65/41/MED | 05293 | 65 | 120 | E26 | 4300 | >80 | 4100 | 9.45/240 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP65/50/MED | 06659 | 65 | 120 | E26 | 4000 | >80 | 5000 | 9.45/240 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP85/41/MED | 81183 | 85 | 120 | E26 | 5700 | >80 | 4100 | 9.96/253 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP85/50/MED | 81181 | 85 | 120 | E26 | 5350 | >80 | 5000 | 9.96/253 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/41/MED | 81184 | 105 | 120 | E26 | 7000 | >80 | 4100 | 10.75/273 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/41/MOG | 81185 | 105 | 120 | E39 | 7000 | >80 | 4100 | 11.26/286 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/41/MOG-277V | 04412 | 105 | 277 | E39 | 7000 | >80 | 4100 | 11.26/286 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/50/MED | 81180 | 105 | 120 | E26 | 6600 | >80 | 5000 | 10.75/273 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP180/41/MOG | 07822 | 180 | 120 | E39 | 11,100 | 80 | 4100 | 14.3/364 | 9.2 | 10,000 | UL/CSA, TCLP Compliant |
| SP180/50/MOG | 07823 | 180 | 120 | E39 | 10,400 | 80 | 5000 | 14.3/364 | 9.2 | 10,000 | UL/CSA, TCLP Compliant |

PAR CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-----------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|-------|-------------------------------------|
| PAR20/9/30K | 06281 | 9 | 120 | E26 | 280 | >80 | 3000 | 3.82/97 | 1.35 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR20/9/35K | 01519 | 9 | 120 | E26 | 272 | >80 | 3500 | 3.82/97 | 1.35 | 8,000 | UL/CSA, TCLP Compliant |
| PAR20/9/41K | 06282 | 9 | 120 | E26 | 270 | >80 | 4100 | 3.82/97 | 1.35 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR20/9/50K | 01521 | 9 | 120 | E26 | 258 | >80 | 5000 | 3.82/97 | 1.35 | 8,000 | UL/CSA, TCLP Compliant |
| PAR30LN/15/30K | 06279 | 15 | 120 | E26 | 750 | >80 | 3000 | 5.12/130 | 1.93 | 8,000 | UL/CSA, TCLP Compliant |
| PAR30LN/15/35K | 01522 | 15 | 120 | E26 | 728 | >80 | 3500 | 5.12/130 | 1.93 | 8,000 | UL/CSA, TCLP Compliant |
| PAR30LN/15/41K | 06280 | 15 | 120 | E26 | 725 | >80 | 4100 | 5.12/130 | 1.93 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR30LN/15/50K | 01523 | 15 | 120 | E26 | 745 | >80 | 5000 | 5.12/130 | 1.93 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR38/23/27K | 01046 | 23 | 120 | E26 | 1250 | >80 | 2700 | 5.51/140 | 2.31 | 8,000 | UL/CSA, TCLP Compliant |
| PAR38/23/30 | 06277 | 23 | 120 | E26 | 1200 | >80 | 3000 | 5.51/140 | 2.31 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR38/23/30K | 06277 | 23 | 120 | E26 | 1200 | >80 | 3000 | 5.51/140 | 2.5 | 8,000 | UL/CSA, TCLP Compliant |

>>Continued on page 32



PAR CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|---------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|-------|-------------------------------------|
| PAR38/23/41K | 06278 | 23 | 120 | E26 | 1210 | >80 | 4100 | 5.51/140 | 2.31 | 8,000 | UL/CSA, Energy Star, TCLP Compliant |
| PAR38/23/50K | 01531 | 23 | 120 | E26 | 1200 | >80 | 5000 | 5.51/140 | 2.31 | 8,000 | UL/CSA, TCLP Compliant |

R-Shaped CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP14/R20/27K | 06390 | 14 | 120 | E26 | 500 | 82 | 2700 | 4.88/124 | 3 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP14/R20/41K | 06391 | 14 | 120 | E26 | 450 | 82 | 4100 | 4.88/124 | 3 | 8,000 | UL/CSA, TCLP Compliant |
| SP15/R30/27K | 49365 | 15 | | E26 | 700 | 80 | 2700 | 5.394/137 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP15/R30/27K-DIM | 07879 | 15 | 120 | E26 | 680 | | 2700 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/27K-GU24 | 07733 | 15 | 120 | GU24 | 690 | >80 | 2700 | 4.45/113 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP15/R30/41K | 49366 | 15 | | E26 | 700 | 80 | 4100 | 5.394/137 | 1.6 | 10,000 | |
| SP15/R30/41K-DIM | 07880 | 15 | 120 | E26 | 680 | | 4100 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/50K-DIM | 07881 | 15 | 120 | E26 | 680 | | 5000 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/65K | 49367 | 15 | | E26 | 650 | 80 | 6500 | 5.394/137 | 1.6 | 10,000 | |
| SP15/R30/65K-DIM | 07882 | 15 | 120 | E26 | 640 | | 6500 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/27K | 49371 | 23 | 120 | E26 | 1090 | 80 | 2700 | 6.496/165 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/27K-DIM | 07704 | 23 | 120 | E26 | 1090 | | 2700 | 7.01/178 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/41K | 49372 | 23 | 120 | E26 | 1090 | 80 | 4100 | 6.496/165 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/41K-DIM | 07705 | 23 | 120 | E26 | 1090 | | 4100 | 7.01/178 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/50K-DIM | 07706 | 23 | 120 | E26 | 1050 | | 5000 | 7.01/178 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/R40/65K | 49373 | 23 | 120 | E26 | 1000 | 80 | 6500 | 6.496/165 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |

Dimmable Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|-------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|------------------------|
| SP13/27K-DIM | 06392 | 13 | 120 | E26 | 900 | 80 | 2700 | 4.92/125 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP13/41K-DIM | 06393 | 13 | 120 | E26 | 850 | 80 | 4100 | 4.92/125 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP15/R30/27K-DIM | 07879 | 15 | 120 | E26 | 680 | | 2700 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/41K-DIM | 07880 | 15 | 120 | E26 | 680 | | 4100 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/50K-DIM | 07881 | 15 | 120 | E26 | 680 | | 5000 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP15/R30/65K-DIM | 07882 | 15 | 120 | E26 | 640 | | 6500 | 6.102/155 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP19/27K-DIM | 06394 | 18 | 120 | E26 | 1350 | 80 | 2700 | 5.12/130 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP19/41K-DIM | 06395 | 20 | 120 | E26 | 1300 | 80 | 4100 | 5.12/130 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP23/27K-DIM | 06396 | 23 | 120 | E26 | 1550 | 80 | 2700 | 5.47/139 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP23/41K-DIM | 06397 | 23 | 120 | E26 | 1500 | 80 | 4100 | 5.47/139 | 2 | 8,000 | UL/CSA, TCLP Compliant |

GU24 Based Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP13/27-GU24 | 05255 | 13 | 120 | GU24 | 800 | 80 | 2700 | 3.622/92 | 1.6 | 10,000 | Energy Star |
| SP13/27K-GU24-DIM | 07701 | 13 | 120 | GU24 | 800 | 82 | 2700 | 3.94/100 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |

>>Continued on page 33



R20



R30



R40



Dimmable Spiral



GU24 Based Spiral

GU24 Based Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP13/41-GU24 | 07749 | 13 | 120 | GU24 | 900 | 82 | 4100 | 3.74/95 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP18/27-GU24 | 05256 | 18 | | GU24 | 1200 | 80 | 2700 | 4.055/103 | 1.6 | 10,000 | Energy Star |
| SP18/27K-GU24-DIM | 07702 | 18 | 120 | GU24 | 1200 | 82 | 2700 | 4.37/111 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP18/41-GU24 | 07750 | 18 | 120 | GU24 | 1100 | 82 | 4100 | 4.33/110 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/27-GU24 | 07751 | 23 | 120 | GU24 | 1600 | 80 | 2700 | 4.409/112 | 1.6 | 10,000 | Energy Star |
| SP23/27K-GU24-DIM | 07703 | 23 | 120 | GU24 | 1600 | 82 | 2700 | 4.84/123 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/41-GU24 | 07752 | 23 | 120 | GU24 | 1600 | 80 | 4100 | 4.409/112 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP26/27-GU24 | 05258 | 27 | 120 | GU24 | 1900 | 82 | 2700 | 4.73/123 | 3 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |

Medium Based Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|-------------------------------------|
| SP13/27K | 00031 | 13 | 120 | E26 | 900 | 82 | 2700 | 4.50/114 | 2 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP13/35K | 00032 | 13 | 120 | E26 | 800 | 82 | 3500 | 4.10/104 | 2 | 8,000 | UL/CSA, TCLP Compliant |
| SP13/41K | 00033 | 13 | 120 | E26 | 900 | 82 | 4100 | 4.10/104 | 2 | 10,000 | UL/CSA, TCLP Compliant, RoHS |
| SP13/50K | 05667 | 13 | 120 | E26 | 800 | 82 | 5000 | 4.10/104 | 2 | 10,000 | UL/CSA, TCLP Compliant |
| SP13/65K | 06131 | 13 | 120 | E26 | 900 | 82 | 6500 | 4.10/104 | 2 | 10,000 | UL/CSA, TCLP Compliant |
| SP19/27K | 00034 | 18 | 120 | E26 | 1200 | 80 | 2700 | 4.528/115 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP19/35K | 00035 | 18 | 120 | E26 | 1200 | 80 | 3500 | 4.528/115 | 1.6 | 10,000 | UL/cUL, TCLP Compliant, RoHS |
| SP19/41K | 00036 | 18 | 120 | E26 | 1200 | 80 | 4100 | 4.528/115 | 1.6 | 10,000 | UL/cUL, TCLP Compliant, RoHS |
| SP19/50K | 05668 | 18 | 120 | E26 | 1200 | 80 | 5000 | 4.528/115 | 1.6 | 10,000 | UL/cUL, TCLP Compliant, RoHS |
| SP19/65K | 49324 | 18 | 120 | E26 | 1100 | 80 | 6500 | 4.528/115 | 1.6 | 10,000 | UL/cUL, TCLP Compliant, RoHS |
| SP23/27K | 49325 | 23 | 120 | E26 | 1600 | 80 | 2700 | 4.882/124 | 1.6 | 10,000 | UL/CSA, Energy Star, TCLP Compliant |
| SP23/35K | 81171 | 23 | 120 | E26 | 1600 | 80 | 3500 | 4.882/124 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/41K | 49326 | 23 | 120 | E26 | 1600 | 80 | 4100 | 4.882/124 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/50K | 81172 | 23 | 120 | E26 | 1600 | 80 | 5000 | 4.882/124 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP23/65K | 49327 | 23 | 120 | E26 | 1600 | 80 | 6500 | 4.882/124 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP27/27K | 05412 | 26 | | E26 | 1700 | 80 | 2700 | 5.079/129 | 1.6 | 10,000 | Energy Star |
| SP27/35K | 05413 | 26 | 120 | E26 | 1700 | 80 | 3500 | 5.08/129 | 1.6 | 10,000 | UL/CSA, TCLP Compliant |
| SP27/41K | 05414 | 26 | | E26 | 1700 | 80 | 4100 | 5.079/129 | 1.6 | 10,000 | |
| SP27/50K | 05415 | 26 | | E26 | 1700 | 80 | 5000 | 5.079/129 | 1.6 | 10,000 | |
| SP32/27K | 05416 | 32 | | E26 | 2000 | 80 | 2700 | 5.711/145 | 3.2 | 10,000 | |
| SP32/35K | 05417 | 32 | 120 | E26 | 2050 | 80 | 3500 | 5.63/143 | 3.2 | 8,000 | UL/CSA, TCLP Compliant |
| SP32/41K | 05418 | 32 | 120 | E26 | 2050 | 80 | 4100 | 5.63/143 | 3.2 | 8,000 | UL/CSA, TCLP Compliant |
| SP32/50K | 05419 | 32 | 120 | E26 | 2000 | 80 | 5000 | 5.71/145 | 3.2 | 10,000 | UL/CSA, TCLP Compliant |
| SP42/27K | 05420 | 40 | | E26 | 2600 | 80 | 2700 | 7.283/185 | 3.2 | 10,000 | UL/CSA, TCLP Compliant |
| SP42/35K | 05421 | 40 | | E26 | 2600 | 80 | 3500 | 7.283/185 | 3.2 | 10,000 | |
| SP42/41K | 05422 | 40 | | E26 | 2600 | 80 | 4100 | 7.13/181 | 3.2 | 10,000 | |
| SP42/50K | 05423 | 40 | | E26 | 2600 | 80 | 5000 | 7.283/185 | 3.2 | 10,000 | |
| SP65/41/MED | 05293 | 65 | 120 | E26 | 4300 | >80 | 4100 | 9.45/240 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP65/50/MED | 06659 | 65 | 120 | E26 | 4000 | >80 | 5000 | 9.45/240 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP85/41/MED | 81183 | 85 | 120 | E26 | 5700 | >80 | 4100 | 9.96/253 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |

>>Continued on page 34



Medium Based Spiral

Medium Based Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|---------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|------------------------|
| SP85/50/MED | 81181 | 85 | 120 | E26 | 5350 | >80 | 5000 | 9.96/253 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/41/MED | 81184 | 105 | 120 | E26 | 7000 | >80 | 4100 | 10.75/273 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/50/MED | 81180 | 105 | 120 | E26 | 6600 | >80 | 5000 | 10.75/273 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |

Mogul Based Spiral CFLi Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life | Approvals |
|--------------------------|---------|-------|-------|------|-----------------------|-----|-------|-----------|-------|--------|------------------------|
| SP105/41/MOG | 81185 | 105 | 120 | E39 | 7000 | >80 | 4100 | 11.26/286 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP105/41/MOG-277V | 04412 | 105 | 277 | E39 | 7000 | >80 | 4100 | 11.26/286 | 4.8 | 10,000 | UL/CSA, TCLP Compliant |
| SP180/41/MOG | 07822 | 180 | 120 | E39 | 11,100 | 80 | 4100 | 14.3/364 | 9.2 | 10,000 | UL/CSA, TCLP Compliant |
| SP180/50/MOG | 07823 | 180 | 120 | E39 | 10,400 | 80 | 5000 | 14.3/364 | 9.2 | 10,000 | UL/CSA, TCLP Compliant |

4-Pin Based Spiral CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-------------------|---------|-------|---------|-----------------------|-----|-------|-----------|-------|--------|
| SP13/27-4P | 05251 | 13 | G24q-1 | 900 | 80 | 2700 | 3.74/95 | 2.5 | 10,000 |
| SP18/27-4P | 05250 | 18 | GX24q-2 | 1100 | 82 | 2700 | 4.41/112 | 2.5 | 10,000 |
| SP26/27-4P | 05252 | 26 | GX24q-3 | 1800 | 82 | 2700 | 4.72/120 | 2.5 | 10,000 |

Duo-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-------------------|---------|-------|------|-----------------------|-----|-------|-----------|-------|--------|
| DT5/27 | 15554 | 5 | G23 | 250 | 82 | 2700 | 4.2/107 | 2.2 | 10,000 |
| DT5/35 | 49204 | 5 | G23 | 250 | 82 | 3500 | 4.2/107 | 2.2 | 10,000 |
| DT5/41 | 49205 | 5 | G23 | 250 | 82 | 4100 | 4.2/107 | 2.2 | 10,000 |
| DT5/50 | 49206 | 5 | G23 | 250 | 82 | 5000 | 4.2/107 | 2.2 | 10,000 |
| DT5/65 | 49207 | 5 | G23 | 250 | 82 | 6500 | 4.2/107 | 2.2 | 10,000 |
| DT7/27 | 15556 | 7 | G23 | 400 | 82 | 2700 | 5.3/135 | 2.2 | 10,000 |
| DT7/35 | 49208 | 7 | G23 | 400 | 82 | 3500 | 5.3/135 | 2.2 | 10,000 |
| DT7/41 | 49209 | 7 | G23 | 400 | 82 | 4100 | 5.3/135 | 2.2 | 10,000 |
| DT7/50 | 49210 | 7 | G23 | 400 | 82 | 5000 | 5.3/135 | 2.2 | 10,000 |
| DT7/65 | 49211 | 7 | G23 | 400 | 82 | 6500 | 5.3/135 | 2.2 | 10,000 |
| DT9/27 | 15558 | 9 | G23 | 600 | 82 | 2700 | 6.6/168 | 2.2 | 10,000 |
| DT9/35 | 49212 | 9 | G23 | 600 | 82 | 3500 | 6.6/168 | 2.2 | 10,000 |
| DT9/41 | 49213 | 9 | G23 | 600 | 82 | 4100 | 6.6/168 | 2.2 | 10,000 |
| DT9/50 | 49214 | 9 | G23 | 600 | 82 | 5000 | 6.6/168 | 2.2 | 10,000 |
| DT9/65 | 49215 | 9 | G23 | 600 | 82 | 6500 | 6.6/168 | 2.2 | 10,000 |
| DT13/27 | 15560 | 13 | GX23 | 825 | 82 | 2700 | 7.3/185 | 2.2 | 10,000 |
| DT13/30 | 49216 | 13 | GX23 | 825 | 82 | 3000 | 7.3/185 | 2.2 | 10,000 |
| DT13/35 | 15575 | 13 | GX23 | 825 | 82 | 3500 | 7.3/185 | 2.2 | 10,000 |
| DT13/41 | 49217 | 13 | GX23 | 825 | 82 | 4100 | 7.3/185 | 2.2 | 10,000 |
| DT13/50 | 49218 | 13 | GX23 | 825 | 82 | 5000 | 7.3/185 | 2.2 | 10,000 |
| DT13/65 | 49219 | 13 | GX23 | 825 | 82 | 6500 | 7.3/185 | 2.2 | 10,000 |
| DT18/30/RS | 49283 | 18 | 2G11 | 1250 | 82 | 3000 | 9.0/229 | 2.2 | 20,000 |
| DT18/35/RS | 49284 | 18 | 2G11 | 1250 | 82 | 3500 | 9.0/229 | 2.2 | 20,000 |

>>Continued on page 35



Duo-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-------------------|---------|-------|------|-----------------------|-----|-------|-----------|-------|--------|
| DT18/41/RS | 49285 | 18 | 2G11 | 1250 | 82 | 4100 | 9.0/229 | 2.2 | 20,000 |
| DT18/50/RS | 49286 | 18 | 2G11 | 1250 | 82 | 5000 | 9.0/229 | 2.2 | 20,000 |
| DT24/30/RS | 49288 | 24 | 2G11 | 1800 | 82 | 3000 | 12.9/328 | 2.2 | 20,000 |
| DT24/35/RS | 49289 | 24 | 2G11 | 1800 | 82 | 3500 | 12.9/328 | 2.2 | 20,000 |
| DT24/41/RS | 49290 | 24 | 2G11 | 1800 | 82 | 4100 | 12.9/328 | 2.2 | 20,000 |
| DT24/50/RS | 49291 | 24 | 2G11 | 1800 | 82 | 5000 | 12.9/328 | 2.2 | 20,000 |
| DT24/65/RS | 49292 | 24 | 2G11 | 1800 | 82 | 6500 | 12.9/328 | 2.2 | 20,000 |
| DT36/30/RS | 49293 | 36 | 2G11 | 2900 | 82 | 3000 | 16.6/422 | 2.2 | 20,000 |
| DT36/35/RS | 49294 | 36 | 2G11 | 2900 | 82 | 3500 | 16.6/422 | 2.2 | 20,000 |
| DT36/41/RS | 49295 | 36 | 2G11 | 2900 | 82 | 4100 | 16.6/422 | 2.2 | 20,000 |
| DT36/50/RS | 49296 | 36 | 2G11 | 2900 | 82 | 5000 | 16.6/422 | 2.2 | 20,000 |
| DT36/65/RS | 49297 | 36 | 2G11 | 2900 | 82 | 6500 | 16.6/422 | 2.2 | 20,000 |
| DT40/30/RS | 49298 | 40 | 2G11 | 3300 | 82 | 3000 | 22.5/572 | 2.2 | 20,000 |
| DT40/35/RS | 49299 | 40 | 2G11 | 3300 | 82 | 3500 | 22.5/572 | 2.2 | 20,000 |
| DT40/41/RS | 49300 | 40 | 2G11 | 3300 | 82 | 4100 | 22.5/572 | 2.2 | 20,000 |
| DT40/50/RS | 49301 | 40 | 2G11 | 3300 | 82 | 5000 | 22.5/572 | 2.2 | 20,000 |
| DT40/65/RS | 49302 | 40 | 2G11 | 3300 | 82 | 6500 | 22.5/572 | 2.2 | 20,000 |
| DT50/30/RS | 49303 | 50 | 2G11 | 4300 | 82 | 3000 | 22.5/572 | 2.2 | 18,000 |
| DT50/35/RS | 49304 | 50 | 2G11 | 4300 | 82 | 3500 | 22.5/572 | 2.2 | 18,000 |
| DT50/41/RS | 49305 | 50 | 2G11 | 4300 | 82 | 4100 | 22.5/572 | 2.2 | 18,000 |
| DT50/50/RS | 49306 | 50 | 2G11 | 4300 | 82 | 5000 | 22.5/572 | 2.2 | 18,000 |
| DT50/65/RS | 49307 | 50 | 2G11 | 4300 | 82 | 6500 | 22.5/572 | 2.2 | 18,000 |
| DT55/30/RS | 49308 | 55 | 2G11 | 4800 | 82 | 3000 | 21.5/546 | 2.2 | 18,000 |
| DT55/35/RS | 49309 | 55 | 2G11 | 4800 | 82 | 3500 | 21.5/546 | 2.2 | 18,000 |
| DT55/41/RS | 49310 | 55 | 2G11 | 4800 | 82 | 4100 | 21.5/546 | 2.2 | 18,000 |
| DT55/50/RS | 49311 | 55 | 2G11 | 4800 | 82 | 5000 | 21.5/546 | 2.2 | 18,000 |
| DT55/65/RS | 49312 | 55 | 2G11 | 4800 | 82 | 6500 | 21.5/546 | 2.2 | 18,000 |

Triple-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|----------------|---------|-------|---------|-----------------------|-----|-------|-----------|-------|--------|
| TT18/27 | 49259 | 18 | GX24q-2 | 1200 | 82 | 2700 | 4.8/122 | 2.2 | 10,000 |
| TT18/30 | 49260 | 18 | GX24q-2 | 1200 | 82 | 3000 | 4.8/122 | 2.2 | 10,000 |
| TT18/35 | 49261 | 18 | GX24q-2 | 1200 | 82 | 3500 | 4.8/122 | 2.2 | 10,000 |
| TT18/41 | 49262 | 18 | GX24q-2 | 1200 | 82 | 4100 | 4.8/122 | 2.2 | 10,000 |
| TT18/65 | 49264 | 18 | GX24q-2 | 1200 | 82 | 6500 | 4.8/122 | 2.2 | 10,000 |
| TT26/27 | 49265 | 26 | GX24q-3 | 1800 | 82 | 2700 | 5.2/132 | 2.2 | 10,000 |
| TT26/30 | 49266 | 26 | GX24q-3 | 1800 | 82 | 3000 | 5.2/132 | 2.2 | 10,000 |
| TT26/35 | 49267 | 26 | GX24q-3 | 1800 | 82 | 3500 | 5.2/132 | 2.2 | 10,000 |
| TT26/41 | 49268 | 26 | GX24q-3 | 1800 | 82 | 4100 | 5.2/132 | 2.2 | 10,000 |
| TT26/50 | 49269 | 26 | GX24q-3 | 1800 | 82 | 5000 | 5.2/132 | 2.2 | 10,000 |
| TT26/65 | 49270 | 26 | GX24q-3 | 1800 | 82 | 6500 | 5.2/132 | 2.2 | 10,000 |
| TT32/27 | 49271 | 32 | GX24q-3 | 2200 | 82 | 2700 | 5.8/147 | 2.2 | 10,000 |
| TT32/30 | 49272 | 32 | GX24q-3 | 2200 | 82 | 3000 | 5.8/147 | 2.2 | 10,000 |
| TT32/35 | 49273 | 32 | GX24q-3 | 2200 | 82 | 3500 | 5.8/147 | 2.2 | 10,000 |

>>Continued on page 36



Triple-Tube

Triple-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|----------------|---------|-------|---------|-----------------------|-----|-------|-----------|-------|--------|
| TT32/41 | 49274 | 32 | GX24q-3 | 2200 | 82 | 4100 | 5.8/147 | 2.2 | 10,000 |
| TT32/50 | 49275 | 32 | GX24q-3 | 2200 | 82 | 5000 | 5.8/147 | 2.2 | 10,000 |
| TT32/65 | 49276 | 32 | GX24q-3 | 2200 | 82 | 6500 | 5.8/147 | 2.2 | 10,000 |
| TT42/27 | 49277 | 42 | GX24q-4 | 3200 | 82 | 2700 | 6.4/163 | 2.2 | 10,000 |
| TT42/30 | 49278 | 42 | GX24q-4 | 3200 | 82 | 3000 | 6.4/163 | 2.2 | 10,000 |
| TT42/35 | 49279 | 42 | GX24q-4 | 3200 | 82 | 3500 | 6.4/163 | 2.2 | 10,000 |
| TT42/41 | 49280 | 42 | GX24q-4 | 3200 | 82 | 4100 | 6.4/163 | 2.2 | 10,000 |
| TT42/50 | 49281 | 42 | GX24q-4 | 3200 | 82 | 5000 | 6.4/163 | 2.2 | 10,000 |
| TT42/65 | 49282 | 42 | GX24q-4 | 3200 | 82 | 6500 | 6.4/163 | 2.2 | 10,000 |

Quad-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|----------------------|---------|-------|--------|-----------------------|-----|-------|-----------|-------|--------|
| QT9/27 | 15562 | 9 | G23-2 | 550 | 82 | 2700 | 4.3/109 | 2.2 | 10,000 |
| QT9/35 | 49221 | 9 | G23-2 | 550 | 82 | 3500 | 4.3/109 | 2.2 | 10,000 |
| QT9/41 | 49558 | 9 | G23-2 | 550 | 82 | 4100 | 4.3/109 | 2.2 | 10,000 |
| QT13/27 | 15564 | 13 | GX23-2 | 810 | 82 | 2700 | 4.6/117 | 2.2 | 10,000 |
| QT13/27-4P | 49241 | 13 | G24q-1 | 900 | 82 | 2700 | 5/127 | 2.2 | 10,000 |
| QT13/30 | 49222 | 13 | GX23-2 | 810 | 82 | 3000 | 4.6/117 | 2.2 | 10,000 |
| QT13/30-4P | 49242 | 13 | G24q-1 | 900 | 82 | 3000 | 5/127 | 2.2 | 10,000 |
| QT13/35 | 15576 | 13 | GX23-2 | 810 | 82 | 3500 | 4.6/117 | 2.2 | 10,000 |
| QT13/35-4P | 49243 | 13 | G24q-1 | 900 | 82 | 3500 | 5/127 | 2.2 | 10,000 |
| QT13/41 | 49084 | 13 | GX23-2 | 810 | 82 | 4100 | 4.6/117 | 2.2 | 10,000 |
| QT13/41-4P | 49244 | 13 | G24q-1 | 900 | 82 | 4100 | 5/127 | 2.2 | 10,000 |
| QT13/50 | 49223 | 13 | GX23-2 | 810 | 82 | 5000 | 4.6/117 | 2.2 | 10,000 |
| QT13/50-4P | 49245 | 13 | G24q-1 | 900 | 82 | 5000 | 5/127 | 2.2 | 10,000 |
| QT13/65 | 49224 | 13 | GX23-2 | 810 | 82 | 6500 | 4.6/117 | 2.2 | 10,000 |
| QT13/65-4P | 49246 | 13 | G24q-1 | 900 | 82 | 6500 | 5/127 | 2.2 | 10,000 |
| QT13/G24D1/30 | 49226 | 13 | G24d-1 | 900 | 82 | 3000 | 5.5/140 | 2.5 | 10,000 |
| QT13/G24D1/35 | 49227 | 13 | G24d-1 | 900 | 82 | 3500 | 5.5/140 | 2.5 | 10,000 |
| QT13/G24D1/50 | 49229 | 13 | G24d-1 | 900 | 82 | 5000 | 5.5/140 | 2.5 | 10,000 |
| QT13/G24D1/65 | 49230 | 13 | G24d-1 | 900 | 82 | 6500 | 5.5/140 | 2.5 | 10,000 |
| QT18/27 | 15566 | 18 | G24d-2 | 1150 | 82 | 2700 | 5.9/150 | 2.2 | 10,000 |
| QT18/27-4P | 49247 | 18 | G24q-2 | 1150 | 82 | 2700 | 5.8/147 | 2.2 | 10,000 |
| QT18/30 | 49231 | 18 | G24d-2 | 1150 | 82 | 3000 | 5.9/150 | 2.2 | 10,000 |
| QT18/30-4P | 49248 | 18 | G24q-2 | 1150 | 82 | 3000 | 5.8/147 | 2.2 | 10,000 |
| QT18/35 | 49232 | 18 | G24d-2 | 1150 | 82 | 3500 | 5.9/150 | 2.2 | 10,000 |
| QT18/35-4P | 49249 | 18 | G24q-2 | 1150 | 82 | 3500 | 5.8/147 | 2.2 | 10,000 |
| QT18/41 | 49233 | 18 | G24d-2 | 1150 | 82 | 4100 | 5.9/150 | 2.2 | 10,000 |
| QT18/41-4P | 49250 | 18 | G24q-2 | 1150 | 82 | 4100 | 5.8/147 | 2.2 | 10,000 |
| QT18/50 | 49234 | 18 | G24d-2 | 1150 | 82 | 5000 | 5.9/150 | 2.2 | 10,000 |
| QT18/50-4P | 49251 | 18 | G24q-2 | 1150 | 82 | 5000 | 5.8/147 | 2.2 | 10,000 |
| QT26/27 | 15568 | 26 | G24d-3 | 1710 | 82 | 2700 | 6.7/170 | 2.2 | 10,000 |
| QT26/27-4P | 49253 | 26 | G24q-3 | 1710 | 82 | 2700 | 6.4/163 | 2.2 | 10,000 |
| QT26/30 | 49236 | 26 | G24d-3 | 1710 | 82 | 3000 | 6.7/170 | 2.2 | 10,000 |

>>Continued on page 37



Quad-Tube



FML


Quad-Tube CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-------------------|---------|-------|--------|-----------------------|-----|-------|-----------|-------|--------|
| QT26/30-4P | 49254 | 26 | G24q-3 | 1710 | 82 | 3000 | 6.4/163 | 2.2 | 10,000 |
| QT26/35 | 49237 | 26 | G24d-3 | 1710 | 82 | 3500 | 6.7/170 | 2.2 | 10,000 |
| QT26/35-4P | 49255 | 26 | G24q-3 | 1710 | 82 | 3500 | 6.4/163 | 2.2 | 10,000 |
| QT26/41 | 49238 | 26 | G24d-3 | 1710 | 82 | 4100 | 6.7/170 | 2.2 | 10,000 |
| QT26/41-4P | 49256 | 26 | G24q-3 | 1710 | 82 | 4100 | 6.4/163 | 2.2 | 10,000 |
| QT26/50 | 49239 | 26 | G24d-3 | 1710 | 82 | 5000 | 6.7/170 | 2.2 | 10,000 |
| QT26/50-4P | 49257 | 26 | G24q-3 | 1710 | 82 | 5000 | 6.4/163 | 2.2 | 10,000 |
| QT26/65 | 49240 | 26 | G24d-3 | 1710 | 82 | 6500 | 6.7/170 | 2.2 | 10,000 |
| QT26/65-4P | 49258 | 26 | G24q-3 | 1710 | 82 | 6500 | 6.4/163 | 2.2 | 10,000 |

FML CFL Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-----------------|---------|-------|---------|-----------------------|-----|-------|-----------|-------|--------|
| FML18/65 | 05148 | 18 | GX10q-4 | 1080 | 82 | 6500 | 5.1/129 | 2.5 | 10,000 |
| FML27/27 | 49313 | 27 | GX10q-4 | 1400 | 82 | 2700 | 5.7/145 | 2.5 | 10,000 |
| FML27/41 | 49314 | 27 | GX10q-4 | 1400 | 82 | 4100 | 5.7/145 | 2.5 | 10,000 |
| FML27/65 | 49315 | 27 | GX10q-4 | 1400 | 82 | 6500 | 5.7/145 | 2.5 | 10,000 |

CFL & CFLi Lamps > Base Types

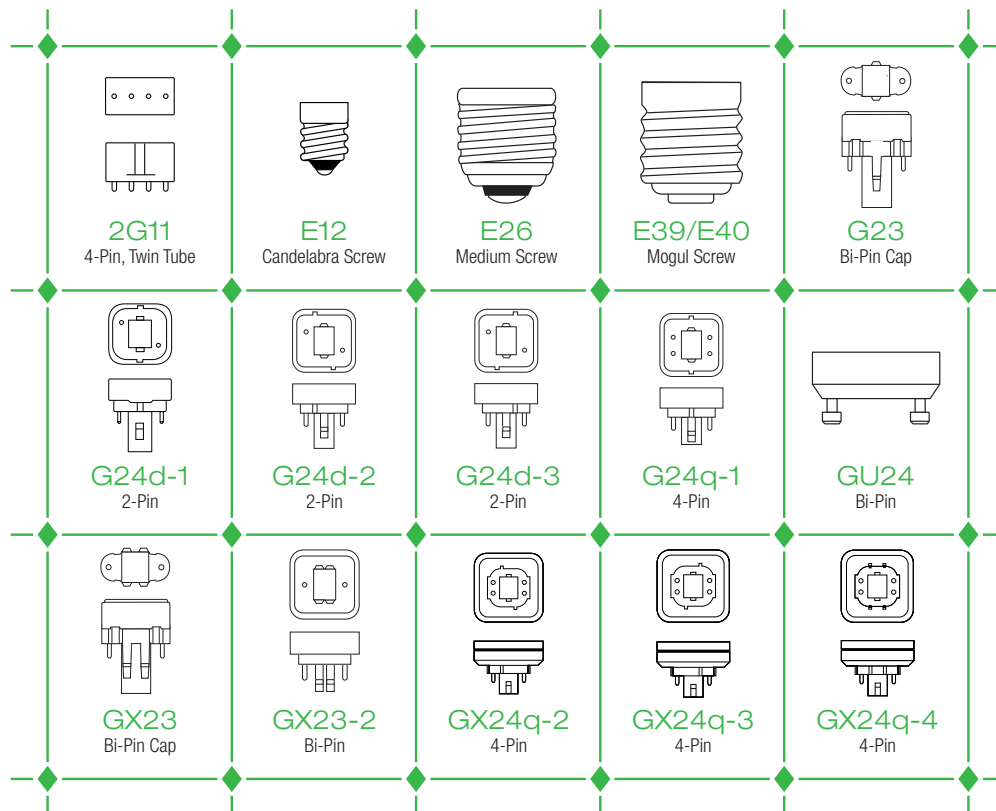



Linear Fluorescent Lamps

EIKO's entire line of linear fluorescent lamps features long life, high quality tri-phosphor blends and a variety of environmentally-friendly TCLP and CEE ratings. Our selection includes linear, circuline and u-bend fluorescents in various sizes, wattages and color temperatures.

Programmed Start T5 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|---------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F14T5/835 | 81147 | 14 | G5 | 1350 | 1256 | 85 | 3500 | 22/559 | 2.7 | 25,000 | 35,000 |
| F14T5/841 | 81148 | 14 | G5 | 1200 | | 85 | 4000 | 22/559 | 2.7 | 25,000 | 35,000 |
| F14T5/865 | 07151 | 14 | G5 | 1300 | 1210 | 85 | 6500 | 22/559 | 4.25 | 25,000 | 35,000 |
| F21T5/835 | 81149 | 21 | G5 | 2100 | 1953 | 85 | 3500 | 34/864 | 2.7 | 25,000 | 35,000 |
| F21T5/841 | 81150 | 21 | G5 | 1900 | | 85 | 4000 | 34/864 | 2.7 | 25,000 | 35,000 |
| F24T5/HO/835 | 81154 | 24 | G5 | 1750 | 1625 | 85 | 3500 | 22/559 | 4.25 | 25,000 | 35,000 |
| F24T5/HO/841 | 81155 | 24 | G5 | 1750 | 1625 | 85 | 4100 | 22/559 | 4.25 | 25,000 | 35,000 |
| F28T5/835 | 81151 | 28 | G5 | 2600 | | 85 | 3000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F28T5/841 | 81152 | 28 | G5 | 2600 | | 85 | 4000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F28T5/850 | 81153 | 28 | G5 | 2400 | | 85 | 5000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F28T5/865 | 07150 | 28 | G5 | 2850 | 2650 | 85 | 6500 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F35T5/830 | 04727 | 35 | G5 | 3300 | | 85 | 3000 | 57/1463 | 2.7 | 25,000 | 35,000 |
| F39T5/HO/835 | 81156 | 39 | G5 | 3200 | 2975 | 85 | 3500 | 34/864 | 4.25 | 25,000 | 35,000 |
| F39T5/HO/841 | 81157 | 39 | G5 | 3200 | 2975 | 85 | 4100 | 34/864 | 4.25 | 25,000 | 35,000 |
| F49T5/HO/835 | 00973 | 49 | G5 | 4900 | 4750 | 85 | 3500 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F49T5/HO/841 | 00976 | 49 | G5 | 4900 | 4750 | 85 | 4000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F49T5/HO/850 | 00981 | 49 | G5 | 4800 | 4625 | 85 | 5000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F49T5/HO/865 | 00982 | 49 | G5 | 4800 | 4625 | 85 | 6500 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F54T5/HO/830 | 07376 | 54 | G5 | 5000 | 4650 | 85 | 3000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F54T5/HO/835 | 81158 | 54 | G5 | 5000 | 4650 | 85 | 3500 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F54T5/HO/841 | 81159 | 54 | G5 | 5000 | 4650 | 85 | 4100 | 46/1169 | 2.7 | 25,000 | 35,000 |

>>Continued on page 39



T5 Linear

Programmed Start T5 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|---------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F54T5/HO/850 | 81160 | 54 | G5 | 4850 | 4500 | 85 | 5000 | 46/1169 | 2.7 | 25,000 | 35,000 |
| F54T5/HO/865 | 06854 | 54 | G5 | 4850 | 4500 | 85 | 6500 | 46/1169 | 2.7 | 25,000 | 35,000 |

Preheat T5 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-----------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|-------|
| F4T5/CW | 15500 | 4 | G5 | 135 | 100 | 60 | 4100 | 6.0/152 | 2.72 | 6,000 |
| F4T5/D | 15501 | 4 | G5 | 115 | 92 | 75 | 6500 | 6.0/152 | 2.75 | 6,000 |
| F6T5/CW | 15505 | 6 | G5 | 295 | 235 | 60 | 4100 | 9.0/229 | 2.75 | 7,500 |
| F6T5/D | 15506 | 6 | G5 | 230 | 185 | 75 | 6500 | 9.0/229 | 2.75 | 7,500 |
| F6T5/WW | 15507 | 6 | G5 | 275 | 220 | 52 | 3000 | 9.0/229 | 2.75 | 7,500 |
| F8T5/CW | 15510 | 8 | G5 | 400 | 320 | 60 | 4100 | 12.0/305 | 2.75 | 7,500 |
| F8T5/D | 15511 | 8 | G5 | 330 | 265 | 75 | 6500 | 12.0/305 | 2.75 | 7,500 |
| F8T5/W | 15513 | 8 | G5 | 400 | 320 | 55 | 3500 | 12.0/305 | 2.75 | 7,500 |
| F8T5/WW | 15512 | 8 | G5 | 410 | 330 | 52 | 3000 | 12.0/305 | 2.75 | 7,500 |
| F13T5/CW | 15517 | 13 | G5 | 850 | 705 | 60 | 4100 | 21.0/533 | 2.75 | 7,500 |
| F13T5/D | 15531 | 13 | G5 | 700 | 460 | 75 | 6500 | 21.0/533 | 2.75 | 7,500 |
| F13T5/WW | 15518 | 13 | G5 | 870 | 720 | 60 | 3000 | 21.0/533 | 2.75 | 7,500 |

Blacklight T5 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | MOL in/mm | MOD in/mm | mg Hg | Life |
|-----------------|---------|-------|------|-----------|-----------|-------|-------|
| F4T5/BL | 15503 | 4 | G5 | 6.0/152 | 0.63/16 | 2.75 | 6,000 |
| F4T5/BLB | 15504 | 4 | G5 | 6.0/152 | 0.63/16 | 2.75 | 6,000 |
| F6T5/BL | 15528 | 6 | G5 | 9.0/229 | 0.63/16 | 2.75 | 7,500 |
| F6T5/BLB | 15509 | 6 | G5 | 9.0/229 | 0.63/16 | 2.75 | 7,500 |
| F8T5/BL | 15515 | 8 | G5 | 12.0/305 | 0.63/16 | 2.75 | 7,500 |
| F8T5/BLB | 15516 | 8 | G5 | 12.0/305 | 0.63/16 | 2.75 | 7,500 |

T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|-------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F17T8/730K | 49572 | 17 | G13 | 1325 | 1200 | 73 | 3000 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/735K | 49573 | 17 | G13 | 1325 | 1200 | 73 | 3500 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/741K | 49574 | 17 | G13 | 1325 | 1200 | 73 | 4100 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/830K | 49575 | 17 | G13 | 1400 | 1300 | 85 | 3000 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/835K | 49576 | 17 | G13 | 1400 | 1300 | 85 | 3500 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/841K | 49577 | 17 | G13 | 1400 | 1300 | 85 | 4100 | 24.0/610 | 3 | 20,000 | 25,000 |
| F17T8/850K | 48055 | 17 | G13 | 1400 | 1300 | 85 | 5000 | 24.0/610 | 3 | 20,000 | 25,000 |
| F25T8/830K | 49581 | 25 | G13 | 2225 | 2050 | 85 | 3000 | 36.0/915 | 3 | 20,000 | 25,000 |
| F25T8/835K | 49582 | 25 | G13 | 2225 | 2050 | 85 | 3500 | 36.0/915 | 3 | 20,000 | 25,000 |
| F25T8/841K | 49583 | 25 | G13 | 2225 | 2050 | 85 | 4100 | 36.0/915 | 3 | 20,000 | 25,000 |
| F32T8/735K | 49585 | 32 | G13 | 2850 | 2705 | 75 | 3500 | 48.0/1219 | 3 | 20,000 | 25,000 |
| F32T8/741K | 49586 | 32 | G13 | 2850 | 2705 | 75 | 4100 | 48.0/1219 | 3 | 20,000 | 25,000 |
| F32T8/830K | 49587 | 32 | G13 | 2950 | 2800 | 85 | 3000 | 48.0/1219 | 3 | 20,000 | 25,000 |
| F32T8/835K | 49588 | 32 | G13 | 2950 | 2800 | 85 | 3500 | 48.0/1219 | 3 | 20,000 | 25,000 |

>>Continued on page 40



T8 Linear Fluorescent Lamps


| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|-------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F32T8/841K | 49589 | 32 | G13 | 2950 | 2800 | 85 | 4100 | 48.0/1219 | 3 | 20,000 | 25,000 |
| F32T8/850K | 81174 | 32 | G13 | 2950 | 2773 | 85 | 5000 | 48.0/1219 | 3 | 24000 | 24000 |
| F32T8/865K | 07147 | 32 | G13 | 2900 | 2725 | 85 | 6500 | 48.0/1219 | 3 | 20,000 | 25,000 |

CEE Specified T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|-------------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F32T8/830/ES/25W | 06748 | 25 | G13 | 2400 | 2260 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/835/ES/25W | 06749 | 25 | G13 | 2400 | 2260 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/841/ES/25W | 06750 | 25 | G13 | 2400 | 2260 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/850/ES/25W | 06751 | 25 | G13 | 2350 | 2200 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/865/ES/25W | 07149 | 25 | G13 | 2350 | 2200 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/830/ES | 06603 | 28 | G13 | 2800 | 2635 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/835/ES | 06604 | 28 | G13 | 2800 | 2635 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/841/ES | 06605 | 28 | G13 | 2800 | 2635 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/850/ES | 06606 | 28 | G13 | 2800 | 2635 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/865/ES | 07146 | 28 | G13 | 2750 | 2585 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/830K/HL | 06568 | 32 | G13 | 3100 | 2915 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/835K/HL | 06569 | 32 | G13 | 3100 | 2915 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/841K/HL | 06570 | 32 | G13 | 3100 | 2915 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/850K | 81174 | 32 | G13 | 2950 | 2773 | 85 | 5000 | 48.0/1219 | 3 | 24000 | 24000 |
| F32T8/850K/HL | 06571 | 32 | G13 | 3000 | 2820 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/850K/XL | 07476 | 32 | G13 | 2950 | 2810 | 85 | 5000 | 48.0/1219 | 3.5 | 44,000 | 55,000 |
| F32T8/865K/HL | 07148 | 32 | G13 | 3000 | 2820 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |

Energy Saving T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|-------------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F25T8/830K | 49581 | 25 | G13 | 2225 | 2050 | 85 | 3000 | 36.0/915 | 3 | 20,000 | 25,000 |
| F25T8/835K | 49582 | 25 | G13 | 2225 | 2050 | 85 | 3500 | 36.0/915 | 3 | 20,000 | 25,000 |
| F25T8/841K | 49583 | 25 | G13 | 2225 | 2050 | 85 | 4100 | 36.0/915 | 3 | 20,000 | 25,000 |
| F32T8/830/ES/25W | 06748 | 25 | G13 | 2400 | 2260 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/835/ES/25W | 06749 | 25 | G13 | 2400 | 2260 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/841/ES/25W | 06750 | 25 | G13 | 2400 | 2260 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/850/ES/25W | 06751 | 25 | G13 | 2350 | 2200 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/865/ES/25W | 07149 | 25 | G13 | 2350 | 2200 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/830/ES | 06603 | 28 | G13 | 2800 | 2635 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/835/ES | 06604 | 28 | G13 | 2800 | 2635 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/841/ES | 06605 | 28 | G13 | 2800 | 2635 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/850/ES | 06606 | 28 | G13 | 2800 | 2635 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F28T8/865/ES | 07146 | 28 | G13 | 2750 | 2585 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |



T8 Linear

Long Life T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|----------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F32T8/830K/XL | 07437 | 32 | G13 | 2950 | 2810 | 83 | 3000 | 48.0/1219 | 3.5 | 44,000 | 55,000 |
| F32T8/835K/XL | 07833 | 32 | G13 | 2950 | 2810 | 83 | 3500 | 48.0/1213 | 3.5 | 44,000 | 55,000 |
| F32T8/841K/XL | 07789 | 32 | G13 | 2950 | 2810 | 83 | 4100 | 48.0/1219 | 3.5 | 44,000 | 55,000 |
| F32T8/850K/XL | 07476 | 32 | G13 | 2950 | 2810 | 85 | 5000 | 48.0/1219 | 3.5 | 44,000 | 55,000 |
| F32T8/865K/XL | 07592 | 32 | G13 | 2850 | 2710 | 83 | 6500 | 48.0/1219 | 3.5 | 44,000 | 55,000 |

High Lumen T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|----------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F32T8/830K/HL | 06568 | 32 | G13 | 3100 | 2915 | 85 | 3000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/835K/HL | 06569 | 32 | G13 | 3100 | 2915 | 85 | 3500 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/841K/HL | 06570 | 32 | G13 | 3100 | 2915 | 85 | 4100 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/850K/HL | 06571 | 32 | G13 | 3000 | 2820 | 85 | 5000 | 48.0/1219 | 3 | 24,000 | 30,000 |
| F32T8/865K/HL | 07148 | 32 | G13 | 3000 | 2820 | 85 | 6500 | 48.0/1219 | 3 | 24,000 | 30,000 |

Preheat T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life |
|-----------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|-------|
| F10T8/CW | 15524 | 10 | G13 | 480 | 425 | 60 | 4100 | 13.6/346 | 2.75 | 7,500 |
| F13T8/CW | 15545 | 13 | G13 | 565 | 480 | 60 | 4100 | 12.0/305 | 2.75 | 7,500 |
| F14T8/CW | 15519 | 14 | G13 | 685 | 580 | 60 | 4100 | 15.0/381 | 2.75 | 7,500 |
| F14T8/D | 15520 | 14 | G13 | 645 | 545 | 75 | 6500 | 15.0/381 | 2.75 | 7,500 |
| F15T8/CW | 15521 | 15 | G13 | 825 | 725 | 60 | 4100 | 18.0/457 | 2.75 | 7,500 |
| F15T8/D | 15522 | 15 | G13 | 700 | 615 | 75 | 6500 | 18.0/457 | 2.75 | 7,500 |
| F15T8/W | 15525 | 15 | G13 | 800 | 725 | 55 | 3500 | 18.0/457 | 2.75 | 7,500 |
| F15T8/WW | 15523 | 15 | G13 | 845 | 745 | 52 | 3000 | 18.0/457 | 2.75 | 7,500 |

Blacklight T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | MOL in/mm | MOD in/mm | mg Hg | Life |
|------------------|---------|-------|------|-----------|-----------|-------|-------|
| F15T8/BL | 15526 | 15 | G13 | 18.0/457 | 1.0/26 | 2.75 | 7,500 |
| F15T8/BLB | 15527 | 15 | G13 | 18.0/457 | 1.0/26 | 2.75 | 7,500 |

Safety-Coated T8 Linear Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | mg Hg | Life 3hr Start | Life 12hr Start |
|---------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-------|----------------|-----------------|
| F32T8/741K-C | 06787 | 32 | G13 | 2850 | 2705 | 75 | 4100 | 48.0/1219 | 9 | 20,000 | 25,000 |
| F32T8/841K-C | 06788 | 32 | G13 | 2950 | 2800 | 83 | 4100 | 48.0/1219 | 3.5 | 20,000 | 25,000 |
| F32T8/850K-C | 06845 | 32 | G13 | 2950 | 2800 | 85 | 5000 | 48.0/1219 | 3.5 | 20,000 | 25,000 |

Circular Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | MOL in/mm | MOD in/mm | mg Hg | Life |
|------------------|---------|-------|------|-----------|-----------|-------|--------|
| FC8T9/CW | 15604 | 22 | G10q | 8.25/215 | | 7.5 | 12,000 |
| FC8T9/D | 15532 | 22 | G10q | 8.25/215 | | 7.5 | 12,000 |
| FC12T9/CW | 15606 | 32 | G10q | 12.0/305 | | 7.5 | 12,000 |

>>Continued on page 42



Circular Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | MOL in/mm | MOD in/mm | mg Hg | Life |
|------------------|---------|-------|------|-----------|-----------|-------|--------|
| FC12T9/D | 15533 | 32 | G10q | 12.0/305 | | 7.5 | 12,000 |
| FC16T9/CW | 15534 | 40 | G10q | 16.0/406 | | 7.5 | 12,000 |
| FC16T9/D | 15535 | 40 | G10q | 16.0/406 | | 7.5 | 12,000 |

T8 U-Bend Fluorescent Lamps

| Ordering Code | Barcode | Watts | Base | MOL in/mm | MOD in/mm | mg Hg | Life |
|----------------------|---------|-------|------|-----------|-----------|-------|--------|
| F31T8/830/U | 05287 | 31 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F31T8/835/U | 05288 | 31 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F31T8/841/U | 05289 | 31 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F31T8/850/U | 05290 | 31 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F32T8/835K/U6 | 02403 | 32 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F32T8/841K/U6 | 02404 | 32 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |
| F32T8/850K/U6 | 02405 | 32 | G13 | 22.5/571 | 1.0/26 | 7.5 | 20,000 |



PowerMaster™ Ballasts

| Ordering Code | Barcode | Volts |
|---------------------------|---------|------------|
| PM-2X32T8-UNV-IS | 07825 | 120-277VAC |
| PM-2X32T8-UNV-IS-H | 07873 | 120-277VAC |
| PM-2X32T8-UNV-IS-L | 07872 | 120-277VAC |
| PM-2X54T5-UNV-PS | 07827 | 120-277VAC |
| PM-3X32T8-UNV-IS | 07868 | 120-277VAC |
| PM-3X32T8-UNV-IS-H | 07875 | 120-277VAC |
| PM-3X32T8-UNV-IS-L | 07874 | 120-277VAC |
| PM-4X32T8-UNV-IS | 07826 | 120-277VAC |
| PM-4X32T8-UNV-IS-L | 07876 | 120-277VAC |
| PM-4X54T5-UNV-PS | 07828 | 120-277VAC |

Fluorescent Starters

| Ordering Code | Barcode | Description |
|------------------|---------|---------------|
| FS-U-120V | 49554 | Aluminum case |
| FS-5 | 49552 | Aluminum case |
| FS-4 | 49551 | Aluminum case |
| FS-2 | 49550 | Aluminum case |



U-Bend




Ballast



Starter



Linear Fluorescent Lamps > Base Types

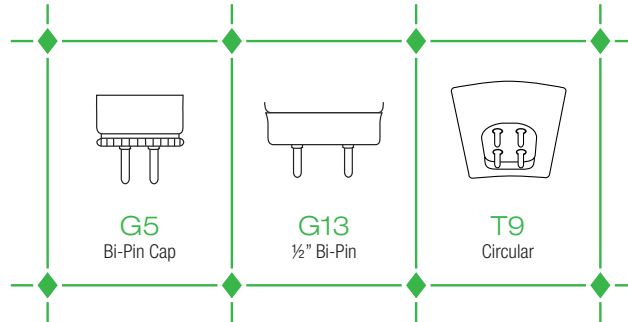



HID Lamps

EiKO commercial grade HID lamps are manufactured with the professional in mind. High-quality components, heavy-duty construction, durable packaging and a full warranty result in a lamp you can install with confidence. With many options to choose from, including pulse start, clear and coated, open fixture rated and our new ColorMaster PRO™ ceramic metal halides, EiKO's HID's are a high quality, flexible option.



ColorMaster PRO™ Ceramic Metal Halide PAR Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | Beam Angle | Approx Initial Max Beam CP | ANSI Ballast | Life |
|-----------------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|------------|----------------------------|---------------------|--------|
| CMP20/PAR20/FL | 07172 | 20 | E26 | 1200 | 900 | 85+ | 3000 | 3.74/95 | 30 | 3500 | M156/0 | 9,000 |
| CMP20/PAR20/SP | 07165 | 20 | E26 | 1200 | 900 | 85+ | 3000 | 3.74/95 | 10 | 15000 | M156/0 | 9,000 |
| CMP20/PAR30LN/FL | 07174 | 20 | E26 | 1200 | 900 | 85+ | 3000 | 4.92/125 | 30 | 4000 | M156/0 | 9,000 |
| CMP20/PAR30LN/SP | 07173 | 20 | E26 | 1200 | 900 | 85+ | 3000 | 4.92/125 | 10 | 24000 | M156/0 | 9,000 |
| CMP35/PAR20/FL | 06774 | 35 | E26 | 2000 | 1660 | 85+ | 3000 | 3.74/95 | 30 | 5000 | M130/0 | 10,000 |
| CMP35/PAR20/SP | 06773 | 35 | E26 | 2000 | 1660 | 85+ | 3000 | 3.74/95 | 10 | 23000 | M130/0 | 10,000 |
| CMP35/PAR30LN/FL | 06776 | 35 | E26 | 2400 | 1990 | 85+ | 3000 | 4.92/125 | 30 | 7500 | M130/0 | 10,000 |
| CMP35/PAR30LN/FL/842 | 07829 | 35 | E26 | 2400 | 1990 | 85+ | 4200 | 4.92/125 | 30 | 7500 | M130/0 | 10,000 |
| CMP35/PAR30LN/SP | 06775 | 35 | E26 | 2400 | 1990 | 85+ | 3000 | 4.92/125 | 10 | 44000 | M130/0 | 10,000 |
| CMP70/PAR30LN/FL | 07166 | 70 | E26 | 4850 | 3640 | 85+ | 3000 | 4.92/125 | 40 | 10500 | M139/M98/ M143/0 | 10,000 |
| CMP70/PAR30LN/SP | 07175 | 70 | E26 | 4850 | 3640 | 85+ | 3000 | 4.92/125 | 10 | 68000 | M139/M98/ M143/0 | 10,000 |
| CMP70/PAR38/FL | 07177 | 70 | E26 | 4800 | 3600 | 85+ | 3000 | 5.43/138 | 25 | 20000 | M139/M98/ M143/0 | 10,000 |
| CMP70/PAR38/SP | 07176 | 70 | E26 | 4800 | 3600 | 85+ | 3000 | 5.43/138 | 15 | 53000 | M139/M98/ M143/0 | 10,000 |



CMP PAR20



CMP PAR30LN



CMP PAR38

ColorMaster PRO™ Ceramic Metal Halide MR16 Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | Beam Angle | Approx Initial Max Beam CP | ANSI Ballast | Life |
|-----------------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|------------|----------------------------|--------------|--------|
| CMP-MR16/20W/NFL/830 | 07178 | 20 | GX10 | 1200 | 900 | 85+ | 3000 | 2.56/65 | 25 | 2900 | M156/O | 9,000 |
| CMP-MR16/20W/SP/830 | 07171 | 20 | GX10 | 1200 | 900 | 85+ | 3000 | 2.56/65 | 12 | 9000 | M156/O | 9,000 |
| CMP-MR16/39W/NFL/830 | 08286 | 35 | GX10 | 2100 | 1470 | 88+ | 3000 | 2.56/65 | 25 | 5500 | | 10,000 |

ColorMaster PRO™ Ceramic Metal Halide EDX17 Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | CRI | CT° K | MOL in/mm | ANSI Ballast | Life |
|-----------------------|---------|-------|------|-----------------------|-----|-------|-----------|-----------------|--------|
| CMP70/C/MP/3K | 07281 | 70 | E26 | 5400 | 90+ | 3000 | 5.43/138 | M139/M98/M143/O | 16,000 |
| CMP70/C/MP/4K | 07284 | 70 | E26 | 5200 | 90+ | 4000 | 5.43/138 | M139/M98/M143/O | 20,000 |
| CMP70/MP/3K | 07278 | 70 | E26 | 5900 | 90+ | 3000 | 5.43/138 | M139/M98/M143/O | 16,000 |
| CMP70/MP/4K | 07277 | 70 | E26 | 5800 | 92+ | 4000 | 5.43/138 | M139/M98/M143/O | 20,000 |
| CMP100/C/MP/3K | 07280 | 100 | E26 | 7900 | 92+ | 3000 | 5.43/138 | M140/M90/O | 16,000 |
| CMP100/C/MP/4K | 07283 | 100 | E26 | 7500 | 92+ | 4000 | 5.43/138 | M140/M90/O | 20,000 |
| CMP100/MP/3K | 07279 | 100 | E26 | 8600 | 92+ | 3000 | 5.43/138 | M140/M90/O | 16,000 |
| CMP100/MP/4K | 07276 | 100 | E26 | 8200 | 92+ | 4000 | 5.43/138 | M140/M90/O | 20,000 |
| CMP150/MP/3K | 07285 | 150 | E26 | 12900 | 90+ | 3000 | 5.43/138 | M142/M102/O | 16,000 |
| CMP150/MP/4K | 07282 | 150 | E26 | 12000 | 93+ | 4000 | 5.43/138 | M142/M102/O | 20,000 |

ColorMaster PRO™ Ceramic Metal Halide Bi-pin Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | ANSI Ballast | Life |
|----------------------|---------|-------|-------|-----------------------|--------------------|-----|-------|-----------|-----------------|--------|
| CMP20/TC/930 | 07164 | 20 | G8.5 | 1750 | 1320 | 90 | 3000 | 3.15/80 | M156/E | 10,000 |
| CMP20/TM/930 | 07167 | 20 | GU6.5 | 1750 | 1320 | 90 | 3000 | 2.05/52 | M156/E | 10,000 |
| CMP35/T6/930 | 06630 | 35 | G12 | 3700 | 3070 | 90 | 3000 | 4.33/110 | M130/E | 12,000 |
| CMP35/T6/942 | 06777 | 35 | G12 | 3700 | 3070 | 90+ | 4200 | 4.33/110 | M130/E | 12,000 |
| CMP35/TC/930 | 06955 | 35 | G8.5 | 3700 | 3070 | 90 | 3000 | 3.15/80 | M130/E | 12,000 |
| CMP70/T6/930 | 06632 | 70 | G12 | 7200 | 5980 | 90 | 3000 | 4.33/110 | M139/M98/M143/E | 12,000 |
| CMP70/T6/942 | 06633 | 70 | G12 | 7100 | 5890 | 90+ | 4200 | 4.33/110 | M139/M98/M143/E | 12,000 |
| CMP70/TC/930 | 06634 | 70 | G8.5 | 7200 | 5980 | 90 | 3000 | 3.15/80 | M139/M98/M143/E | 12,000 |
| CMP150/T6/930 | 06629 | 150 | G12 | 15000 | 12450 | 90+ | 3000 | 4.33/110 | M142/E | 12,000 |
| CMP150/T6/942 | 07168 | 150 | G12 | 13000 | 9750 | 95 | 4000 | 4.33/110 | M142/E | 10,000 |


ColorMaster PRO™ Ceramic Metal Halide Double-Ended Lamps

| Ordering Code | Barcode | Watts | Base | Approx Initial Lumens | Approx Mean Lumens | CRI | CT° K | MOL in/mm | ANSI Ballast | Life |
|---------------------|---------|-------|------|-----------------------|--------------------|-----|-------|-----------|-----------------|--------|
| CMP70/TD/930 | 07169 | 70 | Rx7s | 6500 | 4875 | 90 | 3000 | 4.69/119 | M139/M98/M143/E | 12,000 |
| CMP70/TD/942 | 06732 | 70 | Rx7s | 7100 | 5890 | 90+ | 4200 | 4.72/120 | M139/M98/M143/E | 15,000 |

Medium & Mogul Based Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|---------------------|---------|-------|-------|------|-----------------------|-------|------------|--------------|--------|
| MH50/C/U/MED | 49187 | 50 | ED-17 | E26 | 3000 | 3700 | 5.50/139.7 | M110 | 10,000 |
| MH50/U/MED | 49188 | 50 | ED-17 | E26 | 3400 | 4000 | 5.50/139.7 | M110 | 10,000 |
| MH70/C/U/MED | 49189 | 70 | ED-17 | E26 | 5300 | 3700 | 5.50/139.7 | M98 | 15,000 |
| MH70/U/MED | 15410 | 70 | ED-17 | E26 | 5600 | 4000 | 5.50/139.7 | M98 | 15,000 |

>>Continued on page 46

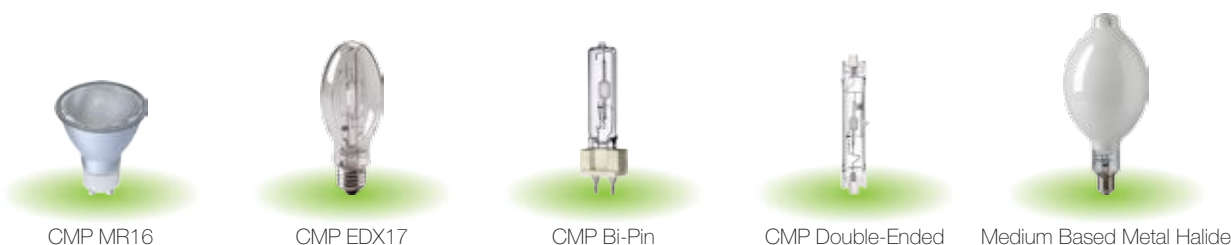

Medium & Mogul Based Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|-----------------------|---------|-------|-------|------|-----------------------|-------|------------|--------------|--------|
| MH100/C/U/MED | 49190 | 100 | ED-17 | E26 | 8500 | 3700 | 5.50/139.7 | M90/M140 | 15,000 |
| MH100/U/MED | 15411 | 100 | ED-17 | E26 | 9000 | 4000 | 5.50/139.7 | M90/M140 | 15,000 |
| MH150/C/U/MED | 49191 | 150 | ED-17 | E26 | 13300 | 3700 | 5.50/139.7 | M102 | 15,000 |
| MH150/U/MED | 15413 | 150 | ED-17 | E26 | 14000 | 4000 | 5.50/139.7 | M102 | 15,000 |
| MH175/C/U | 49194 | 175 | ED-28 | E39 | 13300 | 3700 | 8.3/211.2 | M57 | 10,000 |
| MH175/C/U/MED | 49192 | 175 | ED-17 | E26 | 13300 | 3700 | 5.50/139.7 | M57 | 10,000 |
| MH175/U | 49193 | 175 | ED-28 | E39 | 14000 | 4000 | 8.3/211.2 | M57 | 10,000 |
| MH175/U/MED | 15414 | 175 | ED-17 | E26 | 14000 | 4000 | 5.50/139.7 | M57 | 10,000 |
| MH200/C/U | 49530 | 200 | ED-28 | E39 | 20000 | 3700 | 8.3/211.2 | M136 | 15,000 |
| MH200/U | 49529 | 200 | ED-28 | E39 | 21000 | 4000 | 8.3/211.2 | M136 | 15,000 |
| MH250/C/U | 49196 | 250 | ED-28 | E39 | 20000 | 3700 | 8.3/211.2 | M58 | 10,000 |
| MH250/U | 49195 | 250 | ED-28 | E39 | 21000 | 4000 | 8.3/211.2 | M58 | 10,000 |
| MH250/U/T15 | 49531 | 250 | T-15 | E39 | 21000 | 4000 | 9.75/247.7 | M58 | 10,000 |
| MH320/U | 81052 | 320 | ED-28 | E39 | 31000 | 4000 | 8.3/211.2 | M154/M132/E | 20,000 |
| MH350/HOR | 49532 | 350 | ED-28 | E39 | 33000 | 4000 | 8.3/211.2 | M131 | 20,000 |
| MH400/C/U | 49198 | 400 | ED-37 | E39 | 34000 | 3700 | 11.5/292.1 | M59 | 20,000 |
| MH400/C/U/ED28 | 49556 | 400 | ED-28 | E39 | 34000 | 3700 | 8.3/211.2 | M59 | 20,000 |
| MH400/U | 49197 | 400 | ED-37 | E39 | 36000 | 4000 | 11.5/292.1 | M59 | 20,000 |
| MH400/U/ED28 | 49463 | 400 | ED-28 | E39 | 36000 | 4000 | 8.3/211.2 | M59 | 20,000 |
| MH400/U/T15 | 49534 | 400 | T-15 | E39 | 36000 | 4000 | 9.75/247.7 | M59 | 15,000 |
| MH1000/C/U | 49200 | 1000 | BT-56 | E39 | 105000 | 3700 | 15.5/393.7 | M47 | 12,000 |
| MH1000/U | 49199 | 1000 | BT-56 | E39 | 110000 | 4000 | 15.5/393.7 | M47 | 12,000 |
| MH1000/U/BT37 | 49557 | 1000 | BT-37 | E39 | 110000 | 4000 | 11.5/292.1 | M47 | 12,000 |
| MH1500/U | 49201 | 1500 | BT-56 | E39 | 155000 | 4000 | 15.5/393.7 | M48 | 3,500 |

Open Fixture Rated Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|-------------------------|---------|-------|--------|------|-----------------------|-------|-----------|--------------|--------|
| MP50/U/MED/3K | 44501 | 50 | EDX-17 | E26 | 3200 | 3200 | 5.5/139.7 | M110 | 10,000 |
| MP70/C/U/MED/3K | 49506 | 70 | EDX-17 | E26 | 5000 | 3200 | 5.5/139.7 | M98 | 15,000 |
| MP70/C/U/MED/4K | 49508 | 70 | EDX-17 | E26 | 5000 | 3700 | 5.5/139.7 | M98 | 15,000 |
| MP70/U/MED/3K | 49507 | 70 | EDX-17 | E26 | 5300 | 3200 | 5.5/139.7 | M98 | 15,000 |
| MP70/U/MED/4K | 49509 | 70 | EDX-17 | E26 | 5300 | 4000 | 5.5/139.7 | M98 | 15,000 |
| MP100/C/U/MED/3K | 49511 | 100 | EDX-17 | E26 | 8100 | 3200 | 5.5/139.7 | M90 | 15,000 |
| MP100/C/U/MED/4K | 49513 | 100 | EDX-17 | E26 | 8100 | 3700 | 5.5/139.7 | M90 | 15,000 |
| MP100/U/MED/3K | 49512 | 100 | EDX-17 | E26 | 8500 | 3200 | 5.5/139.7 | M90 | 15,000 |
| MP100/U/MED/4K | 49514 | 100 | EDX-17 | E26 | 8500 | 4000 | 5.5/139.7 | M90 | 15,000 |
| MP150/C/U/MED/3K | 49516 | 150 | EDX-17 | E26 | 12600 | 3200 | 5.5/139.7 | M102 | 15,000 |
| MP150/C/U/MED/4K | 49518 | 150 | EDX-17 | E26 | 12600 | 3700 | 5.5/139.7 | M102 | 15,000 |
| MP150/U/MED/3K | 49517 | 150 | EDX-17 | E26 | 13300 | 3200 | 5.5/139.7 | M102 | 15,000 |
| MP150/U/MED/4K | 49519 | 150 | EDX-17 | E26 | 13300 | 4000 | 5.5/139.7 | M102 | 15,000 |
| MP200/C/U/4K | 49537 | 200 | ED-28 | EX39 | 19000 | 3700 | 8.3/211.2 | M136 | 15,000 |
| MP250/BU/P | 06683 | 250 | ED-28 | EX39 | 25000 | 4000 | 8.3/211.2 | M153/M138/O | 12,000 |
| MP320/BU | 81053 | 320 | ED-28 | EX39 | 31000 | 4000 | 8.3/211.2 | M154/M132/O | 20,000 |
| MP350/BU | 49538 | 350 | ED-28 | EX39 | 35000 | 4000 | 8.3/211.2 | M131 | 20,000 |

>>Continued on page 47



Mogul Based Metal Halide



Open Fixture Rated Metal Halide

Open Fixture Rated Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|------------------------|---------|-------|-------|------|-----------------------|-------|-----------|------------------|--------|
| MP400/BU/ED28/P | 06479 | 400 | ED-28 | EX39 | 41000 | 4000 | 8.86/225 | M155/M128/M135/0 | 20,000 |
| MP400/BU/P | 06276 | 400 | ED-37 | EX39 | 41000 | 4000 | 11.73/296 | M155/M128/M135/0 | 20,000 |

Single Ended Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|------------------------|---------|-------|-------|------|-----------------------|-------|------------|--------------|--------|
| MH-SE70/UVS/3K | 49183 | 70 | T-7 | G12 | 5600 | 3000 | 4.25/108.0 | M85/M98 | 10,000 |
| MH-SE150/UVS/3K | 49185 | 150 | T-7 | G12 | 14000 | 3000 | 4.25/108.0 | M81/M102 | 10,000 |
| MH-SE150/UVS/4K | 49186 | 150 | T-7 | G12 | 14000 | 4000 | 4.25/108.0 | M81/M102 | 10,000 |

Double Ended Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|---------------------------|---------|-------|-------|------|-----------------------|-------|------------|--------------|--------|
| MH-DE70/TD/UVS/3K | 15406 | 70 | T-6 | R7s | 5200 | 3000 | 4.50/114.3 | M85/M98 | 10,000 |
| MH-DE70/TD/UVS/4K | 15407 | 70 | T-6 | R7s | 5500 | 4200 | 4.50/114.3 | M85/M98 | 10,000 |
| MH-DE150/TD/UVS/3K | 15408 | 150 | T-7 | R7s | 11250 | 3000 | 5.19/131.8 | M81/M102 | 10,000 |
| MH-DE150/TD/UVS/4K | 15409 | 150 | T-7 | R7s | 11250 | 4200 | 5.19/131.8 | M81/M102 | 10,000 |

Pulse Start Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Description | Life |
|---------------------------|---------|-------|--------|------|-----------------------|-------|------------|--------------|---------------------------|--------|
| MH50/C/U/MED | 49187 | 50 | ED-17 | E26 | 3000 | 3700 | 5.50/139.7 | M110 | Pulse Start | 10,000 |
| MH50/U/MED | 49188 | 50 | ED-17 | E26 | 3400 | 4000 | 5.50/139.7 | M110 | Pulse Start | 10,000 |
| MP50/U/MED/3K | 44501 | 50 | EDX-17 | E26 | 3200 | 3200 | 5.5/139.7 | M110 | Pulse Start & UV Shielded | 10,000 |
| MH-DE70/TD/UVS/3K | 15406 | 70 | T-6 | R7s | 5200 | 3000 | 4.50/114.3 | M85/M98 | Pulse Start & UV Shielded | 10,000 |
| MH-DE70/TD/UVS/4K | 15407 | 70 | T-6 | R7s | 5500 | 4200 | 4.50/114.3 | M85/M98 | Pulse Start & UV Shielded | 10,000 |
| MH-SE70/UVS/3K | 49183 | 70 | T-7 | G12 | 5600 | 3000 | 4.25/108.0 | M85/M98 | Pulse Start & UV Shielded | 10,000 |
| MH70/C/U/MED | 49189 | 70 | ED-17 | E26 | 5300 | 3700 | 5.50/139.7 | M98 | Pulse Start | 15,000 |
| MH70/U/MED | 15410 | 70 | ED-17 | E26 | 5600 | 4000 | 5.50/139.7 | M98 | Pulse Start | 15,000 |
| MP70/C/U/MED/3K | 49506 | 70 | EDX-17 | E26 | 5000 | 3200 | 5.5/139.7 | M98 | Pulse Start & UV Shielded | 15,000 |
| MP70/C/U/MED/4K | 49508 | 70 | EDX-17 | E26 | 5000 | 3700 | 5.5/139.7 | M98 | Pulse Start & UV Shielded | 15,000 |
| MP70/U/MED/4K | 49509 | 70 | EDX-17 | E26 | 5300 | 4000 | 5.5/139.7 | M98 | Pulse Start & UV Shielded | 15,000 |
| MH100/C/U/MED | 49190 | 100 | ED-17 | E26 | 8500 | 3700 | 5.50/139.7 | M90/M140 | Pulse Start | 15,000 |
| MH100/U/MED | 15411 | 100 | ED-17 | E26 | 9000 | 4000 | 5.50/139.7 | M90/M140 | Pulse Start | 15,000 |
| MP100/C/U/MED/3K | 49511 | 100 | EDX-17 | E26 | 8100 | 3200 | 5.5/139.7 | M90 | Pulse Start & UV Shielded | 15,000 |
| MP100/C/U/MED/4K | 49513 | 100 | EDX-17 | E26 | 8100 | 3700 | 5.5/139.7 | M90 | Pulse Start & UV Shielded | 15,000 |
| MP100/U/MED/3K | 49512 | 100 | EDX-17 | E26 | 8500 | 3200 | 5.5/139.7 | M90 | Pulse Start & UV Shielded | 15,000 |
| MP100/U/MED/4K | 49514 | 100 | EDX-17 | E26 | 8500 | 4000 | 5.5/139.7 | M90 | Pulse Start & UV Shielded | 15,000 |
| MH-DE150/TD/UVS/3K | 15408 | 150 | T-7 | R7s | 11250 | 3000 | 5.19/131.8 | M81/M102 | Pulse Start & UV Shielded | 10,000 |
| MH-DE150/TD/UVS/4K | 15409 | 150 | T-7 | R7s | 11250 | 4200 | 5.19/131.8 | M81/M102 | Pulse Start & UV Shielded | 10,000 |

>>Continued on page 48



Single Ended Metal Halide



Double Ended Metal Halide



Pulse Start Metal Halide

Pulse Start Metal Halide Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Description | Life |
|-------------------------|---------|-------|--------|------|-----------------------|-------|------------|------------------|---------------------------|--------|
| MH-SE150/UVS/3K | 49185 | 150 | T-7 | G12 | 14000 | 3000 | 4.25/108.0 | M81/M102 | Pulse Start & UV Shielded | 10,000 |
| MH-SE150/UVS/4K | 49186 | 150 | T-7 | G12 | 14000 | 4000 | 4.25/108.0 | M81/M102 | Pulse Start & UV Shielded | 10,000 |
| MH150/C/U/MED | 49191 | 150 | ED-17 | E26 | 13300 | 3700 | 5.50/139.7 | M102 | Pulse Start | 15,000 |
| MH150/U/MED | 15413 | 150 | ED-17 | E26 | 14000 | 4000 | 5.50/139.7 | M102 | Pulse Start | 15,000 |
| MP150/C/U/MED/3K | 49516 | 150 | EDX-17 | E26 | 12600 | 3200 | 5.5/139.7 | M102 | Pulse Start & UV Shielded | 15,000 |
| MP150/C/U/MED/4K | 49518 | 150 | EDX-17 | E26 | 12600 | 3700 | 5.5/139.7 | M102 | Pulse Start & UV Shielded | 15,000 |
| MH200/C/U | 49530 | 200 | ED-28 | E39 | 20000 | 3700 | 8.3/211.2 | M136 | Pulse Start | 15,000 |
| MH200/U | 49529 | 200 | ED-28 | E39 | 21000 | 4000 | 8.3/211.2 | M136 | Pulse Start | 15,000 |
| MP200/C/U/4K | 49537 | 200 | ED-28 | EX39 | 19000 | 3700 | 8.3/211.2 | M136 | Pulse Start & UV Shielded | 15,000 |
| MH250/BU/PS | 06745 | 250 | ED-28 | E39 | 25000 | 4000 | 8.3/211.2 | M153/M138/E | Pulse Start | 12,000 |
| MP250/BU/P | 06683 | 250 | ED-28 | EX39 | 25000 | 4000 | 8.3/211.2 | M153/M138/O | Pulse Start & UV Shielded | 12,000 |
| MH320/U | 81052 | 320 | ED-28 | E39 | 31000 | 4000 | 8.3/211.2 | M154/M132/E | Pulse Start | 20,000 |
| MP320/BU | 81053 | 320 | ED-28 | EX39 | 31000 | 4000 | 8.3/211.2 | M154/M132/O | Pulse Start & UV Shielded | 20,000 |
| MH350/C/HOR | 49533 | 350 | ED-28 | E39 | 31000 | 3700 | 8.3/211.2 | M131 | Pulse Start | 20,000 |
| MH350/HOR | 49532 | 350 | ED-28 | E39 | 33000 | 4000 | 8.3/211.2 | M131 | Pulse Start | 20,000 |
| MP350/BU | 49538 | 350 | ED-28 | EX39 | 35000 | 4000 | 8.3/211.2 | M131 | Pulse Start & UV Shielded | 20,000 |
| MH400/BU/PS | 06746 | 400 | ED-37 | E39 | 41000 | 4000 | 11.5/292.1 | M155/M128/M135/E | Pulse Start | 20,000 |
| MH400/C/BU/PS | 06747 | 400 | ED-37 | E39 | 41000 | 3700 | 11.5/292.1 | M155/M128/M135/E | Pulse Start | 20,000 |
| MP400/BU/ED28/P | 06479 | 400 | ED-28 | EX39 | 41000 | 4000 | 8.86/225 | M155/M128/M135/O | Pulse Start & UV Shielded | 20,000 |
| MP400/BU/P | 06276 | 400 | ED-37 | EX39 | 41000 | 4000 | 11.73/296 | M155/M128/M135/O | Pulse Start & UV Shielded | 20,000 |

High Pressure Sodium Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|---------------------|---------|-------|---------|------|-----------------------|-------|-------------|--------------|--------|
| LU35/MED | 15300 | 35 | ED-17 | E26 | 2250 | 2100 | 5.44/138.0 | S76 | 16,000 |
| LU50 | 15304 | 50 | ED-23.5 | E39 | 4000 | 2100 | 7.75/196.9 | S68 | 24,000 |
| LU50/MED | 15302 | 50 | ED-17 | E26 | 4000 | 2100 | 5.44/138.0 | S68 | 24,000 |
| LU70 | 15308 | 70 | ED-23.5 | E39 | 6300 | 2100 | 7.75/196.9 | S62 | 24,000 |
| LU70/D/MED | 49157 | 70 | ED-17 | E26 | 5860 | 2100 | 5.44/138.0 | S62 | 24,000 |
| LU70/MED | 15306 | 70 | ED-17 | E26 | 6300 | 2100 | 5.44/138.0 | S62 | 24,000 |
| LU100 | 15312 | 100 | ED-23.5 | E39 | 9500 | 2100 | 7.75/196.9 | S54 | 24,000 |
| LU100/MED | 15310 | 100 | ED-17 | E26 | 9500 | 2100 | 5.44/138.0 | S54 | 24,000 |
| LU150/100 | 15318 | 150 | ED-28 | E39 | 16000 | 2100 | 8.31/211.1 | S56 | 24,000 |
| LU150/55 | 15316 | 150 | ED-23.5 | E39 | 16000 | 2100 | 7.75/196.9 | S55 | 24,000 |
| LU150/55/MED | 15314 | 150 | ED-17 | E26 | 16000 | 2100 | 5.44/138.0 | S55 | 24,000 |
| LU200 | 15319 | 200 | ED-18 | E39 | 22000 | 2100 | 9.75/247.6 | S66 | 24,000 |
| LU250 | 15320 | 250 | ED-18 | E39 | 28500 | 2100 | 9.75/247.6 | S50 | 24,000 |
| LU250/D | 49164 | 250 | ED-28 | E39 | 26000 | 2100 | 8.31/211.1 | S50 | 24,000 |
| LU400 | 15322 | 400 | ED-18 | E39 | 50000 | 2100 | 9.75/247.6 | S51 | 24,000 |
| LU400/D | 49166 | 400 | ED-37 | E39 | 47500 | 2100 | 11.50/292.1 | S51 | 24,000 |
| LU600 | 49167 | 600 | T-14.5 | E39 | 90000 | 2100 | 11.13/282.6 | S106 | 24,000 |
| LU1000 | 15324 | 1000 | E-25 | E39 | 140000 | 2100 | 15.06/382.6 | S52 | 24,000 |



Non-Cycling High Pressure Sodium Lamps


| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|----------------------|---------|-------|---------|------|-----------------------|-------|------------|--------------|--------|
| LU70/NC | 08230 | 70 | ED-23.5 | E39 | 6000 | 2100 | 7.31/185.7 | S62 | 24,000 |
| LU100/NC | 08231 | 100 | ED-23.5 | E39 | 9000 | 2100 | 7.31/185.7 | S54 | 24,000 |
| LU150/55/NC | 08232 | 150 | ED-23.5 | E39 | 15000 | 2100 | 7.31/185.7 | S55 | 24,000 |
| LU250/NC | 08233 | 250 | ED-28 | E39 | 29000 | 2100 | 8.7/221 | S50 | 24,000 |
| LU400/ED28/NC | 08234 | 400 | ED-28 | E39 | 49000 | 2100 | 10.7/271.8 | S51 | 24,000 |
| LU400/NC | 08235 | 400 | ED-18 | E39 | 50000 | 2100 | 9.75/247.7 | S51 | 24,000 |

Mercury Vapor Lamps

| Ordering Code | Barcode | Watts | Shape | Base | Approx Initial Lumens | CT° K | MOL in/mm | ANSI Ballast | Life |
|-----------------------|---------|-------|---------|------|-----------------------|-------|-------------|--------------|--------|
| H43AV-75/DX | 49564 | 75 | ED-17 | E26 | 2700 | 3200 | 5.44/138.0 | H43 | 10,000 |
| H38AV-100/DX | 00332 | 100 | ED-17 | E26 | 4000 | 3900 | 5.44/138.0 | H38 | 12,000 |
| H38JA-100/DX | 15353 | 100 | ED-23.5 | E39 | 4100 | 3200 | 7.50/190.5 | H38 | 12,000 |
| H38MP-100/DX | 49168 | 100 | A-23 | E26 | 4000 | 3700 | 5.44/138.0 | H38 | 12,000 |
| H39KB-175 | 15356 | 175 | ED-28 | E39 | 7350 | 6800 | 8.31/211.1 | H39 | 12,000 |
| H39KC-175/DX | 15355 | 175 | ED-28 | E39 | 7665 | 3700 | 8.31/211.1 | H39 | 12,000 |
| H37KB-250 | 15358 | 250 | ED-28 | E39 | 11000 | 6700 | 8.31/211.1 | H37 | 18,000 |
| H37KC-250/DX | 15357 | 250 | ED-28 | E39 | 11550 | 3700 | 8.31/211.1 | H37 | 18,000 |
| H33CD-400 | 15360 | 400 | ED-37 | E39 | 21000 | 6500 | 11.50/292.1 | H33 | 18,000 |
| H33GL-400/DX | 15359 | 400 | ED-37 | E39 | 22050 | 3700 | 11.50/292.1 | H33 | 18,000 |
| H46DL-40/50/DX | 15350 | 40/50 | ED-17 | E26 | 1570 | 3200 | 5.12/130.0 | H45/46 | 8,000 |

WARNING: HID lamps can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

HID Lamps > Base Types

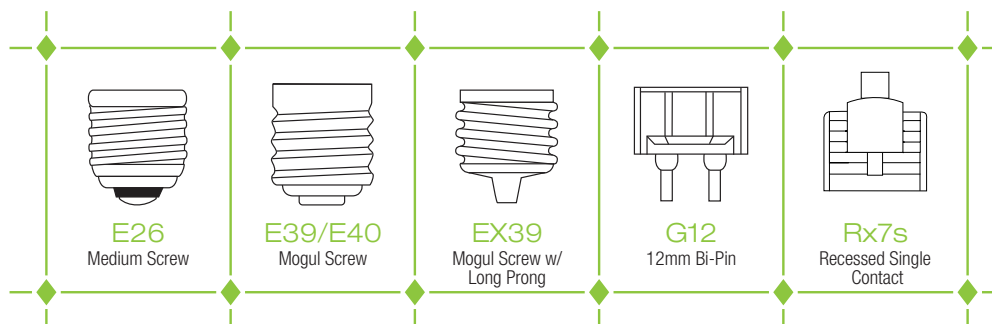



Halogen Lamps

EIKO's commercial grade Halogen Lamps feature high-grade, heavy-gauge glass, high output halogen burners, premium gas mixtures, quality reflector coatings, linear beam patterns, and superior construction quality. The result? A reliable, high performance product that lowers your overall cost. Halogen lamps provide a whiter, brighter light that saves up to 30% in energy costs when compared to incandescent lamps.



EIKON™ Energy Efficient Halogen IR PAR30

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|----------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| IR53PAR30/FL | 08206 | 53 | 120 | E26 | CC-8 | 1050 | 3.66/93 | 3.74/95 | 35 | 4,000 |
| IR53PAR30/NFL | 08205 | 53 | 120 | E26 | CC-8 | 1050 | 3.66/93 | 3.74/95 | 25 | 4,000 |
| IR53PAR30/SP | 08204 | 53 | 120 | E26 | CC-8 | 1050 | 3.66/93 | 3.74/95 | 10 | 4,000 |

EIKON™ Energy Efficient Halogen IR PAR30LN

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|------------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| IR53PAR30LN/NFL | 08208 | 53 | 120 | E26 | CC-8 | 930 | 4.76/121 | 3.74/95 | 25 | 4,000 |
| IR53PAR30LN/WFL | 08209 | 53 | 120 | E26 | CC-8 | 930 | 4.76/121 | 3.74/95 | 50 | 4,000 |
| IR53PAR30LN/SP | 08207 | 53 | 120 | E26 | CC-8 | 930 | 4.76/121 | 3.74/95 | 10 | 4,000 |

EIKON™ Energy Efficient Halogen IR PAR38

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| IR53PAR38/FL | 08210 | 53 | 120 | E26 | CC-8 | 960 | 5.51/140 | 4.80/122 | 25 | 4,000 |
| IR71PAR38/FL | 08211 | 71 | 120 | E26 | CC-8 | 1370 | 5.51/140 | 4.80/122 | 25 | 4,000 |
| IR71PAR38/SP | 08212 | 71 | 120 | E26 | CC-8 | 1370 | 5.51/140 | 4.80/122 | 10 | 4,000 |

EIKON™ Energy Efficient Halogen Silver PAR20

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| 35PAR20/H/NFL-120V | 08019 | 35 | 120 | E26 | CC-8 | 530 | 3.11/79 | 2.48/63 | 30 | 1,500 |
| 35PAR20/H/SP-120V | 08020 | 35 | 120 | E26 | CC-8 | 530 | 3.11/79 | 2.48/63 | 15 | 1,500 |



EIKON™ IR PAR30



EIKON™ IR PAR30LN



EIKON™ IR PAR38



EIKON™ Silver PAR20

EiKON™ Energy Efficient Halogen Silver PAR30

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| 35PAR30/H/FL-120V | 08021 | 35 | 120 | E26 | CC-8 | 530 | 3.54/90 | 3.74/95 | 30 | 1,500 |
| 35PAR30/H/SP-120V | 08022 | 35 | 120 | E26 | CC-8 | 530 | 3.54/90 | 3.74/95 | 15 | 1,500 |
| 60PAR30/H/FL-120V | 08137 | 60 | 120 | E26 | CC-8 | 1070 | 3.54/90 | 3.74/95 | 30 | 1,500 |
| 60PAR30/H/NFL-120V | 08138 | 60 | 120 | E26 | CC-8 | 1070 | 3.54/90 | 3.74/95 | 25 | 1,500 |
| 60PAR30/H/SP-120V | 08139 | 60 | 120 | E26 | CC-8 | 1070 | 3.54/90 | 3.74/95 | 15 | 1,500 |

EiKON™ Energy Efficient Halogen Silver PAR30LN

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|-----------------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| 35PAR30LN/H/FL-120V | 08023 | 35 | 120 | E26 | CC-8 | 530 | 4.69/119 | 3.74/95 | 30 | 1,500 |
| 35PAR30LN/H/NFL-120V | 08024 | 35 | 120 | E26 | CC-8 | 530 | 4.69/119 | 3.74/95 | 25 | 1,500 |
| 35PAR30LN/H/SP-120V | 08025 | 35 | 120 | E26 | CC-8 | 530 | 4.69/119 | 3.74/95 | 15 | 1,500 |
| 60PAR30LN/H/FL-120V | 08140 | 60 | 120 | E26 | CC-8 | 1070 | 4.69/119 | 3.74/95 | 30 | 1,500 |
| 60PAR30LN/H/NFL-120V | 08141 | 60 | 120 | E26 | CC-8 | 1070 | 4.69/119 | 3.74/95 | 25 | 1,500 |
| 60PAR30LN/H/SP-120V | 08142 | 60 | 120 | E26 | CC-8 | 1070 | 4.69/119 | 3.74/95 | 15 | 1,500 |

EiKON™ Energy Efficient Halogen Silver PAR38

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------------------|---------|-------|-------|------|----------|--------|-----------|-----------|------------|-------|
| 35PAR38/H/FL-120V | 08018 | 35 | 120 | E26 | CC-8 | 530 | 5.2/132 | 4.8/122 | 30 | 1,500 |
| 35PAR38/H/SP-120V | 08026 | 35 | 120 | E26 | CC-8 | 530 | 5.2/132 | 4.8/122 | 15 | 1,500 |
| 35PAR38/H/WFL-120V | 08027 | 35 | 120 | E26 | CC-8 | 530 | 5.2/132 | 4.8/122 | 50 | 1,500 |
| 60PAR38/H/FL-120V | 08143 | 60 | 120 | E26 | CC-8 | 1070 | 5.2/132 | 4.8/122 | 30 | 1,500 |
| 60PAR38/H/SP-120V | 08144 | 60 | 120 | E26 | CC-8 | 1070 | 5.2/132 | 4.8/122 | 15 | 1,500 |
| 60PAR38/H/WFL-120V | 08145 | 60 | 120 | E26 | CC-8 | 1070 | 5.2/132 | 4.8/122 | 50 | 1,500 |
| 70PAR38/H/FL-120V | 08187 | 70 | 120 | E26 | CC-8 | 1305 | 5.2/132 | 4.8/122 | 30 | 1,500 |
| 70PAR38/H/SP-120V | 08152 | 70 | 120 | E26 | CC-8 | 1305 | 5.2/132 | 4.8/122 | 15 | 1,500 |
| 70PAR38/H/WFL-120V | 08153 | 70 | 120 | E26 | CC-8 | 1305 | 5.2/132 | 4.8/122 | 50 | 1,500 |

EiKON™ Energy Efficient Halogen A-Line

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|------|----------|--------|-----------|-----------|-------|
| 29A/CL/H-120V | 07757 | 29 | 120 | E26 | CC-8 | 430 | 4.25/108 | 2.36/60 | 1,000 |
| 43A/CL/H-120V | 07758 | 43 | 120 | E26 | CC-8 | 750 | 4.25/108 | 2.36/60 | 1,000 |
| 53A/CL/H-120V | 07759 | 53 | 120 | E26 | CC-8 | 1050 | 4.25/108 | 2.36/60 | 1,000 |
| 72A/CL/H-120V | 07760 | 72 | 120 | E26 | CC-8 | 1490 | 4.25/108 | 2.36/60 | 1,000 |

Classic BT15 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-------|-------|------|----------|--------|-----------|-----------|-------|
| 60BT15/H/CL | 81138 | 60 | 120 | E26 | CC-8 | 900 | 4.0/101 | 1.9/48.3 | 3,000 |
| 60BT15/H/W | 81137 | 60 | 120 | E26 | CC-8 | 840 | 4.0/101 | 1.9/48.3 | 3,000 |
| 75BT15/H/W | 81139 | 75 | 120 | E26 | CC-8 | 1120 | 4.0/101 | 1.9/48.3 | 3,000 |
| 150BT15/H/W | 81141 | 150 | 120 | E26 | CC-8 | 2850 | 4.0/101 | 1.9/48.3 | 1,500 |

MR8 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|----------------------|---------|-------|-------|------|----------|-----------|-----------|------------|-------|
| Q10MR8/NSP/CG | 06240 | 10 | 6 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 10 | 2,000 |
| Q20MR8/NFL/CG | 05042 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 20 | 2,000 |
| Q20MR8/NSP/CG | 04977 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 10 | 2,000 |
| Q35MR8/NFL/CG | 06242 | 35 | 12 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 20 | 2,000 |



MR8 Supreme Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|------|----------|-----------|-----------|------------|-------|
| 49407 | 49407 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 10 | 2,000 |
| 49408 | 49408 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 0.99/25.2 | 23 | 2,000 |

MR11 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|------|----------|-----------|-----------|------------|-------|
| FTA | 15115 | 12 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 10 | 2,000 |
| FTB | 15120 | 20 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 10 | 2,000 |
| FTB-FG | 15140 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 10 | 2,000 |
| FTC | 15122 | 20 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 20 | 2,000 |
| FTC-FG | 15142 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 20 | 2,000 |
| FTD | 15124 | 20 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 30 | 2,000 |
| FTD-FG | 15144 | 20 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 30 | 2,000 |
| FTE | 15126 | 35 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 10 | 2,000 |
| FTE-FG | 15146 | 35 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 10 | 2,000 |
| FTF | 15128 | 35 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 20 | 2,000 |
| FTF-FG | 15148 | 35 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 20 | 2,000 |
| FTH | 15130 | 35 | 12 | GU4 | C-8 | 1.38/35.0 | 1.39/35.3 | 30 | 2,000 |
| FTH-FG | 15150 | 35 | 12 | GU4 | C-8 | 1.56/39.5 | 1.41/35.8 | 30 | 2,000 |

MR16 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|-------------------------|---------|-------|-------|-------|----------|-----------|-----------|------------|-------|
| BAB | 15030 | 20 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 3,000 |
| BAB-BLACK | 81109 | 20 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 3,000 |
| BAB-FG | 15070 | 20 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 3,000 |
| BAB-FG-GU10-120V | 05373 | 20 | 120 | GU10 | 8-Style | 2.20/56 | 2.00/51 | 38 | 3,000 |
| BAB-SILVER | 81108 | 20 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 3,000 |
| ESX | 15032 | 20 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 12 | 3,000 |
| ESX-FG | 15072 | 20 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 3,000 |
| FMT | 15047 | 35 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 12 | 4,000 |
| FMT-FG | 15053 | 35 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FMV | 15049 | 35 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 24 | 4,000 |
| FMV-FG | 15055 | 35 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 24 | 4,000 |
| FMW | 15051 | 35 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 4,000 |
| FMW-BLACK | 81111 | 35 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 4,000 |
| FMW-FG | 15057 | 35 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |
| FMW-FG-GU10-130V | 00009 | 35 | 130 | GU10 | 8-Style | 2.20/56 | 2.20/50.8 | 38 | 2,000 |
| FMW-SILVER | 81110 | 35 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 4,000 |
| FRA-FG | 49433 | 35 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 18 | 4,000 |
| EYP | 15034 | 42 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 38 | 4,000 |
| EYP-FG | 15074 | 42 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |
| EYR | 15036 | 42 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 12 | 4,000 |
| EYR-FG | 15076 | 42 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| EYS | 15038 | 42 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 24 | 4,000 |
| EYS-FG | 15078 | 42 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 24 | 4,000 |
| ENL | 15040 | 50 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 24 | 4,000 |
| EXN | 15042 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 38 | 4,000 |
| EXN-BLACK | 81115 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 38 | 4,000 |
| EXN-FG | 15080 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |
| EXN-FG-24V | 49565 | 50 | 24 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |

>>Continued on page 53



MR8



MR11



MR16

MR16 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|-------------------------|---------|-------|-------|-------|----------|-----------|-----------|------------|-------|
| EXN-FG-GU10-130V | 00305 | 50 | 130 | GU10 | 8-Style | 2.20/56 | 2.20/50.8 | 38 | 3,500 |
| EXN-SILVER | 81114 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 38 | 4,000 |
| EXT | 15044 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 12 | 4,000 |
| EXT-FG | 15082 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| EXT-FG-24V | 49566 | 50 | 24 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| EXZ | 15046 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 24 | 4,000 |
| EXZ-BLACK | 81113 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 24 | 4,000 |
| EXZ-FG | 15084 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 24 | 4,000 |
| EXZ-SILVER | 81112 | 50 | 12 | GU5.3 | C-8 | 1.77/45.0 | 2.00/50.8 | 24 | 4,000 |
| FNC-FG | 15048 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FND-FG | 15050 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FNE-FG | 15052 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FNF-FG | 15054 | 50 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FNV | 00296 | 50 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 60 | 3,000 |
| FNV-FG | 00297 | 50 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 60 | 3,000 |
| FPA | 15056 | 65 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 12 | 4,000 |
| FPA-FG | 15086 | 65 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| FPB | 15058 | 65 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 38 | 4,000 |
| FPB-FG | 15088 | 65 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |
| FPC | 15060 | 65 | 12 | GU5.3 | C-8 | 1.81/46.0 | 2.00/50.8 | 24 | 4,000 |
| FPC-FG | 15090 | 65 | 12 | GU5.3 | C-8 | 1.85/47.0 | 2.00/50.8 | 24 | 4,000 |
| EYC | 15062 | 75 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 38 | 4,000 |
| EYC-FG | 15092 | 75 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 38 | 4,000 |
| EYF | 15064 | 75 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 12 | 4,000 |
| EYF-FG | 15094 | 75 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 12 | 4,000 |
| EYJ | 15066 | 75 | 12 | GU5.3 | C-8 | 1.75/44.5 | 2.00/50.8 | 24 | 4,000 |
| EYJ-FG | 15096 | 75 | 12 | GU5.3 | C-8 | 1.99/50.5 | 2.00/50.8 | 24 | 4,000 |

MR16 Screw Base Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|-------------------|---------|-------|-------|------|----------|-----------|-----------|------------|-------|
| JDR130V50W | 00211 | 50 | 130 | E26 | C-6Z | 2.84/72.0 | 2.00/50.8 | 30 | 2,000 |
| FSA | 15100 | 75 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 12 | 2,000 |
| FSB | 15102 | 75 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 20 | 2,000 |
| FSD | 15106 | 75 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 30 | 2,000 |
| JDR75/FL | 10453 | 75 | 120 | E26 | CC-8 | 2.84/72.0 | 2.00/50.8 | 30 | 2,000 |
| JDR75/MF | 10452 | 75 | 120 | E26 | CC-8 | 2.84/72.0 | 2.00/50.8 | 20 | 2,000 |
| JDR75/SP | 10451 | 75 | 120 | E26 | CC-8 | 2.84/72.0 | 2.00/50.8 | 12 | 2,000 |
| FSC | 15104 | 100 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 12 | 2,000 |
| FSE | 15108 | 100 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 20 | 2,000 |
| FSF | 15110 | 100 | 120 | E17 | CC-8 | 2.75/69.9 | 2.00/50.8 | 30 | 2,000 |
| JDR100/FL | 05426 | 100 | 120 | E26 | CC-8 | 2.84/72.0 | 2.00/50.8 | 30 | 1,500 |
| JDR100/MF | 05425 | 100 | 120 | E26 | CC-8 | 2.84/72.0 | 2.00/50.8 | 20 | 1,500 |

MR16 Line Voltage Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|-------------------------|---------|-------|-------|------|----------|-----------|-----------|------------|-------|
| BAB-FG-GU10-120V | 05373 | 20 | 120 | GU10 | 8-Style | 2.20/56 | 2.00/51 | 38 | 3,000 |
| FMW-FG-GU10-130V | 00009 | 35 | 130 | GU10 | 8-Style | 2.20/56 | 2.20/50.8 | 38 | 2,000 |
| EXN-FG-GU10-130V | 00305 | 50 | 130 | GU10 | 8-Style | 2.20/56 | 2.20/50.8 | 38 | 3,500 |



MR16 Screw Base



MR16 Line Voltage

37mm Diameter Aluminized Reflector Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|-------|----------|-----------|-----------|------------|-------|
| GBD | 49861 | 20 | 12 | BA15d | C-8 | 1.63/41.4 | 1.39/35.3 | 6 | 2,000 |
| GBE | 49862 | 20 | 12 | BA15d | C-8 | 1.63/41.4 | 1.39/35.3 | 18 | 2,000 |
| GBF | 49664 | 20 | 12 | BA15d | C-8 | 1.63/41.4 | 1.39/35.3 | 32 | 2,000 |
| GBF-FR | 49665 | 20 | 12 | BA15d | C-8 | 1.63/41.4 | 1.39/35.3 | 32 | 2,000 |

56mm Diameter Aluminized Reflector Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|-------|----------|-----------|-----------|------------|-------|
| GBJ | 49863 | 50 | 12 | BA15d | C-8 | 2.25/57.2 | 2.25/57.2 | 10 | 2,000 |
| GBK | 49864 | 50 | 12 | BA15d | C-8 | 2.25/57.2 | 2.25/57.2 | 22 | 2,000 |

Single Ended Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| Q50CL/DC-130V | 00212 | 50 | 130 | BA15d | CC-8 | 650 | 2.18/55.4 | 0.52/13.0 | 2,000 |
| Q50CL/MC-130V | 00213 | 50 | 130 | E11 | CC-8 | 650 | 2.56/65.0 | 0.52/13.0 | 2,000 |
| Q75CL-120V | 15215 | 75 | 120 | E11 | CC-8 | 1200 | 2.50/63.5 | 0.44/11.0 | 2,000 |
| Q75CL-130V | 49567 | 75 | 130 | E11 | CC-8 | 1200 | 2.50/63.5 | 0.44/11.0 | 2,000 |
| Q75CL/DC-120V | 15217 | 75 | 120 | BA15d | CC-8 | 1350 | 2.38/60.3 | 0.47/12.0 | 2,000 |
| Q75MC-120V | 15287 | 75 | 120 | E11 | C-8 | 1170 | 2.56/65.0 | 0.52/13.0 | 1,000 |
| Q100/DC-120V | 15220 | 100 | 120 | BA15d | CC-8 | 1500 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q100/MC-120V | 15234 | 100 | 120 | E11 | CC-8 | 1500 | 2.84/72.0 | 0.52/13.0 | 2,000 |
| Q100CL/DC-120V | 15219 | 100 | 120 | BA15d | CC-8 | 1500 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q100CL/DC/2V-120V | 49600 | 100 | 120 | BA15d | CC-2V | 1500 | 2.44/61.9 | 0.55/14.0 | 1,000 |
| Q100CL/DC/2V-130V | 15230 | 100 | 130 | BA15d | CC-2V | 1500 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q100CL/MC-120V | 15232 | 100 | 120 | E11 | CC-8 | 1500 | 2.84/72.0 | 0.52/13.0 | 2,000 |
| Q100CL/MC/2V-120V | 49598 | 100 | 120 | E11 | CC-2V | 1500 | 2.76/70.0 | 0.52/13.0 | 750 |
| Q100CL/MC/2V-130V | 15236 | 100 | 130 | E11 | CC-2V | 1500 | 2.84/72.0 | 0.52/13.0 | 2,000 |
| Q100DC/2V-120V | 49596 | 100 | 120 | BA15d | CC-2V | 1500 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q100MC/2V-120V | 49599 | 100 | 120 | E11 | CC-2V | 1500 | 2.76/70.0 | 0.52/13.0 | 750 |
| Q150CL/DC-120V | 49604 | 150 | 120 | BA15d | CC-8 | 2800 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q150CL/DC-130V | 15250 | 150 | 130 | BA15d | CC-8 | 2800 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| Q150CL/MC-120V | 49601 | 150 | 120 | E11 | CC-8 | 2600 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| Q150CL/MC-130V | 15239 | 150 | 130 | E11 | CC-8 | 2600 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| Q150CL/MC/2V-130V | 15252 | 150 | 130 | E11 | CC-2V | 2800 | 2.84/72.0 | 0.52/13.0 | 1,000 |
| Q150DC-120V | 49602 | 150 | 120 | BA15d | CC-8 | 2700 | 2.68/68.0 | 0.52/13.0 | 2,000 |
| Q150MC-120V | 49603 | 150 | 120 | E11 | CC-8 | 2700 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| Q250CL/DC-120V | 49610 | 250 | 120 | BA15d | CC-8 | 5000 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| Q250CL/DC-130V | 15264 | 250 | 130 | BA15d | CC-8 | 5000 | 3.00/76.2 | 0.52/13.0 | 2,000 |
| Q250CL/MC-120V | 49609 | 250 | 120 | E11 | CC-8 | 5000 | 3.15/80.0 | 0.52/13.0 | 2,000 |
| Q250CL/MC-130V | 15268 | 250 | 130 | E11 | CC-8 | 5000 | 3.15/80.0 | 0.52/13.0 | 2,000 |
| Q250DC-120V | 49607 | 250 | 120 | BA15d | CC-8 | 4700 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| Q250DC-130V | 15266 | 250 | 130 | BA15d | CC-8 | 4800 | 3.00/76.2 | 0.52/13.0 | 2,000 |
| Q250MC-120V | 49608 | 250 | 120 | E11 | CC-8 | 4800 | 3.19/81.0 | 0.52/13.0 | 2,000 |
| Q250MC-130V | 15270 | 250 | 130 | E11 | CC-8 | 4800 | 3.19/81.0 | 0.52/13.0 | 2,000 |
| Q500/MC-120V | 49612 | 500 | 120 | E11 | CC-8 | 8800 | 3.75/95.3 | 0.52/13.0 | 1,700 |
| Q500/MC-130V | 49614 | 500 | 130 | E11 | CC-8 | 8800 | 3.75/95.3 | 0.52/13.0 | 1,700 |
| Q500CL/DC-120V | 15282 | 500 | 120 | BA15d | CC-8 | 8800 | 3.75/95.3 | 0.59/15.0 | 1,700 |
| Q500CL/MC-120V | 49613 | 500 | 120 | E11 | CC-8 | 8800 | 3.75/95.3 | 0.55/14.0 | 1,700 |
| Q500CL/MC-130V | 49615 | 500 | 130 | E11 | CC-8 | 8800 | 3.75/95.3 | 0.52/13.0 | 1,700 |
| Q500DC-120V | 15284 | 500 | 120 | BA15d | CC-8 | 8800 | 3.75/95.3 | 0.59/15.0 | 1,700 |



Double Ended Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|-------|-------|------|----------|--------|-------------|-----------|-------|
| Q100T3/CL/120V | 15159 | 100 | 120 | R7s | CC-8 | 1400 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q150T3/CL/120V | 15161 | 150 | 120 | R7s | CC-8 | 2200 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q250T3/CL/120V | 15162 | 250 | 120 | R7s | C-8 | 3500 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q300T3/CL/120V | 15164 | 300 | 120 | R7s | C-8 | 4800 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q300T3/CL/130V | 15166 | 300 | 130 | R7s | C-8 | 4800 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q300T3/CL/220V | 15168 | 300 | 220 | R7s | C-8 | 4500 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q300T3/CL/240V | 00196 | 300 | 240 | R7s | C-8 | 4500 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q500T3/CL/120V | 15170 | 500 | 120 | R7s | C-8 | 10000 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q500T3/CL/130V | 15172 | 500 | 130 | R7s | C-8 | 9500 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q500T3/CL/220V | 15174 | 500 | 220 | R7s | C-8 | 9000 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q500T3/CL/240V | 15176 | 500 | 240 | R7s | C-8 | 9000 | 4.69/119.1 | 0.40/10.0 | 2,000 |
| Q750T3/CL/120V | 49568 | 750 | 120 | R7s | C-8 | 15000 | 7.50/190.5 | 0.40/10.0 | 2,000 |
| Q750T3/CL/240V | 15180 | 750 | 240 | R7s | C-8 | 16500 | 7.50/190.5 | 0.40/10.0 | 2,000 |
| Q1000T3/CL/120V | 49569 | 1000 | 120 | R7s | C-8 | 22000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1000T3/CL/220V | 15182 | 1000 | 220 | R7s | C-8 | 21000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1000T3/CL/240V | 15184 | 1000 | 240 | R7s | C-8 | 21000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1000T3/CL/277V | 15186 | 1000 | 277 | R7s | C-8 | 22000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1500T3/CL/120V | 49570 | 1500 | 120 | R7s | CC-8 | 33000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1500T3/CL/208V | 15188 | 1500 | 208 | R7s | C-8 | 32000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1500T3/CL/220V | 15190 | 1500 | 220 | R7s | CC-8 | 32000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1500T3/CL/240V | 15192 | 1500 | 240 | R7s | CC-8 | 32000 | 10.06/255.6 | 0.40/10.0 | 2,000 |
| Q1500T3/CL/277V | 15194 | 1500 | 277 | R7s | CC-8 | 34000 | 10.06/255.6 | 0.40/10.0 | 2,000 |

Double Ended Short Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-------|-------|------|----------|--------|-----------|-------------|-------|
| Q100W/S120V | 15200 | 100 | 120 | R7s | C-8 | 1300 | 3.15/80.0 | 0.315/8.0 | 2,000 |
| Q100W/S130V | 15202 | 100 | 130 | R7s | C-8 | 1300 | 3.15/80.0 | 0.315/8.0 | 2,000 |
| Q150W/S120V | 15206 | 150 | 120 | R7s | C-8 | 2200 | 3.15/80.0 | 0.344/8.74 | 2,000 |
| Q150W/S130V | 15208 | 150 | 130 | R7s | C-8 | 2200 | 3.15/80.0 | 0.344/8.74 | 2,000 |
| Q200W/S120V | 15211 | 200 | 120 | R7s | C-8 | 3000 | 3.15/80.0 | 0.344/8.74 | 2,000 |
| Q200W/S130V | 15213 | 200 | 130 | R7s | C-8 | 3000 | 3.15/80.0 | 0.344/8.74 | 2,000 |
| Q200W/S220V | 15209 | 200 | 220 | R7s | CC-8 | 3000 | 3.15/80.0 | 0.344/8.74 | 2,000 |
| Q250W/S120V | 49571 | 250 | 120 | R7s | CC-8 | 3500 | 3.15/80.0 | 0.360/9.13 | 2,000 |
| Q300W/S120V | 00019 | 300 | 120 | R7s | CC-8 | 4100 | 3.15/80.0 | 0.360/9.13 | 2,000 |
| Q300W/S130V | 15216 | 300 | 130 | R7s | CC-8 | 4100 | 3.15/80.0 | 0.360/9.13 | 2,000 |
| Q400W/S130V | 15221 | 400 | 130 | R7s | C-8 | 5500 | 3.15/80.0 | 0.406/10.32 | 2,000 |

G4 Base 2-pin Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-------|-------|------|----------|--------|-----------|-----------|-------|
| JC12V5W-FR | 81120 | 5 | 12 | G4 | C-6 | 60 | 1.38/35.0 | 0.36/9.0 | 2,000 |
| JCD12V5WH20 | 15005 | 5 | 12 | G4 | C-6 | 60 | 1.22/31.0 | 0.32/8.2 | 2,000 |
| JCD12V10WH20 | 15007 | 10 | 12 | G4 | C-6 | 150 | 1.22/31.0 | 0.36/9.0 | 2,000 |
| JCD6V10WH20 | 15001 | 10 | 6 | G4 | C-6 | 150 | 1.22/31.0 | 0.36/9.0 | 2,000 |
| JC12V20W | 03510 | 20 | 12 | G4 | C-6 | 350 | 1.38/35.0 | 0.36/9.0 | 50 |
| JCD12V20WH20 | 15009 | 20 | 12 | G4 | C-6 | 300 | 1.22/31.0 | 0.36/9.0 | 2,000 |
| JCD24V20WH20 | 15011 | 20 | 24 | G4 | CC-6 | 280 | 1.22/31.0 | 0.32/8.2 | 2,000 |
| JCD6V20WH20 | 15003 | 20 | 6 | G4 | C-6 | 300 | 1.22/31.0 | 0.36/9.0 | 2,000 |
| JC12V30W | 03520 | 30 | 12 | G4 | C-6 | 800 | 1.22/31.0 | 0.36/9.0 | 50 |
| JCD12V35WH20 | 49561 | 35 | 12 | G4 | CC-6 | 650 | 1.22/31.0 | 0.36/9.0 | 2,000 |



Double Ended Short



G4 Base 2-Pin



G6.35 Base 2-Pin

G6.35 Base 2-pin Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| JC12V20WH20 | 15013 | 20 | 12 | G6.35 | C-6 | 350 | 1.73/44.0 | 0.46/11.5 | 2,000 |
| JC12V30WH20 | 15015 | 30 | 12 | G6.35 | C-6 | 560 | 1.73/44.0 | 0.46/11.5 | 2,000 |
| JC12V35WH20 | 15017 | 35 | 12 | G6.35 | C-6 | 600 | 1.73/44.0 | 0.46/11.5 | 2,000 |
| JC12V50WH20 | 15019 | 50 | 12 | G6.35 | C-8 | 950 | 1.73/44.0 | 0.46/11.5 | 2,000 |
| JC12V75WH20 | 15021 | 75 | 12 | G6.35 | C-6 | 1600 | 1.73/44.0 | 0.46/11.5 | 2,000 |
| JC12V100WH20 | 15023 | 100 | 12 | G6.35 | C-6 | 2000 | 1.73/44.0 | 0.51/13.0 | 1,200 |

Bi-pin Line Voltage Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| JCD130V20WG6.35 | 00307 | 20 | 130 | G6.35 | CC-6V | 130 | 1.44/36.5 | 0.52/13 | 1,500 |
| JCD130V20WG8 | 00314 | 20 | 130 | G8 | CC-6V | 130 | 1.44/36.5 | 0.52/13 | 1,500 |
| JCD130V25WG6.35 | 00308 | 25 | 130 | G6.35 | CC-6V | 170 | 1.44/36.5 | 0.52/13 | 1,500 |
| JCD130V25WG8 | 00315 | 25 | 130 | G8 | CC-6V | 170 | 1.44/36.5 | 0.52/13 | 1,500 |
| JCD130V25WG9 | 00321 | 25 | 130 | G9 | 4-Style | 180 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V25WG9/F | 00326 | 25 | 130 | G9 | 4-Style | 170 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V35WG6.35 | 00309 | 35 | 130 | G6.35 | CC-6V | 380 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V35WG8 | 00316 | 35 | 130 | G8 | CC-6V | 380 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V40WG9 | 00322 | 40 | 130 | G9 | 4-Style | 400 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V40WG9/F | 00327 | 40 | 130 | G9 | 4-Style | 380 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V50WG6.35 | 00311 | 50 | 130 | G6.35 | CC-2V | 600 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V50WG8 | 00317 | 50 | 130 | G8 | CC-2V | 600 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V50WG9 | 00323 | 50 | 130 | G9 | 4-Style | 550 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V50WG9/F | 00328 | 50 | 130 | G9 | 4-Style | 500 | 1.81/46 | 0.52/13 | 2,000 |
| JCD130V60WG9 | 00324 | 60 | 130 | G9 | 4-Style | 720 | 1.93/49 | 0.52/13 | 1,500 |
| JCD130V60WG9/F | 00329 | 60 | 130 | G9 | 4-Style | 680 | 1.93/49 | 0.52/13 | 1,500 |
| JCD130V75WG6.35 | 00312 | 75 | 130 | G6.35 | CC-7A | 930 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V75WG8 | 00318 | 75 | 130 | G8 | CC-7A | 930 | 1.77/45 | 0.52/13 | 2,000 |
| JCD130V75WG9 | 00325 | 75 | 130 | G9 | 4-Style | 900 | 1.93/49 | 0.52/13 | 1,500 |
| JCD130V75WG9/F | 00331 | 75 | 130 | G9 | 4-Style | 850 | 1.93/49 | 0.52/13 | 1,500 |
| JCD130V100WG8 | 00319 | 100 | 130 | G8 | CC-7A | 1450 | 1.97/50 | 0.53/13.5 | 1,500 |

Halogen Heat Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|---------|------------|----------|-------------|-----------|-------|
| 17002 | 17002 | 375 | 115-125 | 6 in Leads | C-8 | 8.82/224.0 | 0.40/10.0 | 5,000 |
| 17004 | 17004 | 375 | 115-125 | R7s | C-8 | 8.70/221.0 | 0.40/10.0 | 5,000 |
| 17006 | 17006 | 500 | 115-125 | 6 in Leads | C-8 | 8.82/224.0 | 0.40/10.0 | 5,000 |
| 17008 | 17008 | 500 | 115-125 | 6 in Leads | C-8 | 8.82/224.0 | 0.40/10.0 | 5,000 |
| 17010 | 17010 | 500 | 115-125 | R7s | C-8 | 8.70/221.0 | 0.40/10.0 | 5,000 |
| 17012 | 17012 | 1000 | 200-220 | 6 in Leads | C-8 | 13.78/350.0 | 0.40/10.0 | 5,000 |
| 17014 | 17014 | 1000 | 230-250 | 6 in Leads | C-8 | 13.78/350.0 | 0.40/10.0 | 5,000 |
| 17016 | 17016 | 1000 | 230-250 | 6 in Leads | C-8 | 11.89/302.0 | 0.40/10.0 | 5,000 |
| 17018 | 17018 | 1000 | 230-250 | 6 in Leads | C-8 | 13.78/350.0 | 0.40/10.0 | 5,000 |
| 17022 | 17022 | 1200 | 144 | 6 in Leads | C-8 | 8.82/224.0 | 0.40/10.0 | 5,000 |
| 17024 | 17024 | 1600 | 200-220 | 6 in Leads | C-8 | 19.80/503.0 | 0.40/10.0 | 5,000 |
| 17026 | 17026 | 1600 | 230-250 | 6 in Leads | C-8 | 19.80/503.0 | 0.40/10.0 | 5,000 |
| 17028 | 17028 | 1600 | 277 | 6 in Leads | C-8 | 19.80/503.0 | 0.40/10.0 | 5,000 |
| 17030 | 17030 | 1600 | 230-250 | 6 in Leads | C-8 | 19.80/503.0 | 0.40/10.0 | 5,000 |
| 17032 | 17032 | 1600 | 200-220 | R7s | C-8 | 19.63/498.5 | 0.40/10.0 | 5,000 |
| 17034 | 17034 | 1600 | 230-250 | R7s | C-8 | 19.63/498.5 | 0.40/10.0 | 5,000 |
| 17040 | 17040 | 2000 | 230-250 | 6 in Leads | C-8 | 13.78/350.0 | 0.40/10.0 | 5,000 |

>>Continued on page 57



Halogen Heat Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|---------|------------|----------|-----------|-----------|-------|
| 17042 | 17042 | 2500 | 460-500 | 6 in Leads | C-8 | 28.82/732 | 0.40/10.0 | 5,000 |
| 17046 | 17046 | 2500 | 460-500 | 6 in Leads | C-8 | 28.82/732 | 0.40/10.0 | 5,000 |
| 17048 | 17048 | 3650 | 480 | 6 in Leads | C-8 | 41.6/1057 | 0.40/10.0 | 5,000 |
| 17050 | 17050 | 3800 | 550-600 | 6 in Leads | C-8 | 41.8/1062 | 0.40/10.0 | 5,000 |
| 17052 | 17052 | 3800 | 550-600 | 6 in Leads | C-8 | 41.8/1062 | 0.40/10.0 | 5,000 |

SoLux® MR16 3500K Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | CRI | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|-------|----------|-----|-----------|-----------|------------|-------|
| 35006 | 35006 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 35007 | 35007 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 35008 | 35008 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 36 | 4,000 |
| 35009 | 35009 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 24 | 4,000 |
| 18006 | 18006 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 18007 | 18007 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 18008 | 18008 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 36 | 4,000 |
| 18009 | 18009 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 24 | 4,000 |


SoLux® MR16 4100K Halogen Lamps


| Ordering Code | Barcode | Watts | Volts | Base | Filament | CRI | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|-------|----------|-----|-----------|-----------|------------|-------|
| 35011 | 35011 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 35012 | 35012 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 35014 | 35014 | 35 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 24 | 4,000 |
| 18011 | 18011 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 18012 | 18012 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 18014 | 18014 | 50 | 12 | GU5.3 | C-8 | 98+ | 1.77/45 | 1.97/50 | 24 | 4,000 |

SoLux® MR16 4700K Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | CRI | MOL in/mm | MOD in/mm | Beam Angle | Life |
|---------------|---------|-------|-------|-------|----------|-----|-----------|-----------|------------|-------|
| 35001 | 35001 | 35 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 35002 | 35002 | 35 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 35003 | 35003 | 35 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 36 | 4,000 |
| 35004 | 35004 | 35 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 24 | 4,000 |
| 18001 | 18001 | 50 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 10 | 4,000 |
| 18002 | 18002 | 50 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 17 | 4,000 |
| 18003 | 18003 | 50 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 36 | 4,000 |
| 18004 | 18004 | 50 | 12 | GU5.3 | C-8 | 99+ | 1.77/45 | 1.97/50 | 24 | 4,000 |

Halogen Lamps > Base Types

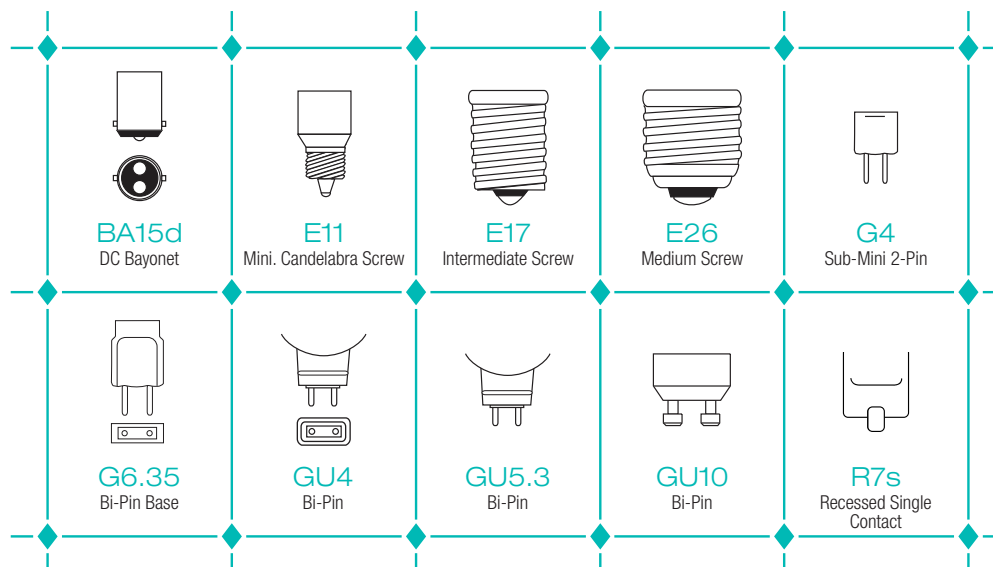

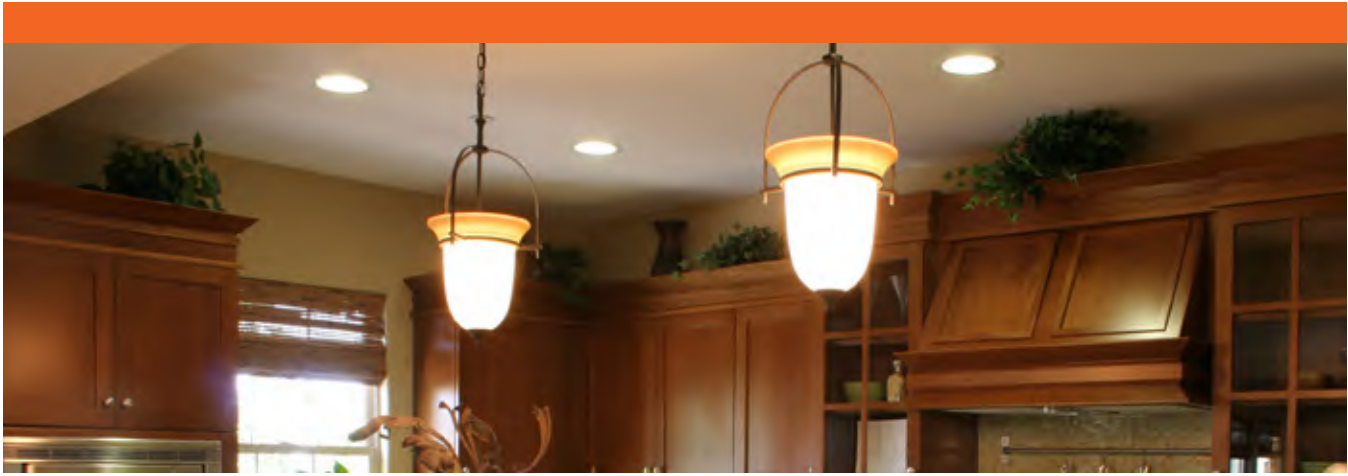

Incandescent Lamps

Incandescent lamps are still commonly used in homes and businesses, and with our wide selection, we have enough shapes, wattages, and finishes to fit almost every application and need. Many of our incandescent lamps are also available in an extended life, 130 volt version, with even more energy efficient alternatives coming soon!

A Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------|---------|-------|---------|-------|------|----------|--------|------------|-----------|-------|
| 40A-130V | 49819 | 40 | 130 | A-19 | E26 | C-9 | 340 | 4.25/108 | 2.38/60.6 | 1,500 |
| 40A/CL-130V | 49846 | 40 | 130 | A-19 | E26 | C-9 | 340 | 4.25/108 | 2.38/60.6 | 1,500 |
| 40A/SW-130V | 49847 | 40 | 130 | A-19 | E26 | C-9 | 500 | 4.44/112.7 | 2.38/60.6 | 1,000 |
| 40A15-130V | 44390 | 40 | 130 | A-15 | E26 | C-2V | 435 | 3.5/89 | 1.9/48 | 1,500 |
| 40A15-230/250V | 44394 | 40 | 230-250 | A-15 | E26 | C-2F | 435 | 3.5/89 | 1.9/48 | 1,500 |
| 40A15/F-130V | 44392 | 40 | 130 | A-15 | E26 | C-2V | 435 | 3.5/89 | 1.9/48 | 1,500 |
| 40A15/F-230/250V | 44396 | 40 | 230-250 | A-15 | E26 | 2CC-9 | 435 | 3.5/89 | 1.9/48 | 1,500 |
| 60A-130V | 49823 | 60 | 130 | A-19 | E26 | C-9 | 610 | 4.25/108 | 2.38/60.6 | 1,500 |
| 60A/CL-130V | 49848 | 60 | 130 | A-19 | E26 | CC-6 | 700 | 4.44/112.7 | 2.38/60.6 | 2,000 |

Rough Service Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-------|-------|-------|------|----------|--------|------------|-----------|-------|
| 50A/RS | 15800 | 50 | 130 | A-19 | E26 | C-9 | 380 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 50A/RS-12V | 15812 | 50 | 12 | A-19 | E26 | C-6 | 500 | 4.44/112.8 | 2.38/60.3 | 2,500 |
| 50A/RS/TF | 15806 | 50 | 130 | A-19 | E26 | C-9 | 350 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 75A/RS | 15802 | 75 | 130 | A-19 | E26 | C-9 | 700 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 75A/RS-12V | 15814 | 75 | 12 | A-19 | E26 | C-6 | 750 | 4.44/112.8 | 2.38/60.3 | 2,500 |
| 75A/RS/TF | 15808 | 75 | 130 | A-19 | E26 | C-9 | 660 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 100A/RS | 15804 | 100 | 130 | A-19 | E26 | C-9 | 1050 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 100A/RS-12V | 15816 | 100 | 12 | A-19 | E26 | C-6 | 1100 | 4.44/112.8 | 2.38/60.3 | 2,500 |

>>Continued on page 59



A Shaped



Rough Service

Rough Service Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-------|-------|-------|------|----------|--------|------------|-----------|-------|
| 100A/RS/TF | 15810 | 100 | 130 | A-19 | E26 | C-9 | 1000 | 4.44/112.8 | 2.38/60.3 | 5,000 |
| 150A/RS | 00008 | 150 | 130 | A-21 | E26 | C-9 | 1650 | 4.96/126 | 2.63/66.7 | 5,000 |
| 150A/RS/TF | 01863 | 150 | 130 | A-21 | E26 | C-9 | 1650 | 4.96/126 | 2.63/66.7 | 5,000 |

C Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| 4C7/120V | 40353 | 4 | 120 | C-7 | E12 | C-7A | 20 | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 4C7/130V | 40351 | 4 | 130 | C-7 | E12 | C-7A | 15 | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C7/120V | 40874 | 7 | 120 | C-7 | E12 | C-7A | 37 | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C7/130V | 40875 | 7 | 130 | C-7 | E12 | C-7A | 35 | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C7/130V-W | 44318 | 7 | 130 | C-7 | E12 | C-7A | n/a | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C9-120V-INT | 01709 | 7 | 120 | C-9 | E17 | C-5A | 45 | 3.9/99 | 1.15/29.2 | 3,000 |
| 10C7/120V | 40073 | 10 | 120 | C-7 | E12 | C-7A | 64 | 2.30/58.4 | 0.88/22.3 | 5000+ |
| 10C7DC/120V | 40154 | 10 | 120 | C-7 | BA15d | C-7A | 64 | 2.13/54.1 | 0.88/22.3 | 5000+ |

R & BR Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | Life |
|-----------------------|---------|-------|-------|-------|------|----------|--------|------------|------------------|
| 30R20/FL-120V | 49791 | 30 | 120 | R-20 | E26 | CC-6 | 180 | 3.94/100 | 2,000 |
| 30R20/FL-130V | 49792 | 30 | 130 | R-20 | E26 | CC-6 | 245 | 3.94/100 | 5000 Hrs at 120v |
| 45BR30/FL-120V | 49797 | 45 | 120 | BR-30 | E26 | CC-6 | 390 | 5.38/136.7 | 2,000 |
| 45R20/FL-120V | 05986 | 45 | 120 | R-20 | E26 | CC-6 | 360 | 3.94/100 | 2,000 |
| 45R20/FL-130V | 05987 | 45 | 130 | R-20 | E26 | CC-6 | 340 | 3.94/100 | 5000 Hrs at 120v |
| 65BR30/FL-120V | 49798 | 65 | 120 | BR-30 | E26 | CC-6 | 620 | 5.38/136.7 | 2,000 |
| 65BR30/FL-130V | 49799 | 65 | 130 | BR-30 | E26 | CC-6 | 620 | 5.38/136.7 | 5000 Hrs at 120v |
| 65BR30/SP-120V | 49811 | 65 | 120 | BR-30 | E26 | CC-6 | 620 | 5.38/136.7 | 2,000 |
| 65BR30/SP-130V | 49800 | 65 | 130 | BR-30 | E26 | CC-6 | 620 | 5.38/136.7 | 5000 Hrs at 120v |
| 65BR40/FL-120V | 49801 | 65 | 120 | BR-40 | E26 | CC-6 | 620 | 6.56/166.6 | 2,000 |
| 65BR40/FL-130V | 49802 | 65 | 130 | BR-40 | E26 | CC-6 | 620 | 6.56/166.6 | 5000 Hrs at 120v |

S Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| 3S6/5-120V | 40552 | 3 | 120 | S-6 | E12 | C-7A | 11.31 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 3S6/5-130V | 40554 | 3 | 130 | S-6 | E12 | C-7A | 11.31 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 3S6/5DC-120V | 40556 | 3 | 120 | S-6 | BA15d | C-7A | 11.31 | 1.82/46.2 | 0.75/19.1 | 3,000 |
| 6S6/120V | 40786 | 6 | 120 | S-6 | E12 | C-7A | 39 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/12V | 40784 | 6 | 12 | S-6 | E12 | C-6 | 48 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/130V | 40788 | 6 | 130 | S-6 | E12 | C-7A | 38 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/145V | 40789 | 6 | 145 | S-6 | E12 | C-7A | 17.60 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/155V | 40790 | 6 | 155 | S-6 | E12 | C-7A | 33 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/18V | 49717 | 6 | 18 | S-6 | E12 | C-6 | 50 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/230V | 40791 | 6 | 230 | S-6 | E12 | C-7A | 11.31 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/24V | 40792 | 6 | 24 | S-6 | E12 | C-6 | 53 | 1.88/47.8 | 0.75/19.1 | 1,500 |

>>Continued on page 60



C Shaped



R20



R30



R40



S Shaped

S Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-------|-------|-------|-------|----------|--------|-----------|-----------|--------------|
| 6S6/30V | 40794 | 6 | 30 | S-6 | E12 | C-6 | 52 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/48V | 40796 | 6 | 48 | S-6 | E12 | C-6 | 47 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/60V | 40800 | 6 | 60 | S-6 | E12 | C-7A | 43 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/6V | 40798 | 6 | 6 | S-6 | E12 | C-6 | 54 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6DC/120V | 40804 | 6 | 120 | S-6 | BA15d | C-7A | 39 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/12V | 40802 | 6 | 12 | S-6 | BA15d | C-6 | 48 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/130V | 40806 | 6 | 130 | S-6 | BA15d | C-7A | 38 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/145V | 40807 | 6 | 145 | S-6 | BA15d | C-7A | 17.60 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/24V | 40808 | 6 | 24 | S-6 | BA15d | C-6 | 53 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/30V | 40810 | 6 | 30 | S-6 | BA15d | C-6 | 52 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/32V | 40811 | 6 | 32 | S-6 | BA15d | C-6 | 50 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/48V | 40812 | 6 | 48 | S-6 | BA15d | C-6 | 47 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/60V | 40816 | 6 | 60 | S-6 | BA15d | C-7A | 43 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/6V | 40814 | 6 | 6 | S-6 | BA15d | C-6 | 54 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 10S6/120V | 00020 | 10 | 120 | S-6 | E12 | C-7A | 60 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 10S6/230V | 42446 | 10 | 230 | S-6 | E12 | C-7A | 60 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 10S6/250V | 16013 | 10 | 250 | S-6 | E12 | C-7A | 60 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 10S6DC/250V | 40149 | 10 | 250 | S-6 | BA15d | C-7A | 60 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 40S11N | 01268 | 40 | 130 | S-11 | E17 | C-2V | | 2.45/62 | 1.42/36 | 3500 at 120V |

T Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|-------|-------|---------|-------|----------|--------|------------|-----------|---------------------|
| 15T4C-130V | 16017 | 15 | 130 | T-4 | E12 | C-7A | 90 | 1.97/50.0 | 0.54/39.1 | 1,500 |
| 15T6C-120V | 81134 | 15 | 120 | T-6 | E12 | C-7A | 90 | 3.06/77.7 | 0.77/19.6 | 2,000 |
| 15T6C-130V | 43000 | 15 | 130 | T-6 | E12 | C-7A | 90 | 3.06/77.7 | 0.77/19.6 | 2,000 |
| 15T6C-145V | 43002 | 15 | 145 | T-6 | E12 | C-7A | 90 | 3.06/77.7 | 0.77/19.6 | 2000, (7500 @ 120V) |
| 15T7C-130V | 43006 | 15 | 130 | T-7 | E12 | C-7A | 90 | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 15T7DC-130V | 43008 | 15 | 130 | T-7 | BA15d | C-7A | 90 | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 15T7N-130V | 43004 | 15 | 130 | T-7 | E17 | C-7A | 90 | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 20T6-1/2DC-130V | 43014 | 20 | 130 | T-6 1/2 | BA15d | C-8 | 180 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 20T6-1/2F-130V | 43012 | 20 | 130 | T-6 1/2 | E17 | C-8 | 170 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6-1/2N-130V | 43010 | 20 | 130 | T-6 1/2 | E17 | C-8 | 180 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6-1/2N-145V | 44402 | 20 | 145 | T-6 1/2 | E17 | C-8 | 170 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6.5DC/F-130V | 43016 | 20 | 130 | T-6 1/2 | BA15d | C-8 | 170 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 25T10-130V | 43034 | 25 | 130 | T-10 | E26 | C-5V | 180 | 5.19/131.8 | 1.25/31.8 | 2,000 |
| 25T10/F-130V | 43036 | 25 | 130 | T-10 | E26 | C-8 | 200 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 25T10/IF-120 | 41522 | 25 | 120 | T-10 | E26 | C-8 | | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 25T6-1/2DC-130V | 43024 | 25 | 130 | T-6 1/2 | BA15d | C-8 | 210 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6-1/2N-130V | 43020 | 25 | 130 | T-6 1/2 | E17 | C-8 | 210 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6.5DC/F-130V | 43026 | 25 | 130 | T-6 1/2 | BA15d | C-8 | 200 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 25T6.5N/F-130V | 43022 | 25 | 130 | T-6 1/2 | E17 | C-8 | 200 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6C-120V | 43018 | 25 | 120 | T-6 | E12 | C-7A | 190 | 3.06/77.7 | 0.77/19.6 | 2,000 |
| 25T8C-120V | 43028 | 25 | 120 | T-8 | E12 | C-7A | 180 | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 25T8DC-120V | 49563 | 25 | 120 | T-8 | BA15d | C-7A | 180 | 2.63/66.8 | 1.04/26.4 | 1,500 |

>>Continued on page 61



S Shaped




S Shaped

T Shaped Incandescent Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------|---------|-------|-------|---------|-------|----------|--------|------------|-----------|-------|
| 25T8DC-130V | 43032 | 25 | 130 | T-8 | BA15d | C-7A | 180 | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 25T8N-130V | 43030 | 25 | 130 | T-8 | E17 | C-7A | 180 | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 40T10-130V | 43042 | 40 | 130 | T-10 | E26 | C-8 | 320 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 40T10/F-130V | 43044 | 40 | 130 | T-10 | E26 | C-8 | 310 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 40T6-1/2N-130V | 43038 | 40 | 130 | T-6 1/2 | E17 | C-8 | 330 | 5.5/139.7 | 0.83/21.1 | 1,500 |

Incandescent Lamps > Base Types

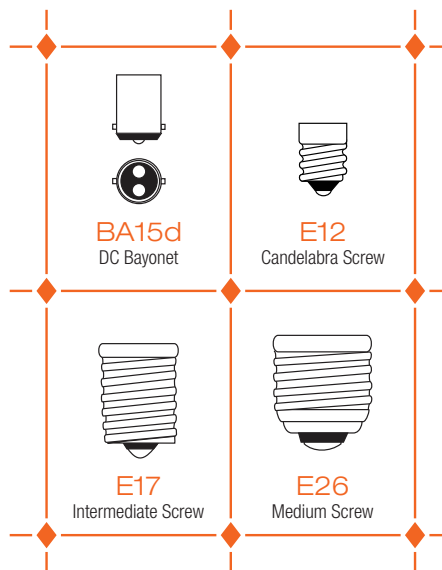



Automotive & Miniature Lamps


EIKO's line of original equipment headlamps and miniature indicator and accent lamps were designed to meet or exceed the performance of your vehicle's original lamp. Manufactured to exacting standards, they feature top quality components and are guaranteed to perform like the original. Our metal-based lamps also feature an industry-first, nickel-plated brass base which prevents corrosion and ensures performance. Additionally, each and every lamp is quality tested before it leaves the factory.

CLEAR VISION
Supreme™

Clear Vision® Supreme High Performance Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|----------|----------|--------|------------|-----------|-------|
| 880CVSU-BP | 07021 | 27 | 12.8 | PG13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 881CVSU-BP | 07033 | 27 | 12.8 | PGJ13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 889CVSU-BP | 07018 | 27 | 12.8 | PGJ13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 893CVSU-BP | 07035 | 37.5 | 12.8 | PG13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 894CVSU-BP | 07043 | 37.5 | 12.8 | PGJ13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 896CVSU-BP | 07001 | 37.5 | 12.8 | PGJ13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 500 |
| 899CVSU-BP | 01206 | 37.5 | 12.8 | PG13 | C-6 | | 2.68/68.1 | 0.42/10.7 | 1,900 |
| H1042CVSU-BP | 07680 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| H1042CVSU2 | 07062 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| 885CVSU-BP | 07013 | 50 | 12.8 | PG13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |
| 9006CVSU-BP | 07677 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006CVSU2 | 02434 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006XSCVSU-BP | 07674 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| 9006XSCVSU2 | 07673 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| H1155CVSU-BP | 07681 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H1155CVSU2 | 07008 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H11BCVSU-BP | 07682 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H11BCVSU2 | 07010 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H155CVSU-BP | 07683 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |

>>Continued on page 63

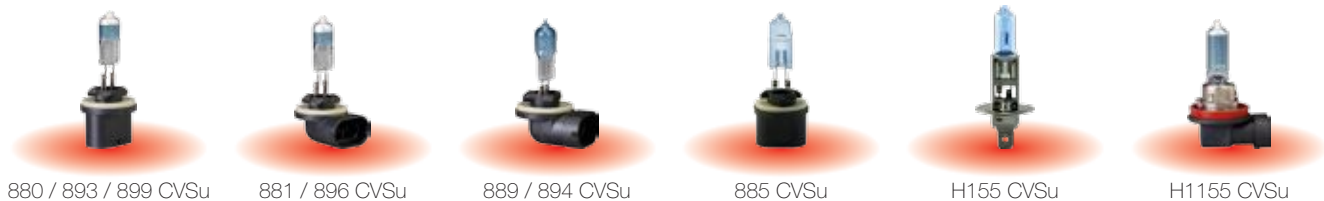

Clear Vision® Supreme High Performance Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------|---------|-------|-----------|--------|----------|-----------|-----------|-----------|----------|
| H155CVSU2 | 03791 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |
| H355CVSU-BP | 07684 | 55 | 12 | PK22s | CC-6 | 1445 | 1.65/41.9 | 0.46/11.5 | 320 |
| H355CVSU2 | 03853 | 55 | 12 | PK22s | CC-6 | 1445 | 1.65/41.9 | 0.46/11.5 | 320 |
| H755CVSU-BP | 07685 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| H755CVSU2 | 04054 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| 9005CVSU-BP | 07672 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005CVSU2 | 02277 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005XSCVSU-BP | 07686 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| 9005XSCVSU2 | 07671 | 65 | 12.8 | P20d | C-8 | 1695 | | 0.42/10.7 | 320 |
| 9003/H4CVSU-BP | 07675 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9003/H4CVSU2 | 01881 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9004CVSU-BP | 07676 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004CVSU2 | 02262 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007CVSU-BP | 07678 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007CVSU2 | 03497 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9008CVSU-BP | 07679 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |
| 9008CVSU2 | 03790 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |



Clear Vision® XL High Performance Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------|---------|-------|-----------|----------------|----------|-----------|-----------|-----------|----------|
| H4651CVXL | 07668 | 50 | 12.8 | 2 Contact Lugs | C-6 | | 4.8/121 | | 200 |
| 9006CVXL-BP | 07660 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006CVXL2 | 02433 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| H1155CVXL-BP | 07663 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H1155CVXL2 | 07005 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H755CVXL-BP | 07664 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| H755CVXL2 | 03855 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| 9005CVXL-BP | 07659 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005CVXL2 | 02276 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9003/H4CVXL-BP | 07657 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9003/H4CVXL2 | 01870 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| H6024CVXL | 07667 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | | 5.0/127 | 7.0/178 | 150/450 |
| 9004CVXL-BP | 07658 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004CVXL2 | 01883 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007CVXL-BP | 07661 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007CVXL2 | 03494 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9008CVXL-BP | 07662 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |
| 9008CVXL2 | 03789 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |




Power Vision PRO® High Performance Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-----------|----------------|----------|-----------|------------|-----------|----------|
| H1042PVP-BP | 07648 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| H1042PVP2 | 07647 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| 9006PVP-BP | 07636 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006PVP2 | 02431 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006XSPVP-BP | 07652 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| 9006XSPVP2 | 07651 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| H1155PVP-BP | 07639 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H1155PVP2 | 07003 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H11BPVP-BP | 07646 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H11BPVP2 | 07645 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H155PVP-BP | 07642 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |
| H155PVP2 | 07641 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |
| H355PVP-BP | 07644 | 55 | 12 | PK22s | CC-6 | 1445 | 1.65/41.9 | 0.46/11.5 | 320 |
| H355PVP2 | 07643 | 55 | 12 | PK22s | CC-6 | 1445 | 1.65/41.9 | 0.46/11.5 | 320 |
| H755PVP-BP | 07640 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| H755PVP2 | 03854 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| 9005PVP-BP | 07635 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005PVP2 | 02268 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005XSPVP-BP | 07650 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| 9005XSPVP2 | 07649 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| H4656PVP | 07655 | 35/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | | 4.8/121 | | 200/320 |
| 9003/H4PVP-BP | 07633 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9003/H4PVP2 | 01868 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| H6024PVP | 07654 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | | 5.0/127 | 7.0/178 | 150/450 |
| H6054PVP | 07653 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | | 5.44/138 | | 150/320 |
| 9004PVP-BP | 07634 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004PVP2 | 02267 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007PVP-BP | 07637 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007PVP2 | 03207 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9008PVP-BP | 07638 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |
| 9008PVP2 | 03788 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |

9000 Series Halogen Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-------|-------|----------|----------|--------|-----------|-----------|-------|
| 9040 | 16070 | 40 | 12.8 | P20d/40t | C-6 | 605 | 3.17/80.5 | 0.5/12.4 | 1,500 |
| 9040-BP | 16056 | 40 | 12.8 | P20d/40t | C-6 | 605 | 3.17/80.5 | 0.5/12.4 | 1,500 |
| 9140 | 06428 | 40 | 12.8 | P20d/40a | C-8 | 605 | 3.17/80.5 | 0.5/12.4 | 1,500 |
| 9045 | 06427 | 45 | 12.8 | P20d/45t | C-6 | 815 | 3.17/80.5 | 0.5/12.4 | 1,000 |
| 9006 | 41055 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006-BP | 41056 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9006LL | 44170 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,500 |
| 9006LL-BP | 44172 | 55 | 12.8 | P22d | C-8 | 1005 | 3.09/78.0 | 0.42/10.7 | 1,500 |

>>Continued on page 65



H155 PVP



H355 PVP



H755 PVP



H1042 PVP



H1155 PVP



H11B PVP


9000 Series Halogen Forward Lighting

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|--------|-----------|----------|----------|-----------|------------|-----------|-------------|
| 9006XS | 49416 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| 9006XS-BP | 49417 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,000 |
| 9006XSLL | 00237 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,500 |
| 9006XSLL-BP | 05356 | 55 | 12.8 | P22d | C-8 | 1005 | 2.61/66.29 | 0.42/10.7 | 1,500 |
| 9155 | 06429 | 55 | 12.8 | P20d/55a | C-8 | 940 | 3.17/80.5 | 0.5/12.4 | 1,200 |
| 9012LL | 00732 | 60 | 12.8 | PX22d | C-8 | 1695 | 3.09/78.5 | 0.43/11.0 | 1000 at 14V |
| 9005 | 41052 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005-BP | 41053 | 65 | 12.8 | P20d | C-8 | 1695 | 3.09/78.0 | 0.42/10.7 | 320 |
| 9005XS | 49413 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| 9005XS-BP | 49414 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| 9005XSLL | 00236 | 65 | 12.8 | P20d | C-8 | 1695 | 2.59/65.9 | 0.42/10.7 | 320 |
| 9011 | 00711 | 65 | 12.8 | PX20d | C-8 | 2300 | 3.09/78.5 | 0.5/12.5 | 150 at 14V |
| 9006HW | 43564 | 80 | 12.8 | P22d | C-8 | 1345 | 3.09/78.0 | 0.42/10.7 | 1,000 |
| 9003 | 42268 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9003-BP | 42064 | 60/55 | 12.8/12.8 | P43t38 | C-8/C-8 | 1545/955 | 3.62/92.0 | 0.65/16.5 | 250/800 |
| 9004 | 41008 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004-BP | 41009 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004LL | 41063 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9004LL-BP | 41062 | 65/45 | 12.8/12.8 | P29t | C-6/C-6 | 1195/690 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007 | 42426 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007-BP | 42124 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007LL | 44176 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/1500 |
| 9007LL-BP | 44178 | 65/55 | 12.8/12.8 | Px29t | C-8/C-8 | 1345/1105 | 4.17/106 | 1.33/33.8 | 250/1500 |
| 9008 | 49865 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |
| 9008-BP | 49867 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |
| 9004HW | 43504 | 100/80 | 12.8/12.8 | P29t | C-6/C-6 | 1545/1255 | 4.17/106 | 1.33/33.8 | 250/500 |
| 9007HW | 43517 | 100/80 | 12.8/12.8 | Px29t | C-8/C-8 | 1695/1445 | 4.17/106 | 1.33/33.8 | 250/500 |

800 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| 882 | 42100 | 4.5 | 12.8 | B10d | C-6 | 48 | 1.18/30.0 | 0.72/18.3 | 2,000 |
| 882-BP | 42096 | 4.5 | 12.8 | B10d | C-6 | 48 | 1.18/30.0 | 0.72/18.3 | 2,000 |
| 891 | 42116 | 8 | 12.8 | G4 | C-6 | 145 | 1.20/30.5 | 0.32/8.1 | 800 |
| 891-BP | 42114 | 8 | 12.8 | G4 | C-6 | 145 | 1.20/30.5 | 0.32/8.1 | 800 |
| 880 | 42450 | 27 | 12.8 | PG13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 880-BP | 42088 | 27 | 12.8 | PG13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 880SW-BP | 49435 | 27 | 12.8 | PG13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 881 | 42452 | 27 | 12.8 | PGJ13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 881-BP | 42094 | 27 | 12.8 | PGJ13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 881SW-BP | 49436 | 27 | 12.8 | PGJ13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 889 | 42460 | 27 | 12.8 | PGJ13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 889-BP | 42106 | 27 | 12.8 | PGJ13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 890 | 42462 | 27 | 12.8 | PG13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 890-BP | 42110 | 27 | 12.8 | PG13 | C-6 | 565 | 2.68/68.1 | 0.42/10.7 | 500 |
| 862 | 00043 | 37.5 | 12.8 | PGJ13 | C-6 | 755 | 2.68/68.1 | 0.42/10.7 | 2,000 |

>>Continued on page 66



800 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| 893 | 42464 | 37.5 | 12.8 | PG13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 893-BP | 42120 | 37.5 | 12.8 | PG13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 893SW-BP | 49443 | 37.5 | 12.8 | PG13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 894 | 42466 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 894-BP | 42134 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 894SW-BP | 49444 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 896 | 42468 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 896-BP | 42138 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 896SW-BP | 49445 | 37.5 | 12.8 | PGJ13 | C-6 | 980 | 2.68/68.1 | 0.42/10.7 | 500 |
| 898 | 49678 | 37.5 | 12.8 | PGJ13 | C-6 | 755 | 2.68/68.1 | 0.42/10.7 | 1,900 |
| 898-BP | 49679 | 37.5 | 12.8 | PGJ13 | C-6 | 755 | 2.68/68.1 | 0.42/10.7 | 1,900 |
| 899 | 44330 | 37.5 | 12.8 | PG13 | C-6 | 755 | 2.68/68.1 | 0.42/10.7 | 1,900 |
| 899-BP | 44331 | 37.5 | 12.8 | PG13 | C-6 | 755 | 2.68/68.1 | 0.42/10.7 | 1,900 |
| 885 | 42456 | 50 | 12.8 | PG13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |
| 885-BP | 48082 | 50 | 12.8 | PG13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |
| 885SW-BP | 49438 | 50 | 12.8 | PG13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |
| 886 | 42458 | 50 | 12.8 | PGJ13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |
| 886-BP | 42130 | 50 | 12.8 | PGJ13 | C-6 | 1320 | 2.68/68.1 | 0.42/10.7 | 500 |

H1 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|--------|----------|--------|-----------|-----------|------|
| 01000 | 40122 | 55 | 6 | P14.5s | C-8 | 1345 | 2.65/67.3 | 0.33/8.4 | 150 |
| 01003 | 40124 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |
| 01003-BP | 40129 | 55 | 12 | P14.5s | C-8 | 1545 | 2.65/67.3 | 0.33/8.4 | 225 |
| 01027 | 40150 | 70 | 24 | P14.5s | CC-8 | 1900 | 2.65/67.3 | 0.33/8.4 | 150 |
| 01004 | 40126 | 100 | 12 | P14.5s | C-8 | 1850 | 2.65/67.3 | 0.33/8.4 | 100 |
| 01004-BP | 40135 | 100 | 12 | P14.5s | C-8 | 1850 | 2.65/67.3 | 0.33/8.4 | 100 |

H2 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|------|----------|--------|-----------|-----------|------|
| 01005 | 40128 | 55 | 12 | X511 | C-8 | 1545 | 1.22/31.0 | 0.33/8.4 | 225 |
| 01005-BP | 42226 | 55 | 12 | X511 | C-8 | 1545 | 1.22/31.0 | 0.33/8.4 | 225 |
| 01023 | 40148 | 100 | 12 | X511 | C-8 | 1850 | 1.22/31.0 | 0.33/8.4 | 100 |

H3 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-------|-------|-------|----------|--------|-----------|-----------|------|
| 01031 | 40153 | 35 | 12 | PK22s | C-6 | 755 | 1.65/41.9 | 0.45/11.5 | 200 |
| 01031-BP | 49839 | 35 | 12 | PK22s | C-6 | 755 | 1.65/41.9 | 0.45/11.5 | 200 |
| 01006 | 40130 | 55 | 6 | PK22s | C-6 | 1055 | 1.65/41.9 | 0.45/11.5 | 150 |
| 01007 | 40132 | 55 | 12 | PK22s | CC-6 | 1450 | 1.65/41.9 | 0.46/11.5 | 320 |
| 01007-Blue | 44348 | 55 | 12 | PK22s | CC-6 | 1445 | 1.65/41.9 | 0.46/11.5 | 150 |
| 01007-BP | 40133 | 55 | 12 | PK22s | CC-6 | 1450 | 1.65/41.9 | 0.46/11.5 | 320 |
| H3C | 05620 | 55 | 12 | H3C | CC-6 | 1450 | 2.48/63 | 0.43/10.8 | 320 |
| 01008 | 40134 | 70 | 24 | PK22s | CC-6 | 1745 | 1.65/41.9 | 0.45/11.5 | 150 |
| 01008-BP | 49834 | 70 | 24 | PK22s | CC-6 | 1745 | 1.65/41.9 | 0.45/11.5 | 150 |

>>Continued on page 67



880



01003 (H1)



01005 (H2)



01008 (H3)



01009 (H4)



H755 (H7)

H3 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|-------|----------|--------|-----------|-----------|------|
| 01015 | 40140 | 100 | 12 | PK22s | C-6 | 2400 | 1.65/41.9 | 0.45/11.5 | 100 |
| 01015-BP | 40141 | 100 | 12 | PK22s | C-6 | 2400 | 1.65/41.9 | 0.45/11.5 | 100 |

H4 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|--------|-----------|--------|----------|-----------|-----------|-----------|---------|
| 48220-BP | 57043 | 35/35 | 12.8/12.8 | P43t | C-8/C-8 | 750/510 | 3.63/92.1 | 0.67/17.0 | 120/300 |
| 4745 | 57045 | 45/45 | 12.8/12.8 | P43t38 | C-8/C-8 | 890/630 | 3.63/92.1 | 0.67/17.0 | 120/250 |
| 01009 | 40136 | 60/55 | 12/12 | P43t38 | C-8/C-8 | 1645/1005 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 01009-Blue | 44364 | 60/55 | 12/12 | P43t38 | C-8/C-8 | 1645/1005 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 01009-Blue-BP | 44366 | 60/55 | 12/12 | P43t38 | C-8/C-8 | 1645/1005 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 01009-BP | 42228 | 60/55 | 12/12 | P43t38 | C-8/C-8 | 1645/1005 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 01010 | 40138 | 75/70 | 24/24 | P43t38 | C-8/C-8 | 1900/1205 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 01019 | 40144 | 100/55 | 12/12 | P43t38 | C-8/C-8 | 2400/1005 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 01019-BP | 40145 | 100/55 | 12/12 | P43t38 | C-8/C-8 | 2400/1005 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 01021 | 40146 | 100/80 | 12/12 | P43t38 | C-8/C-8 | 2200/1700 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 01021-BP | 40143 | 100/80 | 12/12 | P43t38 | C-8/C-8 | 2200/1700 | 3.62/92.0 | 0.65/16.5 | 100/200 |

H7 Series Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------------------|---------|-------|-------|-------|----------|--------|-----------|-----------|-------|
| H755 | 44074 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 550 |
| H755-BP | 44076 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| H755LL | 00266 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,100 |
| H755LL-BP | 05357 | 55 | 12.8 | PX26d | C-8 | 1510 | 2.36/60.0 | 0.49/12.5 | 1,000 |
| H7/70W/24V | 01532 | 70 | 24 | PX26d | CC-8 | | 2.24/57 | 0.43/10.9 | 250 |
| H7100 | 44082 | 100 | 12.8 | PX26d | C-8 | 1800 | 2.36/60.0 | 0.49/12.5 | 150 |
| H7100-BP | 44084 | 100 | 12.8 | PX26d | C-8 | 1800 | 2.36/60.0 | 0.49/12.5 | 150 |
| H7100-Super White | 44086 | 100 | 12.8 | PX26d | C-8 | | 2.36/60.0 | 0.49/12.5 | 150 |
| H7100-SUPER WHITE-BP | 44088 | 100 | 12.8 | PX26d | C-8 | | 2.36/60.0 | 0.49/12.5 | 150 |

H8-H13 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-------|-------|----------|----------|--------|-----------|-----------|-------|
| H835 | 81162 | 35 | 13.2 | PGJ19-1 | CC-8 | 805 | 2.64/67 | 0.43/10.8 | 320 |
| H835-BP | 05427 | 35 | 13.2 | PGJ19-1 | CC-8 | 805 | 2.64/67 | 0.43/10.8 | 320 |
| 9040 | 16070 | 40 | 12.8 | P20d/40t | C-6 | 605 | 3.17/80.5 | 0.5/12.4 | 1,500 |
| 9040-BP | 16056 | 40 | 12.8 | P20d/40t | C-6 | 605 | 3.17/80.5 | 0.5/12.4 | 1,500 |
| H1042 | 81163 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| H1042-BP | 00042 | 42 | 13.2 | PY20d | CC-8 | 840 | 3.17/80.5 | 0.47/11.8 | 775 |
| H1156 | 44038 | 50 | 12.8 | BA15s | C-6 | 1355 | 2.08/53 | 0.50/12.7 | 250 |
| H1156-BP2 | 81179 | 50 | 12.8 | BA15s | C-6 | 1355 | 2.08/53 | 0.50/12.7 | 250 |
| H1253 | 81165 | 53 | 13.2 | PZ20d | CC-6 | 1055 | 3.17/80.5 | 0.47/11.8 | 950 |
| H1253-BP | 05430 | 53 | 13.2 | PZ20d | CC-6 | 1055 | 3.17/80.5 | 0.47/11.8 | 950 |
| 9155 | 06429 | 55 | 12.8 | P20d/55a | C-8 | 940 | 3.17/80.5 | 0.5/12.4 | 1,200 |
| H1155 | 81164 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 800 |
| H1155-BP | 05429 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 550 |
| H1155LL | 00267 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 1,200 |

>>Continued on page 68



H835 (H8)



H965 (H9)



H1042 (H10)



H1155 (H11)



H1253 (H12)



9008 (H13)

H8-H13 Halogen Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-------|-----------|----------|----------|-----------|-----------|-----------|----------|
| H1155LL-BP | 05355 | 55 | 13.2 | PGJ19-2 | CC-8 | 1345 | 2.64/67 | 0.43/10.8 | 1,000 |
| H11B | 06716 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H11B-BP | 06715 | 55 | 13.2 | PGJY19-2 | CC-8 | 1345 | 2.63/66.8 | 0.43/10.8 | 1,000 |
| H965 | 81161 | 65 | 13.2 | PGJ19-5 | CC-8 | 2100 | 2.64/67 | 0.43/10.8 | 120 |
| H965-BP | 05428 | 65 | 13.2 | PGJ19-5 | CC-8 | 2100 | 2.64/67 | 0.43/10.8 | 120 |
| H1157 | 44040 | 50/15 | 12.8/12.8 | BAY15d | C-6/C-6 | 1355/300 | 2.00/50.8 | 0.5/13.0 | 250/400 |
| H1157-BP | 49685 | 50/15 | 12.8/12.8 | BAY15d | C-6/C-6 | 1355/300 | 2.00/50.8 | 0.5/13.0 | 250/400 |
| 9008 | 49865 | 65/55 | 12.8/12.8 | P26.4t | C-8/C-8 | 1510/1005 | 3.68/93.6 | 0.63/16.0 | 250/1500 |

HID - OE Replacement Lamps

| Ordering Code | Barcode | Watts | Base | Lumens | Life |
|---------------|---------|-------|---------|--------|-------|
| D1R | 04403 | 35 | PK32d-3 | 2900 | 3,000 |
| D1S | 04402 | 35 | PK32d-2 | 3200 | 3,000 |
| D2R | 00362 | 35 | P32d-3 | 2900 | 3,000 |
| D2S | 00363 | 35 | P32d-2 | 3200 | 3,000 |
| D3R | 06904 | 35 | PK32d-6 | 2700 | 3,000 |
| D3S | 07103 | 35 | PK32d-5 | 3000 | 3,000 |
| D4R | 06381 | 35 | P32d-6 | 2700 | 3,000 |
| D4S | 06382 | 35 | P32d-5 | 3000 | 3,000 |

Motorcycle and Snowmobile Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|
| A-1262 | 48004 | 1.2 | 6 | BA7s | C-2R | 0.91/23.0 | 0.27/6.9 | 200 |
| A-1272 | 48006 | 2 | 12 | BA7s | C-2R | 0.91/23.0 | 0.27/6.9 | 200 |
| A-1272-BP | 48007 | 2 | 12 | BA7s | C-2R | 0.91/23.0 | 0.27/6.9 | 200 |
| A-62 | 48000 | 3 | 6.75 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | |
| A-62-BP | 48001 | 3 | 6.75 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | |
| A-72 | 48002 | 4 | 13.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 4,000 |
| A-72-BP | 48003 | 4 | 13.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 4,000 |
| 6253 | 40667 | 6 | 12 | BA9s | C-2V | 1.07/27.2 | 0.59/15.0 | 200 |
| A-4513 | 48014 | 17 | 6.4 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| A-4513-BP | 48015 | 17 | 6.4 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| A-4527 | 48016 | 23 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| A-4527-BP | 48017 | 23 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 625J | 48044 | 25 | 12.8 | P15s30 | C-6 | 2.30/58.4 | 1.38/35.0 | 100 |
| 635B | 48052 | 35 | 12.8 | BA20s | C-6 | 2.60/66.0 | 1.42/36.0 | 100 |
| 635J | 48046 | 35 | 12.8 | P15s-3 | C-6 | 2.25/57.2 | 1.25/32.0 | 100 |
| HM202 | 00402 | 36.5/35 | 12.8/12.8 | PX15d25-2 | C-6/C-6 | 1.63/41.3 | 0.40/10.2 | 200/300 |
| 660B | 48054 | 60 | 12.8 | BA20s | C-6 | 2.60/66.0 | 1.42/36.0 | 75 |
| A-4813 | 48020 | 17/5 | 6.4/7 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200/1000 |
| A-4813-BP | 48021 | 17/5 | 6.4/7 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200/1000 |
| A-4829-BP | 57031 | 27/8 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| A-3598H | 48012 | 15/15 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | - |
| A-3598H-BP | 57029 | 15/15 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | - |
| A-3603 | 48008 | 25/25 | 12/12 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 100/100 |

>>Continued on page 69



D1R / D3R



D1S / D3S



D2R



D2S



D4R



D4S

Motorcycle and Snowmobile Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|--------|-----------|-----------|-----------|-----------|-----------|---------|
| A-3603-BP | 48009 | 25/25 | 12/12 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 100/100 |
| A-3625 | 48010 | 25/25 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 150/150 |
| A-3625-BP | 48011 | 25/25 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 150/150 |
| HM201 | 00385 | 30/30 | 12.8/12.8 | PX15d25-1 | C-6/C-6 | 1.63/41.3 | 0.40/10.2 | 300/320 |
| A-7025-BP | 48027 | 35/25 | 13/13 | P15d-3 | C-6/C-2V | 2.20/56.0 | 1.38/35.0 | 100/100 |
| 6235B | 48056 | 35/35 | 12.8/12.8 | BA20d | C-8/C-2R | 2.60/66.0 | 1.42/36.0 | 100/100 |
| 6235B-BP | 48057 | 35/35 | 12.8/12.8 | BA20d | C-8/C-2R | 2.60/66.0 | 1.42/36.0 | 100/100 |
| 6235J | 48038 | 35/35 | 12.8/12.8 | P15d-3 | C-6/C-6 | 2.25/57.2 | 1.25/32.0 | 100/100 |
| 6235J-BP | 57033 | 35/35 | 12.8/12.8 | P15d-3 | C-6/C-6 | 2.25/57.2 | 1.25/32.0 | 100/100 |
| 6235Y | 48028 | 35/35 | 12.8/12.8 | P15d30 | C-6/C-6 | 2.30/58.4 | 1.38/35.0 | 100/100 |
| 6235Y-BP | 57032 | 35/35 | 12.8/12.8 | P15d30 | C-6/C-6 | 2.30/58.4 | 1.38/35.0 | 100/100 |
| A-5659 | 48024 | 35/35 | 6.5/6.5 | P15d30 | C-6/C-2V | 2.20/56.0 | 1.26/32.0 | 100/100 |
| A-5659-BP | 48025 | 35/35 | 6.5/6.5 | P15d30 | C-6/C-2V | 2.20/56.0 | 1.26/32.0 | 100/100 |
| 4745-BP | 57044 | 45/45 | 12.8/12.8 | P43t38 | C-8/C-8 | 3.63/92.1 | 0.67/17.0 | 120/250 |
| 6245B | 48058 | 45/45 | 12.8/12.8 | BA20d | C-8/C-2R | 2.60/66.0 | 1.42/36.0 | 100/100 |
| 6245B-BP | 48059 | 45/45 | 12.8/12.8 | BA20d | C-8/C-2R | 2.60/66.0 | 1.42/36.0 | 100/100 |
| 6245BA | 48062 | 45/45 | 12.8/12.8 | P45t41 | C-8/C-2R | 3.00/76.2 | 1.61/41.0 | 100/100 |
| 6245BA-BP | 48063 | 45/45 | 12.8/12.8 | P45t41 | C-8/C-2R | 3.00/76.2 | 1.61/41.0 | 100/100 |
| 6245J-BP | 48041 | 45/45 | 12.8/12.8 | P15d-3 | C-6/C-2V | 2.25/57.2 | 1.25/32.0 | 100/100 |
| 6245Y-BP | 48031 | 45/45 | 12.8/12.8 | P15d30 | C-6/C-6 | 2.30/58.4 | 1.38/35.0 | 100/100 |
| 6255BAH-BP | 48067 | 60/55 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 6260HD-BP | 48097 | 60/55 | 12/12 | P43t38 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 6361-BP | 57027 | 60/55 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 6260B-BP | 48061 | 60/60 | 12.8/12.8 | BA20d | C-8/C-2R | 2.60/66.0 | 1.42/36.0 | 75 |
| 6260BA | 48064 | 60/60 | 12.8/12.8 | P45t41 | C-8/C-2R | 3.00/76.2 | 1.61/41.0 | 75/75 |
| 6260BA-BP | 48065 | 60/60 | 12.8/12.8 | P45t41 | C-8/C-2R | 3.00/76.2 | 1.61/41.0 | 75/75 |
| 6260J | 48042 | 60/60 | 12.8/12.8 | P15d-3 | C-6/C-2V | 2.25/57.2 | 1.25/32.0 | 75/75 |
| 6260J-BP | 48043 | 60/60 | 12.8/12.8 | P15d-3 | C-6/C-2V | 2.25/57.2 | 1.25/32.0 | 75/75 |
| 6260S | 48036 | 60/60 | 12.8/12.8 | P36t | C-6/C-6 | 3.00/76.2 | 1.42/36.0 | 75/75 |
| 6260S-BP | 48037 | 60/60 | 12.8/12.8 | P36t | C-6/C-6 | 3.00/76.2 | 1.42/36.0 | 75/75 |
| 6260SA-BP | 48035 | 60/60 | 12.8/12.8 | P43t38 | C-8/C-2R | 3.00/76.2 | 1.42/36.0 | 75/75 |
| 6255BAHP-BP | 48069 | 100/55 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 6260HP-BP | 48073 | 100/55 | 12/12 | P43t38 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 6263-BP | 48096 | 100/55 | 12/12 | P43t38 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 6265-BP | 48095 | 100/80 | 12/12 | P43t38 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 100/200 |
| 6365 | 48093 | 100/80 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.63/92.1 | 0.67/17.0 | 100/200 |
| 6365-BP | 48094 | 100/80 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.63/92.1 | 0.67/17.0 | 100/200 |

Halogen Sealed Beam Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|--------------------------|---------|-------|-------|-----------------|----------|-----------|-----------|------------|
| H7550 | 91074 | 8 | 6 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 50 |
| 36PAR36/CAP/WFL32 | 81166 | 36 | 12 | 2 MP | C-6 | 2.36/60 | 4.5/114.3 | 4,000 |
| H7600 | 91072 | 37.5 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| H7616 | 91073 | 37.5 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| H9415 | 91099 | 37.5 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 200 at 14V |

>>Continued on page 70



HM201



6235B



6260BA



H9415

Halogen Sealed Beam Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-------|-------|----------------------|----------|-----------|-----------|------------|
| H4651 | 46110 | 50 | 12.8 | 2 Contact Lugs | C-6 | 4.8/121 | | 200 |
| H5001 | 46114 | 50 | 12.8 | 2 Contact Lugs | C-6 | 4.0/102 | 5.75/146 | 200 |
| H7604 | 91070 | 50 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 100 |
| H7606 | 02464 | 50 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 400 @ 14V |
| H7609 | 91077 | 50 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 400 @ 14V |
| H7610 | 91069 | 50 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 400 @ 14V |
| H7614 | 91071 | 50 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 100 |
| H7619 | 91078 | 50 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 400 @ 14V |
| H7635 | 46122 | 50 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 100 |
| H7921-1 | 91088 | 50 | 12.8 | 2 MP | C-6 | 4.53/115 | | 200 @ 14V |
| H7935-1 | 91089 | 50 | 12.8 | 2 MP | C-6 | 4.53/115 | | 100 |
| H9405 | 91100 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 100 |
| H9406 | 91096 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 400 at 14V |
| H9411 | 91098 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 400 at 14V |
| H9414 | 91101 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 400 at 14V |
| H9420 | 91102 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 200 at 14V |
| H9421 | 91097 | 50 | 12.8 | 2 Rt Angle Lugs | C-6 | 3.0/76 | | 200 at 14V |
| H4351 | 46107 | 55 | 12.8 | Right Angle, Plastic | C-8 | 4.0/102 | | 500 |
| H4703 | 91094 | 55 | 12.8 | 2 Contact Lugs | C-8 | 3.35/85 | | 320 |
| H4352 | 46109 | 65 | 12.8 | Right Angle, Plastic | C-8 | 4.0/102 | | 150 |
| H4701 | 91095 | 65 | 12.8 | 2 Contact Lugs | C-8 | 3.35/85 | | 150 |
| H4656 | 46112 | 35/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 4.8/121 | | 200/320 |
| H4656CVXL | 07669 | 35/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 4.8/121 | | 200/320 |
| H4656PVP | 07655 | 35/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 4.8/121 | | 200/320 |
| H5006 | 46116 | 35/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 4.0/102 | 5.75/146 | 200/320 |
| H6024 | 46118 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.0/127 | 7.0/178 | 150/450 |
| H6054 | 46120 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.44/138 | | 150/320 |
| H6054CVXL | 07666 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.315/136 | | 150/320 |
| H6054PVP | 07653 | 65/35 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.44/138 | | 150/320 |
| H4666 | 46117 | 65/45 | 12.8 | 3 Contact Lugs | C-8/C-8 | 4.8/121 | | 150/320 |
| H4666CVXL | 07755 | 65/45 | 12.8 | 3 Contact Lugs | C-8/C-8 | 4.8/121 | | 150/320 |

>>Continued on page 71



H4651



H4701



H4666



H6054

Halogen Sealed Beam Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|----------------|----------|-----------|-----------|---------|
| H4666PVP | 07756 | 65/45 | 12.8 | 3 Contact Lugs | C-8/C-8 | 4.8/121 | | 150/320 |
| H6054HO/H6554 | 46123 | 65/55 | 12.8 | 3 Contact Lugs | C-8/C-8 | 5.44/138 | | 150/700 |

Incandescent Sealed Beam Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|-------|-------------------|----------|-----------|-----------|-----------|
| 4546 | 46072 | 2.35 | 4.7 | 2ST | C-2R | 2.75/70 | 4.5/114.3 | 100 |
| 7672-1 | 01689 | 7.2 | 6 | Slip-On Terminals | C-6 | 2.75/70 | 4.5/114.3 | 50 |
| 7613 | 46108 | 7.4 | 6 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 50 |
| 7613-1 | 49617 | 8 | 6.4 | MP | C-6 | 2.75/70 | 4.5/114.3 | 50 |
| 4044 | 46008 | 12 | 12 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 150 |
| 4414 | 46028 | 18 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4446 | 46048 | 25 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4510 | 46058 | 25 | 6.4 | 2ST | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4405 | 46016 | 30 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 100 |
| 4416 | 46036 | 30 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4416R | 46038 | 30 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4435 | 46044 | 30 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 100 @ 14V |
| 4511 | 46060 | 30 | 6.2 | 2ST | C-6 | 2.75/70 | 4.5/114.3 | 300 @ 7V |
| 4515 | 46062 | 30 | 6.4 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 100 |
| 4406 | 46018 | 35 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 @ 14V |
| 4411 | 46020 | 35 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 @ 14V |
| 4412 | 46022 | 35 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 300 |
| 4412A | 46024 | 35 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 300 |
| 4413 | 46026 | 35 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 300 @ 14V |
| 4415 | 46032 | 35 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4415A | 46034 | 35 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4419 | 46040 | 35 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 300 @ 14V |
| 4436 | 46046 | 35 | 12.8 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 300 |
| 7400 | 46106 | 35 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4502 | 46054 | 50 | 28 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 400 |
| 4505 | 46056 | 50 | 28 | 2 MP | CC-6 | 2.75/70 | 4.5/114.3 | 400 |
| 4589 | 46084 | 50 | 28 | 2 MP | CC-6 | 2.75/70 | 4.5/114.3 | 400 |
| 4651 | 46090 | 50 | 12.8 | 2 Contact Lugs | C-6 | 4.8/121 | | 200 |
| 4350 | 46014 | 60 | 36 | 2 MP | C-2V | 2.75/70 | 4.5/114.3 | 400 |
| 4461 | 46050 | 60 | 12.8 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 300 @ 14V |
| 4478 | 46052 | 60 | 13 | 2 Contact Lugs | 2C-6 | 4.0/102 | 5.75/146 | 800 @ 14V |
| 4578 | 46078 | 60 | 28 | 2 Contact Lugs | 2C-6 | 4.0/102 | 5.75/146 | 800 |
| 4880 | 01380 | 60 | 28 | 2 Contact Lugs | 2C-6 | 4.0/102 | 5.75/146 | 800 |
| 4340 | 46012 | 80 | 48 | 2 MP | C-2V | 2.75/70 | 4.5/114.3 | 400 |
| 4636 | 91031 | 80 | 14 | 2 MP | 2CC6 | 3.75/95 | 5.75/146 | 200 |
| 4509 | 46057 | 100 | 13 | 2 MP | C-6 | 2.75/70 | 4.5/114.3 | 25 |

>>Continued on page 72






















Incandescent Sealed Beam Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|---------------|---------|---------|-------|----------------|-----------|-----------|-----------|---------|
| 4537 | 46066 | 100 | 13 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 25 |
| 4543 | 46068 | 100 | 12.5 | 2ST | C-6 | 4.5/114 | 7.0/178 | 50 |
| 4545 | 46070 | 100 | 12.0 | 2ST | C-6 | 4.5/114 | 7.0/178 | 100 |
| 4049 | 46010 | 150 | 13 | 2 MP | C-6 | 3.75/95 | 5.75/146 | 15 |
| 4570 | 46076 | 150 | 28 | 2ST | CC-6 | 3.75/95 | 5.75/146 | 300 |
| 4571 | 01359 | 150 | 28 | 2ST | CC-6 | 3.75/95 | 5.75/146 | 300 |
| 4626 | 46086 | 150 | 28 | 2 MP | CC-6 | 2.75/70 | 4.5/114.3 | 300 |
| 4581 | 46082 | 450 | 28 | 2 MP | CC-8 | 3.75/95 | 5.75/146 | 10 |
| 4652 | 46092 | 40/60 | 12.8 | 3 Contact Lugs | C-6/C-6 | 4.8/121 | | 200/320 |
| 6014 | 46098 | 60/50 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.0/127 | 7.0/178 | 200/320 |
| 6015 | 46100 | 60/50 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.0/127 | 7.0/178 | 300/500 |
| 6052 | 46102 | 65/55 | 12.8 | 3 Contact Lugs | C-6/C-6 | 5.44/138 | | 150/320 |
| 4579 | 46080 | 80/60 | 28/28 | 3 Contact Lugs | CC-6/CC-6 | 4.0/102 | 5.75/146 | 400/400 |
| 4007 | 46002 | 100/100 | 13 | 3 MP | C-6/C-6 | 3.75/95 | 5.75/146 | 25/25 |
| 4700 | 01373 | 100/100 | 13 | 3 MP | C-6/C-6 | 2.75/70 | 4.5/114.3 | 25/25 |

Automotive Cabinets

| Ordering Code | Barcode |
|---------------|---------|
| 44250 | 44250 |
| CVSUKIT | 07777 |

Automotive Capsules > Base Types

| | | | | | |
|--|---|---|---|--|---|
|  B10d Printed Circuit Socket |  BA7s European Bayonet |  BA9s Miniature Bayonet |  BA15s SC Bayonet |  BAY15d DC Index Bayonet |  P14.5s H1 Type |
|  P20d Axial Prefocus |  P22d Axial Prefocus |  P29t Axial Prefocus |  P43t Axial Prefocus |  PG13 Axial Prefocus |  PGJ13 Right Angle Prefocus |
|  PGJ19 Right Angle Prefocus |  PK22s Prefocus Flanged, H3 |  PX26d Axial Prefocus |  PY20d Right Angle Prefocus |  X511 H2 Prefocus Type | |

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-----------|---------|--------|----------|-----------|-----------|------------|
| 1003 | 40155 | 0.94 | 12.8 | BA15s | C-6 | 1.75/44.5 | 0.79/20.1 | 100 |
| 1003-BP | 40156 | 0.94 | 12.8 | BA15s | C-6 | 1.75/44.5 | 0.79/20.1 | 100 |
| 1003LL-BP | 00201 | 0.94 | 12.8 | BA15s | C-6 | 1.75/44.5 | 0.79/20.1 | 200 |
| 1004 | 40158 | 0.94 | 12.8 | BA15d | C-6 | 1.75/44.5 | 0.79/20.1 | 200 |
| 1004-BP | 40159 | 0.94 | 12.8 | BA15d | C-6 | 1.75/44.5 | 0.79/20.1 | 200 |
| 1016 | 40166 | 1.34/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1000 |
| 1016-BP | 48083 | 1.34/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1000 |
| 1034 | 40161 | 1.8/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 5000 |
| 1034-BP | 49690 | 1.8/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 5000 |
| 1047 | 16012 | 2.7 | 26.0 | BA15s | 2CC6 | 2.25/57.2 | 1.42/36.1 | 25 |
| 105 | 40163 | 1.0 | 12.8 | BA15s | C-6 | 1.75/44.5 | 0.79/20.1 | 500 |
| 105-BP | 42026 | 1.0 | 12.8 | BA15s | C-6 | 1.75/44.5 | 0.79/20.1 | 500 |
| 1062 | 49618 | 0.92 | 40 | BA15d | C-2V | 2.25/57.2 | 1.42/36.1 | 100 |
| 1073 | 40165 | 1.8 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1073-BP | 49691 | 1.8 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1076 | 40167 | 1.8 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1076-BP | 81031 | 1.8 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1093 | 49684 | 1.19 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 1105 | 05147 | 5.72 | 6.2 | BA15s | C-2V | 2.25/57.2 | 1.42/36.1 | 125 |
| 112 | 40168 | 0.25 | 1.2 | E10 | S-2 | 0.93/23.6 | 0.38/9.6 | 5 |
| 1129 | 40170 | 2.63 | 6.4 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1129-BP | 40103 | 2.63 | 6.4 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1130 | 40172 | 2.63 | 6.4 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1133 | 40174 | 3.91 | 6.2 | BA15s | C-6 | 2.25/57.2 | 1.42/36.1 | 200 |
| 1134 | 49619 | 3.91 | 6.2 | BA15d | C-2R | 2.25/57.2 | 1.42/36.1 | 200 |
| 1139IF | 00487 | 1.04 | 12.8 | BA15s | C-6 | 2.25/57.2 | 1.42/36.1 | 700 |
| 1141 | 40176 | 1.6 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,500 |
| 1141-BP | 41066 | 1.6 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,500 |
| 1141IF | 40115 | 1.6 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 1141LL | 42514 | 1.6 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 2,000 |
| 1141LL-BP | 40327 | 1.6 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 2,000 |
| 1142 | 40178 | 1.6 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 1142-BP | 42164 | 1.6 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 1143 | 49635 | 1.98 | 12.5 | BA15s | C-2R | 2.25/57.2 | 1.42/36.1 | 400 |
| 1143IF | 49636 | 1.98 | 12.5 | BA15s | C-2R | 2.25/57.2 | 1.42/36.1 | 400 |
| 1144 | 49637 | 1.98 | 12.5 | BA15d | C-2R | 2.25/57.2 | 1.42/36.1 | 400 |
| 1152 | 40184 | 1.34 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 500 |
| 1154 | 40186 | 2.63/0.75 | 6.4/7 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 |
| 1154-BP | 40121 | 2.63/0.75 | 6.4/7 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 |
| 1155 | 40188 | 0.59 | 13.5 | BA15s | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 1155-BP | 40189 | 0.59 | 13.5 | BA15s | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 1156 | 40190 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156-BP | 40191 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156A | 44030 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156A-BP | 40215 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156B | 00354 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156DC | 44334 | 2.1 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156G | 00352 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156LL | 42516 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 2,400 |
| 1156LL-BP | 40323 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 2,400 |
| 1156NA | 40193 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156NA-BP | 44034 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1156R | 00351 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 1157 | 40194 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 1157-BP | 40195 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 1157A | 40197 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |

>>Continued on page 74

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-----------|---------|-----------|----------|-----------|-----------|------------|
| 1157A-BP | 40198 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 1157LL | 42518 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 1157LL-BP | 40321 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 1157NA | 40199 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 1157NA-BP | 40200 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 1157NALL-BP | 40339 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 1158 | 40202 | 2.63/0.75 | 6.4/7 | BA15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 |
| 1158-BP | 42166 | 2.63/0.75 | 6.4/7 | BA15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 |
| 1176 | 40204 | 1.34/0.59 | 12.8/14 | BA15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1500 |
| 1176-BP | 40205 | 1.34/0.59 | 12.8/14 | BA15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1500 |
| 1178 | 49091 | 0.69 | 13.5 | BA15d | C-2V | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 1195 | 40210 | 3.0 | 12.5 | BA15s | C-2V | 2.25/57.2 | 1.42/36.1 | 300 |
| 1196 | 40213 | 3.0 | 12.5 | BA15d | C-2V | 2.25/57.2 | 1.42/36.1 | 300 |
| 1203 | 40232 | 0.71 | 28 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 400 |
| 1204 | 49080 | 0.71 | 28 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 400 |
| 120MB | 40226 | 0.025 | 120 | BA9s | CC-7A | 1.19/30.2 | 0.33/8.4 | 10,000 |
| 120MB-Neon | 40225 | 0.004 | 120 | BA9s | Neon | 1.19/30.2 | 0.38/9.6 | 10,000 |
| 120MB/6 | 44022 | 0.052 | 120 | BA9s | CC-7A | 1.19/30.2 | 0.33/8.4 | 3,000 |
| 120PSB5 | 40230 | 0.025 | 120 | TS5 | CC-7A | 1.11/28.2 | 0.27/6.9 | 10,000 |
| 120PSB5-Neon | 40229 | 0.0035 | 120 | TS5 | Neon | 1.12/28.5 | 0.27/6.9 | 10,000 |
| 120RB | 40231 | 0.025 | 120 | BA9s | CC-7A | 1.16/29.5 | 0.91/23.1 | 7,500 |
| 120RC | 40253 | 0.025 | 120 | E12 | CC-7A | 1.22/31.0 | 0.91/23.1 | 7,500 |
| 120RC-Neon | 40297 | 0.0035 | 120 | E12 | Neon | 1.22/31.0 | 0.91/23.1 | 10,000 |
| 1210X | 49015 | 0.833 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 2,000 |
| 1211X | 49017 | 0.917 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 1224 | 40234 | 0.16 | 32 | BA15d | C-2F | 1.44/36.6 | 0.75/19.1 | 200 |
| 1224K | 49692 | 0.16 | 32 | E12 | C-2F | 1.38/35.1 | 0.75/19.1 | 200 |
| 1228 | 49693 | 0.45 | 32 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 150 |
| 123 | 40237 | 0.3 | 1.25 | E10 | S-2 | 0.94/23.9 | 0.43/11.0 | 10 |
| 1236X | 49013 | 0.3 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 20,000 |
| 124 | 40238 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 1250X | 49019 | 0.37 | 13.5 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 1250X-2 | 49023 | 0.37 | 13.5 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 2,000 |
| 1250X-5 | 49025 | 0.37 | 13.5 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 1251 | 40242 | 0.23 | 28 | BA15s | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 2,000 |
| 1252 | 40244 | 0.23 | 28 | BA15d | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 2,000 |
| 1295 | 40246 | 3.0 | 12.5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 1295NA | 42172 | 3.0 | 12.5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 1295NA-BP | 42170 | 3.0 | 12.5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 12ESB5 | 40218 | 0.04 | 12 | TS5 | C-2V | 0.92/23.4 | 0.27/6.9 | 7,500 |
| 12MB | 40220 | 0.17 | 12 | BA9s | C-2F | 1.19/30.2 | 0.33/8.4 | 12,000 |
| 12PSB5 | 40222 | 0.17 | 12 | TS5 | C-2F | 1.11/28.2 | 0.27/6.9 | 12,000 |
| 12RB | 44016 | 0.17 | 12 | BA9s | C-2F | 1.16/29.5 | 0.91/23.1 | 12,000 |
| 12RC | 40223 | 0.17 | 12 | E12 | C-2F | 1.22/31.0 | 0.91/23.1 | 12,000 |
| 13 | 40247 | 0.3 | 3.7 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| 130 | 49671 | 0.15 | 6.3 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 5,000 |
| 1309 | 40250 | 0.52 | 28 | BA15s | 2C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 130MB | 40249 | 0.025 | 130 | BA9s | CC-7A | 1.19/30.2 | 0.33/8.4 | 10,000 |
| 131 | 40252 | 0.1 | 1.3 | E10 | S-2 | 0.94/23.9 | 0.43/11.0 | 50 |
| 1383 | 40258 | 1.5 | 13 | BA15s | C-8 | 2.63/66.8 | 1.55/39.4 | 300 |
| 1383TF | 40259 | 1.5 | 13 | BA15s | CC-8 | 2.63/66.8 | 1.55/39.4 | 300 |
| 1385 | 40262 | 0.72 | 28 | BA15s | CC-8 | 2.63/66.8 | 1.55/39.4 | 300 |
| 14 | 40264 | 0.3 | 2.47 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| 14-BP | 40265 | 0.3 | 2.47 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| 1408 | 40268 | 0.13 | 10 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 250 |
| 1414 | 49695 | 0.46 | 14 | BA9s | C-2R | 1.38/35.0 | 0.59/15.0 | 500 |

>>Continued on page 75

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-----------|-------|-----------|----------|-----------|-----------|------------|
| 1416 | 44340 | 0.8 | 12.8 | BA9s | C-2R | 1.38/35.1 | 0.59/15.0 | 1,000 |
| 1434 | 49623 | 2.75 | 3.7 | BA15s | C-6 | 1.75/44.5 | 0.65/16.5 | 100 |
| 1437 | 00611 | 0.06 | 24 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 20 |
| 1440X | 49029 | 0.286 | 14 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 4,000 |
| 1445 | 40271 | 0.135 | 14.4 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 2,000 |
| 1445-BP | 40272 | 0.135 | 14.4 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 2,000 |
| 1446 | 00613 | 0.2 | 12 | E10 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| 1447 | 49696 | 0.15 | 18 | E10 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| 1449 | 40276 | 0.2 | 14 | E10 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| 1449-BP | 81121 | 0.2 | 14 | E10 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| 1450 | 49624 | 0.035 | 24 | BA9s | C-2F | 0.94/23.9 | 0.43/11.0 | 3,000 |
| 1450X | 49031 | 0.357 | 14 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 1464 | 49697 | 0.25 | 22 | BA9s | C-6 | 1.19/30.2 | 0.62/15.8 | 250 |
| 147 | 40278 | 0.43 | 7 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 1477 | 40282 | 0.17 | 24 | E10 | C-2V | 1.25/31.8 | 0.40/10.2 | 250 |
| 1487 | 40284 | 0.2 | 14 | E10 | C-2V | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1490 | 40286 | 0.16 | 3.2 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1495 | 40703 | 0.3 | 28 | BA9s | C-2F | 1.38/35.1 | 0.59/15.0 | 500 |
| 1524X | 50050 | 0.3 | 24 | W2.1x9.5d | C-2F | 1.53/38.9 | 0.62/15.8 | 2,500 |
| 155MB | 40296 | 0.025 | 155 | BA9s | CC-7A | 1.19/30.2 | 0.33/8.4 | 10,000 |
| 155PSB5 | 40298 | 0.025 | 155 | TS5 | CC-7A | 1.11/28.2 | 0.27/6.9 | 10,000 |
| 158 | 40300 | 0.24 | 14 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 158-BP | 40301 | 0.24 | 14 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 159 | 40303 | 0.15 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 1591 | 40305 | 0.61 | 28 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 161 | 40304 | 0.19 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 4,000 |
| 161-BP | 42030 | 0.19 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 4,000 |
| 16120X | 50044 | 1.35 | 12.8 | W2.1x9.5d | C-2R | 1.53/38.9 | 0.62/15.8 | 10,000 |
| 1619 | 49626 | 1.9 | 6.7 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 500 |
| 1638 | 00647 | 1.02 | 28 | BA15d | 2C-6 | 2.00/50.8 | 1.04/26.4 | 500 |
| 1651 | 40316 | 0.6 | 5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 20 |
| 1662 | 42382 | 0.93/0.34 | 28/28 | BAY15d | CC-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 1000 |
| 168 | 40317 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 168-BP | 40318 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 1680 | 49627 | 4.1 | 6 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 1683 | 40322 | 1.02 | 28 | BA15s | 2C-6 | 2.00/50.8 | 1.04/26.4 | 500 |
| 168LL | 42502 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 168LL | 42502 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 168LL-BP | 40337 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 168NA | 00227 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 168NA-BP | 00228 | 0.35 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 1691 | 40324 | 0.61 | 28 | BA15s | 2C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 1692 | 40326 | 0.61 | 28 | BA15d | 2C-6 | 2.00/50.8 | 1.04/26.4 | 1,000 |
| 16ESB5 | 40291 | 0.04 | 16 | TS5 | C-2F | 0.92/23.4 | 0.27/6.9 | 7,500 |
| 17 | 44322 | 0.065 | 28 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 5,000 |
| 1768 | 40342 | 0.2 | 6 | E5 | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 1769 | 40344 | 0.2 | 2.5 | E5 | C-2R | 0.72/18.3 | 0.23/5.9 | 500 |
| 1775 | 40346 | 0.075 | 6.3 | E5 | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 18 | 40350 | 0.04 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 5,000 |
| 1804 | 40352 | 0.06 | 4 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1810 | 40356 | 0.4 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1813 | 40358 | 0.1 | 14.4 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1815 | 40360 | 0.2 | 14 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1815-BP | 42176 | 0.2 | 14 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1816 | 40362 | 0.33 | 13 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1816-BP | 42178 | 0.33 | 13 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 1,000 |

>>Continued on page 76



Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|-----------|----------|-----------|-----------|--------|
| 1818 | 40364 | 0.17 | 24 | BA9s | C-2V | 1.19/30.2 | 0.43/11.0 | 250 |
| 1819 | 40366 | 0.04 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 2,500 |
| 1820 | 40368 | 0.1 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1820-BP | 81124 | 0.1 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1820BTS | 49790 | 0.1 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1820R | 00723 | 0.1 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1821 | 40370 | 0.17 | 28 | E10 | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 1822 | 40372 | 0.1 | 36 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1828 | 40380 | 0.05 | 37.5 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1829 | 40382 | 0.07 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1829-BP | 81126 | 0.07 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1835 | 40386 | 0.05 | 55 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 5,000 |
| 1843 | 40707 | 0.022 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 1847 | 40390 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 5,000 |
| 1850 | 40394 | 0.09 | 5 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 1,500 |
| 1864 | 40398 | 0.17 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,500 |
| 1866 | 40400 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 5,000 |
| 1869 | 49698 | 0.014 | 10 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 50,000 |
| 1873 | 40404 | 0.2 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 7,000 |
| 1873-BP | 81129 | 0.2 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 7,000 |
| 1876 | 49699 | 2.5 | 3.5 | BA15s | C-6 | 1.75/44.5 | 0.65/16.5 | 2,000 |
| 1888 | 40406 | 0.5 | 7 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 1,500 |
| 1889 | 40408 | 0.27 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 2,000 |
| 1889-BP | 49689 | 0.27 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 2,000 |
| 1891 | 40409 | 0.24 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 1891-BP | 40410 | 0.24 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 1892 | 40412 | 0.12 | 14.4 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1892-BP | 42180 | 0.12 | 14.4 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 1893 | 40413 | 0.33 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 7,500 |
| 1893-BP | 40414 | 0.33 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 7,500 |
| 1895 | 40416 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895-BP | 40417 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895A | 40419 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895A-BP | 49447 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895B | 40719 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895B-BP | 40721 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895G | 00754 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1895R | 40725 | 0.27 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 2,000 |
| 1906 | 40422 | 0.07 | 5 | BA9s | C-6 | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 192 | 40424 | 0.33 | 13 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 192-BP | 42344 | 0.33 | 13 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 193 | 40426 | 0.33 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 15,000 |
| 194 | 40427 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194-BP | 40428 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194A | 40430 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194A-BP | 40431 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194B | 42438 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194B-BP | 42440 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194G | 00794 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194G-BP | 49830 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194LL | 42504 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 194LL-BP | 40335 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 194NA | 40432 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194NA-BP | 40433 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194R | 42442 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 194R-BP | 42444 | 0.27 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |

>>Continued on page 77

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-----------|---------|----------------|----------|-----------|------------|--------------|
| 198 | 40443 | 2.25/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 |
| 198-BP | 42032 | 2.25/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 |
| 198LL | 42508 | 2.25/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400 / 10000 |
| 199 | 40445 | 2.25 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 1,200 |
| 2 | 40446 | 0.021 | 5 | WL | C-2R | 0.20/5.1 | 0.09/2.3 | 10,000 |
| 20-99 | 16024 | 1.08 | 13.0 | BA15s | C-6 | 3.00/76.2 | 2.12/53.9 | 1,000 |
| 20-99F | 16025 | 1.08 | 13.0 | BA15s | C-6 | 3.00/76.2 | 2.12/53.9 | 1,000 |
| 200 | 00805 | 0.85 | 4.0 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 50 |
| 2040-BP | 42182 | 0.625 | 12.8 | W2x4.6d | CC-6 | 1.29/32.8 | 0.38/9.6 | 500 |
| 2057 | 40448 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057-BP | 40449 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057A | 42262 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057A-BP | 42062 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057LL | 42522 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 2057LL-BP | 40325 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 2057NA | 40455 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057NA-BP | 40456 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| 2057NALL | 42524 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 2057NALL-BP | 40341 | 2.1/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400/10000 |
| 2058U | 40451 | 2.1/0.48 | 12.8/14 | WL | C-6/C-6 | 1.81/46.0 | 1.04/26.4 | 1200 / 5000 |
| 210 | 40454 | 1.78 | 6.5 | BA15d | C-6 | 1.75/44.5 | 0.79/20.1 | 100 |
| 2102 | 16026 | 0.04 | 18 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 10,000 |
| 211-2 | 40480 | 0.97 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 1,000 |
| 211-2-BP | 40481 | 0.97 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 1,000 |
| 211-2/F | 42312 | 0.97 | 12.8 | SV8.5mm | C-8 | 1.72/43.7 | 0.42/10.54 | 1,000 |
| 211-2/F-BP | 42238 | 0.97 | 12.8 | SV8.5mm | C-8 | 1.72/43.7 | 0.42/10.54 | 1,000 |
| 211-2B | 00837 | 0.37 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.43/11.0 | 1,000 |
| 211-2B | 00837 | 0.37 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.43/11.0 | 1,000 |
| 211-2B-BP | 00838 | 0.37 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.43/11.0 | 1,000 |
| 211-2R-BP | 00841 | 0.37 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.43/11.0 | 1,000 |
| 2114 | 40464 | 0.06 | 6 | WL | C-2R | 0.46/11.7 | 0.17/4.3 | 3,000 |
| 212-2 | 42256 | 0.74 | 13.5 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 2,000 |
| 212-2-BP | 42036 | 0.74 | 13.5 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 2,000 |
| 214-2 | 42040 | 0.52 | 13.5 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 1,000 |
| 2162 | 40468 | 0.1 | 14 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 10,000 |
| 2174 | 40470 | 0.04 | 12 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 10,000 |
| 2176 | 40472 | 0.05 | 24 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 1,000 |
| 2181 | 49106 | 0.2 | 6.3 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 20,000 |
| 2182 | 40478 | 0.08 | 14 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 40,000 |
| 2185 | 00226 | 0.04 | 28 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 10,000 |
| 2187 | 40484 | 0.04 | 28 | WL | C-2F | 0.52/13.2 | 0.23/5.9 | 10,000 |
| 219 | 49701 | 0.25 | 6.3 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 5,000 |
| 2200 | 40488 | 0.06 | 5 | WL | C-2R | 0.52/13.2 | 0.23/5.9 | 25,000 |
| 222 | 40492 | 0.25 | 2.25 | E10 | C-2R | 0.93/23.6 | 0.38/9.6 | 5 |
| 222-BP | 40493 | 0.25 | 2.25 | E10 | C-2R | 0.93/23.6 | 0.38/9.6 | 5 |
| 2232 | 42384 | 0.643 | 28 | BA15s | CC-8 | 2.00/50.8 | 1.04/26.4 | 2,000 |
| 2233 | 42386 | 0.766 | 28 | BA15s | CC-8 | 2.00/50.8 | 1.04/26.4 | 2,000 |
| 233 | 49702 | 0.27 | 2.33 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 10 |
| 2357 | 40498 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |

>>Continued on page 78

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-----------|---------|-----------|----------|------------|-----------|-------------|
| 2357-BP | 40499 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |
| 2357A | 42304 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |
| 2357A-BP | 42234 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |
| 2357LL-BP | 40329 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 800 / 10000 |
| 2357NA | 40501 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |
| 2357NA-BP | 40502 | 2.23/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 |
| 238 | 49704 | 0.5 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 2,000 |
| 239 | 00929 | 0.36 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 5000 + |
| 2396 | 40504 | 2.23 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 400 |
| 2396-BP | 40633 | 2.23 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 400 |
| 2397 | 42229 | 2.23/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 2000 |
| 2397-BP | 42230 | 2.23/0.48 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 2000 |
| 24 | 42240 | 0.24 | 14 | W2x4.6d | C-2V | 0.91/23.1 | 0.34/8.7 | 1,500 |
| 24-BP | 42010 | 0.24 | 14 | W2x4.6d | C-2V | 0.91/23.1 | 0.34/8.7 | 1,500 |
| 2410X-1 | 50038 | 0.417 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 10,000 |
| 2410X-1 | 50038 | 0.417 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 10,000 |
| 2410X-2 | 50054 | 0.417 | 24 | W2.1x9.5d | C-2F | 1.53/38.9 | 0.62/15.8 | 3,000 |
| 2410X-2 | 50054 | 0.417 | 24 | W2.1x9.5d | C-2F | 1.53/38.9 | 0.62/15.8 | 3,000 |
| 243 | 40520 | 0.27 | 2.33 | E10 | C-6 | 0.93/23.6 | 0.38/9.6 | 10 |
| 245 | 49703 | 0.5 | 2.46 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| 2450X | 50030 | 0.208 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 2450X | 50030 | 0.208 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 2470X | 50032 | 0.3 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 12,000 |
| 2470X | 50032 | 0.3 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 12,000 |
| 2475X-1 | 50036 | 0.313 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 10,000 |
| 2475X-1 | 50036 | 0.313 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 10,000 |
| 24A | 42244 | 0.24 | 14 | W2x4.6d | C-2V | 0.91/23.1 | 0.34/8.7 | 1,500 |
| 24CSB | 40513 | 0.017 | 24 | TS5 | C-2F | 0.92/23.4 | 0.27/6.9 | 15,000 |
| 24E1 | 44017 | 0.035 | 24 | TS1 | C-2F | 1.69/42.9 | 0.27/6.9 | 10,000 |
| 24E2 | 44018 | 0.035 | 24 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 7,000 |
| 24E3 | 40509 | 0.035 | 24 | TS3 | C-2F | 1.69/42.9 | 0.27/6.9 | 7,000 |
| 24ESB5 | 40507 | 0.04 | 24 | TS5 | C-2F | 0.92/23.4 | 0.27/6.9 | 8,000 |
| 24EX | 44020 | 0.035 | 24 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 8,000 |
| 24MB | 40510 | 0.073 | 24 | BA9s | C-2F | 1.19/30.2 | 0.33/8.4 | 10,000 |
| 24PSB5 | 40512 | 0.073 | 24 | TS5 | C-2F | 1.11/28.2 | 0.27/6.9 | 10,000 |
| 24X | 40516 | 0.035 | 24 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 8,000 |
| 251 | 40524 | 0.3 | 2.47 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 30 |
| 257 | 49674 | 0.27 | 14 | BA9s | C-2R | 1.07/27.2 | 0.59/15.0 | 500 |
| 258 | 49706 | 0.27 | 14 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 500 |
| 259 | 40534 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 5,000 |
| 265 | 49707 | 0.08 | 28 | BA9s | C-2F | 0.94/23.9 | 0.43/11.0 | 5,000 |
| 267 | 01034 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 5,000 |
| 27 | 40539 | 0.3 | 4.9 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 30 |
| 2721 | 42231 | 0.1 | 12 | W2x4.6d | C-2V | 0.80/20.3 | 0.20/5.1 | 1,000 |
| 2721-BP | 40635 | 0.1 | 12 | W2x4.6d | C-2V | 0.80/20.3 | 0.20/5.1 | 1,000 |
| 2721MF | 05259 | 0.1 | 12 | B8.5d | C-2V | 0.925/23.5 | 0.20/5.1 | 1,000 |
| 2721MF-BP | 49831 | 0.1 | 12 | B8.5d | C-2V | 0.925/23.5 | 0.20/5.1 | 1,000 |
| 2723 | 01044 | 0.19 | 12 | W2x4.6d | C-2V | 0.80/20.3 | 0.20/5.1 | 1,100 |
| 2723-BP | 40638 | 0.19 | 12 | W2x4.6d | C-2V | 0.80/20.3 | 0.20/5.1 | 1,100 |
| 2741 | 42223 | 0.05 | 24 | W2x4.6d | C-2V | 0.80/20.3 | 0.20/5.1 | 1,000 |
| 2741MF | 00198 | 0.05 | 24 | B8.5d | C-2V | 0.925/23.5 | 0.20/5.1 | 1,000 |
| 2821 | 42232 | 0.25 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 2821-BP | 42233 | 0.25 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 2827 | 06379 | 0.4 | 12 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 300 |
| 2827-BP | 06380 | 0.4 | 12 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 300 |
| 2841 | 49053 | 0.125 | 24 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |

>>Continued on page 79

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-----------|---------|-----------|----------|------------|-----------|------------|
| 2860X | 50042 | 0.214 | 28 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 2860X | 50042 | 0.214 | 28 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 28ESB5 | 40544 | 0.04 | 28 | TS5 | C-2F | 0.92/23.4 | 0.27/6.9 | 6,000 |
| 28MB | 40546 | 0.04 | 28 | BA9s | C-2F | 1.19/30.2 | 0.33/8.4 | 5,000 |
| 28PSB5 | 40548 | 0.04 | 28 | TS5 | C-2F | 1.11/28.2 | 0.27/6.9 | 5,000 |
| 28RC | 40549 | 0.4 | 28 | E12 | C-2F | 1.22/31.0 | 0.91/23.1 | 5,000 |
| 293 | 40550 | 0.33 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 5,000 |
| 293-BP | 42044 | 0.33 | 14 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 5,000 |
| 301 | 49448 | 0.17 | 28 | BA15s | C-2F | 1.38/35.1 | 0.62/15.8 | 500 |
| 303 | 40562 | 0.3 | 28 | BA15s | CC-6 | 1.44/36.6 | 0.75/19.1 | 500 |
| 304 | 49103 | 0.3 | 28 | BA15d | C-2F | 1.44/36.6 | 0.75/19.1 | 500 |
| 3047K | 06383 | 1.59/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3047K-BP | 06384 | 1.59/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3057 | 40600 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3057-BP | 40601 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3057A | 42621 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3057A-BP | 42622 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3057K | 42600 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3057K-BP | 42601 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3057NA | 40603 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3057NA-BP | 40604 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 306 | 40566 | 0.51 | 28 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 307 | 40568 | 0.67 | 28 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 308 | 40570 | 0.67 | 28 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 31 | 40574 | 0.3 | 6.15 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 |
| 311 | 40576 | 1.29 | 28 | BA15s | CC-2V | 2.38/60.5 | 1.35/34.3 | 300 |
| 312 | 01125 | 1.29 | 28 | BA15d | C-2V | 2.38/60.45 | 1.42/36 | 300 |
| 313 | 40578 | 0.17 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 313-BP | 81130 | 0.17 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 313-R | 01132 | 0.17 | 28 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |
| 315 | 40580 | 0.9 | 28 | BA15s | CC-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 3155 | 42288 | 1.6 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 1,500 |
| 3155-BP | 42186 | 1.6 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 1,500 |
| 3155K | 49718 | 1.44 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 2,000 |
| 3156 | 42292 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 1,200 |
| 3156-BP | 42188 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 1,200 |
| 3156A | 49035 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 1,200 |
| 3156K | 42603 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 2,000 |
| 3156K-BP | 42604 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 2,000 |
| 3157 | 40610 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3157-BP | 40611 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3157A | 42624 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3157A-BP | 42625 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3157K | 42606 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3157K-BP | 42607 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000/10000 |
| 3157NA | 40613 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 3157NA-BP | 40614 | 2.1/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 327 | 40596 | 0.04 | 28 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 4,000 |
| 328 | 40598 | 0.2 | 6 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 330 | 40599 | 0.08 | 14 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 1,500 |
| 334 | 40606 | 0.04 | 28 | S5.7s | C-2F | 0.63/16.0 | 0.23/5.9 | 4,000 |
| 335 | 40607 | 0.04 | 28 | E5 | C-2F | 0.72/18.3 | 0.23/5.9 | 4,000 |
| 3357 | 42189 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3357-BP | 49720 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3357A | 49037 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3357NA | 42195 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |

>>Continued on page 80



Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-------------------------|---------|-----------|---------|-----------|----------|-----------|-----------|--------------|
| 3357NA-BP | 49833 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 336 | 49631 | 0.08 | 14 | S5.7s | C-2F | 0.63/16.0 | 0.23/5.9 | 1,500 |
| 337 | 40616 | 0.2 | 6.3 | S5.7s | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 338 | 01183 | 0.06 | 2.7 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 6,000 |
| 342 | 01185 | 0.04 | 6 | E5 | C-2R | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 344 | 40622 | 0.014 | 10 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 50,000 |
| 345 | 40624 | 0.04 | 6 | SX6s | C-2V | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 3456K | 05467 | 2.1 | 12.8 | W2.5x16d | C-6 | 2.09/53.1 | 1.04/26.4 | 800 |
| 3457/3357 | 42192 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3457/3357-BP | 42190 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3457A | 16033 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3457K/3357K | 42609 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 800 / 10000 |
| 3457K/3357K-BP | 42610 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 800 / 10000 |
| 3457NA/3357NA | 42198 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3457NA/3357NA-BP | 42196 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 |
| 3496 | 40641 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 0.79/20.1 | 600/5000 |
| 3496-BP | 40627 | 2.1/0.59 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 0.79/20.1 | 600/5000 |
| 3497 | 40645 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 0.79/20.1 | 600 |
| 3497-BP | 40629 | 2.1 | 12.8 | BA15s | C-6 | 2.00/50.8 | 0.79/20.1 | 600 |
| 356 | 40636 | 0.17 | 28 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 500 |
| 359 | 49787 | 0.06 | 1.35 | E10 | S-2 | 0.94/23.9 | 0.43/11.0 | 50 |
| 35A2 | 49460 | 0.040 | 35 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 7,500 |
| 363 | 40640 | 0.2 | 14 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| 3652 | 40655 | 0.37 | 13.5 | W2.1x9.5d | C-6 | 1.06/26.9 | 0.40/10.2 | 700 |
| 3652-BP | 40653 | 0.37 | 13.5 | W2.1x9.5d | C-6 | 1.06/26.9 | 0.40/10.2 | 700 |
| 367 | 49709 | 0.04 | 10 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 5,000 |
| 37 | 40648 | 0.09 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 2,500 |
| 37-BP | 42014 | 0.09 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 2,500 |
| 370 | 40650 | 0.04 | 18 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 373 | 40654 | 0.08 | 14 | E5 | C-2F | 0.72/18.3 | 0.23/5.9 | 1,500 |
| 375 | 01215 | 0.015 | 3.0 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 3757NAK | 00183 | 2.1/0.59 | 12.8/14 | WX2.5 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000 / 10000 |
| 3757NAK-BP | 00184 | 2.1/0.59 | 12.8/14 | WX2.5 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000 / 10000 |
| 376 | 40658 | 0.06 | 28 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 25,000 |
| 377 | 40660 | 0.075 | 6.3 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 378 | 40662 | 0.2 | 6.3 | E5 | C-2F | 0.72/18.3 | 0.23/5.9 | 20,000 |
| 379 | 40664 | 0.2 | 6.3 | S5.7s | C-2F | 0.63/16.0 | 0.23/5.9 | 20,000 |
| 380 | 40666 | 0.04 | 6.3 | SX6s | C-2V | 0.63/16.0 | 0.23/5.9 | 20,000 |
| 381 | 40668 | 0.2 | 6.3 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 20,000 |
| 382 | 40670 | 0.08 | 14 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 15,000 |
| 385 | 40672 | 0.04 | 28 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 386 | 40674 | 0.08 | 14 | S5.7s | C-2F | 0.63/16.0 | 0.23/5.9 | 40,000 |
| 387 | 40678 | 0.04 | 28 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 388 | 40680 | 0.04 | 28 | S5.7s | C-2F | 0.63/16.0 | 0.23/5.9 | 25,000 |
| 3898 | 16037 | 0.17 | 12 | BA7s | C-2V | 0.82/20.8 | 0.27/6.9 | 200 |
| 394 | 40686 | 0.04 | 12 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 20,000 |
| 398 | 49632 | 0.2 | 6.3 | S5.7s | C-2R | 0.63/16.0 | 0.23/5.9 | 5,000 |
| 399 | 40692 | 0.04 | 28 | E5 | C-2F | 0.72/18.3 | 0.23/5.9 | 7,000 |
| 40 | 40694 | 0.15 | 6.3 | E10 | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 400 | 40696 | 0.1 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,000 |
| 4057K | 05390 | 2.23/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4057K-BP | 05375 | 2.1/0.48 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 407 | 40698 | 0.3 | 4.9 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 50 |
| 41 | 40700 | 0.5 | 2.5 | E10 | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |

>>Continued on page 81

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-----------|---------|-----------|----------|-----------|-----------|------------|
| 41-BP | 81133 | 0.5 | 2.5 | E10 | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 4114K | 00181 | 2.23/0.59 | 14/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4114K-BP | 00182 | 2.23/0.59 | 14/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4157K | 81143 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4157K-BP | 81047 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4157NAK | 81136 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 4157NAK-BP | 81182 | 2.23/0.59 | 12.8/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 |
| 42000 | 42000 | 0.32 | 1.35 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42002 | 42002 | 0.32 | 2.7 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42003 | 42003 | 0.32 | 2.7 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42005 | 42005 | 0.32 | 1.35 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42005 | 42005 | 0.32 | 1.35 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42006 | 42006 | 0.32 | 2.7 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 42006 | 42006 | 0.32 | 2.7 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 425 | 40702 | 0.5 | 5 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 |
| 428 | 40704 | 0.25 | 12.5 | E10 | C-2V | 1.07/27.2 | 0.59/15.0 | 250 |
| 43 | 40706 | 0.5 | 2.5 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 432 | 49726 | 0.25 | 18 | E10 | C-2V | 1.07/27.2 | 0.59/15.0 | 250 |
| 44 | 40716 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-A | 05198 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-B | 01347 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-BP | 49419 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-G | 01349 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-P | 05204 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-R | 01351 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 44-Y | 01353 | 0.25 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 455 | 40720 | 0.5 | 6.5 | BA9s | C-2R | 1.07/27.2 | 0.59/15.0 | 500 |
| 456 | 49634 | 0.17 | 28 | BA9s | C-2F | 1.07/27.2 | 0.59/15.0 | 5,000 |
| 45675 | 49462 | 0.046 | 14 | G2.54 | C-2F | 0.60/15.2 | 0.17/4.3 | |
| 45685 | 05223 | 0.06 | 14 | G2.54 | C-2F | 0.60/15.2 | 0.19/4.8 | |
| 46 | 40726 | 0.25 | 6.3 | E10 | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 46-BP | 42330 | 0.25 | 6.3 | E10 | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 464 | 40728 | 0.17 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 1,500 |
| 47 | 40730 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-A | 05202 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-B | 00025 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-BP | 49420 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-G | 00026 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-P | 05200 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-R | 00027 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 47-Y | 00028 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 3,000 |
| 48 | 40732 | 0.06 | 2 | E10 | S-2 | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 48C2 | 49549 | 0.035 | 48 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 10,000 |
| 48ESB5 | 40738 | 0.04 | 48 | TS5 | CC-2F | 0.92/23.4 | 0.27/6.9 | 5,000 |
| 48MB | 40740 | 0.05 | 48 | BA9s | C-2F | 1.19/30.2 | 0.33/8.4 | 10,000 |
| 48PSB5 | 40742 | 0.05 | 48 | TS5 | C-7A | 1.11/28.2 | 0.27/6.9 | 10,000 |
| 48RC | 40743 | 0.05 | 48 | E12 | C-2F | 1.22/31.0 | 0.91/23.1 | 10,000 |
| 49 | 40744 | 0.06 | 2 | BA9s | C-6 | 1.19/30.2 | 0.43/11.0 | 1,000 |
| 50 | 40746 | 0.22 | 7.5 | E10 | C-2R | 0.94/23.9 | 0.43/11.0 | 1,000 |
| 5007 | 40647 | 0.42 | 12 | BA15s | C-2R | 1.44/36.6 | 0.75/19.1 | 500 |
| 5007-BP | 40639 | 0.42 | 12 | BA15s | C-2R | 1.44/36.6 | 0.75/19.1 | 500 |
| 502 | 40750 | 0.15 | 5.1 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 100 |
| 502-BP | 16041 | 0.15 | 5.1 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 100 |
| 503 | 40752 | 0.15 | 5.1 | BA9s | C-2R | 1.07/27.2 | 0.59/15.0 | 100 |
| 509K | 40754 | 0.18 | 24 | E12 | C-2F | 1.38/35.1 | 0.75/19.1 | 1,000 |
| 51 | 40756 | 0.22 | 7.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 1,000 |

>>Continued on page 82

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-----------|-------|----------------|----------|-----------|-----------|-----------|
| 51-BP | 42016 | 0.22 | 7.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 1,000 |
| 51A | 01408 | 0.035 | 10 | TS6 | C-2F | 0.92/23.4 | 0.27/6.9 | 8,000 |
| 52 | 40760 | 0.1 | 14.4 | E10 | C-2V | 0.94/23.9 | 0.43/11.0 | 1,000 |
| 53 | 40761 | 0.12 | 14.4 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 1,000 |
| 53-BP | 40762 | 0.12 | 14.4 | BA9s | C-2V | 0.94/23.9 | 0.43/11.0 | 1,000 |
| 55 | 40766 | 0.41 | 7 | BA9s | C-2R | 1.07/27.2 | 0.59/15.0 | 200 |
| 55-BP | 40767 | 0.41 | 7 | BA9s | C-2R | 1.07/27.2 | 0.59/15.0 | 200 |
| 555 | 40783 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-A | 05199 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-B | 16043 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-G | 16044 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-P | 05203 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-R | 16045 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 555-Y | 16046 | 0.25 | 6.3 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 3,000 |
| 558 | 40769 | 0.33 | 13 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 500 |
| 55A/S8 | 41702 | 0.55 | 12 | P15s30 | C-8S | 2.09/53.1 | 1.04/26.4 | 500 |
| 55C2 | 40765 | 0.050 | 55 | TS2 | C-2F | 1.69/42.9 | 0.27/6.9 | 5,000 |
| 55C3 | 40768 | 0.05 | 55 | TS3 | CC-2F | 1.69/42.9 | 0.27/6.9 | 5,000 |
| 56 | 44326 | 0.115 | 5 | W2.1x4.9d | C-2R | 0.80/20.3 | 0.23/5.9 | 20,000 |
| 561 | 40775 | 0.97 | 12.8 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 1,000 |
| 561-BP | 40776 | 0.97 | 12.8 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 1,000 |
| 562 | 42052 | 0.74 | 13.5 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 2,000 |
| 562-BP | 42050 | 0.74 | 13.5 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 2,000 |
| 563 | 42058 | 0.52 | 13.5 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 1,000 |
| 564 | 42070 | 0.44 | 14 | RGLP | C-8 | 1.72/43.7 | 0.39/9.9 | 2,000 |
| 57 | 40771 | 0.24 | 14 | BA9s | C-2V | 1.07/27.2 | 0.59/15.0 | 500 |
| 57-BP | 40772 | 0.24 | 14 | BA9s | C-2V | 1.07/27.2 | 0.59/15.0 | 500 |
| 5702NAK | 06145 | 1.92/0.59 | 14/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 5702NAK-BP | 06146 | 1.92/0.59 | 14/14 | W2.5x16q | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 |
| 577 | 42082 | 1.4 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.62/15.8 | 1,000 |
| 577-BP | 42080 | 1.4 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.62/15.8 | 1,000 |
| 578 | 06699 | 0.78 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 1,000 |
| 578-BP | 06700 | 0.97 | 12.8 | Double End Cap | C-8 | 1.72/43.7 | 0.38/9.6 | 1,000 |
| 579 | 06702 | 0.80 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 200 |
| 579-BP | 06703 | 0.80 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 200 |
| 585 | 40759 | 0.04 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 7,000 |
| 6022 | 40824 | 0.02 | 5 | WL | C-2R | 0.25/6.4 | 0.13/3.2 | 10,000 |
| 605 | 40826 | 0.5 | 6.15 | E10 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 |
| 60MB | 40820 | 0.05 | 60 | BA9s | CC-2F | 1.19/30.2 | 0.33/8.4 | 7,500 |
| 60PSB5 | 40822 | 0.05 | 60 | TS5 | CC-2F | 1.11/28.2 | 0.27/6.9 | 7,500 |
| 60RB | 40821 | 0.05 | 60 | BA9s | CC-7A | 1.16/29.5 | 0.91/23.1 | 7,500 |
| 623 | 40828 | 0.37 | 28 | BA15s | 2C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 624 | 40829 | 0.37 | 28 | BA15d | 2C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 63 | 40830 | 0.63 | 7 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 63-BP | 40831 | 0.63 | 7 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 63-R | 81186 | 0.63 | 7 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 631 | 40832 | 0.63 | 14 | BA15s | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 631-BP | 40833 | 0.63 | 14 | BA15s | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 64 | 40835 | 0.63 | 7 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 1,000 |
| 6411 | 40671 | 0.83 | 12 | SV8.5mm | C-8 | 1.61/40.9 | 0.43/11.0 | 200 |
| 6411-BP | 40673 | 0.83 | 12 | SV8.5mm | C-8 | 1.61/40.9 | 0.43/11.0 | 200 |
| 64111 | 40689 | 0.416 | 12 | BA9s | C-6 | 1.29/32.8 | 0.38/9.6 | 240 |
| 64111-BP | 40691 | 0.416 | 12 | BA9s | C-6 | 1.29/32.8 | 0.38/9.6 | 240 |

>>Continued on page 83

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-----------|-----------|-----------|----------|-----------|-----------|------------|
| 655 | 49620 | 0.20 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 7,000 |
| 656 | 40836 | 0.06 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 2,500 |
| 657 | 40837 | 0.08 | 28 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 15,000 |
| 658 | 42272 | 0.08 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 15,000 |
| 658-BP | 42086 | 0.08 | 14 | W2.1x9.5d | C-2F | 1.06/26.9 | 0.40/10.2 | 15,000 |
| 6610F | 40840 | 0.055 | 12 | SF6/6 | C-8 | 1.26/32.0 | 0.24/6.1 | 5,000 |
| 6612F | 40841 | 0.25 | 12 | SF6/6 | C-8 | 1.26/32.0 | 0.24/6.1 | 5,000 |
| 6614F | 05833 | 0.05 | 14 | SF6/6 | C-8 | 1.26/32.0 | 0.24/6.1 | 10,000 |
| 6614F-BP | 49724 | 0.05 | 14 | SF6/6 | C-8 | 1.26/32.0 | 0.24/6.1 | 10,000 |
| 6615F | 40844 | 0.08 | 14 | SF6/6 | C-8 | 1.26/32.0 | 0.24/6.1 | 10,000 |
| 67 | 40845 | 0.59 | 13.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 67-BP | 40846 | 0.59 | 13.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 67K | 49711 | 0.59 | 13.5 | E12 | C-2R | 1.38/35.1 | 0.75/19.1 | 5,000 |
| 68 | 40850 | 0.59 | 13.5 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 68-BP | 42018 | 0.59 | 13.5 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 680 | 40852 | 0.06 | 5 | WL | C-2R | 0.25/6.4 | 0.13/3.2 | 60,000 |
| 683 | 40856 | 0.06 | 5 | WL | C-2R | 0.25/6.4 | 0.13/3.2 | 25,000 |
| 6833 | 40864 | 0.06 | 5 | WL | C-2R | 0.20/5.1 | 0.09/2.3 | 25,000 |
| 6838 | 40866 | 0.024 | 28 | WL | CC-2F | 0.25/6.4 | 0.13/3.2 | 16,000 |
| 6839 | 40868 | 0.024 | 28 | SX4s | CC-2F | 0.38/9.7 | 0.13/3.2 | 16,000 |
| 6848 | 49098 | 0.025 | 48 | SX6s | CC-2F | 0.63/16.0 | 0.23/5.9 | 5,000 |
| 685 | 40872 | 0.06 | 5 | SX4s | C-2R | 0.38/9.7 | 0.13/3.2 | 25,000 |
| 6MB | 40777 | 0.14 | 6 | BA9s | C-2V | 1.19/30.2 | 0.33/8.4 | 20,000 |
| 6PSB5 | 40778 | 0.14 | 6 | TS5 | C-2V | 1.11/28.2 | 0.27/6.9 | 20,000 |
| 70 | 40876 | 0.15 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 100 |
| 715 | 40884 | 0.115 | 5 | WL | C-2R | 0.25/6.4 | 0.13/3.2 | 40,000 |
| 718 | 81173 | 0.115 | 5 | SX4s | C-2R | 0.38/9.7 | 0.13/3.2 | 40,000 |
| 7219 | 42390 | 0.06 | 12 | WL | C-2F | 0.25/6.4 | 0.13/3.2 | 10,000 |
| 73 | 40898 | 0.08 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 15,000 |
| 73-BP | 42020 | 0.08 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 15,000 |
| 7327 | 40896 | 0.04 | 28 | G3.17 | C-2F | 0.60/15.2 | 0.23/5.9 | 4,000 |
| 7328 | 42400 | 0.2 | 6 | G3.17 | C-2R | 0.63/16.0 | 0.23/5.9 | 1,000 |
| 7330 | 40902 | 0.08 | 14 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 1,500 |
| 7333 | 81145 | 0.06 | 5 | SX6s | C-2R | 0.63/16.0 | 0.23/5.9 | 25,000 |
| 7349 | 42408 | 0.2 | 6.3 | G3.17 | C-2R | 0.63/16.0 | 0.23/5.9 | 5,000 |
| 7362 | 49503 | 0.115 | 5 | G3.17 | C-2R | 0.63/16.0 | 0.23/5.9 | 40,000 |
| 7371 | 40910 | 0.04 | 12 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 7373 | 40912 | 0.1 | 14 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 7374 | 49712 | 0.04 | 28 | G3.17 | C-2F | 0.60/15.2 | 0.23/5.9 | 10,000 |
| 7377 | 49056 | 0.075 | 6.3 | G3.17 | C-2R | 0.60/15.2 | 0.23/5.9 | 1,000 |
| 7380 | 01662 | 0.04 | 6.3 | G3.17 | C-2F | 0.60/15.2 | 0.23/5.9 | 20,000 |
| 7381 | 40920 | 0.2 | 6.3 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 20,000 |
| 7382 | 40922 | 0.08 | 14 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 40,000 |
| 7387 | 40926 | 0.04 | 28 | G3.17 | C-2F | 0.63/16.0 | 0.23/5.9 | 25,000 |
| 74 | 40928 | 0.1 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 1,000 |
| 74-BP | 42022 | 0.1 | 14 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 1,000 |
| 7440 | 40931 | 1.85 | 13.5 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 7440-BP | 40925 | 1.85 | 13.5 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 7440NA | 00178 | 1.85 | 13.5 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 7440NA-BP | 00199 | 1.85 | 13.5 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 7441 | 00849 | 2.1 | 12.8 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 1,200 |
| 7441-BP | 07819 | 2.1 | 12.8 | W3x16d | C-6 | 1.75/44.5 | 0.79/20.1 | 1,200 |
| 7443 | 40935 | 1.85/0.44 | 13.5/13.5 | W3x16q | C-6/C-6 | 1.75/44.5 | 0.79/20.1 | 500/1000 |
| 7443-BP | 40927 | 1.85/0.44 | 13.5/13.5 | W3x16q | C-6/C-6 | 1.75/44.5 | 0.79/20.1 | 500/1000 |
| 7444NA | 06409 | 1.85/0.44 | 13.5/13.5 | W3x16q | C-6/C-6 | 1.75/44.5 | 0.79/20.1 | 500 / 1000 |
| 7444NA-BP | 06463 | 1.85/0.44 | 13.5/13.5 | W3x16q | C-6/C-6 | 1.75/44.5 | 0.79/20.1 | 500 / 1000 |

>>Continued on page 84



Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-----------|-------|-----------|----------|-----------|-----------|----------|
| 7507NA | 05594 | 1.85 | 13.5 | BAU15s | C-6 | 2.00/50.8 | 1.04/26.4 | 150 |
| 7507NA-BP | 42225 | 1.85 | 13.5 | BAU15s | C-6 | 2.00/50.8 | 1.04/26.4 | 150 |
| 7511 | 00233 | 1.00 | 28 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 350 |
| 7537 | 00234 | 1.00/0.36 | 28/28 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300/2000 |
| 755 | 40932 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 20,000 |
| 755-BP | 16052 | 0.15 | 6.3 | BA9s | C-2R | 1.19/30.2 | 0.43/11.0 | 20,000 |
| 756 | 40934 | 0.08 | 14 | BA9s | C-2F | 1.19/30.2 | 0.43/11.0 | 15,000 |
| 757 | 40936 | 0.08 | 28 | BA9s | C-2F | 1.19/30.2 | 0.40/10.2 | 15,000 |
| 757-BP | 42362 | 0.08 | 28 | BA9s | C-2F | 1.19/30.2 | 0.40/10.2 | 15,000 |
| 7632 | 40938 | 0.04 | 28 | G2.54 | C-2F | 0.60/15.2 | 0.17/4.3 | 1,000 |
| 7646 | 49713 | 0.08 | 14 | G2.54 | C-2R | 0.60/15.2 | 0.17/4.3 | 1,000 |
| 7683 | 40944 | 0.06 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 25,000 |
| 7683 | 40944 | 0.06 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 25,000 |
| 7714 | 40946 | 0.075 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 25,000 |
| 7714 | 40946 | 0.075 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 25,000 |
| 7715 | 40948 | 0.115 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 40,000 |
| 7715 | 40948 | 0.115 | 5 | G1.27 | C-2R | 0.38/9.7 | 0.13/3.2 | 40,000 |
| 77A/S8 | 41704 | 0.77 | 12 | P15s30 | C-8S | 2.09/53.1 | 1.04/26.4 | 500 |
| 7839 | 40950 | 0.024 | 28 | G1.27 | CC-2F | 0.38/9.7 | 0.13/3.2 | 40,000 |
| 7839 | 40950 | 0.024 | 28 | G1.27 | CC-2F | 0.38/9.7 | 0.13/3.2 | 40,000 |
| 7876 | 40954 | 0.06 | 28 | G3.17 | C-2F | 0.60/15.2 | 0.23/5.9 | 25,000 |
| 79 | 44328 | 0.2 | 6 | W2.1x4.9d | C-2R | 0.80/20.3 | 0.23/5.9 | 1,000 |
| 8-3995 | 44300 | 0.025 | 120 | BA9s | CC-7A | 1.19/30.2 | 0.43/10.9 | 7,500 |
| 81 | 40958 | 1.02 | 6.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 500 |
| 8111 | 40960 | 0.065 | 14 | WL | C-2F | 0.25/6.4 | 0.13/3.2 | 10,000 |
| 82 | 40964 | 1.02 | 6.5 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 500 |
| 8362 | 42418 | 0.08 | 14 | E5 | C-2F | 0.69/17.5 | 0.23/5.9 | 15,000 |
| 84 | 40968 | 0.04 | 6.3 | W2.1x4.9d | C-2R | 0.80/20.3 | 0.23/5.9 | 20,000 |
| 85 | 40972 | 0.04 | 28 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 7,000 |
| 86 | 40974 | 0.2 | 6.3 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 20,000 |
| 8610 | 40976 | 0.2 | 6.3 | WL | C-2R | 0.46/11.7 | 0.17/4.3 | 5,000 |
| 8627 | 40978 | 0.04 | 28 | WL | C-2F | 0.46/11.7 | 0.17/4.3 | 1,000 |
| 8640 | 40982 | 0.08 | 14 | WL | C-2F | 0.46/11.7 | 0.17/4.3 | 1,000 |
| 86G | 00361 | 0.2 | 6.3 | W2.1x4.9d | C-2F | 0.80/20.3 | 0.23/5.9 | 20,000 |
| 87 | 40986 | 1.91 | 6.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 88 | 40992 | 1.91 | 6.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 300 |
| 89 | 40995 | 0.58 | 13 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 750 |
| 89-BP | 40996 | 0.58 | 13 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 750 |
| 8918 | 41002 | 0.1 | 14 | SX6s | C-2F | 0.63/16.0 | 0.23/5.9 | 10,000 |
| 895 | 41004 | 0.53 | 40 | BA15d | CC-6 | 2.00/50.8 | 1.04/26.4 | 3,800 |
| 89K | 01785 | 0.58 | 13 | E12 | C-2R | 1.38/35.1 | 0.75/19.1 | 750 |
| 90 | 41005 | 0.58 | 13 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 750 |
| 90-BP | 41006 | 0.58 | 13 | BA15d | C-6 | 1.44/36.6 | 0.75/19.1 | 750 |
| 904 | 41010 | 0.69 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 5,000 |
| 904-BP | 42206 | 0.69 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 5,000 |
| 906 | 41012 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906-BP | 42142 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906A | 01814 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906B | 00358 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906G | 00356 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906P | 06011 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906R | 00357 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 906Y | 00359 | 0.69 | 13 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 908 | 41014 | 1.5 | 6 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| 909 | 41016 | 0.62 | 6 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| 90MB | 40886 | 0.03 | 90 | BA9s | CC-7A | 1.19/30.2 | 0.33/8.4 | 5,000 |

>>Continued on page 85

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------|---------|--------|-------|---------------|----------|-----------|-----------|--------|
| 912 | 41017 | 1.0 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 912-BP | 41018 | 1.0 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 912LL | 42510 | 1.0 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 2,000 |
| 914 | 41020 | 0.9 | 4 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| 915 | 41021 | 0.75 | 12 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| 916 | 41022 | 0.54 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 10,000 |
| 916-BP | 42152 | 0.54 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 10,000 |
| 916NA | 42150 | 0.54 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 10,000 |
| 916NA-BP | 42146 | 0.54 | 13.5 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 10,000 |
| 917 | 41024 | 1.2 | 12.0 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,200 |
| 920 | 42157 | 1.2 | 12.8 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 1,200 |
| 921 | 41026 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 921-BP | 41027 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 921-FR | 49562 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 1,000 |
| 921LL | 42512 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 2,000 |
| 921X | 50046 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.53/38.9 | 0.62/15.8 | 3,000 |
| 921X | 50046 | 1.4 | 12.8 | W2.1x9.5d | C-2R | 1.53/38.9 | 0.62/15.8 | 3,000 |
| 922 | 41029 | 0.98 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 200 |
| 922-BP | 42156 | 0.98 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 200 |
| 927 | 49682 | 1.2 | 6 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| 928 | 41032 | 0.3 | 28 | W2.1x9.5d | C-2F | 1.49/37.9 | 0.62/15.8 | 500 |
| 93 | 41033 | 1.04 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 700 |
| 93-BP | 41034 | 1.04 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 700 |
| 939 | 49683 | 0.9 | 6 | W2.1x9.5d | C-6 | 1.49/37.9 | 0.62/15.8 | 75 |
| 94 | 41037 | 1.04 | 12.8 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 700 |
| 949 | 49621 | 0.022 | 130 | BA9s | 2C-2F | 1.19/30.2 | 0.43/11.0 | 7,000 |
| 957 | 41040 | 0.5 | 9.84 | BA9s | C-2R | 1.38/35.1 | 0.59/15.0 | 200 |
| 96 | 41041 | 0.69 | 13.5 | BA15d | C-2V | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 967 | 49622 | 0.025 | 120 | BA9s | CC-7A | 1.19/30.2 | 0.43/11.0 | 7,500 |
| 97 | 41043 | 0.69 | 13.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 97-BP | 41044 | 0.69 | 13.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 97A | 41046 | 0.69 | 13.5 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 5,000 |
| 98 | 41048 | 0.62 | 13 | BA15s | C-6 | 1.44/36.6 | 0.75/19.1 | 800 |
| A2B | 40010 | 0.0007 | 110 | WL (2" Leads) | Neon | 0.75/19.1 | 0.25/6.4 | 25,000 |
| B7A | 40020 | 0.002 | 110 | E12 | Neon | 1.38/35.0 | 0.50/12.7 | 7,500 |
| DE3021 | 42216 | 0.24 | 14 | SV7mm | C-8 | 1.10/28.0 | 0.32/8.0 | 1,000 |
| DE3021-BP | 42214 | 0.24 | 14 | SV7mm | C-8 | 1.10/28.0 | 0.32/8.0 | 1,000 |
| DE3022 | 42308 | 0.38 | 13 | SV7mm | C-8 | 1.15/29.2 | 0.32/8.0 | 1,000 |
| DE3022-BP | 42236 | 0.38 | 13 | SV7mm | C-8 | 1.15/29.2 | 0.32/8.0 | 1,000 |
| DE3175 | 42298 | 0.77 | 13 | SV8.5mm | C-8 | 1.23/31.3 | 0.40/10.0 | 400 |
| DE3175-BP | 42204 | 0.77 | 13 | SV8.5mm | C-8 | 1.23/31.3 | 0.40/10.0 | 400 |
| DE3423 | 42222 | 0.39 | 13 | SV8.5mm | C-8 | 1.46/37.1 | 0.43/11.0 | 150 |
| DE3423-BP | 42220 | 0.39 | 13 | SV8.5mm | C-8 | 1.46/37.1 | 0.43/11.0 | 150 |
| DE3425 | 42424 | 0.77 | 13 | SV8.5mm | C-8 | 1.46/37.1 | 0.43/11.0 | 400 |
| DE3425-BP | 42420 | 0.77 | 13 | SV8.5mm | C-8 | 1.46/37.1 | 0.43/11.0 | 400 |
| E37 | 49453 | 0.09 | 14 | W2x4.6d | C-2F | 0.80/20.3 | 0.20/5.1 | 2,500 |
| E73 | 49454 | 0.08 | 14 | W2x4.6d | C-2F | 0.80/20.3 | 0.20/5.1 | 15,000 |
| E85 | 49458 | 0.04 | 28 | W2x4.6d | C-2F | 0.80/20.3 | 0.20/5.1 | 7,000 |
| E86 | 49459 | 0.2 | 6.3 | W2x4.6d | C-2F | 0.80/20.3 | 0.20/5.1 | 20,000 |
| H21W | 01727 | 1.75 | 12 | BA9s | C-6 | 1.29/32.8 | 0.38/9.6 | 200 |
| HPR36 | 40031 | 1.0 | 5.5 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 40 |
| HPR40 | 44000 | 0.67 | 6 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 50 |
| HPR44 | 40034 | 1.0 | 4 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 300 |
| HPR50 | 40040 | 0.85 | 5.2 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 25 |
| HPR51 | 40046 | 0.7 | 6.5 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 25 |

>>Continued on page 86



Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|-----------|-----------|---------|----------|-----------|-----------|----------|
| HPR52 | 40052 | 0.85 | 2.8 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 10 |
| HPR53 | 40058 | 0.85 | 4 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 25 |
| HPR55 | 40070 | 0.5 | 5.2 | P13.5s | C-6 | 1.25/31.8 | 0.38/9.6 | 15 |
| JF02XE | 50114 | 0.833 | 6 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 20,000 |
| JF03XE | 50118 | 0.417 | 12 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF07XE | 50124 | 0.833 | 12 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 20,000 |
| JF08XE | 50126 | 1.0 | 12 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF08XE | 50126 | 1.0 | 12 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF13XE | 50132 | 0.208 | 24 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF14XE | 50134 | 0.208 | 24 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 20,000 |
| JF14XE/F | 16065 | 0.208 | 24 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 20,000 |
| JF16XE | 50136 | 0.417 | 24 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF16XE | 50136 | 0.417 | 24 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 3,000 |
| JF260050XE | 50100 | 0.192 | 26 | RGLP | C-8 | 1.72/43.7 | 0.40/10.0 | 15,000 |
| K12 | 40059 | 0.7 | 5.95 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| K15 | 40061 | 0.7 | 4.8 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| K222 | 40063 | 0.6 | 2.33 | E10 | C-2R | 0.93/23.6 | 0.38/9.6 | 5 |
| KK10XE | 50056 | 0.37 | 13.5 | SV8.5mm | C-8 | 1.22/31.0 | 0.40/10.0 | 5,000 |
| KO10XE | 50086 | 0.37 | 13.5 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO10XE/F | 05584 | 0.37 | 13.5 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO16XE | 50090 | 0.74 | 13.5 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO16XE/F | 05586 | 0.74 | 13.5 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO20XE | 50092 | 0.192 | 26 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO20XE/F | 05588 | 0.192 | 26 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 5,000 |
| KO23XE | 50094 | 0.385 | 26 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 3,000 |
| KO23XE/F | 05590 | 0.385 | 26 | SV8.5mm | C-8 | 1.73/44.0 | 0.40/10.0 | 3,000 |
| KPR102 | 40047 | 0.7 | 2.4 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| KPR103 | 40049 | 0.75 | 3.6 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| KPR118 | 40051 | 0.55 | 7.2 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 20 |
| KPR13 | 40045 | 0.5 | 4.75 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 10 |
| KPR130 | 40055 | 1.2 | 3.85 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 20 |
| KPR2 | 40041 | 0.5 | 2.38 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| KPR2-BP | 44001 | 0.5 | 2.38 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| KPR3 | 40043 | 0.91 | 3.6 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 30 |
| KPR4 | 44003 | 0.47 | 2.2 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| P21/5W | 44011 | 1.86/0.44 | 13.5/13.5 | BAY15d | C-6/C-6 | 2.06/52.5 | 1.05/26.5 | 300/2000 |
| P25-1 | 40082 | 1.86 | 13.5 | BA15s | C-6 | 2.06/52.5 | 1.05/26.5 | 350 |
| PC168 | 00231 | 0.35 | 14 | P12.4d | C-2F | 1.11/28.2 | 0.40/10.2 | 1,500 |
| PC168-BP | 00232 | 0.35 | 14 | P12.4d | C-2F | 1.11/28.2 | 0.40/10.2 | 1,500 |
| PC194 | 00229 | 0.27 | 14 | P12.4d | C-2F | 1.11/28.2 | 0.40/10.2 | 2,500 |
| PC194-BP | 00230 | 0.27 | 14 | P12.4d | C-2F | 1.11/28.2 | 0.40/10.2 | 2,500 |
| PC37 | 06431 | 0.09 | 14 | P8.25d | C-2F | 0.82/20.8 | 0.23/5.9 | 2,500 |
| PC37-BP | 06464 | 0.09 | 14 | P8.25d | C-2F | 0.82/20.8 | 0.23/5.9 | 2,500 |
| PC74 | 06432 | 0.10 | 14 | P8.25d | C-2F | 0.82/20.8 | 0.23/5.9 | 1,000 |
| PC74-BP | 06465 | 0.10 | 14 | P8.25d | C-2F | 0.82/20.8 | 0.23/5.9 | 1,000 |
| PR12 | 40084 | 0.5 | 5.95 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR12-BP | 40085 | 0.5 | 5.95 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR13 | 40086 | 0.5 | 4.75 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR13-BP | 40087 | 0.5 | 4.75 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR15 | 40090 | 0.5 | 4.82 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 30 |
| PR16 | 40092 | 0.25 | 12.5 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 50 |
| PR18 | 40096 | 0.55 | 7.2 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 3 |
| PR2 | 40100 | 0.5 | 2.38 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR2-BP | 40101 | 0.5 | 2.38 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR20 | 40102 | 0.5 | 8.63 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR3 | 40104 | 0.5 | 3.57 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |

>>Continued on page 87

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|--------|-------|-----------|----------|-----------|-----------|--------|
| PR3-BP | 40105 | 0.5 | 3.57 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 15 |
| PR30 | 40106 | 0.86 | 3.75 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 40 |
| PR4 | 40108 | 0.27 | 2.33 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 10 |
| PR6 | 40112 | 0.3 | 2.47 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 30 |
| PR7 | 40114 | 0.3 | 3.7 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 30 |
| PR9 | 40116 | 0.15 | 2.7 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 45 |
| SE1274 | 40117 | 0.12 | 14.4 | BA7s | C-2F | 0.80/20.3 | 0.23/5.9 | 500 |
| SE1274-BP | 42208 | 0.12 | 14.4 | BA7s | C-2F | 0.80/20.3 | 0.23/5.9 | 500 |
| XPR3 | 06028 | 0.91 | 3.6 | P13.5s | C-2R | 1.25/31.8 | 0.45/11.5 | 30 |
| A-1272-BP | 48007 | 0.17 | 12 | BA7s | C-2R | 0.91/23.0 | 0.27/6.9 | 200 |
| PC119 | 07753 | 0.15 | 14 | P8.25d | C-2V | 2.28/58 | 0.28/7.14 | 3,000 |
| 1028.09.527-501 | 49731 | 0.02 | 130 | BA9s | 2C-2F | 1.19/30.2 | 0.43/11.0 | 20,000 |
| 1480 | 00618 | 0.17 | 18 | E12 | C-7A | 1.97/50.0 | 0.54/39.1 | 1,500 |
| 3S6/5-120V | 40552 | 0.025 | 120 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 3S6/5-130V | 40554 | 0.023 | 130 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 3S6/5DC-120V | 40556 | 0.025 | 120 | BA15d | C-7A | 1.82/46.2 | 0.75/19.1 | 3,000 |
| A-62 | 48000 | 0.49 | 6.75 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | |
| A-62-BP | 48001 | 0.49 | 6.75 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | |
| 3893 | 40659 | 0.33 | 12 | BA9s | C-2R | 1.06/27 | 0.38/9.6 | 300 |
| 3893-BP | 40661 | 0.33 | 12 | BA9s | C-2R | 1.06/27 | 0.38/9.6 | 300 |
| 4C7/120V | 40353 | 0.033 | 120 | E12 | C-7A | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 4C7/130V | 40351 | 0.031 | 130 | E12 | C-7A | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 901 | 42141 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 901-BP | 42143 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 901A | 43201 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 901B | 43204 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 901G | 43207 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 901R | 43210 | 0.31 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| A-72 | 48002 | 0.29 | 13.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 4,000 |
| A-72-BP | 48003 | 0.29 | 13.5 | BA9s | C-2R | 0.94/23.9 | 0.43/11.0 | 4,000 |
| 882 | 42100 | 0.35 | 12.8 | B10d | C-6 | 1.18/30.0 | 0.72/18.3 | 2,000 |
| 2825 | 40637 | 0.4 | 12 | W2.1x9.5d | C-2V | 1.06/26.9 | 0.40/10.2 | 750 |
| 2825-BP | 42235 | 0.4 | 12 | W2.1x9.5d | C-2R | 1.06/26.9 | 0.40/10.2 | 750 |
| 6418 | 40675 | 0.4 | 12 | SV8.5mm | C-8 | 1.38/35.1 | 0.43/11.0 | 300 |
| 6418-BP | 40677 | 0.4 | 12 | SV8.5mm | C-8 | 1.38/35.1 | 0.43/11.0 | 300 |
| 6253 | 40667 | 0.5 | 12 | BA9s | C-2V | 1.07/27.2 | 0.59/15.0 | 200 |
| 6S6/120V | 40786 | 0.05 | 120 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/12V | 40784 | 0.50 | 12 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/130V | 40788 | 0.046 | 130 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/145V | 40789 | 0.041 | 145 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/155V | 40790 | 0.039 | 155 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/18V | 49717 | 0.33 | 18 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/230V | 40791 | 0.026 | 230 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/24V | 40792 | 0.25 | 24 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/30V | 40794 | 0.20 | 30 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/48V | 40796 | 0.125 | 48 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/60V | 40800 | 0.10 | 60 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6/6V | 40798 | 1 | 6 | E12 | C-6 | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 6S6DC/12V | 40802 | 0.50 | 12 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/130V | 40806 | 0.046 | 130 | BA15d | C-7A | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/145V | 40807 | 0.041 | 145 | BA15d | C-7A | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/24V | 40808 | 0.25 | 24 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/30V | 40810 | 0.20 | 30 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/32V | 40811 | 0.1875 | 32 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/48V | 40812 | 0.125 | 48 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 6S6DC/60V | 40816 | 0.10 | 60 | BA15d | C-7A | 1.82/46.2 | 0.75/19.1 | 1,500 |

>>Continued on page 88



Miniature Lamps (Alphanumeric)


| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|--------|-------|------------------|----------|------------|-----------|---------------------|
| 6S6DC/6V | 40814 | 1 | 6 | BA15d | C-6 | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 7C7/120V | 40874 | 0.0583 | 120 | E12 | C-7A | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C7/130V | 40875 | 0.0538 | 130 | E12 | C-7A | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 7C7/130V-W | 44318 | 0.0538 | 130 | E12 | C-7A | 2.30/58.4 | 0.88/22.3 | 3,000 |
| 918 | 41025 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 918-BP | 43300 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 918A | 43302 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 918B | 43305 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 918G | 43308 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 918R | 43311 | 0.56 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 891 | 42116 | 0.625 | 12.8 | G4 | C-6 | 1.20/30.5 | 0.32/8.1 | 800 |
| 10C7DC/120V | 40154 | 0.083 | 120 | BA15d | C-7A | 2.13/54.1 | 0.88/22.3 | 5000+ |
| 10ESB5 | 44014 | 0.035 | 10 | TS5 | C-6 | 0.92/23.4 | 0.27/6.9 | 10,000 |
| 10S6/230V | 42446 | 0.043 | 230 | E12 | C-7A | 1.88/47.8 | 0.75/19.1 | 1,500 |
| 10S6DC/250V | 40149 | 0.04 | 250 | BA15d | C-7A | 1.82/46.2 | 0.75/19.1 | 1,500 |
| 5008 | 40663 | 0.83 | 12 | BA15s | C-2R | 1.44/36.6 | 0.75/19.1 | 500 |
| 5008-BP | 40665 | 0.83 | 12 | BA15s | C-2R | 1.44/36.6 | 0.75/19.1 | 500 |
| 787 | 41402 | 1.67 | 6 | G4 | C-6 | 1.00/25.4 | 0.30/7.6 | 100 |
| 923 | 41031 | 0.91 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 923-BP | 43400 | 0.91 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 923G | 43408 | 0.91 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| 923R | 43411 | 0.91 | 12.8 | W2.1x9.5d | C-2R | 1.49/37.9 | 0.62/15.8 | 500 |
| PS13W | 07865 | 1.08 | 12 | PG18.5d-1 | C-8Z | 1.42/36 | .71/18 | 4,000 |
| 789 | 41406 | 1.17 | 12 | G4 | C-6 | 1.05/26.7 | 0.38/9.6 | 200 |
| A3C | 40012 | 0.0018 | 110 | WL (2" Leads) | Neon | 0.75/19.1 | 0.25/6.4 | 25,000 |
| B1A | 40016 | 0.003 | 110 | BA9s | Neon | 1.19/30.2 | 0.38/9.6 | 25,000 |
| B2A | 40018 | 0.0012 | 110 | BA9s | Neon | 1.19/30.2 | 0.38/9.6 | 25,000 |
| C2A | 40024 | 0.0018 | 110 | WL (1.25" Leads) | Neon | 0.75/19.1 | 0.25/6.4 | 25,000 |
| C9A | 40030 | 0.0018 | 110 | SX6s | Neon | 0.94/23.9 | 0.23/5.9 | 25,000 |
| NE51-R | 40074 | 0.0003 | 110 | BA9s | Neon | 1.19/30.2 | 0.38/9.6 | 25,000 |
| NE51H-R | 40076 | 0.0012 | 110 | BA9s | Neon | 1.19/30.2 | 0.38/9.6 | 25,000 |
| 15T6C-130V | 43000 | 0.12 | 130 | E12 | C-7A | 3.06/77.7 | 0.77/19.6 | 2,000 |
| 15T6C-145V | 43002 | 0.10 | 145 | E12 | C-7A | 3.06/77.7 | 0.77/19.6 | 2000, (7500 @ 120V) |
| 15T7C-130V | 43006 | 0.12 | 130 | E12 | C-7A | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 15T7DC-130V | 43008 | 0.12 | 130 | BA15d | C-7A | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 15T7N-130V | 43004 | 0.12 | 130 | E17 | C-7A | 2.25/57.2 | 0.89/22.6 | 1,500 |
| 7010 | 07858 | 1.19 | 13.5 | PU20d-1 | C-8Z | 1.42/36 | .71/18 | 3,000 |
| A-4513-BP | 48015 | 2.66 | 6.4 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| A1C | 40004 | 0.0012 | 110 | WL (1.25" Leads) | Neon | 0.50/12.7 | 0.25/6.4 | 25,000 |
| A1H | 40006 | 0.0012 | 110 | SX6s | Neon | 0.63/16 | 0.23/5.9 | 25,000 |
| 1493 | 40701 | 2.75 | 6.4 | BA15d | C-6 | 2.00/50.8 | 1.04/26.4 | 100 |
| 1489 | 40407 | 2.75 | 6.5 | BA15s | C-6U | 1.75/44.5 | 0.65/16.5 | 125 |
| 5201 | 07864 | 1.58 | 12 | PG20-1 | C-8Z | 1.42/36 | .71/18 | 1,000 |
| 7012 | 07859 | 1.41 | 13.5 | PU20d-3 | C-8Z | 1.42/36 | .71/18 | 2,000 |
| 20T6-1/2DC-130V | 43014 | 0.15 | 130 | BA15d | C-8 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 20T6-1/2F-130V | 43012 | 0.15 | 130 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6-1/2N-130V | 43010 | 0.15 | 130 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6-1/2N-145V | 44402 | 0.14 | 145 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 20T6.5DC/F-130V | 43016 | 0.15 | 130 | BA15d | C-8 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 778 | 41400 | 3.33 | 6 | G4 | C-6 | 1.05/26.7 | 0.38/9.6 | 100 |
| 788 | 41404 | 3.33 | 6 | G4 | C-6 | 1.00/25.4 | 0.30/7.6 | 100 |
| 7506 | 42241 | 1.86 | 13.5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 500 |
| 7506-BP | 42242 | 1.86 | 13.5 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 500 |

>>Continued on page 89

Miniature Lamps (Alphanumeric)

| Ordering Code | Barcode | Amps | Volts | Base | Filament | MOL in/mm | MOD in/mm | Life |
|------------------------|---------|-------------|-----------|------------------|-----------|------------|-----------|------------|
| A-4527-BP | 48017 | 1.80 | 12.8 | BA15s | C-6 | 2.00/50.8 | 1.04/26.4 | 200 |
| 2504 | 07861 | 2.00 | 12 | PG20-7 | C-8Z | 1.42/36 | .71/18 | 750 |
| 5200 | 07862 | 2.00 | 12 | PGU20-4 | C-8Z | 1.42/36 | .71/18 | 1,200 |
| 5202 | 06153 | 1.78 | 13.5 | PG20/3 | C-8Z | 1.42/36 | 0.73/18.5 | 1,500 |
| 7014 | 07860 | 1.78 | 13.5 | PU20d-6 | C-8Z | 1.42/36 | .71/18 | |
| PSY24WSV | 07863 | 2.00 | 12 | PG20-4 | C-8Z | 1.42/36 | .71/18 | 1,000 |
| PSY24WY | 07867 | 2.00 | 12 | PG20-4 | C-8Z | 1.42/36 | .71/18 | 1,200 |
| 25T10-130V | 43034 | 0.19 | 130 | E26 | C-5V | 5.19/131.8 | 1.25/31.8 | 2,000 |
| 25T10/F-130V | 43036 | 0.19 | 130 | E26 | C-8 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 25T10/IF-120 | 41522 | 0.21 | 120 | E26 | C-8 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 25T6-1/2DC-130V | 43024 | 0.19 | 130 | BA15d | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6-1/2N-130V | 43020 | 0.19 | 130 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6.5DC/F-130V | 43026 | 0.19 | 130 | BA15d | C-8 | 5.56/141.2 | 0.83/21.1 | 3,000 |
| 25T6.5N/F-130V | 43022 | 0.19 | 130 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 3,000 |
| 25T6C-120V | 43018 | 0.21 | 120 | E12 | C-7A | 3.06/77.7 | 0.77/19.6 | 2,000 |
| 25T8C-120V | 43028 | 0.21 | 120 | E12 | C-7A | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 25T8DC-120V | 49563 | 0.21 | 120 | BA15d | C-7A | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 25T8DC-130V | 43032 | 0.19 | 130 | BA15d | C-7A | 2.63/66.8 | 1.04/26.4 | 1,500 |
| 25T8N-130V | 43030 | 0.19 | 130 | E17 | C-7A | 2.63/66.8 | 1.04/26.4 | 1,500 |
| PSX26W | 07866 | 2.17 | 12 | PG18.5d-3 | C-8Z | 1.42/36 | .71/18 | 1,500 |
| 1A/27W | 00403 | 2.11 | 12.8 | G7.1 | C-6 | 2.5/63.5 | 0.5/13 | 300 |
| 27.OH1 | 00408 | 2.11 | 12.8 | GY6.35 | C-6 | 1.33/33.8 | 0.42/10.7 | 220 |
| 796 | 44023 | 2.73 | 12.8 | BA15s | C-6 | 2.50/63.5 | 0.48/12.2 | 300 |
| 37.5H1 | 00446 | 2.93 | 12.8 | GY6.35 | C-6 | 1.33/33.8 | 0.42/10.7 | 200 |
| 40T10-130V | 43042 | 0.31 | 130 | E26 | C-8 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 40T10/F-130V | 43044 | 0.31 | 130 | E26 | C-8 | 5.19/131.8 | 1.25/31.8 | 1,500 |
| 40T6-1/2N-130V | 43038 | 0.31 | 130 | E17 | C-8 | 5.5/139.7 | 0.83/21.1 | 1,500 |
| 795 | 44019 | 3.91 | 12.8 | BA15s | C-6 | 2.50/63.5 | 0.48/12.2 | 200 |
| 795X | 44021 | 3.91 | 12.8 | BA15s | C-8 | 2.50/63.5 | 0.48/12.2 | 200 |
| 797 | 00447 | 3.91 | 12.8 | G7.1 | C-6 | 1.9/48.3 | 0.5/13 | 200 |
| H1156 | 44038 | 3.91 | 12.8 | BA15s | C-6 | 2.08/53 | 0.50/12.7 | 250 |
| H1156-BP2 | 81179 | 3.91 | 12.8 | BA15s | C-6 | 2.08/53 | 0.50/12.7 | 250 |
| A1A | 40000 | 0.0006 | 110 | WL (1.25" Leads) | Neon | 1.00/25.4 | 0.25/6.4 | 25,000 |
| A9A | 40014 | 0.007 | 110 | WL (2" Leads) | Neon | 1.00/25.4 | 0.25/6.4 | 25,000 |
| C7A | 40029 | 0.007 | 110 | SX6s | Neon | 0.94/23.9 | 0.23/5.9 | 25,000 |
| A1B | 40002 | 0.0003 | 110 | WL (1" Leads) | Neon | 0.50/12.7 | 0.25/6.4 | 25,000 |
| A-4813-BP | 48021 | 2.66/0.71 | 6.4/7 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200/1000 |
| 7225 | 42237 | 1.852/0.370 | 13.5 | BAZ15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 150 / 1500 |
| 7225-BP | 42239 | 1.852/0.370 | 13.5 | BAZ15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 150 / 1500 |
| 7528 | 42245 | 1.86/0.44 | 13.5/13.5 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300/2000 |
| 7528-BP | 42247 | 1.86/0.44 | 13.5/13.5 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300/2000 |
| A-4829-BP | 57031 | 2.11/0.57 | 12.8/14 | BAY15d | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200/5000 |
| A-3598H-BP | 57029 | 2.31/2.31 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | - |
| A-3603-BP | 48009 | 2.08/2.08 | 12/12 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 100/100 |
| A-3625-BP | 48011 | 3.85/3.85 | 6.5/6.5 | PX15d | C-2V/C-2V | 1.85/47.0 | 0.79/20.1 | 150/150 |
| A-5659-BP | 48025 | 5.38/5.38 | 6.5/6.5 | P15d30 | C-6/C-2V | 2.20/56.0 | 1.26/32.0 | 100/100 |
| 4745-BP | 57044 | 3.52/3.52 | 12.8/12.8 | P43t38 | C-8/C-8 | 3.63/92.1 | 0.67/17.0 | 120/250 |
| H1157 | 44040 | 3.91/1.17 | 12.8/12.8 | BAY15d | C-6/C-6 | 2.00/50.8 | 0.5/13.0 | 250/400 |
| 6361-BP | 57027 | 4.68/4.30 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.62/92.0 | 0.65/16.5 | 150/300 |
| 6365-BP | 48094 | 7.81/6.25 | 12.8/12.8 | P45t41 | C-8/C-8 | 3.63/92.1 | 0.67/17.0 | 100/200 |

(See page 7 for Miniature Base Types.)

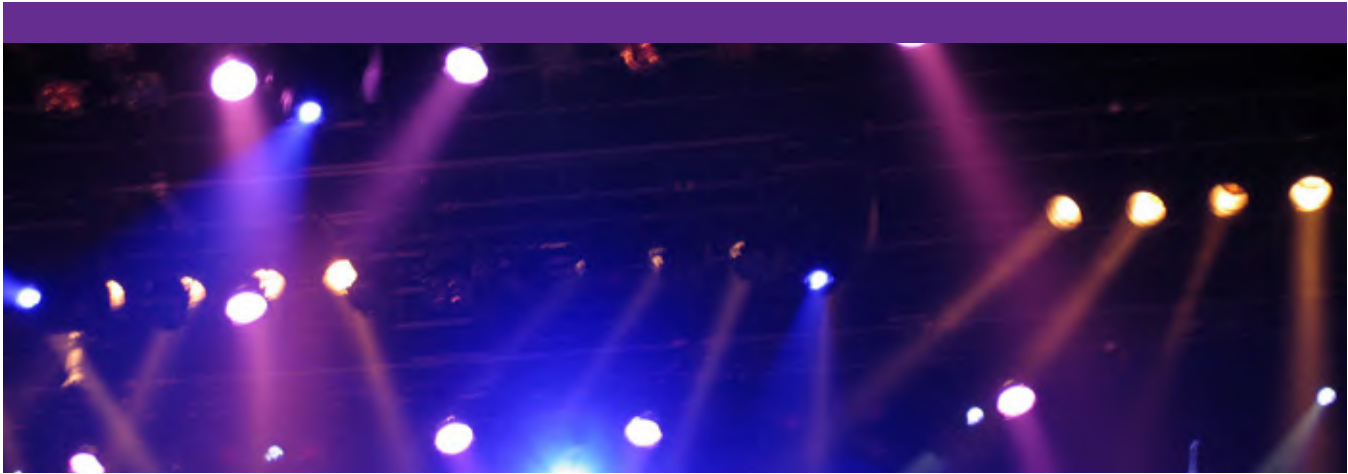

Specialty Lamps

Our long-term reputation for high quality products ensures customers that our AV and photographic lamps - including modeling, photoflood, enlarger/printer lamps and flashtubes - and our healthcare, medical and scientific lamps - including hard-to-find lamps for microscopes, bronchoscopes, otoscopes, cystoscopes, esophagoscopes, ophthalmoscopes and retinoscopes - meet the exacting standards required by precision equipment.



ArcMaster™ SSTV Discharge Lamps

| Ordering Code | Barcode | Watts | Volts | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------------|---------|-------|-------|------------|----------|--------|-----------|-----------|-------|
| ESR200-SE-HR | 04011 | 200 | 70 | GZY9.5 | | 15000 | 3.15/80 | 0.79/20 | 200 |
| ESD250-SE-D | 04006 | 250 | 95 | GY9.5 | | 18800 | 4.25/108 | 0.91/23 | 2,000 |
| ESR400-SE-HR | 04012 | 400 | 67 | GZZ9.5 | | 33000 | 4.33/110 | 0.91/23 | 650 |
| ESD575-SE-D | 04007 | 575 | 95 | GX9.5 | | 49000 | 4.92/125 | 1.18/30 | 2,000 |
| ESD575/2-SE-D7.2 | 04009 | 575 | 95 | GX9.5 | | 45000 | 4.92/125 | 1.18/30 | 1,000 |
| ESI575-DE | 04017 | 575 | 95 | SFc 10-4 | | 49000 | 5.35/136 | 0.83/21 | 750 |
| ESR575-SE-HR | 04013 | 575 | 95 | G22 | | 49000 | 5.71/145 | 1.18/30 | 750 |
| ESR575-SE-NHR | 04001 | 575 | 95 | GX9.5 | | 49000 | 4.92/125 | 1.18/30 | 750 |
| ESR600-DE-SA | 04026 | 600 | 95 | Mo Pins | | 48000 | 2.95/75 | 0.63/16 | 300 |
| ESR600-SE-SA | 04025 | 600 | 95 | FaX1.5 | | 48000 | 3.31/84 | 0.63/16 | 300 |
| ESR800-SE-HR | 04014 | 800 | 95 | G22 | | 64000 | 5.71/145 | 1.22/31 | 1,000 |
| ESI1200-DE | 04018 | 1200 | 100 | SFc 15.5-6 | | 110000 | 8.66/220 | 1.1/28 | 750 |
| ESR1200-SE-HR | 04015 | 1200 | 100 | G38 | | 110000 | 7.87/200 | 1.57/40 | 750 |
| ESR1200-SE-NHR | 04003 | 1200 | 100 | G22 | | 110000 | 6.89/175 | 1.57/40 | 750 |

ColorMaster™ Digital Imaging Lamps



| Ordering Code | Barcode | Watts | Volts | Shape | Base | MOL in/mm | MOD in/mm | Life |
|------------------|---------|-------|-------|-------|------|-----------|-----------|--------|
| SP30/955K | 48045 | 30 | 120 | T-4 | E26 | 6.3/160 | 2.76/70 | 10,000 |
| SP50/955K | 05622 | 50 | 120 | T-4 | E26 | 9.06/230 | 2.80/71 | 10,000 |



ESD250-SE-D



ESR400-SE-HR



ESR1200-SE-NHR



SP30/955K

HPL Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|-------|-----------------|----------|--------|-----------|-----------|-------|
| HPL375/115V | 05913 | 375 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 10540 | 3.86/98 | 0.72/18.4 | 300 |
| HPL375LL/115V | 05914 | 375 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 8000 | 3.86/98 | 0.72/18.4 | 1,000 |
| HPL550/77V | 05641 | 550 | 77 | T-6 | G9.5 w/Heatsink | 4-C8 | 16170 | 3.86/98 | 0.72/18.4 | 300 |
| HPL550LL/77V | 05915 | 550 | 77 | T-6 | G9.5 w/Heatsink | 4-C8 | 12160 | 3.86/98 | 0.72/18.4 | 2,000 |
| HPL575/115V | 10415 | 575 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 16520 | 3.86/98 | 0.72/18.4 | 300 |
| HPL575/120V | 05152 | 575 | 120 | T-6 | G9.5 w/Heatsink | 4-C8 | 16520 | 3.86/98 | 0.72/18.4 | 300 |
| HPL575/230V | 05916 | 575 | 230 | T-6 | G9.5 w/Heatsink | 6-C8 | 14900 | 3.86/98 | 0.72/18.4 | 400 |
| HPL575LL/115V | 10416 | 575 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 12360 | 3.86/98 | 0.72/18.4 | 2,000 |
| HPL575LL/120V | 05918 | 575 | 120 | T-6 | G9.5 w/Heatsink | 4-C8 | 12360 | 3.86/98 | 0.72/18.4 | 2,000 |
| HPL575LL/240V | 05920 | 575 | 240 | T-6 | G9.5 w/Heatsink | 6-C8 | 11780 | 4.09/104 | 0.72/18.4 | 1,500 |
| HPL750/115V | 10417 | 750 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 21900 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/120V | 05921 | 750 | 120 | T-6 | G9.5 w/Heatsink | 4-C8 | 21900 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/230V | 05922 | 750 | 230 | T-6 | G9.5 w/Heatsink | 6-C8 | 19750 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/240V | 05923 | 750 | 240 | T-6 | G9.5 w/Heatsink | 6-C8 | 19750 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/77V | 05642 | 750 | 77 | T-6 | G9.5 w/Heatsink | 4-C8 | 22950 | 3.86/98 | 0.72/18.4 | 300 |
| HPL750LL/115V | 05924 | 750 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 16400 | 4.09/104 | 0.72/18.4 | 1,500 |
| HPL750LL/120V | 05925 | 750 | 120 | T-6 | G9.5 w/Heatsink | 4-C8 | 16400 | 4.09/104 | 0.72/18.4 | 2,000 |
| HPL750LL/230V | 05926 | 750 | 230 | T-6 | G9.5 w/Heatsink | 6-C8 | 15600 | 4.09/104 | 0.72/18.4 | 1,500 |

Enlarger Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------|---------|-------|---------|-------|-------|----------|--------|------------|-----------|------|
| PH/111A | 03650 | 75 | 120 | S-11 | BA15s | CC-2V | 1120 | 2.38/60.3 | 1.38/35.0 | 25 |
| PH/140 | 03662 | 75 | 120 | S-14 | E26 | CC-2V | 1150 | 3.38/86.0 | 1.73/44.0 | 50 |
| PH/211 | 03663 | 75 | 115-125 | A-21 | E26 | CC-2V | 1000 | 4.94/125.4 | 2.60/66.0 | 100 |
| ESJ | 02770 | 85 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 40 |
| EJV | 02290 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| ESD | 02750 | 150 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 12 |
| PH/212 | 03664 | 150 | 115-125 | A-21 | E26 | CC-2V | 2300 | 4.94/125.4 | 2.60/66.0 | 100 |
| EJL | 02260 | 200 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| EYA | 02940 | 200 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 50 |
| ELC | 02400 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| ELC/E | 02420 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| ENH | 02570 | 250 | 120 | MR16 | GY5.3 | CC-8 | 15000 | 1.75/44.5 | 2.00/50.8 | 175 |
| EVW | 02820 | 250 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 50 |
| ELH | 02450 | 300 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 35 |
| FAL | 03020 | 420 | 120 | T-4 | R7s | CC-8 | 11000 | 2.63/66.7 | 0.55/14.0 | 90 |



Flashtubes

| Ordering Code | Barcode | Watts | Volts |
|-------------------|---------|----------|----------|
| WK93 | 80120 | 200 | 400 |
| WK120HD | 80020 | 400 | 450 |
| WK120HD-UV | 80030 | 400 | 450 |
| WK140HD | 80040 | 400 | 450-500 |
| WK140HD-UV | 80050 | 400 | 450-500 |
| WK76 | 80150 | 400 | 600-1000 |
| WK76-UV | 80160 | 400 | 600-1000 |
| WK95 | 80130 | 400 | 400 |
| WK92 | 80100 | 1000 | 800 |
| WK92-UV | 80110 | 1000 | 800 |
| WK96 | 80060 | 2000 | 900 |
| WK96-UV | 80070 | 2000 | 900 |
| WK98 | 80190 | 3200 | 600-1200 |
| WK98-UV | 80200 | 3200 | 600-1200 |
| WK101 | 80205 | 600-1000 | 450-900 |

Modeling Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-------------------|---------|---------|---------|---------|-------|----------|-----------|------------|-----------|---------|
| 25T8/DC | 03750 | 25 | 120 | T-8 | BA15d | C-7A | 195 | 2.63/66.7 | 0.99/25.0 | 200 |
| ESN | 15222 | 100 | 120 | T-4 | E11 | CC-2V | 1900 | 2.80/71.0 | 0.52/13.0 | 750 |
| ESR | 15226 | 100 | 120 | T-4 | BA15d | CC-2V | 1900 | 2.44/61.9 | 0.55/14.0 | 1,000 |
| ETD | 15228 | 100 | 120 | T-4 | BA15d | CC-2V | 1750 | 2.44/61.9 | 0.52/13.0 | 750 |
| ETE | 15224 | 100 | 120 | T-4 | E11 | CC-2V | 1750 | 2.80/71.0 | 0.52/13.0 | 750 |
| ML-2100 | 05411 | 100 | 120 | R-19 | E26 | CC-6 | 1450 | 4.06/103 | 2.36/60 | 750 |
| 150T10/H/F | 00251 | 150 | 120 | T-10 | E26 | CC-8 | 2850 | 4.0/101 | 1.25/31.8 | 1,500 |
| ESL | 15240 | 150 | 120 | T-4 | E11 | CC-2V | 2800 | 2.80/71.0 | 0.52/13.0 | 1,000 |
| ESP | 15246 | 150 | 120 | T-4 | BA15d | CC-8 | 2400 | 2.44/61.9 | 0.55/14.0 | 1,000 |
| ETC | 15244 | 150 | 120 | T-4 | BA15d | CC-8 | 2800 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| ETF | 15248 | 150 | 120 | T-4 | BA15d | CC-8 | 2700 | 2.68/68.0 | 0.52/13.0 | 2,000 |
| ETG | 15238 | 150 | 120 | T-4 | E11 | CC-8 | 2600 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| ETH | 15242 | 150 | 120 | T-4 | E11 | CC-8 | 2700 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| 250T10/H/F | 00197 | 250 | 120 | T-10 | E26 | CC-8 | 4600 | 4.0/101 | 1.25/31.8 | 1,500 |
| EHT | 15256 | 250 | 120 | T-4 | E11 | CC-8 | 5000 | 3.15/80.0 | 0.52/13.0 | 2,000 |
| ESM | 15258 | 250 | 120 | T-4 | E11 | CC-8 | 4800 | 3.19/81.0 | 0.52/13.0 | 2,000 |
| ESS | 15260 | 250 | 120 | T-4 | BA15d | CC-8 | 5000 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| ETB | 15262 | 250 | 120 | T-4 | BA15d | CC-8 | 4700 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| EVR | 15278 | 500 | 120 | T-4 | E11 | CC-8 | 10000 | 3.75/95.3 | 0.55/14.0 | 2,000 |
| EAJ | 01930 | 35 / 25 | 12 / 12 | T-6 1/2 | BA15d | C-6/C-6 | 620 / 420 | 3.97/100.8 | 0.83/21.0 | 300/300 |

Photoflood Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|-------|-------|------|----------|--------|------------|-----------|------|
| BBA | 00040 | 250 | 120 | A-21 | E26 | C-9 | 8500 | 4.77/121.2 | 2.68/68.0 | 3 |
| BBA-LN | 06959 | 250 | 120 | A-21 | E26 | C-9 | 8700 | 4.88/124 | 2.68/68.0 | 4 |
| BCA | 00050 | 250 | 120 | A-21 | E26 | C-9 | 5000 | 4.94/125.4 | 2.68/68.0 | 3 |
| ECA | 01970 | 250 | 120 | A-23 | E26 | C-9 | 6500 | 5.52/140.2 | 2.76/70.0 | 20 |

>>Continued on page 93



Flashtube



Modeling



Photoflood

Photoflood Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------|---------|-------|-------|-------|------|----------|--------|-----------|-----------|------|
| ECA-LN | 07015 | 250 | 120 | A-23 | E26 | C-9 | 6500 | 5.87/149 | 2.76/70.0 | 20 |
| EBV | 01950 | 500 | 120 | PS-25 | E26 | C-9 | 17000 | 6.10/155 | 3.15/80.0 | 6 |
| EBV-LN | 06940 | 500 | 120 | PS-25 | E26 | C-9 | 17800 | 6.85/174 | 3.15/80.0 | 8 |
| EBW | 01960 | 500 | 120 | PS-25 | E26 | C-9 | 10500 | 6.10/155 | 3.15/80.0 | 6 |
| ECT | 01980 | 500 | 120 | PS-25 | E26 | C-9 | 13650 | 6.10/155 | 3.15/80.0 | 60 |
| ECT-LN | 06906 | 500 | 120 | PS-25 | E26 | C-9 | 13650 | 6.85/174 | 3.15/80.0 | 60 |

Healthcare, Medical & Scientific Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|--------------------|---------|-------|-------|----------|-----------------------|----------|--------|-----------|-----------|-------|
| 02500 | 41210 | | 6 | G-6 | E10 | C-2R | 8.1 | 1.20/30.5 | 0.75/19 | 50 |
| 03600 | 41224 | | 2.5 | TL-2 | E10 | C-2R | 600 | 0.95/24.1 | 1.38/35 | 2,000 |
| 03900 | 41228 | | 2.5 | | | | | | | |
| 08200 | 41258 | | 3.5 | TL-2 | Flange | C-6 | | 0.80/20.3 | 0.22/5.5 | |
| 41352 | 41352 | 0.95 | 2.5 | T-1 1/4 | Special Screw | C-2R | 10 | 0.59/15.0 | 0.24/6 | 10 |
| 41354 | 41354 | 1.08 | 2.7 | T-2 1/2 | Special Screw | S-2F | 11 | 0.79/20 | 0.28/7 | 20 |
| 01800 | 41412 | 1.125 | 2.5 | T-2 1/2 | Thread | CC-6 | | 0.98/25.0 | 0.34/8.7 | |
| 41338 | 41338 | 1.2 | 6 | T-1 1/2 | 5.5 x 15 (M4.5 x 0.5) | C-2R | 9 | 1/25 | 0.2/5 | 500 |
| 41336 | 41336 | 1.5 | 3 | T-2 1/2 | 9 x 17 (M5 x 0.75) | S-2F | 18 | 1.02/26 | 0.31/8 | 10 |
| 41314 | 41314 | 2.4 | 6 | G-4 1/2 | E10 | C-2R | 12 | 1.1/28 | 0.57/14.5 | 200 |
| 03000 | 41216 | 2.5 | 3.5 | T-1 1/2 | Flange | | 2.7 | 0.88/22.3 | 0.25/6.35 | 15 |
| 03100 | 41218 | 2.5 | 3.5 | TL-1 1/2 | 48 Grooves/" | C-2R | | 0.75/19.1 | 0.19/4.8 | 20 |
| 04900 | 41240 | 2.5 | 3.5 | TL-1 1/2 | Flange | C-2R | | 0.90/22.9 | 0.31/7.9 | 20 |
| 06500 | 07352 | 2.73 | 3.5 | TL-1 1/2 | | | | | 0.19/4.75 | 15 |
| 41320 | 41320 | 3 | 6 | G-3 1/2 | E10 | C-2R | 15 | 0.94/24 | 0.43/11 | 300 |
| GTL-3 | 41568 | 3 | 10.5 | T-6 | E17 | | | 2.5/63 | 0.79/20 | 2,000 |
| 41374 | 41374 | 3.6 | 4 | T-2 1/2 | Special Base | S-2F | 45 | 1.02/26 | 0.31/8 | 10 |
| 07800 | 41254 | 4.26 | 6 | TL-1 1/2 | Thread | C-6 | | 1.12/28.4 | 0.19/4.8 | 75 |
| 41324 | 41324 | 5 | 6 | G-6 | BA15d | C-2R | 70 | 1.38/35 | 0.75/19 | 600 |
| 80-A | 41508 | 7 | 60 | T-4 | 4 Pin | | 40 | 1.32/33.5 | 3.23/82 | 3,000 |
| 80-B | 41510 | 7 | 60 | T-4 | 4 Pin | | 40 | 4.09/104 | 3.23/82 | 3,000 |
| 10S11N | 41528 | 10 | 120 | S-11 | E17 | C-5A | 80 | 2.31/58.7 | 1.36/34.4 | 1,500 |
| 10S11NF | 41530 | 10 | 120 | S-11 | E17 | C-7A | 79 | 2.31/58.7 | 1.36/34.4 | 1,500 |
| 41364 | 41364 | 10 | 6 | T-2 1/2 | Special Base | C-6 | 200 | 1.06/27 | 0.31/8 | 100 |
| 787 | 41402 | 10 | 6 | T-2 1/4 | G4 | C-6 | 16 | 1.00/25.4 | 0.30/7.6 | 100 |
| 8013 | 41085 | 10 | 6 | G-25mm | BA15d | C-6 | 150 | 1.81/46.0 | 0.99/25.0 | 200 |
| 8014 | 41086 | 10 | 6 | G-25mm | BA15s | C-6 | 100 | 1.81/46.0 | 0.99/25.0 | 600 |
| ESA/FHD | 10329 | 10 | 6 | T-2 3/4 | G4 | C-6 | 200 | 1.18/30.0 | 0.36/9.0 | 100 |
| EL-2B | 41076 | 12 | 8 | G-5 1/2 | BA9s | C-2R | 160 | 1.25/32.0 | 0.71/18.0 | 100 |
| EL-3B | 41077 | 12 | 8 | G-5 1/2 | BA9s | C-2R | 160 | 1.25/32.0 | 0.71/18.0 | 100 |
| 789 | 41406 | 14 | 12 | T-2 3/4 | G4 | C-6 | 22 | 1.05/26.7 | 0.38/9.6 | 200 |
| 15S11-13 | 41516 | 15 | 120 | S-11 | E12 | C-7A | 137 | 2.28/58 | 1.38/35 | 750 |
| 15S11-14 | 41514 | 15 | 120 | S-11 | E12 | C-7A | 150 | 2.28/58 | 1.38/35 | 200 |
| 15S11-87 | 41532 | 15 | 120 | S-11 | E17 | C-7A | | 2.28/58 | 1.38/35 | 750 |
| 15S11-F | 41512 | 15 | 120 | S-11 | E12 | C-7A | 137 | 2.28/58 | 1.38/35 | 250 |
| 15S11/102CL | 41099 | 15 | 120 | S-11 | E26 | C-5 | 150 | 2.20/56.0 | 1.38/35.0 | 500 |
| 15S11/102IF | 04411 | 15 | 120 | S-11 | E26 | C-5 | | 2.20/56.0 | 1.38/35.0 | 500 |
| 41304 | 41304 | 15 | 120 | S-11 | E17 | C-5 | 100 | 2.36/60 | 1.38/35 | 600 |
| 41308 | 41308 | 15 | 6 | T-6 | P25d | C-6Z | 130 | 2.13/54 | 0.75/19 | 100 |
| 41310 | 41310 | 15 | 6 | G-6 | BA15d | C-8Z | 130 | 1.46/37 | 0.75/19 | 100 |
| 41316 | 41316 | 15 | 6 | G-8 | BA15s | C-6 | 130 | 1.69/43 | 1/25 | 150 |

>>Continued on page 94

Healthcare, Medical & Scientific Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|-----------------|---------|-------|-------|----------|---|----------|--------|-----------|-----------|-------|
| 41348 | 41348 | 15 | 120 | G-11 | E26 | C-5 | 100 | 2.2/56 | 1.38/35 | 600 |
| 41350 | 41350 | 15 | 120 | G-11 | E26 | C-10 | 100 | 2.2/56 | 1.38/35 | 600 |
| 41360 | 41360 | 15 | 110 | G-11 | E26 | C-5 | 150 | 2.2/56 | 1.38/35 | 500 |
| 76907 | 41092 | 15 | 6 | G-19mm | BA15d | C BAR 6 | 150 | 1.40/35.6 | 0.75/19.1 | 100 |
| 77903 | 41100 | 15 | 6 | T-19mm | P15d30 | C BAR 6 | 130 | 2.16/55.0 | 0.75/19 | 200 |
| 8017 | 41087 | 15 | 6 | T-19mm | BA15d | C BAR 6 | 145 | 2.12/54.0 | 0.75/19.1 | 1,000 |
| 8018 | 41088 | 15 | 6 | T-19mm | BA15d | C BAR 6 | 210 | 2.05/52.0 | 0.75/19.1 | 100 |
| EI-77Z | 41091 | 15 | 6 | T-6 | DC w/ Special Flange | C BAR 6 | 130 | 2.05/52.0 | 0.75/19.1 | 100 |
| EL-12B | 41078 | 15 | 6 | G-5 1/2 | BA9s | C BAR 6 | 180 | 1.25/32.0 | 0.71/18.0 | 100 |
| EL-38 | 49680 | 15 | 8 | G-5 1/2 | BA9s | C BAR 6 | 140 | 1.25/32.0 | 0.71/18.0 | 200 |
| 1460 | 40279 | 18 | 6.5 | S-8 | P30d | C-6 | 289 | 2.00/50.8 | 1.04/26.4 | 100 |
| 1460X | 40281 | 18 | 6.5 | S-8 | P30d | C-6 | 289 | 2.00/50.8 | 1.04/26.4 | 100 |
| 1489 | 40407 | 18 | 6.5 | T-5 | BA15s | C-6U | 300 | 1.75/44.5 | 0.65/16.5 | 125 |
| 1630 | 40311 | 18 | 6.5 | S-8 | P30d | C-6 | 289 | 2.00/50.8 | 1.04/26.4 | 100 |
| 1631X | 40312 | 18 | 6.5 | S-8 | P30d | C-6 | 289 | 2.00/50.8 | 1.04/26.4 | 100 |
| 1649 | 40705 | 18 | 6.5 | S-8 | P30d | FC-6Z | 23 | 2.00/50.8 | 1.04/26.4 | 100 |
| 77910 | 41094 | 18 | 6 | G-18mm | P25d | C BAR 6 | 180 | 1.40/35.6 | 0.75/19.1 | 50 |
| EI-737 | 41080 | 18 | 6 | S-9 1/2 | BA15d | C-6 | 176 | 2.08/53.0 | 1.18/30.0 | 100 |
| 06300 | 41248 | 20 | 12 | T-3 | G4 | C-6 | | | 0.51/13 | 2,000 |
| 11143 | 41540 | 20 | 6 | T-2 1/2 | G4 | C-6 | 570 | 1.1/28 | 0.35/9 | 2,000 |
| 1634 | 40313 | 20 | 20 | S-8 | P30d | CC-6 | 302 | 2.00/50.8 | 1.04/26.4 | 200 |
| 41368 | 41368 | 20 | 6 | T-2 1/2 | G4 | C-6 | 475 | 1.22/31 | 0.35/9 | 100 |
| 778 | 41400 | 20 | 6 | T-2 3/4 | G4 | C-6 | 400 | 1.05/26.7 | 0.38/9.6 | 100 |
| 788 | 41404 | 20 | 6 | T-2 1/4 | G4 | C-6 | 32 | 1.00/25.4 | 0.30/7.6 | 100 |
| EI-2201 | 41082 | 20 | 115 | S-9 1/2 | BA15d | C-5 | 150 | 2.08/53.0 | 1.18/30.0 | 500 |
| EI-886 | 41083 | 20 | 120 | G-9 1/2 | BA15d | CC-7A | 150 | 2.08/53.0 | 1.18/30.0 | 400 |
| EI-B153 | 41096 | 20 | 120 | S-11 | BA15d | CC-2V | 150 | 2.36/60.0 | 1.38/35.0 | 300 |
| ESB/FHE | 10330 | 20 | 6 | T-2 3/4 | G4 | C-6 | 450 | 1.18/30.0 | 0.36/9.0 | 100 |
| 25S11-2C | 41520 | 25 | 120 | S-11 | E12 | C-7A | 200 | 2.28/58 | 1.38/35 | 500 |
| 25S11-5C | 41518 | 25 | 120 | S-11 | E12 | C-7A | 190 | 2.28/58 | 1.38/35 | 500 |
| 41344 | 41344 | 25 | 6 | T-7 | BA20d/26 | C-8 | 330 | 2.36/60 | 0.88/22 | 100 |
| 41346 | 41346 | 25 | 120 | S-11 | E17 | C-5 | 150 | 2.32/59 | 1.38/35 | 600 |
| 41382 | 41382 | 25 | 6 | T-8 | P15s30 | C-8 | 450 | 3.11/79 | 1/25 | 50 |
| 56016164 | 41432 | 25 | 24 | G-13 | BA15d | C-6 | | 2.52/64.0 | 1.57/40 | 700 |
| BFM | 10012 | 25 | 120 | T-8 | E14 | CC-6V | 300 | 2.62/66.6 | 1.03/26.0 | 500 |
| 8001 | 41084 | 26.1 | 6 | S-35mm | E14 | C-6 | 410 | 2.56/65.0 | 1.38/35.0 | 100 |
| 1096 | 40401 | 27 | 6 | S-8 | P30d | C-2R | 375 | 2.00/50.8 | 1.04/26.4 | 500 |
| 1096X | 40403 | 27 | 6 | S-8 | P30d | C-2R | 375 | 2.00/50.8 | 1.04/26.4 | 500 |
| 1468X | 40405 | 27 | 6 | S-8 | P30d | C-2R | 375 | 2.00/50.8 | 1.04/26.4 | 500 |
| 41318 | 41318 | 27 | 6 | G-12 1/2 | P44s | C-6 | 360 | 2.64/67 | 1.57/40 | 100 |
| 41328 | 41328 | 27 | 6 | S-11 | E14 w/ Special Prefocus Flange | C-6U | 300 | 2.64/67 | 1.38/35 | 100 |
| 41340 | 41340 | 27 | 6 | S-11 | P44s | C-6 | 360 | 2.52/64 | 1.38/35 | 100 |
| 41306 | 41306 | 30 | 6 | T-8 | BA15d | C-6Z | 230 | 2.2/56 | 1/25 | 200 |
| 41334 | 41334 | 30 | 12 | T-3 1/4 | G6.35 | C-6 | 570 | 1.73/44 | 0.43/11 | 1,000 |
| 64260 | 41546 | 30 | 12 | T-3 | PG22d-b | C BAR 6 | 800 | 1.57/40 | 0.35/9 | 50 |
| 77904 | 41093 | 30 | 6 | T-25 | BA15d | C BAR 6 | 250 | 2.16/55.0 | 0.99/25.0 | 200 |
| 8100 | 41089 | 30 | 6 | S-35mm | E14 | C-6 | 260 | 2.56/65.0 | 1.38/35.0 | 600 |
| EI-722 | 41079 | 30 | 120 | S-9 1/2 | BA15d | C-5 | 250 | 2.08/53.0 | 1.18/30.0 | 500 |
| EI-738 | 41081 | 30 | 6 | T-25 | BA15d | C BAR 6 | 250 | 2.16/55.0 | 0.99/25.0 | 100 |
| 04100 | 41230 | 33 | 14.5 | TL-3 1/2 | Thread | CC-6 | | 1.35/34.3 | 0.37/9.5 | 100 |

>>Continued on page 95

Healthcare, Medical & Scientific Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|---------|-------|---------|--|----------|--------|------------|-----------|-------|
| 41326 | 41326 | 33 | 6 | S-8 | SC Bayonet Prefocus w/ Triangle Flange | C-8Z | 430 | 2/50 | 1/25 | 80 |
| 41366 | 41366 | 33 | 6 | T-8 | DC w/ Special Flange | C-8Z | 430 | 3/75 | 1/25 | 80 |
| 04200 | 41232 | 35 | 12 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.01/51 | 50 |
| 41312 | 41312 | 35 | 7 | S-8 | BA15d | C-8Z | 460 | 2/50 | 1/25 | 100 |
| 41332 | 41332 | 35 | 7 | S-8 | P30d | C-8Z | 460 | 2/50 | 1/25 | 100 |
| 1507 | 40294 | 37.5 | 12.5 | RP-11 | P15s30 | C-2V | 625 | 2.2/56 | 1.42/36 | 300 |
| 56018769 | 41554 | 40 | 22.8 | T-3 1/2 | G6.35 | CC-6 | 760 | 1.73/44.0 | 0.43/11 | 1,000 |
| A1-010-28 | 41556 | 40 | 24 | T-4 | E11 | CC-6 | 720 | 2.36/60.0 | 0.51/13 | 600 |
| 56018566 | 41552 | 50 | 22.8 | T-3 1/2 | G6.35 | CC-6 | 1000 | 1.73/44.0 | | 1,000 |
| 8022 | 41090 | 50 | 12 | S-35mm | BA20d | CC-6 | 1000 | 2.71/69.0 | 1.38/35.0 | 50 |
| A1-510-01 | 41560 | 50 | 24 | T-4 | E11 | CC-6 | 800 | 2.36/60.0 | 0.51/13 | 800 |
| B1-010-28 | 41390 | 50 | 24 | T-4 1/2 | G8 | C BAR 6 | 1100 | 2.20/56.0 | 0.51/13 | 100 |
| BZW | 00602 | 50 | 120 | T-8 | BA15s | CC-2V | 850 | 3.13/79.4 | 0.99/25.0 | 50 |
| CAX | 00780 | 50 | 120 | T-8 | BA15d | CC-13 | 775 | 3.13/79.4 | 1.00/25.4 | 50 |
| CAX-130V | 00790 | 50 | 130 | T-8 | BA15d | CC-13 | 775 | 3.13/79.4 | 1.00/25.4 | 50 |
| CAX-130V-HAL | 06312 | 50 | 130 | T-4 | BA15d | C-2V | 800 | 2.36/60 | 0.53/13.5 | 500 |
| 41358 | 41358 | 50.4 | 12 | T-3 1/4 | P44s | C BAR 6 | 1400 | 2.6/66 | | 30 |
| EL-1B | 41075 | 54 | 13.5 | S-7 3/4 | BA15s | C BAR 6 | 1000 | 1.97/50.0 | 0.99/25.0 | 100 |
| 41376 | 41376 | 60 | 12.5 | G-11 | P15s30 | C BAR 6 | 1300 | 2.2/56 | 1.38/35 | 25 |
| A1-420-10 | 41558 | 60 | 24 | T-4 | E10 | CC-6 | 1100 | 2.36/60.0 | 0.51/13 | 800 |
| 71818 | 41095 | 70 | 10 | G-50mm | P28s | C BAR 6 | 1100 | 3.31/84.1 | 1.97/50.0 | 100 |
| 16073 | 16073 | 80 | 12 | MR11 | G5.3-4.8 | CC-8 | | 1.46/37.0 | 1.41/35.8 | 50 |
| EJY | 10272 | 80 | 19 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 25 |
| B5-011-32 | 41562 | 100 | 24 | T-4 1/2 | G8 | C BAR 6 | 2700 | 2.20/56.0 | 0.51/13 | 100 |
| CDD | 00730 | 100 | 120 | T-8 | BA15s | CC-2V | 2000 | 3.13/79.4 | 1.00/25.4 | 50 |
| EVA | 10348 | 100 | 12 | T-3 1/2 | GY6.35 | C BAR 6 | 2400 | 1.73/44.0 | 0.46/11.5 | 1,000 |
| FCR | 10403 | 100 | 12 | T-3 1/2 | GY6.35 | C BAR 6 | 2900 | 1.73/44.0 | 0.46/11.5 | 50 |
| EI-74000 | 41394 | 120 | 24 | T-4 1/2 | X514 | CC-6 | 3000 | 1.81/46.0 | | 200 |
| 150P25/10 | 81118 | 150 | 120 | P-25 | E26 | C-7A | 2100 | 4.75/120.7 | 3.13/79.4 | 200 |
| FCS | 10404 | 150 | 24 | T-4 | G6.35 | C BAR 6 | 4500 | 1.97/50.0 | 0.53/13.5 | 50 |
| P129362-228 | 41564 | 220 | 22.8 | T-4 | GY9.5 | CC-6 | 4300 | 2.44/62.0 | 0.51/13 | 500 |
| Q235T4/3-33V | 41392 | 235 | 33 | T-4 | GY9.5 | CC-6 | 5000 | 2.44/62.0 | 0.51/13 | 500 |
| EI-M102 | 41097 | 6 - 12 | 3 - 6 | G-6 | BA15s | C BAR 6 | 125 | 1.40/35.6 | 0.75/19.1 | 100 |
| EI-M103 | 41098 | 12 - 18 | 6 - 9 | G-6 | BA15s | C BAR 6 | 200 | 1.40/35.6 | 0.75/19.1 | 100 |

Germicidal Lamps

| Ordering Code | Barcode | Shape | Base | MOL in/mm | Description | UV Output Watts | Life |
|---------------|---------|-------|------|-----------|--|-----------------|-------|
| GTL-2 | 02449 | T-6 | E17 | 2.2/55 | Germicidal (254nm), Preheat, Ozoneless | 0.12 | 2,000 |
| GTL-3 | 41568 | T-6 | E17 | 2.5/63 | Germicidal (254nm), Preheat, Ozoneless | 0.18 | 2,000 |
| G4T5 | 41300 | T-5 | G5 | 5.3/134.5 | Germicidal (254nm), Preheat, Ozoneless | 0.8 | 6,000 |
| G6T5 | 41302 | T-5 | G5 | 8.3/210.5 | Germicidal (254nm), Preheat, Ozoneless | 1.7 | 6,000 |


>>Continued on page 96



Germicidal Lamps

| Ordering Code | Barcode | Shape | Base | MOL in/mm | Description | UV Output Watts | Life |
|-----------------|---------|-------|------------------|------------|--|-----------------|-------|
| G8T5 | 41384 | T-5 | G5 | 11.3/287.0 | Germicidal (254nm), Preheat, Ozoneless | 2.5 | 6,000 |
| G10T8 | 41386 | T-8 | G13 | 13/330 | Germicidal (254nm), Preheat, Ozoneless | 2.7 | 6,000 |
| G11T5 | 00217 | T-5 | G5 | 8.3/210.5 | Germicidal (254nm), Preheat, Ozoneless | 2.2 | 8,000 |
| G14T5/4P | 00219 | T-5 | 4 Pin | 11.3/287 | Germicidal (254nm), Preheat, Ozoneless | 3 | 8,000 |
| G15T8 | 41388 | T-8 | G13 | 17.2/436 | Germicidal (254nm), Preheat, Ozoneless | 4.9 | 8,000 |
| G10T5/4P | 00216 | T-5 | 4 Pin | 14/357 | Germicidal (254nm), Preheat, Ozoneless | 5.3 | 9,000 |
| G10T5L | 00205 | T-5 | Single Pin 7.9mm | 14/357 | Germicidal (254nm), Preheat, Ozoneless | 5.3 | 9,000 |
| G16T5 | 00221 | T-5 | G5 | 11.3/287 | Germicidal (254nm), Preheat, Ozoneless | 3.2 | 8,000 |
| G20T10 | 00202 | T-10 | G13 | 23.2/588.5 | Germicidal (254nm), Preheat, Ozoneless | 7.5 | 8,000 |
| G20T5 | 00222 | T-5 | G5 | 15.8/400 | Germicidal (254nm), Preheat, Ozoneless | 5.5 | 8,000 |
| G25T8 | 00203 | T-8 | G13 | 17.2/436 | Germicidal (254nm), Preheat, Ozoneless | 6.9 | 8,000 |
| G30T8 | 00204 | T-8 | G13 | 35.2/893 | Germicidal (254nm), Preheat, Ozoneless | 13.4 | 8,000 |
| G36T5/4P | 00223 | T-5 | 4 Pin | 33.2/842 | Germicidal (254nm), Preheat, Ozoneless | 12 | 9,000 |
| G36T5L | 00206 | T-5 | Single Pin 7.9mm | 33.2/842 | Germicidal (254nm), Preheat, Ozoneless | 12 | 9,000 |
| G40T10 | 00214 | T-10 | G13 | 47.2/1198 | Germicidal (254nm), Preheat, Ozoneless | 19.8 | 8,000 |
| G55T8 | 00224 | T-8 | G13 | 35.2/893 | Germicidal (254nm), Preheat, Ozoneless | 18 | 8,000 |
| G64T5/4P | 00225 | T-5 | 4 Pin | 61.2/1554 | Germicidal (254nm), Preheat, Ozoneless | 25 | 9,000 |
| G64T5L | 00207 | T-5 | Single Pin 7.9mm | 61.2/1554 | Germicidal (254nm), Preheat, Ozoneless | 25 | 9,000 |

Specialty Lamps > Base Types

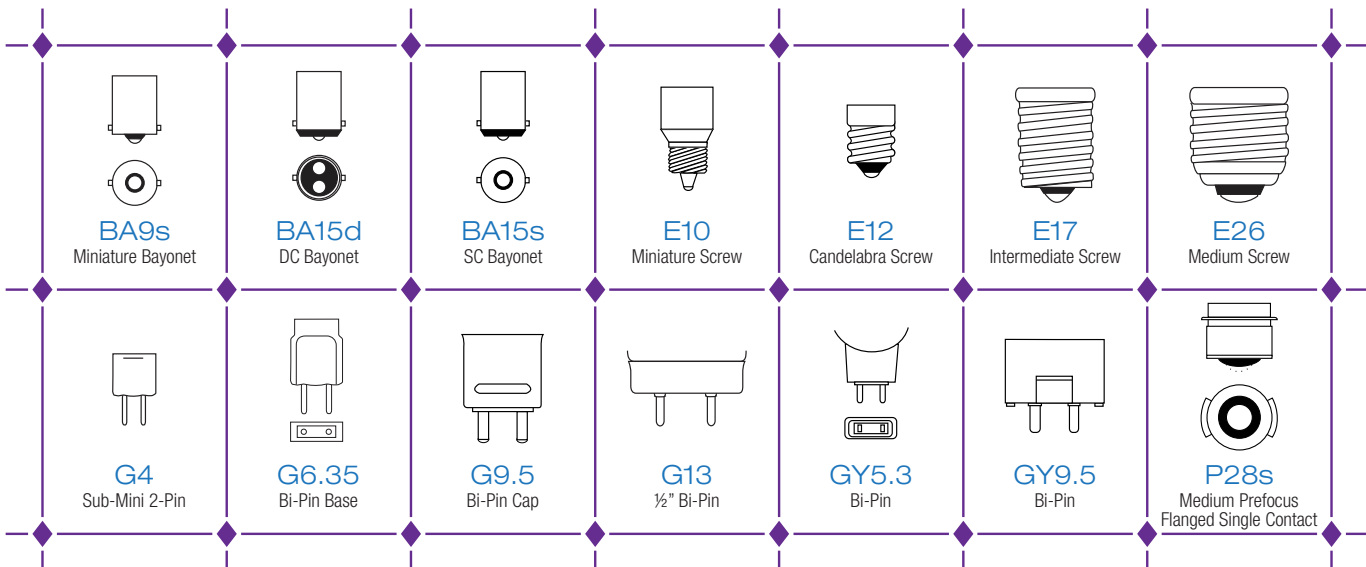

ANSI Coded Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-------|---------|---------|----------|----------|--------|------------|-----------|-------|
| 25T8/DC | 03750 | 25 | 120 | T-8 | BA15d | C-7A | 195 | 2.63/66.7 | 0.99/25.0 | 200 |
| FLT | 03470 | 28 | 13.8 | MR11 | GU4 | CC-6 | | 1.50/38.0 | 1.41/35.8 | 500 |
| BKV | 00140 | 30 | 120 | S-11 | BA15s | CC-2V | 400 | 2.38/60.3 | 1.40/35.5 | 50 |
| BLC | 10020 | 30 | 120 | S-11 | BA15d | CC-2V | 400 | 2.38/60.3 | 1.40/35.5 | 50 |
| DZA | 01890 | 30 | 10.8 | T-3 1/2 | G5.3 | C-6 | 800 | 2.00/50.8 | 0.46/11.5 | 400 |
| EKZ | 02370 | 30 | 10.8 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 200 |
| EPN | 02660 | 35 | 12 | MR16 | GX5.3 | C-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| JCR/M14V35W | 03625 | 35 | 14 | MR11 | GZ4 | CC-8 | | 1.65/42.0 | 1.50/38.0 | 50 |
| EPT | 02680 | 42 | 10.8 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 8,000 |
| BLR | 00170 | 50 | 120 | S-11 | BA15s | CC-2V | 780 | 2.38/60.3 | 1.40/35.5 | 50 |
| BRL | 10033 | 50 | 12 | T-3 1/2 | G6.35 | C BAR 6 | 1400 | 1.73/44.0 | 0.46/11.5 | 50 |
| CXL/CXR | 01040 | 50 | 8 | T-9 1/2 | P15s30 | C-6 | | 3.78/96.0 | 1.69/43.0 | 25 |
| EFM | 01990 | 50 | 8 | MR16 | GZ6.35 | C-6 | | 1.65/42.0 | 1.97/50.0 | 50 |
| ENZ | 02620 | 50 | 30 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 25 |
| EPZ | 02720 | 50 | 13.8 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 1,000 |
| BNF | 00220 | 75 | 120 | S-11 | BA15d | CC-2V | 1300 | 2.38/60.3 | 1.40/35.5 | 25 |
| BXE | 00580 | 75 | 10 | T-8 | BA15s | C-8 | 1700 | 3.13/79.4 | 0.99/25.0 | 100 |
| CBX/CBS | 00720 | 75 | 120 | T-8 | BA15d | CC-13 | 1200 | 3.13/79.4 | 0.99/25.0 | 50 |
| EFN | 10234 | 75 | 12 | MR16 | GZ6.35 | C-8 | | 1.65/42.0 | 1.97/50.0 | 50 |
| JCR/M12V75W | 03623 | 75 | 12 | MR11 | G5.3-4.8 | C-8 | 300 | 1.46/37.0 | 1.41/35.8 | 50 |
| PH/111A | 03650 | 75 | 120 | S-11 | BA15s | CC-2V | 1120 | 2.38/60.3 | 1.38/35.0 | 25 |
| PH/140 | 03662 | 75 | 120 | S-14 | E26 | CC-2V | 1150 | 3.38/86.0 | 1.73/44.0 | 50 |
| PH/211 | 03663 | 75 | 115-125 | A-21 | E26 | CC-2V | 1000 | 4.94/125.4 | 2.60/66.0 | 100 |
| Q75CL-28V | 15210 | 75 | 28 | T-3 1/2 | EZ10 | CC-6 | 1200 | 2.50/63.5 | 0.44/11.0 | 2,000 |
| Q75CL/DC-28V | 15212 | 75 | 28 | T-3 1/2 | BA15d | CC-6 | 1300 | 2.38/60.3 | 0.44/11.0 | 2,000 |
| DDJ/DZZ | 01230 | 80 | 10 | T-3 | GY9.5 | C BAR 6 | 1700 | 2.00/50.8 | 0.44/11.0 | 1,000 |
| DDK | 01240 | 80 | 19 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| DDM | 01250 | 80 | 19 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| DDS | 01290 | 80 | 21 | MR16 | GX5.3 | CC-6 | 165 | 1.75/44.5 | 2.00/50.8 | 1,000 |
| DLD/DFZ | 01444 | 80 | 30 | T-14 | GX17q | CC-6 | | 3.50/89.0 | 1.77/45.0 | 15 |
| EJY | 10272 | 80 | 19 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 25 |
| EKP/ENA | 02350 | 80 | 30 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 25 |
| ELB | 02390 | 80 | 30 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 15 |
| ELE | 02440 | 80 | 30 | MR14 | GX7.9 | CC-6 | | 1.60/40.7 | 1.75/44.5 | 20 |
| ESH | 02760 | 85 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 250 |
| ESJ | 02770 | 85 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 40 |
| 100T8/1SC | 49638 | 100 | 20 | T-8 | BA15s | CC-6 | 2600 | 3.00/76.2 | 0.99/25.0 | 50 |
| CDJ | 00740 | 100 | 120 | T-8 | BA15d | CC-2V | 2000 | 3.13/79.4 | 0.99/25.0 | 50 |
| CDS/CDX | 00750 | 100 | 120 | T-8 | BA15s | CC-13 | 1800 | 3.13/79.4 | 0.99/25.0 | 50 |
| CEA/CEB/CDK | 00760 | 100 | 120 | T-8 | BA15d | CC-13 | 2000 | 3.13/79.4 | 0.99/25.0 | 50 |
| EFP | 10235 | 100 | 12 | MR16 | GZ6.35 | C-8 | | 1.65/42.0 | 1.97/50.0 | 50 |
| ESN | 15222 | 100 | 120 | T-4 | E11 | CC-2V | 1900 | 2.80/71.0 | 0.52/13.0 | 750 |
| ESR | 15226 | 100 | 120 | T-4 | BA15d | CC-2V | 1900 | 2.44/61.9 | 0.55/14.0 | 1,000 |
| ETD | 15228 | 100 | 120 | T-4 | BA15d | CC-2V | 1750 | 2.44/61.9 | 0.52/13.0 | 750 |
| ETE | 15224 | 100 | 120 | T-4 | E11 | CC-2V | 1750 | 2.80/71.0 | 0.52/13.0 | 750 |
| EXV | 02880 | 100 | 12 | MR16 | GX5.3 | CC-6 | 3300 | 1.75/44.5 | 2.00/50.8 | 50 |
| FCR | 10403 | 100 | 12 | T-3 1/2 | GY6.35 | C BAR 6 | 2900 | 1.73/44.0 | 0.46/11.5 | 50 |
| FDT | 03220 | 100 | 12 | T-3 1/4 | GZ9.5 | C BAR 6 | 2900 | 2.25/57.2 | 0.44/11.0 | 50 |
| JCR/M12V100W | 03624 | 100 | 12 | MR11 | G5.3-4.8 | C-8 | | 1.46/37.0 | 1.41/35.8 | 50 |
| ML-2100 | 05411 | 100 | 120 | R-19 | E26 | CC-6 | 1450 | 4.06/103 | 2.36/60 | 750 |
| CEM | 00770 | 120 | 120 | T-8 | BA15s | CC-2V | 1950 | 3.13/79.4 | 0.99/25.0 | 200 |
| 125T10P | 03666 | 125 | 120 | T-10 | P28s | C-13B | 1740 | 5.75/146.1 | 1.26/32.0 | 500 |
| 150T10/H/F | 00251 | 150 | 120 | T-10 | E26 | CC-8 | 2850 | 4.0/101 | 1.25/31.8 | 1,500 |
| CEW/CFC | 00800 | 150 | 120 | T-8 | BA15s | 2CC-8 | 3500 | 3.63/92.1 | 0.99/25.0 | 25 |
| CHK | 00820 | 150 | 120 | T-8 | BA15s | CC-13 | 2995 | 3.63/92.1 | 0.99/25.0 | 500 |
| DCH/DJA/DFP | 01190 | 150 | 120 | T-12 | G17q | CC-6 | | 3.56/90.5 | 1.50/38.0 | 15 |

>>Continued on page 98

ANSI Coded Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|---------------------|---------|-------|---------|---------|--------|----------|--------|------------|-----------|-------|
| DDL | 10146 | 150 | 20 | MR16 | GX5.3 | C-8 | | 1.75/44.5 | 2.00/50.8 | 500 |
| DFN/DFC | 01390 | 150 | 120 | T-12 | G17q | CC-8 | | 3.19/81.0 | 1.50/38.0 | 15 |
| DJL | 01430 | 150 | 120 | T-14 | G17q | CC-8 | | 3.50/89.0 | 1.77/45.0 | 15 |
| DLG/DLS/DHX | 01450 | 150 | 21.5 | T-14 | GX17q | CC-6 | | 3.50/89.0 | 1.77/45.0 | 10 |
| DNF | 01490 | 150 | 21 | MR16 | GX7.9 | C-6 | | 2.00/50.8 | 2.25/57.2 | 25 |
| DZE/FDS | 49451 | 150 | 24 | T-4 | GY9.5 | C BAR 6 | 4600 | 2.25/57.2 | 0.55/14.0 | 100 |
| EFR | 10236 | 150 | 15 | MR16 | GZ6.35 | C-8 | | 1.65/42.0 | 1.97/50.0 | 50 |
| EJA | 10264 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| EJM | 02280 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| EJV | 02290 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| EKE | 10275 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 200 |
| ELD/EJN | 02430 | 150 | 21 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 40 |
| ESD | 02750 | 150 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 12 |
| ESL | 15240 | 150 | 120 | T-4 | E11 | CC-2V | 2800 | 2.80/71.0 | 0.52/13.0 | 1,000 |
| ESP | 15246 | 150 | 120 | T-4 | BA15d | CC-8 | 2400 | 2.44/61.9 | 0.55/14.0 | 1,000 |
| ESY | 02780 | 150 | 120 | T-4 | G6.35 | CC-6 | 3300 | 1.97/50.0 | 0.53/13.5 | 200 |
| ETC | 15244 | 150 | 120 | T-4 | BA15d | CC-8 | 2800 | 2.44/61.9 | 0.52/13.0 | 2,000 |
| ETF | 15248 | 150 | 120 | T-4 | BA15d | CC-8 | 2700 | 2.68/68.0 | 0.52/13.0 | 2,000 |
| ETG | 15238 | 150 | 120 | T-4 | E11 | CC-8 | 2600 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| ETH | 15242 | 150 | 120 | T-4 | E11 | CC-8 | 2700 | 3.00/76.2 | 0.55/14.0 | 2,000 |
| EZE | 03000 | 150 | 82 | MR13 | GX5.3 | CC-8 | 350 | 1.75/44.5 | 1.66/42.1 | 150 |
| FCS | 10404 | 150 | 24 | T-4 | G6.35 | C BAR 6 | 4500 | 1.97/50.0 | 0.53/13.5 | 50 |
| FDV | 03230 | 150 | 24 | T-4 | G6.35 | C BAR 6 | 4300 | 2.00/50.8 | 0.55/14.0 | 100 |
| JCR120V150WB | 03640 | 150 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 100 |
| PH/212 | 03664 | 150 | 115-125 | A-21 | E26 | CC-2V | 2300 | 4.94/125.4 | 2.60/66.0 | 100 |
| Q150T4/CL/25 | 15204 | 150 | 25 | T-4 | R7s | C-8 | 2700 | 2.48/63.0 | 0.52/13.0 | 3,000 |
| CVX/CVS | 00880 | 200 | 120 | T-10 | P28s | CC-13 | 4250 | 5.31/135.0 | 1.26/32.0 | 50 |
| EJL | 02260 | 200 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| EYA | 02940 | 200 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 50 |
| FEV | 15254 | 200 | 120 | T-4 | BA15d | CC-2V | 5500 | 2.44/61.9 | 0.55/14.0 | 50 |
| WK93 | 80120 | 200 | 400 | | | | | | | |
| 250T10/H/F | 00197 | 250 | 120 | T-10 | E26 | CC-8 | 4600 | 4.0/101 | 1.25/31.8 | 1,500 |
| BBA | 00040 | 250 | 120 | A-21 | E26 | C-9 | 8500 | 4.77/121.2 | 2.68/68.0 | 3 |
| BBA-LN | 06959 | 250 | 120 | A-21 | E26 | C-9 | 8700 | 4.88/124 | 2.68/68.0 | 4 |
| BCA | 00050 | 250 | 120 | A-21 | E26 | C-9 | 5000 | 4.94/125.4 | 2.68/68.0 | 3 |
| ECA | 01970 | 250 | 120 | A-23 | E26 | C-9 | 6500 | 5.52/140.2 | 2.76/70.0 | 20 |
| ECA-LN | 07015 | 250 | 120 | A-23 | E26 | C-9 | 6500 | 5.87/149 | 2.76/70.0 | 20 |
| EHJ | 10257 | 250 | 24 | T-4 | G6.35 | C BAR 6 | 8000 | 2.16/55.0 | 0.53/13.5 | 50 |
| EHT | 15256 | 250 | 120 | T-4 | E11 | CC-8 | 5000 | 3.15/80.0 | 0.52/13.0 | 2,000 |
| ELC | 02400 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| ELC/5 | 02410 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 100 |
| ELC/5H | 49423 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 500 |
| ELC/E | 02420 | 250 | 24 | MR16 | GX5.3 | CC-6 | | 1.75/44.5 | 2.00/50.8 | 50 |
| EMM/EKS | 02530 | 250 | 24 | MR14 | GX7.9 | CC-6 | | 1.87/47.5 | 1.75/44.5 | 50 |
| ENH | 02570 | 250 | 120 | MR16 | GY5.3 | CC-8 | 15000 | 1.75/44.5 | 2.00/50.8 | 175 |
| ESM | 15258 | 250 | 120 | T-4 | E11 | CC-8 | 4800 | 3.19/81.0 | 0.52/13.0 | 2,000 |
| ESS | 15260 | 250 | 120 | T-4 | BA15d | CC-8 | 5000 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| ETB | 15262 | 250 | 120 | T-4 | BA15d | CC-8 | 4700 | 3.15/80.0 | 0.55/14.0 | 2,000 |
| ETJ | 02790 | 250 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 175 |
| EVC/FGX | 02800 | 250 | 24 | T-4 | G6.35 | C BAR 6 | 8400 | 2.25/57.2 | 0.57/14.5 | 200 |
| EVW | 02820 | 250 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 50 |
| EXY | 02920 | 250 | 82 | MR13 | GX5.3 | CC-8 | | 1.75/44.5 | 1.66/42.1 | 200 |
| EYH/FKT | 02970 | 250 | 120 | G-6 | G5.3 | CC-6 | 5400 | 2.48/63.0 | 0.87/22.0 | 200 |
| GCA | 03503 | 250 | 120 | T-3 1/2 | G5.3 | CC-8 | 6000 | 2.25/57.2 | 0.46/11.5 | 200 |
| FNT | 03500 | 275 | 24 | T-4 | G6.35 | C BAR 6 | 10000 | 2.16/55.0 | 0.55/14.0 | 75 |
| 64514 | 03655 | 300 | 120 | T-6 | GX6.35 | CC-2F | 7700 | 2.26/57.5 | 0.74/18.8 | 75 |

>>Continued on page 99

ANSI Coded Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|----------|---------|---------------------|---------------|--------|------------|-----------|-------|
| CLS/CLG | 00830 | 300 | 120 | T-8 1/2 | BA15s | C-13 | 7600 | 4.12/104.8 | 1.06/27.0 | 25 |
| CMV/CMT | 00850 | 300 | 120 | T-8 1/2 | BA15s | C-13D | 7300 | 4.12/104.8 | 1.06/27.0 | 25 |
| CXK | 01030 | 300 | 120 | T-10 | P28s | C-13 | 7500 | 5.75/146.1 | 1.26/32.0 | 25 |
| CYC | 01070 | 300 | 120 | T-10 | BA15s | C-13 | 7400 | 3.19/81.0 | 1.14/29.0 | 25 |
| DRA | 01580 | 300 | 120 | T-5 | G6.35 | CC-6 | 6900 | 1.97/50.0 | 0.63/16.0 | 300 |
| EHM | 02180 | 300 | 120 | T-3 | R7s | C-8 | 6000 | 4.72/119.9 | 0.40/10.0 | 2,000 |
| EHP | 15214 | 300 | 120 | T-4 | R7s | CC-8 | 5000 | 3.17/80.6 | 0.52/13.0 | 2,000 |
| EHZ | 02230 | 300 | 120 | T-3 | R7s | C-8 | 6000 | 4.72/119.9 | 0.36/9.0 | 2,000 |
| ELH | 02450 | 300 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 35 |
| ELH/5 | 02460 | 300 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 70 |
| ENG | 02550 | 300 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 15 |
| EXR | 02850 | 300 | 82 | MR13 | GX5.3 | CC-8 | | 1.75/44.5 | 1.66/42.1 | 35 |
| EXR/5 | 02860 | 300 | 82 | MR13 | GX5.3 | CC-8 | | 1.75/44.5 | 1.66/42.1 | 70 |
| EYK | 02980 | 300 | 120 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 60 |
| FHS | 03420 | 300 | 82 | MR13 | GX5.3 | CC-8 | | 1.75/44.5 | 1.66/42.1 | 70 |
| FKW | 03455 | 300 | 120 | T-6 | GY9.5 | C-13 | 7800 | 3.54/90.0 | 0.75/19.1 | 200 |
| FLW | 03480 | 300 | 24 | T-4 | GY6.35 | C BAR 6 | 10200 | 2.16/55.0 | 0.55/14.0 | 50 |
| JC24V300W | 03530 | 300 | 24 | T-4 1/2 | G6.35 | C-6 | 9900 | 2.16/55.0 | 0.55/14.0 | 50 |
| ENX | 02600 | 360 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 75 |
| ENX/5 | 02610 | 360 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 150 |
| EYB | 02950 | 360 | 82 | T-3 1/2 | G5.3 | CC-8 | 10000 | 2.25/57.2 | 0.46/11.5 | 75 |
| EYB/5 | 02960 | 360 | 82 | T-3 1/2 | G5.3 | CC-8 | 10000 | 2.25/57.2 | 0.46/11.5 | 150 |
| HPL375/115V | 05913 | 375 | 115 | T-6 | G9.5 w/ Heatsink | 4-C8 | 10540 | 3.86/98 | 0.72/18.4 | 300 |
| HPL375LL/115V | 05914 | 375 | 115 | T-6 | G9.5 w/ Heatsink | 4-C8 | 8000 | 3.86/98 | 0.72/18.4 | 1,000 |
| EHR | 15218 | 400 | 120 | T-4 | R7s | CC-8 | 7750 | 3.17/80.6 | 0.52/13.0 | 2,000 |
| EVD | 02810 | 400 | 36 | T-6 | G6.35 | C BAR 6 | 14500 | 2.38/60.3 | 0.75/19.1 | 50 |
| WK120HD | 80020 | 400 | 450 | | | | | | | |
| WK120HD-UV | 80030 | 400 | 450 | | | | | | | |
| WK140HD | 80040 | 400 | 450-500 | | | | | | | |
| WK140HD-UV | 80050 | 400 | 450-500 | | | | | | | |
| WK76 | 80150 | 400 | 600-1000 | | | | | | | |
| WK76-UV | 80160 | 400 | 600-1000 | | | | | | | |
| WK95 | 80130 | 400 | 400 | | | | | | | |
| FXL | 03501 | 410 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 50 |
| FXL/5 | 49116 | 410 | 82 | MR16 | GY5.3 | CC-8 | | 1.75/44.5 | 2.00/50.8 | 100 |
| EKB | 54837 | 420 | 120 | G-7 | GZ9.5 | CC-6 | 11000 | 2.50/63.5 | 0.87/22.0 | 75 |
| FAL | 03020 | 420 | 120 | T-4 | R7s | CC-8 | 11000 | 2.63/66.7 | 0.55/14.0 | 90 |
| BCK | 00060 | 500 | 120 | T-6 | G17t | C-13D P.R. | | 3.22/82.0 | 0.77/19.5 | 50 |
| BTL | 00390 | 500 | 120 | T-6 | P28s | C-13D | 11000 | 5.00/127.0 | 0.77/19.5 | 500 |
| CBA | 00690 | 500 | 120 | T-6 | G17q | C-13D P.R. | | 3.63/92.1 | 0.77/19.5 | 50 |
| CZX/DAB | 01130 | 500 | 120 | T-10 | P28s | C-13D | 12500 | 5.75/146.1 | 1.26/32.0 | 25 |
| DAY/DAK | 01160 | 500 | 120 | T-10 | G17q | C-13D | 12500 | 4.06/103.0 | 1.26/32.0 | 30 |
| DMX | 01470 | 500 | 120 | T-20 | P28s | C-13 | 13200 | 5.75/146.1 | 2.52/64.0 | 50 |
| DNS/FMC | 01500 | 500 | 120 | T-12 | P28s | C-13D | 11000 | 6.12/155.5 | 1.50/38.0 | 200 |
| DNW | 01530 | 500 | 120 | T-20 | P28s | C-13 | 10000 | 5.75/146.1 | 2.52/64.0 | 500 |
| DVS | 01690 | 500 | 130 | T-3 | R7s | CC-8 | 10000 | 4.71/119.6 | 0.40/10.0 | 2,000 |
| DYY/EGH | 01880 | 500 | 120 | T-6 | G17t | C-13D | 14000 | 3.22/82.0 | 0.77/19.5 | 50 |
| EBV | 01950 | 500 | 120 | PS-25 | E26 | C-9 | 17000 | 6.10/155 | 3.15/80.0 | 6 |
| EBV-LN | 06940 | 500 | 120 | PS-25 | E26 | C-9 | 17800 | 6.85/174 | 3.15/80.0 | 8 |
| EBW | 01960 | 500 | 120 | PS-25 | E26 | C-9 | 10500 | 6.10/155 | 3.15/80.0 | 6 |
| ECT | 01980 | 500 | 120 | PS-25 | E26 | C-9 | 13650 | 6.10/155 | 3.15/80.0 | 60 |
| ECT-LN | 06906 | 500 | 120 | PS-25 | E26 | C-9 | 13650 | 6.85/174 | 3.15/80.0 | 60 |

>>Continued on page 100

ANSI Coded Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|-------|-------|---------|---------------------|-----------|--------|------------|-----------|-------|
| EGE | 02010 | 500 | 120 | T-4 1/2 | P28s | CC-8 | 10000 | 6.00/152.4 | 0.55/14.0 | 2,000 |
| EGN | 02070 | 500 | 120 | T-6 | G22 | C-13D | 13000 | 5.50/139.7 | 0.77/19.5 | 100 |
| EHA | 02120 | 500 | 120 | T-6 | GY9.5 | C-13 P.R. | | 3.00/76.2 | 0.77/19.5 | 50 |
| EHC/EHB | 02140 | 500 | 120 | T-4 | G9.5 | CC-8 | 13000 | 3.75/95.3 | 0.55/14.0 | 300 |
| EHD | 02150 | 500 | 120 | T-5 | G9.5 | CC-8 | 10000 | 4.00/101.6 | 0.55/14.0 | 2,000 |
| EVR | 15278 | 500 | 120 | T-4 | E11 | CC-8 | 10000 | 3.75/95.3 | 0.55/14.0 | 2,000 |
| EYV | 15276 | 500 | 130 | T-4 | E11 | CC-8 | 10000 | 3.75/95.3 | 0.52/13.0 | 2,000 |
| EYW | 15280 | 500 | 130 | T-4 | E11 | CC-8 | 10000 | 3.75/95.3 | 0.52/13.0 | 2,000 |
| EYX | 15274 | 500 | 120 | T-4 | E11 | CC-8 | 10000 | 3.75/95.3 | 0.52/13.0 | 2,000 |
| FCL | 03130 | 500 | 120 | T-3 | R7s | C-8 | 10000 | 4.72/119.9 | 0.44/11.0 | 2,000 |
| FCZ | 03160 | 500 | 120 | T-3 | R7s | C-8 | 10800 | 4.72/119.9 | 0.44/11.0 | 2,000 |
| FDN | 03200 | 500 | 120 | T-3 | R7s | C-8 | 12500 | 4.72/119.9 | 0.44/11.0 | 400 |
| FTK | 15097 | 500 | 120 | T-6 | GY9.5 | CC-6 | 13500 | 2.57/65.3 | 0.75/19.1 | 200 |
| GDA | 03507 | 500 | 120 | T-4 | R7s | C-8 | 11000 | 5.25/133.3 | 0.48/12.0 | 100 |
| HPL550/77V | 05641 | 550 | 77 | T-6 | G9.5 w/ Heatsink | 4-C8 | 16170 | 3.86/98 | 0.72/18.4 | 300 |
| HPL550LL/77V | 05915 | 550 | 77 | T-6 | G9.5 w/ Heatsink | 4-C8 | 12160 | 3.86/98 | 0.72/18.4 | 2,000 |
| FLK | 03475 | 575 | 120 | T-6 | G9.5 | CC-8 | 16500 | 3.97/100.8 | 0.75/19.1 | 300 |
| GLA | 10418 | 575 | 115 | T-7 | G9.5 | C-13D | 13000 | 4.00/101.6 | 0.87/22.0 | 1,500 |
| GLC | 10419 | 575 | 115 | T-7 | G9.5 | C-13D | 15500 | 4.00/101.6 | 0.87/22.0 | 400 |
| HPL575/115V | 10415 | 575 | 115 | T-6 | G9.5 w/ Heatsink | 4-C8 | 16520 | 3.86/98 | 0.72/18.4 | 300 |
| HPL575/120V | 05152 | 575 | 120 | T-6 | G9.5 w/ Heatsink | 4-C8 | 16520 | 3.86/98 | 0.72/18.4 | 300 |
| HPL575/230V | 05916 | 575 | 230 | T-6 | G9.5 w/ Heatsink | 6-C8 | 14900 | 3.86/98 | 0.72/18.4 | 400 |
| HPL575LL/115V | 10416 | 575 | 115 | T-6 | G9.5 w/ Heatsink | 4-C8 | 12360 | 3.86/98 | 0.72/18.4 | 2,000 |
| HPL575LL/120V | 05918 | 575 | 120 | T-6 | G9.5 w/ Heatsink | 4-C8 | 12360 | 3.86/98 | 0.72/18.4 | 2,000 |
| HPL575LL/240V | 05920 | 575 | 240 | T-6 | G9.5 w/ Heatsink | 6-C8 | 11780 | 4.09/104 | 0.72/18.4 | 1,500 |
| DYH | 01800 | 600 | 120 | G-7 | G5.3 | CC-6 | 17000 | 2.50/63.5 | 0.87/22.0 | 75 |
| DYS/DYV/BHC | 01850 | 600 | 120 | T-6 | G29.5 | CC-6 | 17000 | 2.50/63.5 | 0.87/22.0 | 75 |
| DYS/DYV/BHC/5 | 01860 | 600 | 120 | T-6 | G29.5 | CC-6 | 17000 | 2.50/63.5 | 0.87/22.0 | 150 |
| FCB | 03100 | 600 | 120 | T-4 | R7s | CC-8 | 16500 | 3.75/95.3 | 0.55/14.0 | 75 |
| DVY | 01700 | 650 | 120 | G-6 | G5.3 | CC-6 | 20000 | 2.48/63.0 | 0.79/20.0 | 25 |
| EKD | 02310 | 650 | 120 | G-6 | G29.5 | CC-6 | 20000 | 2.60/66.0 | 0.78/19.9 | 25 |
| FAD | 03010 | 650 | 120 | T-4 | R7s | CC-8 | 16500 | 3.17/80.6 | 0.55/14.0 | 100 |
| FRK | 15095 | 650 | 120 | T-7 | GY9.5 | C-13 | 16900 | 3.54/90.0 | 0.87/22.0 | 200 |
| BFE | 00090 | 750 | 120 | T-20 | P28s | C-13 | 17000 | 5.75/146.1 | 2.52/64.0 | 200 |
| BFK/BFL | 00100 | 750 | 120 | T-20 | P28s | C-13 | 13500 | 5.75/146.1 | 2.52/64.0 | 200 |
| BTN | 00410 | 750 | 120 | T-7 | P28s | C-13D | 17000 | 5.00/127.0 | 0.91/23.0 | 500 |
| BTP | 00420 | 750 | 120 | T-7 | P28s | C-13D | 20000 | 5.00/127.0 | 0.91/23.0 | 200 |
| EGF | 02020 | 750 | 120 | T-5 | P28s | CC-8 | 20000 | 6.00/152.4 | 0.63/16.0 | 250 |
| EGG | 02030 | 750 | 120 | T-5 | P28s | CC-8 | 15000 | 6.00/152.4 | 0.63/16.0 | 2,000 |
| EGR | 02080 | 750 | 120 | T-7 | G22 | C-13D | 20000 | 5.50/139.7 | 0.91/23.0 | 200 |
| EHF | 02160 | 750 | 120 | T-5 | G9.5 | CC-8 | 20400 | 4.12/104.8 | 0.73/18.5 | 300 |
| EHG | 02170 | 750 | 120 | T-5 | G9.5 | CC-8 | 15000 | 4.12/104.8 | 0.73/18.5 | 2,000 |
| EJG | 02250 | 750 | 120 | T-3 | R7s | C-8 | 20600 | 4.72/119.9 | 0.48/12.0 | 400 |
| EMD | 02520 | 750 | 120 | T-3 | R7s | C-8 | 19500 | 4.72/119.9 | 0.44/11.0 | 400 |
| HPL750/115V | 10417 | 750 | 115 | T-6 | G9.5 w/ Heatsink | 4-C8 | 21900 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/120V | 05921 | 750 | 120 | T-6 | G9.5 w/ Heatsink | 4-C8 | 21900 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/230V | 05922 | 750 | 230 | T-6 | G9.5 w/ Heatsink | 6-C8 | 19750 | 4.09/104 | 0.72/18.4 | 300 |
| HPL750/240V | 05923 | 750 | 240 | T-6 | G9.5 w/ Heatsink | 6-C8 | 19750 | 4.09/104 | 0.72/18.4 | 300 |

>>Continued on page 101

ANSI Coded Lamps

| Ordering Code | Barcode | Watts | Volts | Shape | Base | Filament | Lumens | MOL in/mm | MOD in/mm | Life |
|----------------------|---------|----------|----------|---------|-----------------|----------|-----------|-------------|------------|-----------|
| HPL750/77V | 05642 | 750 | 77 | T-6 | G9.5 w/Heatsink | 4-C8 | 22950 | 3.86/98 | 0.72/18.4 | 300 |
| HPL750LL/115V | 05924 | 750 | 115 | T-6 | G9.5 w/Heatsink | 4-C8 | 16400 | 4.09/104 | 0.72/18.4 | 1,500 |
| HPL750LL/120V | 05925 | 750 | 120 | T-6 | G9.5 w/Heatsink | 4-C8 | 16400 | 4.09/104 | 0.72/18.4 | 2,000 |
| HPL750LL/230V | 05926 | 750 | 230 | T-6 | G9.5 w/Heatsink | 6-C8 | 15600 | 4.09/104 | 0.72/18.4 | 1,500 |
| BRH | 00250 | 1000 | 120 | T-5 | R7s | CC-8 | 30000 | 3.75/95.3 | 0.63/16.0 | 75 |
| BTR | 00430 | 1000 | 120 | T-7 | P28s | C-13D | 27500 | 5.00/127.0 | 0.91/23.0 | 200 |
| BVT | 00500 | 1000 | 120 | T-7 | P40s | C-13D | 23000 | 7.00/178.0 | 0.91/23.0 | 500 |
| BVV | 00510 | 1000 | 120 | T-7 | P40s | C-13D | 28500 | 7.00/178.0 | 0.91/23.0 | 200 |
| BWN | 00560 | 1000 | 120 | T-7 | G9.5 | C-13D | 28500 | 4.50/114.3 | 0.81/20.5 | 250 |
| CYV | 01080 | 1000 | 120 | T-7 | G38 | C-13D | 27500 | 7.87/200.0 | 0.91/23.0 | 200 |
| DPT | 01550 | 1000 | 120 | T-20 | E39 | C-13 | 28000 | 9.06/230.2 | 2.52/64.0 | 50 |
| DPW | 01560 | 1000 | 120 | T-20 | P40s | C-13 | 28000 | 9.50/241.3 | 2.52/64.0 | 50 |
| DRB/DRC | 01600 | 1000 | 120 | T-20 | P28s | C-13 | 28000 | 5.75/146.1 | 2.52/64.0 | 25 |
| DRS | 01620 | 1000 | 120 | T-20 | P28s | C-13D | 29000 | 5.75/146.1 | 2.52/64.0 | 25 |
| DRW | 01640 | 1000 | 120 | T-20 | E39 | C-13D | 27400 | 9.06/230.2 | 2.52/64.0 | 25 |
| DWT | 01720 | 1000 | 120 | T-6 | R7s | CC-8 | 23400 | 5.67/144.1 | 0.75/19.1 | 2,000 |
| DXW | 01760 | 1000 | 120 | T-5 | R7s | CC-8 | 28000 | 3.75/95.3 | 0.71/18.0 | 150 |
| EGJ | 02040 | 1000 | 120 | T-6 | P28s | CC-8 | 27500 | 6.00/152.4 | 0.77/19.5 | 400 |
| EGK | 02050 | 1000 | 120 | T-6 | P28s | CC-8 | 26500 | 6.00/152.4 | 0.77/19.5 | 400 |
| EGT | 02090 | 1000 | 120 | T-7 | G22 | C-13D | 27500 | 5.50/139.7 | 0.91/23.0 | 200 |
| FCM | 03140 | 1000 | 120 | T-3 | R7s | C-8 | 27000 | 4.72/119.9 | 0.44/11.0 | 300 |
| FEL | 03240 | 1000 | 120 | T-6 | G9.5 | CC-8 | 27000 | 4.00/101.6 | 0.77/19.5 | 300 |
| FEP | 03250 | 1000 | 220 | T-6 | G9.5 | CC-8 | 26500 | 4.00/101.6 | 0.77/19.5 | 150 |
| FFN | 03320 | 1000 | 120 | PAR 64 | GX16d | CC-6 | 11000 | 6.03/153.1 | 8.35/212.0 | 800 |
| FFP | 03330 | 1000 | 120 | PAR 64 | GX16d | CC-6 | 12000 | 6.03/153.1 | 8.35/212.0 | 800 |
| FFR | 03340 | 1000 | 120 | PAR 64 | GX16d | CC-6 | 14000 | 6.03/153.1 | 8.35/212.0 | 800 |
| FFS | 03350 | 1000 | 120 | PAR 64 | GX16d | CC-6 | 19000 | 6.03/153.1 | 8.35/212.0 | 800 |
| FFT | 03360 | 1000 | 120 | T-3 1/4 | R7s | C-8 | 26400 | 6.61/167.9 | 0.44/11.0 | 300 |
| FHM | 03400 | 1000 | 120 | T-3 | R7s | C-8 | 26000 | 4.72/119.9 | 0.44/11.0 | 300 |
| WK92 | 80100 | 1000 | 800 | | | | | | | |
| WK92-UV | 80110 | 1000 | 800 | | | | | | | |
| BTG | 00380 | 1200 | 120 | T-7 | G17t | C-13D | 38200 | 3.75/95.3 | 0.91/23.0 | 20 |
| CWZ | 01010 | 1500 | 120 | T-8 | P40s | C-13D | 38500 | 7.50/190.5 | 1.38/35.0 | 325 |
| CXZ | 01060 | 1500 | 120 | T-8 | G38 | C-13D | 38500 | 8.00/203.2 | 1.38/35.0 | 325 |
| DTA | 01660 | 1500 | 120 | T-8 | P40s | C-13D | 39000 | 8.00/203.2 | 0.99/25.0 | 100 |
| DTJ | 01670 | 1500 | 120 | T-20 | P40s | C-13D | 42500 | 9.50/241.3 | 2.52/64.0 | 25 |
| FDB | 03180 | 1500 | 120 | T-4 | R7s | C-8 | 40000 | 6.61/167.9 | 0.44/11.0 | 400 |
| BVW | 00520 | 2000 | 120 | T-11 | P40s | C-13 | 59000 | 8.00/203.2 | 1.38/35.0 | 200 |
| BWA | 00530 | 2000 | 120 | T-8 | G38 | CC-8 | 54000 | 8.00/203.2 | 0.99/25.0 | 500 |
| BWF | 00540 | 2000 | 120 | T-9 | E39 | CC-8 | 54000 | 7.50/190.5 | 0.99/25.0 | 500 |
| FEY | 03280 | 2000 | 120 | T-8 | R7s | CC-8 | 57000 | 5.62/142.8 | 1.10/28.0 | 300 |
| WK96 | 80060 | 2000 | 900 | | | | | | | |
| WK96-UV | 80070 | 2000 | 900 | | | | | | | |
| WK98 | 80190 | 3200 | 600-1200 | | | | | | | |
| WK98-UV | 80200 | 3200 | 600-1200 | | | | | | | |
| EAJ | 01930 | 35 / 25 | 12 / 12 | T-6 1/2 | BA15d | C-6/C-6 | 620 / 420 | 3.97/100.8 | 0.83/21.0 | 300 / 300 |
| DPY | 01570 | 5000 | 120 | T-17 | G38 | C-13 | 145000 | 11.00/279.4 | 2.38/60.5 | 500 |
| WK101 | 80205 | 600-1000 | 450-900 | | | | | | | |

(See pages 6-7 for Base Types.)

| | | | | | | | |
|--------------------|--------|----------------------------|--------|----------------------------|--------|--------------------------|----|
| 1A/27W | 89 | 20-99 | 77 | 40T10-130V | 61, 89 | 63..... | 82 |
| 2..... | 77 | 20-99F | 77 | 40T10/F-130V | 61, 89 | 63-BP | 82 |
| 3S6/5-120V | 59, 87 | 20T6-1/2DC-130V | 60, 88 | 41..... | 80 | 63-R..... | 82 |
| 3S6/5-130V | 59, 87 | 20T6-1/2F-130V | 60, 88 | 41-BP | 81 | 64..... | 82 |
| 3S6/5DC-120V | 59, 87 | 20T6-1/2N-130V | 60, 88 | 43..... | 81 | 65BR30/FL-120V | 59 |
| 4C7/120V | 59, 87 | 20T6-1/2N-145V | 60, 88 | 43A/CL/H-120V | 51 | 65BR30/FL-130V | 59 |
| 4C7/130V | 59, 87 | 20T6.5DC/F-130V | 60, 88 | 44..... | 81 | 65BR30/SP-120V | 59 |
| 6MB..... | 83 | 24..... | 78 | 44-A | 81 | 65BR30/SP-130V | 59 |
| 6PSB5 | 83 | 24A | 78 | 44-B | 81 | 65BR40/FL-120V | 59 |
| 6S6/6V | 60, 87 | 24-BP | 78 | 44-BP | 81 | 65BR40/FL-130V | 59 |
| 6S6/12V | 59, 87 | 24CSB | 78 | 44-G | 81 | 67..... | 83 |
| 6S6/18V | 59, 87 | 24E1 | 78 | 44-P | 81 | 67-BP | 83 |
| 6S6/24V | 59, 87 | 24E2 | 78 | 44-R | 81 | 67K..... | 83 |
| 6S6/30V | 60, 87 | 24E3 | 78 | 44-Y | 81 | 68..... | 83 |
| 6S6/48V | 60, 87 | 24ESB5..... | 78 | 45BR30/FL-120V | 59 | 68-BP | 83 |
| 6S6/60V | 60, 87 | 24EX..... | 78 | 45R20/FL-120V | 59 | 70..... | 83 |
| 6S6/120V | 59, 87 | 24MB..... | 78 | 45R20/FL-130V | 59 | 70PAR38/H/FL-120V | 51 |
| 6S6/130V | 59, 87 | 24PSB5 | 78 | 46..... | 81 | 70PAR38/H/SP-120V | 51 |
| 6S6/145V | 59, 87 | 24X..... | 78 | 46-BP | 81 | 70PAR38/H/WFL-120V | 51 |
| 6S6/155V | 59, 87 | 25S11-2C..... | 94 | 47..... | 81 | 72A/CL/H-120V..... | 51 |
| 6S6/230V | 59, 87 | 25S11-5C..... | 94 | 47-A..... | 81 | 73..... | 83 |
| 6S6DC/6V | 60, 88 | 25T6-1/2DC-130V | 60, 89 | 47-B..... | 81 | 73-BP | 83 |
| 6S6DC/12V | 60, 87 | 25T6-1/2N-130V | 60, 89 | 47-BP | 81 | 74..... | 83 |
| 6S6DC/24V | 60, 87 | 25T6.5DC/F-130V | 60, 89 | 47-G..... | 81 | 74-BP | 83 |
| 6S6DC/30V | 60, 87 | 25T6.5N/F-130V | 60, 89 | 47-P..... | 81 | 75A/RS | 58 |
| 6S6DC/32V | 60, 87 | 25T6C-120V | 60, 89 | 47-R..... | 81 | 75A/RS-12V | 58 |
| 6S6DC/48V | 60, 87 | 25T8C-120V | 60, 89 | 47-Y..... | 81 | 75A/RS/TF | 58 |
| 6S6DC/60V | 60, 87 | 25T8/DC | 92, 97 | 48..... | 81 | 75BT15/H/W | 51 |
| 6S6DC/120V | 60 | 25T8DC-120V | 60, 89 | 48C2 | 81 | 77A/S8 | 84 |
| 6S6DC/130V | 60, 87 | 25T8DC-130V | 61, 89 | 48ESB5..... | 81 | 79..... | 84 |
| 6S6DC/145V | 60, 87 | 25T8N-130V | 61, 89 | 48MB..... | 81 | 80-A | 93 |
| 7C7/120V | 59, 88 | 25T10-130V | 60, 89 | 48PSB5 | 81 | 80-B | 93 |
| 7C7/130V | 59, 88 | 25T10/F-130V | 60, 89 | 48RC | 81 | 81..... | 84 |
| 7C7/130V-W | 59, 88 | 25T10/IF-120..... | 60, 89 | 49..... | 81 | 82..... | 84 |
| 7C9-120V-INT | 59 | 27..... | 78 | 50..... | 81 | 84..... | 84 |
| 8-3995 | 84 | 27.0H1 | 89 | 50A/RS | 58 | 85..... | 84 |
| 10C7/120V | 59 | 28ESB5..... | 79 | 50A/RS-12V | 58 | 86..... | 84 |
| 10C7DC/120V | 59, 88 | 28MB..... | 79 | 50A/RS/TF | 58 | 86G | 84 |
| 10ESB5..... | 88 | 28PSB5 | 79 | 51..... | 81 | 87..... | 84 |
| 10S6/120V | 60 | 28RC | 79 | 51A | 82 | 88..... | 84 |
| 10S6/230V | 60, 88 | 29A/CL/H-120V | 51 | 51-BP | 82 | 89..... | 84 |
| 10S6/250V | 60 | 30R20/FL-120V | 59 | 52..... | 82 | 89-BP | 84 |
| 10S6DC/250V | 60, 88 | 30R20/FL-130V | 59 | 53..... | 82 | 89K..... | 84 |
| 10S11N | 93 | 31..... | 79 | 53A/CL/H-120V | 51 | 90..... | 84 |
| 10S11NF..... | 93 | 35A2 | 80 | 53-BP | 82 | 90-BP | 84 |
| 12ESB5..... | 74 | 35PAR20/H/NFL-120V | 50 | 55..... | 82 | 90MB..... | 84 |
| 12MB..... | 74 | 35PAR20/H/SP-120V | 50 | 55A/S8 | 82 | 93..... | 85 |
| 12PSB5 | 74 | 35PAR30/H/FL-120V | 51 | 55-BP | 82 | 93-BP | 85 |
| 12RB | 74 | 35PAR30/H/SP-120V | 51 | 55C2 | 82 | 94..... | 85 |
| 12RC | 74 | 35PAR30LN/H/FL-120V | 51 | 55C3 | 82 | 96..... | 85 |
| 13..... | 74 | 35PAR30LN/H/NFL-120V | 51 | 56..... | 82 | 97..... | 85 |
| 14..... | 74 | 35PAR30LN/H/SP-120V | 51 | 57..... | 82 | 97A | 85 |
| 14-BP | 74 | 35PAR38/H/FL-120V | 51 | 57-BP | 82 | 97-BP | 85 |
| 15S11-13 | 93 | 35PAR38/H/SP-120V | 51 | 60A-130V | 58 | 98..... | 85 |
| 15S11-14 | 93 | 35PAR38/H/WFL-120V | 51 | 60A/CL-130V | 58 | 100A/RS | 58 |
| 15S11-87 | 93 | 36PAR36/CAP/WFL32 | 69 | 60BT15/H/CL | 51 | 100A/RS-12V | 58 |
| 15S11/102CL | 93 | 37..... | 80 | 60BT15/H/W | 51 | 100A/RS/TF | 59 |
| 15S11/102IF | 93 | 37.5H1 | 89 | 60MB..... | 82 | 100T8/1SC | 97 |
| 15S11-F | 93 | 37-BP | 80 | 60PAR30/H/FL-120V | 51 | 105..... | 73 |
| 15T4C-130V | 60 | 40..... | 80 | 60PAR30/H/NFL-120V | 51 | 105-BP | 73 |
| 15T6C-120V | 60 | 40A15-130V | 58 | 60PAR30/H/SP-120V | 51 | 112..... | 73 |
| 15T6C-130V | 60, 88 | 40A15-230/250V | 58 | 60PAR30LN/H/FL-120V | 51 | 120MB..... | 74 |
| 15T6C-145V | 60, 88 | 40A15/F-130V | 58 | 60PAR30LN/H/NFL-120V | 51 | 120MB/6 | 74 |
| 15T7C-130V | 60, 88 | 40A15/F-230/250V | 58 | 60PAR30LN/H/SP-120V | 51 | 120MB-Neon..... | 74 |
| 15T7DC-130V | 60, 88 | 40A-130V | 58 | 60PAR38/H/FL-120V | 51 | 120PSB5 | 74 |
| 15T7N-130V | 60, 88 | 40A/CL-130V | 58 | 60PAR38/H/SP-120V | 51 | 120PSB5-Neon | 74 |
| 16ESB5..... | 75 | 40A/SW-130V | 58 | 60PAR38/H/WFL-120V | 51 | 120RB | 74 |
| 17..... | 75 | 40S11N | 60 | 60PSB5 | 82 | 120RC | 74 |
| 18..... | 75 | 40T6-1/2N-130V..... | 61, 89 | 60RB | 82 | 120RC-Neon | 74 |

| | | | | | | | |
|------------------|--------|-------------|----|-----------------|--------|-----------------|----|
| 123..... | 74 | 258..... | 78 | 558..... | 82 | 891-BP..... | 65 |
| 124..... | 74 | 259..... | 78 | 561..... | 82 | 893..... | 66 |
| 125T10P..... | 97 | 265..... | 78 | 561-BP..... | 82 | 893-BP..... | 66 |
| 130..... | 74 | 267..... | 78 | 562..... | 82 | 893CVSU-BP..... | 62 |
| 130MB..... | 74 | 293..... | 79 | 562-BP..... | 82 | 893SW-BP..... | 66 |
| 131..... | 74 | 293-BP..... | 79 | 563..... | 82 | 894..... | 66 |
| 147..... | 75 | 301..... | 79 | 564..... | 82 | 894-BP..... | 66 |
| 150A/RS..... | 59 | 303..... | 79 | 577..... | 82 | 894CVSU-BP..... | 62 |
| 150A/RS/TF..... | 59 | 304..... | 79 | 577-BP..... | 82 | 894SW-BP..... | 66 |
| 150BT15/H/W..... | 51 | 306..... | 79 | 578..... | 82 | 895..... | 84 |
| 150P25/10..... | 95 | 307..... | 79 | 578-BP..... | 82 | 896..... | 66 |
| 150T10/H/F..... | 92, 97 | 308..... | 79 | 579..... | 82 | 896-BP..... | 66 |
| 155MB..... | 75 | 311..... | 79 | 579-BP..... | 82 | 896CVSU-BP..... | 62 |
| 155PSB5..... | 75 | 312..... | 79 | 585..... | 82 | 896SW-BP..... | 66 |
| 158..... | 75 | 313..... | 79 | 605..... | 82 | 898..... | 66 |
| 158-BP..... | 75 | 313-BP..... | 79 | 623..... | 82 | 898-BP..... | 66 |
| 159..... | 75 | 313-R..... | 79 | 624..... | 82 | 899..... | 66 |
| 161..... | 75 | 315..... | 79 | 625J..... | 68 | 899-BP..... | 66 |
| 161-BP..... | 75 | 327..... | 79 | 631..... | 82 | 899CVSU-BP..... | 62 |
| 168..... | 75 | 328..... | 79 | 631-BP..... | 82 | 901..... | 87 |
| 168-BP..... | 75 | 330..... | 79 | 635B..... | 68 | 901A..... | 87 |
| 168LL..... | 75 | 334..... | 79 | 635J..... | 68 | 901B..... | 87 |
| 168LL-BP..... | 75 | 335..... | 79 | 655..... | 83 | 901-BP..... | 87 |
| 168NA..... | 75 | 336..... | 80 | 656..... | 83 | 901G..... | 87 |
| 168NA-BP..... | 75 | 337..... | 80 | 657..... | 83 | 901R..... | 87 |
| 192..... | 76 | 338..... | 80 | 658..... | 83 | 904..... | 84 |
| 192-BP..... | 76 | 342..... | 80 | 658-BP..... | 83 | 904-BP..... | 84 |
| 193..... | 76 | 344..... | 80 | 660B..... | 68 | 906..... | 84 |
| 194..... | 76 | 345..... | 80 | 680..... | 83 | 906A..... | 84 |
| 194A..... | 76 | 356..... | 80 | 683..... | 83 | 906B..... | 84 |
| 194A-BP..... | 76 | 359..... | 80 | 685..... | 83 | 906-BP..... | 84 |
| 194B..... | 76 | 363..... | 80 | 715..... | 83 | 906G..... | 84 |
| 194B-BP..... | 76 | 367..... | 80 | 718..... | 83 | 906P..... | 84 |
| 194-BP..... | 76 | 370..... | 80 | 755..... | 84 | 906R..... | 84 |
| 194G..... | 76 | 373..... | 80 | 755-BP..... | 84 | 906Y..... | 84 |
| 194G-BP..... | 76 | 375..... | 80 | 756..... | 84 | 908..... | 84 |
| 194LL..... | 76 | 376..... | 80 | 757..... | 84 | 909..... | 84 |
| 194LL-BP..... | 76 | 377..... | 80 | 757-BP..... | 84 | 912..... | 85 |
| 194NA..... | 76 | 378..... | 80 | 778..... | 88, 94 | 912-BP..... | 85 |
| 194NA-BP..... | 76 | 379..... | 80 | 787..... | 88, 93 | 912LL..... | 85 |
| 194R..... | 76 | 380..... | 80 | 788..... | 88, 94 | 914..... | 85 |
| 194R-BP..... | 76 | 381..... | 80 | 789..... | 88, 93 | 915..... | 85 |
| 198..... | 77 | 382..... | 80 | 795..... | 89 | 916..... | 85 |
| 198-BP..... | 77 | 385..... | 80 | 795X..... | 89 | 916-BP..... | 85 |
| 198LL..... | 77 | 386..... | 80 | 796..... | 89 | 916NA..... | 85 |
| 199..... | 77 | 387..... | 80 | 797..... | 89 | 916NA-BP..... | 85 |
| 200..... | 77 | 388..... | 80 | 862..... | 65 | 917..... | 85 |
| 210..... | 77 | 394..... | 80 | 880..... | 65 | 918..... | 88 |
| 211-2..... | 77 | 398..... | 80 | 880-BP..... | 65 | 918A..... | 88 |
| 211-2B..... | 77 | 399..... | 80 | 880CVSU-BP..... | 62 | 918B..... | 88 |
| 211-2B-BP..... | 77 | 400..... | 80 | 880SW-BP..... | 65 | 918-BP..... | 88 |
| 211-2-BP..... | 77 | 407..... | 80 | 881..... | 65 | 918G..... | 88 |
| 211-2/F..... | 77 | 425..... | 81 | 881-BP..... | 65 | 918R..... | 88 |
| 211-2/F-BP..... | 77 | 428..... | 81 | 881CVSU-BP..... | 62 | 920..... | 85 |
| 211-2R-BP..... | 77 | 432..... | 81 | 881SW-BP..... | 65 | 921..... | 85 |
| 212-2..... | 77 | 455..... | 81 | 882..... | 65, 87 | 921-BP..... | 85 |
| 212-2-BP..... | 77 | 456..... | 81 | 882-BP..... | 65 | 921-FR..... | 85 |
| 214-2..... | 77 | 464..... | 81 | 885..... | 66 | 921LL..... | 85 |
| 219..... | 77 | 502..... | 81 | 885-BP..... | 66 | 921X..... | 85 |
| 222..... | 77 | 502-BP..... | 81 | 885CVSU-BP..... | 62 | 922..... | 85 |
| 222-BP..... | 77 | 503..... | 81 | 885SW-BP..... | 66 | 922-BP..... | 85 |
| 233..... | 77 | 509K..... | 81 | 886..... | 66 | 923..... | 88 |
| 238..... | 78 | 555..... | 82 | 886-BP..... | 66 | 923-BP..... | 88 |
| 239..... | 78 | 555-A..... | 82 | 889..... | 65 | 923G..... | 88 |
| 243..... | 78 | 555-B..... | 82 | 889-BP..... | 65 | 923R..... | 88 |
| 245..... | 78 | 555-G..... | 82 | 889CVSU-BP..... | 62 | 927..... | 85 |
| 250T10/H/F..... | 92, 98 | 555-P..... | 82 | 890..... | 65 | 928..... | 85 |
| 251..... | 78 | 555-R..... | 82 | 890-BP..... | 65 | 939..... | 85 |
| 257..... | 78 | 555-Y..... | 82 | 891..... | 65, 88 | 949..... | 85 |

| | | | | | | | |
|----------------------|--------|------------------|--------|---------------|----|------------------|----|
| 957..... | 85 | 1156A-BP..... | 73 | 1493..... | 88 | 2057A..... | 77 |
| 967..... | 85 | 1156B..... | 73 | 1495..... | 75 | 2057A-BP..... | 77 |
| 01000..... | 66 | 1156-BP..... | 73 | 1507..... | 95 | 2057-BP..... | 77 |
| 1003..... | 66, 73 | 1156DC..... | 73 | 1524X..... | 75 | 2057LL..... | 77 |
| 1003-BP..... | 66, 73 | 1156G..... | 73 | 1591..... | 75 | 2057LL-BP..... | 77 |
| 1003LL-BP..... | 73 | 1156LL..... | 73 | 1619..... | 75 | 2057NA..... | 77 |
| 1004..... | 66, 73 | 1156LL-BP..... | 73 | 1630..... | 94 | 2057NA-BP..... | 77 |
| 1004-BP..... | 66, 73 | 1156NA..... | 73 | 1631X..... | 94 | 2057NALL..... | 77 |
| 01005..... | 66 | 1156NA-BP..... | 73 | 1634..... | 94 | 2057NALL-BP..... | 77 |
| 01005-BP..... | 66 | 1156R..... | 73 | 1638..... | 75 | 2058U..... | 77 |
| 01006..... | 66 | 1157..... | 73 | 1649..... | 94 | 2102..... | 77 |
| 01007..... | 66 | 1157A..... | 73 | 1651..... | 75 | 2114..... | 77 |
| 01007-Blue..... | 66 | 1157A-BP..... | 74 | 1662..... | 75 | 2162..... | 77 |
| 01007-BP..... | 66 | 1157-BP..... | 73 | 1680..... | 75 | 2174..... | 77 |
| 01008..... | 66 | 1157LL..... | 74 | 1683..... | 75 | 2176..... | 77 |
| 01008-BP..... | 66 | 1157LL-BP..... | 74 | 1691..... | 75 | 2181..... | 77 |
| 01009..... | 67 | 1157NA..... | 74 | 1692..... | 75 | 2182..... | 77 |
| 01009-Blue..... | 67 | 1157NA-BP..... | 74 | 1768..... | 75 | 2185..... | 77 |
| 01009-Blue-BP..... | 67 | 1157NALL-BP..... | 74 | 1769..... | 75 | 2187..... | 77 |
| 01009-BP..... | 67 | 1158..... | 74 | 1775..... | 75 | 2200..... | 77 |
| 01010..... | 67 | 1158-BP..... | 74 | 01800..... | 93 | 2232..... | 77 |
| 01015..... | 67 | 1176..... | 74 | 1804..... | 75 | 2233..... | 77 |
| 01015-BP..... | 67 | 1176-BP..... | 74 | 1810..... | 75 | 2357..... | 77 |
| 1016..... | 73 | 1178..... | 74 | 1813..... | 75 | 2357A..... | 78 |
| 1016-BP..... | 73 | 1195..... | 74 | 1815..... | 75 | 2357A-BP..... | 78 |
| 01019..... | 67 | 1196..... | 74 | 1815-BP..... | 75 | 2357-BP..... | 78 |
| 01019-BP..... | 67 | 1203..... | 74 | 1816..... | 75 | 2357LL-BP..... | 78 |
| 01021..... | 67 | 1204..... | 74 | 1816-BP..... | 75 | 2357NA..... | 78 |
| 01021-BP..... | 67 | 1210X..... | 74 | 1818..... | 76 | 2357NA-BP..... | 78 |
| 01023..... | 66 | 1211X..... | 74 | 1819..... | 76 | 2396..... | 78 |
| 01027..... | 66 | 1224..... | 74 | 1820..... | 76 | 2396-BP..... | 78 |
| 1028.09.527-501..... | 87 | 1224K..... | 74 | 1820-BP..... | 76 | 2397..... | 78 |
| 01031..... | 66 | 1228..... | 74 | 1820BTS..... | 76 | 2397-BP..... | 78 |
| 01031-BP..... | 66 | 1236X..... | 74 | 1820R..... | 76 | 2410X-1..... | 78 |
| 1034..... | 73 | 1250X..... | 74 | 1821..... | 76 | 2410X-2..... | 78 |
| 1034-BP..... | 73 | 1250X-2..... | 74 | 1822..... | 76 | 2450X..... | 78 |
| 1047..... | 73 | 1250X-5..... | 74 | 1828..... | 76 | 2470X..... | 78 |
| 1062..... | 73 | 1251..... | 74 | 1829..... | 76 | 2475X-1..... | 78 |
| 1073..... | 73 | 1252..... | 74 | 1829-BP..... | 76 | 02500..... | 93 |
| 1073-BP..... | 73 | 1295..... | 74 | 1835..... | 76 | 2504..... | 89 |
| 1076..... | 73 | 1295NA..... | 74 | 1843..... | 76 | 2721..... | 78 |
| 1076-BP..... | 73 | 1295NA-BP..... | 74 | 1847..... | 76 | 2721-BP..... | 78 |
| 1093..... | 73 | 1309..... | 74 | 1850..... | 76 | 2721MF..... | 78 |
| 1096..... | 94 | 1383..... | 74 | 1864..... | 76 | 2721MF-BP..... | 78 |
| 1096X..... | 94 | 1383TF..... | 74 | 1866..... | 76 | 2723..... | 78 |
| 1105..... | 73 | 1385..... | 74 | 1869..... | 76 | 2723-BP..... | 78 |
| 1129..... | 73 | 1408..... | 74 | 1873..... | 76 | 2741..... | 78 |
| 1129-BP..... | 73 | 1414..... | 74 | 1873-BP..... | 76 | 2741MF..... | 78 |
| 1130..... | 73 | 1416..... | 75 | 1876..... | 76 | 2821..... | 78 |
| 1133..... | 73 | 1434..... | 75 | 1888..... | 76 | 2821-BP..... | 78 |
| 1134..... | 73 | 1437..... | 75 | 1889..... | 76 | 2825..... | 87 |
| 1139IF..... | 73 | 1440X..... | 75 | 1889-BP..... | 76 | 2825-BP..... | 87 |
| 1141..... | 73 | 1445..... | 75 | 1891..... | 76 | 2827..... | 78 |
| 1141-BP..... | 73 | 1445-BP..... | 75 | 1891-BP..... | 76 | 2827-BP..... | 78 |
| 1141IF..... | 73 | 1446..... | 75 | 1892..... | 76 | 2841..... | 78 |
| 1141LL..... | 73 | 1447..... | 75 | 1892-BP..... | 76 | 2860X..... | 79 |
| 1141LL-BP..... | 73 | 1449..... | 75 | 1893..... | 76 | 03000..... | 93 |
| 1142..... | 73 | 1449-BP..... | 75 | 1893-BP..... | 76 | 3047K..... | 79 |
| 1142-BP..... | 73 | 1450..... | 75 | 1895..... | 76 | 3047K-BP..... | 79 |
| 1143..... | 73 | 1450X..... | 75 | 1895A..... | 76 | 3057..... | 79 |
| 1143IF..... | 73 | 1460..... | 94 | 1895A-BP..... | 76 | 3057A..... | 79 |
| 1144..... | 73 | 1460X..... | 94 | 1895B..... | 76 | 3057A-BP..... | 79 |
| 1152..... | 73 | 1464..... | 75 | 1895B-BP..... | 76 | 3057-BP..... | 79 |
| 1154..... | 73 | 1468X..... | 94 | 1895-BP..... | 76 | 3057K..... | 79 |
| 1154-BP..... | 73 | 1477..... | 75 | 1895G..... | 76 | 3057K-BP..... | 79 |
| 1155..... | 73 | 1480..... | 87 | 1895R..... | 76 | 3057NA..... | 79 |
| 1155-BP..... | 73 | 1487..... | 75 | 1906..... | 76 | 3057NA-BP..... | 79 |
| 1156..... | 73 | 1489..... | 88, 94 | 2040-BP..... | 77 | 03100..... | 93 |
| 1156A..... | 73 | 1490..... | 75 | 2057..... | 77 | 3155..... | 79 |

| | | | | | | | |
|-----------------------|----|------------------|--------|----------------|--------|---------------------|----|
| 3155-BP..... | 79 | 4436..... | 71 | 06300..... | 94 | 8013..... | 93 |
| 3155K..... | 79 | 4446..... | 71 | 6361-BP..... | 69, 89 | 8014..... | 93 |
| 3156..... | 79 | 4461..... | 71 | 6365..... | 69 | 8017..... | 94 |
| 3156A..... | 79 | 4478..... | 71 | 6365-BP..... | 69, 89 | 8018..... | 94 |
| 3156-BP..... | 79 | 4502..... | 71 | 6411..... | 82 | 8022..... | 95 |
| 3156K..... | 79 | 4505..... | 71 | 6411-BP..... | 82 | 8100..... | 94 |
| 3156K-BP..... | 79 | 4509..... | 71 | 6418..... | 87 | 8111..... | 84 |
| 3157..... | 79 | 4510..... | 71 | 6418-BP..... | 87 | 08200..... | 93 |
| 3157A..... | 79 | 4511..... | 71 | 06500..... | 93 | 8362..... | 84 |
| 3157A-BP..... | 79 | 4515..... | 71 | 6610F..... | 83 | 8610..... | 84 |
| 3157-BP..... | 79 | 4537..... | 72 | 6612F..... | 83 | 8627..... | 84 |
| 3157K..... | 79 | 4543..... | 72 | 6614F..... | 83 | 8640..... | 84 |
| 3157K-BP..... | 79 | 4545..... | 72 | 6614F-BP..... | 83 | 8918..... | 84 |
| 3157NA..... | 79 | 4546..... | 71 | 6615F..... | 83 | 9003..... | 65 |
| 3157NA-BP..... | 79 | 4570..... | 72 | 6833..... | 83 | 9003-BP..... | 65 |
| 3357..... | 79 | 4571..... | 72 | 6838..... | 83 | 9003/H4CVSU2..... | 63 |
| 3357A..... | 79 | 4578..... | 71 | 6839..... | 83 | 9003/H4CVSU-BP..... | 63 |
| 3357-BP..... | 79 | 4579..... | 72 | 6848..... | 83 | 9003/H4CVXL2..... | 63 |
| 3357NA..... | 79 | 4581..... | 72 | 7010..... | 88 | 9003/H4CVXL-BP..... | 63 |
| 3357NA-BP..... | 80 | 4589..... | 71 | 7012..... | 88 | 9003/H4PVP2..... | 64 |
| 3456K..... | 80 | 4626..... | 72 | 7014..... | 89 | 9003/H4PVP-BP..... | 64 |
| 3457/3357..... | 80 | 4636..... | 71 | 7219..... | 83 | 9004..... | 65 |
| 3457/3357-BP..... | 80 | 4651..... | 71 | 7225..... | 89 | 9004-BP..... | 65 |
| 3457A..... | 80 | 4652..... | 72 | 7225-BP..... | 89 | 9004CVSU2..... | 63 |
| 3457K/3357K..... | 80 | 4700..... | 72 | 7327..... | 83 | 9004CVSU-BP..... | 63 |
| 3457K/3357K-BP..... | 80 | 4745..... | 67 | 7328..... | 83 | 9004CVXL2..... | 63 |
| 3457NA/3357NA..... | 80 | 4745-BP..... | 69, 89 | 7330..... | 83 | 9004CVXL-BP..... | 63 |
| 3457NA/3357NA-BP..... | 80 | 4880..... | 71 | 7333..... | 83 | 9004HW..... | 65 |
| 3496..... | 80 | 04900..... | 93 | 7349..... | 83 | 9004LL..... | 65 |
| 3496-BP..... | 80 | 5007..... | 81 | 7362..... | 83 | 9004LL-BP..... | 65 |
| 3497..... | 80 | 5007-BP..... | 81 | 7371..... | 83 | 9004PVP2..... | 64 |
| 3497-BP..... | 80 | 5008..... | 88 | 7373..... | 83 | 9004PVP-BP..... | 64 |
| 03600..... | 93 | 5008-BP..... | 88 | 7374..... | 83 | 9005..... | 65 |
| 3652..... | 80 | 5200..... | 89 | 7377..... | 83 | 9005-BP..... | 65 |
| 3652-BP..... | 80 | 5201..... | 88 | 7380..... | 83 | 9005CVSU2..... | 63 |
| 3757NAK..... | 80 | 5202..... | 89 | 7381..... | 83 | 9005CVSU-BP..... | 63 |
| 3757NAK-BP..... | 80 | 5702NAK..... | 82 | 7382..... | 83 | 9005CVXL2..... | 63 |
| 3893..... | 87 | 5702NAK-BP..... | 82 | 7387..... | 83 | 9005CVXL-BP..... | 63 |
| 3893-BP..... | 87 | 6014..... | 72 | 7400..... | 71 | 9005PVP2..... | 64 |
| 3898..... | 80 | 6015..... | 72 | 7440..... | 83 | 9005PVP-BP..... | 64 |
| 03900..... | 93 | 6022..... | 82 | 7440-BP..... | 83 | 9005XS..... | 65 |
| 4007..... | 72 | 6052..... | 72 | 7440NA..... | 83 | 9005XS-BP..... | 65 |
| 4044..... | 71 | 6235B..... | 69 | 7440NA-BP..... | 83 | 9005XSCVSU2..... | 63 |
| 4049..... | 72 | 6235B-BP..... | 69 | 7441..... | 83 | 9005XSCVSU-BP..... | 63 |
| 4057K..... | 80 | 6235J..... | 69 | 7441-BP..... | 83 | 9005XSLL..... | 65 |
| 4057K-BP..... | 80 | 6235J-BP..... | 69 | 7443..... | 83 | 9005XSPVP2..... | 64 |
| 04100..... | 94 | 6235Y..... | 69 | 7443-BP..... | 83 | 9005XSPVP-BP..... | 64 |
| 4114K..... | 81 | 6235Y-BP..... | 69 | 7444NA..... | 83 | 9006..... | 64 |
| 4114K-BP..... | 81 | 6245B..... | 69 | 7444NA-BP..... | 83 | 9006-BP..... | 64 |
| 4157K..... | 81 | 6245BA..... | 69 | 7506..... | 88 | 9006CVSU2..... | 62 |
| 4157K-BP..... | 81 | 6245BA-BP..... | 69 | 7506-BP..... | 88 | 9006CVSU-BP..... | 62 |
| 4157NAK..... | 81 | 6245B-BP..... | 69 | 7507NA..... | 84 | 9006CVXL2..... | 63 |
| 4157NAK-BP..... | 81 | 6245J-BP..... | 69 | 7507NA-BP..... | 84 | 9006CVXL-BP..... | 63 |
| 04200..... | 95 | 6245Y-BP..... | 69 | 7511..... | 84 | 9006HW..... | 65 |
| 4340..... | 71 | 6253..... | 68, 87 | 7528..... | 89 | 9006LL..... | 64 |
| 4350..... | 71 | 6255BAH-BP..... | 69 | 7528-BP..... | 89 | 9006LL-BP..... | 64 |
| 4405..... | 71 | 6255BAHP-BP..... | 69 | 7537..... | 84 | 9006PVP2..... | 64 |
| 4406..... | 71 | 6260BA..... | 69 | 7613..... | 71 | 9006PVP-BP..... | 64 |
| 4411..... | 71 | 6260BA-BP..... | 69 | 7613-1..... | 71 | 9006XS..... | 65 |
| 4412..... | 71 | 6260B-BP..... | 69 | 7632..... | 84 | 9006XS-BP..... | 65 |
| 4412A..... | 71 | 6260HD-BP..... | 69 | 7646..... | 84 | 9006XSCVSU2..... | 62 |
| 4413..... | 71 | 6260HP-BP..... | 69 | 7672-1..... | 71 | 9006XSCVSU-BP..... | 62 |
| 4414..... | 71 | 6260J..... | 69 | 7683..... | 84 | 9006XSLL..... | 65 |
| 4415..... | 71 | 6260J-BP..... | 69 | 7714..... | 84 | 9006XSLL-BP..... | 65 |
| 4415A..... | 71 | 6260S..... | 69 | 7715..... | 84 | 9006XSPVP2..... | 64 |
| 4416..... | 71 | 6260SA-BP..... | 69 | 07800..... | 93 | 9006XSPVP-BP..... | 64 |
| 4416R..... | 71 | 6260S-BP..... | 69 | 7839..... | 84 | 9007..... | 65 |
| 4419..... | 71 | 6263-BP..... | 69 | 7876..... | 84 | 9007-BP..... | 65 |
| 4435..... | 71 | 6265-BP..... | 69 | 8001..... | 94 | 9007CVSU2..... | 63 |

| | | | | | | | |
|------------------|--------|----------------|--------|----------------------------------|--------|-----------------------------------|----|
| 9007CVSU-BP..... | 63 | 35014..... | 57 | A-1262..... | 68 | C0820-BR-120W-50K-N27-BR-P-U.... | 9 |
| 9007CVXL2..... | 63 | 41304..... | 93 | A-1272..... | 68 | C0820-BR-120W-50K-N27-BR-TL-U.... | 9 |
| 9007CVXL-BP..... | 63 | 41306..... | 94 | A-1272-BP..... | 68, 87 | C0820-BR-120W-50K-N31-BR-N-U.... | 9 |
| 9007HW..... | 65 | 41308..... | 93 | A-3598H..... | 68 | C0820-BR-120W-50K-N34-BR-N-U.... | 9 |
| 9007LL..... | 65 | 41310..... | 93 | A-3598H-BP..... | 68, 89 | C0820-BR-120W-50K-N34-BR-P-U.... | 9 |
| 9007LL-BP..... | 65 | 41312..... | 95 | A-3603..... | 68 | C0820-BR-160W-50K-N18-BR-N-U.... | 9 |
| 9007PVP2..... | 64 | 41314..... | 93 | A-3603-BP..... | 69, 89 | C0820-BR-160W-50K-N18-BR-TL-U.. | 9 |
| 9007PVP-BP..... | 64 | 41316..... | 93 | A-3625..... | 69 | C0820-BR-160W-50K-N27-W-N-U.... | 9 |
| 9008..... | 65, 68 | 41318..... | 94 | A-3625-BP..... | 69, 89 | C0820-BR-160W-50K-N34-BR-P-U.... | 9 |
| 9008-BP..... | 65 | 41320..... | 93 | A-4513..... | 68 | C0820-BR-200W-50K-N27-BR-TL-U.. | 9 |
| 9008CVSU2..... | 63 | 41324..... | 93 | A-4513-BP..... | 68, 88 | C0820-BR-240W-50K-N18-BR-N-U.... | 9 |
| 9008CVSU-BP..... | 63 | 41326..... | 95 | A-4527..... | 68 | C0820-BR-240W-50K-N18-S-N-U..... | 9 |
| 9008CVXL2..... | 63 | 41328..... | 94 | A-4527-BP..... | 68, 89 | C0820-BR-240W-50K-N18-W-N-U.... | 9 |
| 9008CVXL-BP..... | 63 | 41332..... | 95 | A-4813..... | 68 | C0820-BR-240W-50K-N27-BR-N-U.... | 9 |
| 9008PVP2..... | 64 | 41334..... | 94 | A-4813-BP..... | 68, 89 | C0820-BR-240W-50K-N27-W-N-N.... | 9 |
| 9008PVP-BP..... | 64 | 41336..... | 93 | A-4829-BP..... | 68, 89 | C0820-BR-240W-50K-N31-BR-N-U.... | 9 |
| 9011..... | 65 | 41338..... | 93 | A-5659..... | 69 | C0820-BR-240W-50K-N31-W-N-U.... | 9 |
| 9012LL..... | 65 | 41340..... | 94 | A-5659-BP..... | 69, 89 | C0820-BR-240W-50K-N34-BL-N-U.... | 9 |
| 9040..... | 64, 67 | 41344..... | 94 | A-7025-BP..... | 69 | C0820-CR-240W-50K-N18-W-N-U.... | 8 |
| 9040-BP..... | 64, 67 | 41346..... | 94 | B1-010-28..... | 95 | C0820-DR-120W-50K-N18-BR-N-U.... | 9 |
| 9045..... | 64 | 41348..... | 94 | B1A..... | 88 | C0820-DR-160W-50K-N27-BR-N-U.... | 9 |
| 9140..... | 64 | 41350..... | 94 | B2A..... | 88 | C0820-DR-160W-50K-N27-BR-TL-U.. | 9 |
| 9155..... | 65, 67 | 41352..... | 93 | B5-011-32..... | 95 | C0820-DR-160W-50K-N27-W-N-U.... | 9 |
| 11143..... | 94 | 41354..... | 93 | B7A..... | 85 | C0820-DR-F-50W-50K-N18-BR-N-N.. | 9 |
| 16073..... | 95 | 41358..... | 95 | BAB..... | 52 | C0820-DR-F-90W-50K-N18-BR-N-N.. | 9 |
| 16120X..... | 75 | 41360..... | 94 | BAB-BLACK..... | 52 | C0820-DR-F-240W-40K-N27-W-N-N.. | 9 |
| 17002..... | 56 | 41364..... | 93 | BAB-FG..... | 52 | C0820-FL-30W-40K-N31-BL-N-N.... | 11 |
| 17004..... | 56 | 41366..... | 95 | BAB-FG-GU10-120V..... | 52, 53 | C0820-FL-30W-40K-N31-BL-P-N.... | 11 |
| 17006..... | 56 | 41368..... | 94 | BAB-SILVER..... | 52 | C0820-FL-30W-40K-N31-BR-N-N.... | 11 |
| 17008..... | 56 | 41374..... | 93 | BBA..... | 92, 98 | C0820-FL-30W-40K-N31-BR-P-N.... | 11 |
| 17010..... | 56 | 41376..... | 95 | BBA-LN..... | 92, 98 | C0820-FL-30W-40K-N31-S-N-N.... | 11 |
| 17012..... | 56 | 41382..... | 94 | BCA..... | 92, 98 | C0820-FL-30W-40K-N31-S-P-N.... | 11 |
| 17014..... | 56 | 42000..... | 81 | BCK..... | 99 | C0820-FL-30W-40K-N31-W-N-N.... | 11 |
| 17016..... | 56 | 42002..... | 81 | BFE..... | 100 | C0820-FL-30W-40K-N31-W-P-N.... | 11 |
| 17018..... | 56 | 42003..... | 81 | BFK/BFL..... | 100 | C0820-FL-30W-50K-N31-BL-N-N.... | 11 |
| 17022..... | 56 | 42005..... | 81 | BFM..... | 94 | C0820-FL-30W-50K-N31-BL-P-N.... | 11 |
| 17024..... | 56 | 42006..... | 81 | BKV..... | 97 | C0820-FL-30W-50K-N31-BR-N-N.... | 11 |
| 17026..... | 56 | 44250..... | 72 | BLC..... | 97 | C0820-FL-30W-50K-N31-BR-P-N.... | 11 |
| 17028..... | 56 | 45675..... | 81 | BLR..... | 97 | C0820-FL-30W-50K-N31-S-N-N.... | 11 |
| 17030..... | 56 | 45685..... | 81 | BNF..... | 97 | C0820-FL-30W-50K-N31-S-P-N.... | 11 |
| 17032..... | 56 | 48220-BP..... | 67 | BRH..... | 101 | C0820-FL-30W-50K-N31-W-N-N.... | 11 |
| 17034..... | 56 | 49407..... | 52 | BRL..... | 97 | C0820-FL-30W-50K-N31-W-P-N.... | 11 |
| 17040..... | 56 | 49408..... | 52 | BTG..... | 101 | C0820-FL-50W-40K-N31-BL-N-N.... | 11 |
| 17042..... | 57 | 64111..... | 82 | BTL..... | 99 | C0820-FL-50W-40K-N31-BL-P-N.... | 11 |
| 17046..... | 57 | 64111-BP..... | 82 | BTN..... | 100 | C0820-FL-50W-40K-N31-BR-N-N.... | 11 |
| 17048..... | 57 | 64260..... | 94 | BTP..... | 100 | C0820-FL-50W-40K-N31-BR-P-N.... | 11 |
| 17050..... | 57 | 64514..... | 98 | BTR..... | 101 | C0820-FL-50W-40K-N31-S-N-N.... | 11 |
| 17052..... | 57 | 71818..... | 95 | BVT..... | 101 | C0820-FL-50W-40K-N31-S-P-N.... | 11 |
| 18001..... | 57 | 76907..... | 94 | BVW..... | 101 | C0820-FL-50W-40K-N31-W-N-N.... | 11 |
| 18002..... | 57 | 77903..... | 94 | BVW..... | 101 | C0820-FL-50W-40K-N31-W-P-N.... | 11 |
| 18003..... | 57 | 77904..... | 94 | BWA..... | 101 | C0820-FL-50W-50K-N31-BL-N-N.... | 11 |
| 18004..... | 57 | 77910..... | 94 | BWF..... | 101 | C0820-FL-50W-50K-N31-BL-P-N.... | 11 |
| 18006..... | 57 | 56016164..... | 94 | BWN..... | 101 | C0820-FL-50W-50K-N31-BR-N-N.... | 11 |
| 18007..... | 57 | 56018566..... | 95 | BXE..... | 97 | C0820-FL-50W-50K-N31-BR-P-N.... | 11 |
| 18008..... | 57 | 56018769..... | 95 | BZW..... | 95 | C0820-FL-50W-50K-N31-S-N-N.... | 11 |
| 18009..... | 57 | A1-010-28..... | 95 | C2A..... | 88 | C0820-FL-50W-50K-N31-S-P-N.... | 11 |
| 18011..... | 57 | A1-420-10..... | 95 | C7A..... | 89 | C0820-FL-50W-50K-N31-W-N-N.... | 11 |
| 18012..... | 57 | A1-510-01..... | 95 | C9A..... | 88 | C0820-FL-50W-50K-N31-W-P-N.... | 11 |
| 18014..... | 57 | A1A..... | 89 | C0820-BR-50W-50K-N18-BR-N-N.... | 9 | C0820-FL-80W-40K-N31-BL-N-N.... | 12 |
| 35001..... | 57 | A1B..... | 89 | C0820-BR-50W-50K-N31-BR-N-U.... | 9 | C0820-FL-80W-40K-N31-BL-P-N.... | 12 |
| 35002..... | 57 | A1C..... | 88 | C0820-BR-70W-50K-N27-W-N-U.... | 9 | C0820-FL-80W-40K-N31-BR-N-N.... | 12 |
| 35003..... | 57 | A1H..... | 88 | C0820-BR-90W-50K-N18-BR-N-N.... | 9 | C0820-FL-80W-40K-N31-BR-P-N.... | 12 |
| 35004..... | 57 | A2B..... | 85 | C0820-BR-90W-50K-N18-W-N-U.... | 9 | C0820-FL-80W-40K-N31-S-N-N.... | 12 |
| 35006..... | 57 | A3C..... | 88 | C0820-BR-90W-50K-N27-BR-P-U.... | 9 | C0820-FL-80W-40K-N31-S-P-N.... | 12 |
| 35007..... | 57 | A9A..... | 89 | C0820-BR-90W-50K-N31-BR-N-N.... | 9 | C0820-FL-80W-40K-N31-W-N-N.... | 12 |
| 35008..... | 57 | A-62..... | 68, 87 | C0820-BR-90W-50K-N31-W-N-N.... | 9 | C0820-FL-80W-40K-N31-W-P-N.... | 12 |
| 35009..... | 57 | A-62-BP..... | 68, 87 | C0820-BR-120W-40K-N18-BR-N-U.... | 9 | C0820-FL-80W-50K-N31-BL-N-N.... | 12 |
| 35011..... | 57 | A-72..... | 68, 87 | C0820-BR-120W-50K-N18-BR-N-U.... | 9 | C0820-FL-80W-50K-N31-BL-P-N.... | 12 |
| 35012..... | 57 | A-72-BP..... | 68, 87 | C0820-BR-120W-50K-N27-BR-N-U.... | 9 | C0820-FL-80W-50K-N31-BR-N-N.... | 12 |

| | | | | | | | |
|-----------------------------|----|----------------------|-----|---------------|---------|----------|--------|
| C0820-WP-40W-50K-N19-W-P-N | 19 | CMP70/T6/942 | 45 | DT5/65 | 34 | ECT-LN | 93, 99 |
| C0820-WP-48W-40K-N19-BL-N-N | 19 | CMP70/TC/930 | 45 | DT7/27 | 34 | EFM | 97 |
| C0820-WP-48W-40K-N19-BL-P-N | 19 | CMP70/TD/930 | 45 | DT7/35 | 34 | EFN | 97 |
| C0820-WP-48W-40K-N19-BR-N-N | 19 | CMP70/TD/942 | 45 | DT7/41 | 34 | EFP | 97 |
| C0820-WP-48W-40K-N19-BR-P-N | 19 | CMP100/C/MP/3K | 45 | DT7/50 | 34 | EFR | 98 |
| C0820-WP-48W-40K-N19-S-N-N | 19 | CMP100/C/MP/4K | 45 | DT7/65 | 34 | EGE | 100 |
| C0820-WP-48W-40K-N19-S-P-N | 19 | CMP100/MP/3K | 45 | DT9/27 | 34 | EGF | 100 |
| C0820-WP-48W-40K-N19-W-N-N | 19 | CMP100/MP/4K | 45 | DT9/35 | 34 | EGG | 100 |
| C0820-WP-48W-50K-N19-W-P-N | 19 | CMP150/MP/3K | 45 | DT9/41 | 34 | EGJ | 101 |
| C0820-WP-48W-50K-N19-BL-N-N | 19 | CMP150/MP/4K | 45 | DT9/50 | 34 | EKG | 101 |
| C0820-WP-48W-50K-N19-BL-P-N | 19 | CMP150/T6/930 | 45 | DT9/65 | 34 | EGN | 100 |
| C0820-WP-48W-50K-N19-BR-N-N | 19 | CMP150/T6/942 | 45 | DT13/27 | 34 | EGR | 100 |
| C0820-WP-48W-50K-N19-BR-P-N | 19 | CMP-MR16/20W/NFL/830 | 45 | DT13/30 | 34 | EGT | 101 |
| C0820-WP-48W-50K-N19-S-N-N | 19 | CMP-MR16/20W/SP/830 | 45 | DT13/35 | 34 | EHA | 100 |
| C0820-WP-48W-50K-N19-S-P-N | 19 | CMP-MR16/39W/NFL/830 | 45 | DT13/41 | 34 | EHC/EHB | 100 |
| C0820-WP-48W-50K-N19-W-N-N | 19 | CMV/CMT | 99 | DT13/50 | 34 | EHD | 100 |
| C0820-WP-48W-50K-N19-W-P-N | 19 | CVSUKIT | 72 | DT13/65 | 34 | EHF | 100 |
| C0820-WP-60W-40K-N19-BL-N-N | 19 | CVX/CSV | 98 | DT18/30/RS | 34 | EHG | 100 |
| C0820-WP-60W-40K-N19-BL-P-N | 19 | CWZ | 101 | DT18/35/RS | 34 | EHJ | 98 |
| C0820-WP-60W-40K-N19-BR-N-N | 19 | CXK | 99 | DT18/41/RS | 35 | EHM | 99 |
| C0820-WP-60W-40K-N19-BR-P-N | 19 | CXL/CXR | 97 | DT18/50/RS | 35 | EHP | 99 |
| C0820-WP-60W-40K-N19-S-N-N | 19 | CXZ | 101 | DT24/30/RS | 35 | EHR | 99 |
| C0820-WP-60W-40K-N19-S-P-N | 19 | CYC | 99 | DT24/35/RS | 35 | EHT | 92, 98 |
| C0820-WP-60W-40K-N19-W-N-N | 19 | CYV | 101 | DT24/41/RS | 35 | EHZ | 99 |
| C0820-WP-60W-40K-N19-W-P-N | 19 | CZX/DAB | 99 | DT24/50/RS | 35 | EI-77Z | 94 |
| C0820-WP-60W-50K-N19-BL-N-N | 19 | D1R | 68 | DT24/65/RS | 35 | EI-722 | 94 |
| C0820-WP-60W-50K-N19-BL-P-N | 19 | D1S | 68 | DT36/30/RS | 35 | EI-737 | 94 |
| C0820-WP-60W-50K-N19-BR-N-N | 19 | D2R | 68 | DT36/35/RS | 35 | EI-738 | 94 |
| C0820-WP-60W-50K-N19-BR-P-N | 19 | D2S | 68 | DT36/41/RS | 35 | EI-886 | 94 |
| C0820-WP-60W-50K-N19-S-N-N | 19 | D3R | 68 | DT36/50/RS | 35 | EI-2201 | 94 |
| C0820-WP-60W-50K-N19-S-P-N | 19 | D3S | 68 | DT36/65/RS | 35 | EI-74000 | 95 |
| C0820-WP-60W-50K-N19-W-N-N | 19 | D4R | 68 | DT40/30/RS | 35 | EI-B153 | 94 |
| C0820-WP-60W-50K-N19-W-P-N | 19 | D4S | 68 | DT40/35/RS | 35 | EI-M102 | 95 |
| CAX | 95 | DAY/DAK | 99 | DT40/41/RS | 35 | EI-M103 | 95 |
| CAX-130V | 95 | DCH/DJA/DFP | 97 | DT40/50/RS | 35 | EJA | 98 |
| CAX-130V-HAL | 95 | DDJ/DZZ | 97 | DT40/65/RS | 35 | EJG | 100 |
| CBA | 99 | DDK | 97 | DT50/30/RS | 35 | EJL | 91, 98 |
| CBX/CBS | 97 | DDL | 98 | DT50/35/RS | 35 | EJM | 98 |
| CDD | 95 | DDM | 97 | DT50/41/RS | 35 | EJV | 91, 98 |
| CDJ | 97 | DDS | 97 | DT50/50/RS | 35 | EJY | 95, 97 |
| CDS/CDX | 97 | DE3021 | 85 | DT50/65/RS | 35 | EKB | 99 |
| CEA/CEB/CDK | 97 | DE3021-BP | 85 | DT55/30/RS | 35 | EKD | 100 |
| CEM | 97 | DE3022 | 85 | DT55/35/RS | 35 | EKE | 98 |
| CEW/CFC | 97 | DE3022-BP | 85 | DT55/41/RS | 35 | EKP/ENA | 97 |
| CHK | 97 | DE3175 | 85 | DT55/50/RS | 35 | EKZ | 97 |
| CLS/CLG | 99 | DE3175-BP | 85 | DT55/65/RS | 35 | EL-1B | 95 |
| CMP20/PAR20/FL | 44 | DE3423 | 85 | DTA | 101 | EL-2B | 93 |
| CMP20/PAR20/SP | 44 | DE3423-BP | 85 | DTJ | 101 | EL-3B | 93 |
| CMP20/PAR30LN/FL | 44 | DE3425 | 85 | DVS | 99 | EL-12B | 94 |
| CMP20/PAR30LN/SP | 44 | DE3425-BP | 85 | DVY | 100 | EL-38 | 94 |
| CMP20/TC/930 | 45 | DFN/DFC | 98 | DWT | 101 | ELB | 97 |
| CMP20/TM/930 | 45 | DJL | 98 | DXW | 101 | ELC | 91, 98 |
| CMP35/PAR20/FL | 44 | DLD/DFZ | 97 | DYH | 100 | ELC/5 | 98 |
| CMP35/PAR20/SP | 44 | DLG/DLS/DHX | 98 | DYS/DYV/BHC | 100 | ELC/5H | 98 |
| CMP35/PAR30LN/FL | 44 | DMX | 99 | DYS/DYV/BHC/5 | 100 | ELC/E | 91, 98 |
| CMP35/PAR30LN/FL/842 | 44 | DNF | 98 | DYY/EGH | 99 | ELD/EJN | 98 |
| CMP35/PAR30LN/SP | 44 | DNS/FMC | 99 | DZA | 97 | ELE | 97 |
| CMP35/T6/930 | 45 | DNW | 99 | DZE/FDS | 98 | ELH | 91, 99 |
| CMP35/T6/942 | 45 | DPT | 101 | E37 | 85 | ELH/5 | 99 |
| CMP35/TC/930 | 45 | DPW | 101 | E73 | 85 | EMD | 100 |
| CMP70/C/MP/3K | 45 | DPY | 101 | E85 | 85 | EMM/EKS | 98 |
| CMP70/C/MP/4K | 45 | DRA | 99 | E86 | 85 | ENG | 99 |
| CMP70/MP/3K | 45 | DRB/DRC | 101 | EAJ | 92, 101 | ENH | 91, 98 |
| CMP70/MP/4K | 45 | DRS | 101 | EBV | 93, 99 | ENL | 52 |
| CMP70/PAR30LN/FL | 44 | DRW | 101 | EBV-LN | 93, 99 | ENX | 99 |
| CMP70/PAR30LN/SP | 44 | DT5/27 | 34 | EBW | 93, 99 | ENX/5 | 99 |
| CMP70/PAR38/FL | 44 | DT5/35 | 34 | ECA | 92, 98 | ENZ | 97 |
| CMP70/PAR38/SP | 44 | DT5/41 | 34 | ECA-LN | 93, 98 | EPN | 97 |
| CMP70/T6/930 | 45 | DT5/50 | 34 | ECT | 93, 99 | EPT | 97 |

| | | | | | | | |
|-----------------------|---------|-------------------|--------|-----------------------|--------|-----------------------|--------|
| EPZ..... | 97 | EYK..... | 99 | F32T8/735K..... | 39 | FKW..... | 99 |
| ESA/FHD..... | 93 | EYP..... | 52 | F32T8/741K..... | 39 | FLK..... | 100 |
| ESB/FHE..... | 94 | EYP-FG..... | 52 | F32T8/741K-C..... | 41 | FLT..... | 97 |
| ESD..... | 91, 98 | EYR..... | 52 | F32T8/830/ES/25W..... | 40 | FLW..... | 99 |
| ESD250-SE-D..... | 90 | EYR-FG..... | 52 | F32T8/830K..... | 39 | FML18/65..... | 37 |
| ESD575/2-SE-D7.2..... | 90 | EYS..... | 52 | F32T8/830K/HL..... | 40, 41 | FML27/27..... | 37 |
| ESD575-SE-D..... | 90 | EYS-FG..... | 52 | F32T8/830K/XL..... | 41 | FML27/41..... | 37 |
| ESH..... | 97 | EYV..... | 100 | F32T8/835/ES/25W..... | 40 | FML27/65..... | 37 |
| ESI575-DE..... | 90 | EYW..... | 100 | F32T8/835K..... | 39 | FMT..... | 52 |
| ESI1200-DE..... | 90 | EYX..... | 100 | F32T8/835K/HL..... | 40, 41 | FMT-FG..... | 52 |
| ESJ..... | 91, 97 | EZE..... | 98 | F32T8/835K/U6..... | 42 | FMV..... | 52 |
| ESL..... | 92, 98 | F4T5/BL..... | 39 | F32T8/835K/XL..... | 41 | FMV-FG..... | 52 |
| ESM..... | 92, 98 | F4T5/BLB..... | 39 | F32T8/841/ES/25W..... | 40 | FMW..... | 52 |
| ESN..... | 92, 97 | F4T5/CW..... | 39 | F32T8/841K..... | 40 | FMW-BLACK..... | 52 |
| ESP..... | 92, 98 | F4T5/D..... | 39 | F32T8/841K-C..... | 41 | FMW-FG..... | 52 |
| ESR..... | 92, 97 | F6T5/BL..... | 39 | F32T8/841K/HL..... | 40, 41 | FMW-FG-GU10-130V..... | 52, 53 |
| ESR200-SE-HR..... | 90 | F6T5/BLB..... | 39 | F32T8/841K/U6..... | 42 | FMW-SILVER..... | 52 |
| ESR400-SE-HR..... | 90 | F6T5/CW..... | 39 | F32T8/841K/XL..... | 41 | FNC-FG..... | 53 |
| ESR575-SE-HR..... | 90 | F6T5/D..... | 39 | F32T8/850/ES/25W..... | 40 | FND-FG..... | 53 |
| ESR575-SE-NHR..... | 90 | F6T5/WW..... | 39 | F32T8/850K..... | 40 | FNE-FG..... | 53 |
| ESR600-DE-SA..... | 90 | F8T5/BL..... | 39 | F32T8/850K-C..... | 41 | FNF-FG..... | 53 |
| ESR600-SE-SA..... | 90 | F8T5/BLB..... | 39 | F32T8/850K/HL..... | 40, 41 | FNT..... | 98 |
| ESR800-SE-HR..... | 90 | F8T5/CW..... | 39 | F32T8/850K/U6..... | 42 | FNV..... | 53 |
| ESR1200-SE-HR..... | 90 | F8T5/D..... | 39 | F32T8/850K/XL..... | 40, 41 | FNW-FG..... | 53 |
| ESR1200-SE-NHR..... | 90 | F8T5/W..... | 39 | F32T8/865/ES/25W..... | 40 | FPA..... | 53 |
| ESS..... | 92, 98 | F8T5/WW..... | 39 | F32T8/865K..... | 40 | FPA-FG..... | 53 |
| ESX..... | 52 | F10T8/CW..... | 41 | F32T8/865K/HL..... | 40, 41 | FPB..... | 53 |
| ESX-FG..... | 52 | F13T5/CW..... | 39 | F32T8/865K/XL..... | 41 | FPB-FG..... | 53 |
| ESY..... | 98 | F13T5/D..... | 39 | F35T5/830..... | 38 | FPC..... | 53 |
| ETB..... | 92, 98 | F13T5/WW..... | 39 | F39T5/HO/835..... | 38 | FPC-FG..... | 53 |
| ETC..... | 92, 98 | F13T8/CW..... | 41 | F39T5/HO/841..... | 38 | FRA-FG..... | 52 |
| ETD..... | 92, 97 | F14T5/835..... | 38 | F49T5/HO/835..... | 38 | FRK..... | 100 |
| ETE..... | 92, 97 | F14T5/841..... | 38 | F49T5/HO/841..... | 38 | FS-2..... | 42 |
| ETF..... | 92, 98 | F14T5/865..... | 38 | F49T5/HO/850..... | 38 | FS-4..... | 42 |
| ETG..... | 92, 98 | F14T8/CW..... | 41 | F49T5/HO/865..... | 38 | FS-5..... | 42 |
| ETH..... | 92, 98 | F14T8/D..... | 41 | F54T5/HO/830..... | 38 | FSA..... | 53 |
| ETJ..... | 98 | F15T8/BL..... | 41 | F54T5/HO/835..... | 38 | FSB..... | 53 |
| EVA..... | 95 | F15T8/BLB..... | 41 | F54T5/HO/841..... | 38 | FSC..... | 53 |
| EVC/FGX..... | 98 | F15T8/CW..... | 41 | F54T5/HO/850..... | 39 | FSD..... | 53 |
| EVD..... | 99 | F15T8/D..... | 41 | F54T5/HO/865..... | 39 | FSE..... | 53 |
| EVR..... | 92, 100 | F15T8/W..... | 41 | FAD..... | 100 | FSF..... | 53 |
| EVW..... | 91, 98 | F15T8/WW..... | 41 | FAL..... | 91, 99 | FS-U-120V..... | 42 |
| EXN..... | 52 | F17T8/730K..... | 39 | FC8T9/CW..... | 41 | FTA..... | 52 |
| EXN-BLACK..... | 52 | F17T8/735K..... | 39 | FC8T9/D..... | 41 | FTB..... | 52 |
| EXN-FG..... | 52 | F17T8/741K..... | 39 | FC12T9/CW..... | 41 | FTB-FG..... | 52 |
| EXN-FG-24V..... | 52 | F17T8/830K..... | 39 | FC12T9/D..... | 42 | FTC..... | 52 |
| EXN-FG-GU10-130V..... | 53 | F17T8/835K..... | 39 | FC16T9/CW..... | 42 | FTC-FG..... | 52 |
| EXN-SILVER..... | 53 | F17T8/841K..... | 39 | FC16T9/D..... | 42 | FTD..... | 52 |
| EXR..... | 99 | F17T8/850K..... | 39 | FCB..... | 100 | FTD-FG..... | 52 |
| EXR/5..... | 99 | F21T5/835..... | 38 | FCL..... | 100 | FTE..... | 52 |
| EXT..... | 53 | F21T5/841..... | 38 | FCM..... | 101 | FTE-FG..... | 52 |
| EXT-FG..... | 53 | F24T5/HO/835..... | 38 | FCR..... | 95, 97 | FTF..... | 52 |
| EXT-FG-24V..... | 53 | F24T5/HO/841..... | 38 | FCS..... | 95, 98 | FTF-FG..... | 52 |
| EXV..... | 97 | F25T8/830K..... | 39, 40 | FCZ..... | 100 | FTH..... | 52 |
| EXY..... | 98 | F25T8/835K..... | 39, 40 | FDB..... | 101 | FTH-FG..... | 52 |
| EXZ..... | 53 | F25T8/841K..... | 39, 40 | FDN..... | 100 | FTK..... | 100 |
| EXZ-BLACK..... | 53 | F28T5/835..... | 38 | FDT..... | 97 | FXL..... | 99 |
| EXZ-FG..... | 53 | F28T5/841..... | 38 | FDV..... | 98 | FXL/5..... | 99 |
| EXZ-SILVER..... | 53 | F28T5/850..... | 38 | FEL..... | 101 | G4T5..... | 95 |
| EYA..... | 91, 98 | F28T5/865..... | 38 | FEP..... | 101 | G6T5..... | 95 |
| EYB..... | 99 | F28T8/830/ES..... | 40 | FEV..... | 98 | G8T5..... | 96 |
| EYB/5..... | 99 | F28T8/835/ES..... | 40 | FEY..... | 101 | G10T5/4P..... | 96 |
| EYC..... | 53 | F28T8/841/ES..... | 40 | FFN..... | 101 | G10T5L..... | 96 |
| EYC-FG..... | 53 | F28T8/850/ES..... | 40 | FFP..... | 101 | G10T8..... | 96 |
| EYF..... | 53 | F28T8/865/ES..... | 40 | FFR..... | 101 | G11T5..... | 96 |
| EYF-FG..... | 53 | F31T8/830/U..... | 42 | FFS..... | 101 | G14T5/4P..... | 96 |
| EYH/FKT..... | 98 | F31T8/835/U..... | 42 | FFT..... | 101 | G15T8..... | 96 |
| EYJ..... | 53 | F31T8/841/U..... | 42 | FHM..... | 101 | G16T5..... | 96 |
| EYJ-FG..... | 53 | F31T8/850/U..... | 42 | FHS..... | 99 | G20T5..... | 96 |

| | | | | | | | |
|----------------|--------|----------------------|---------|-----------------|---------|-----------------------------|----|
| G20T10 | 96 | H1155 | 67 | HPL575LL/115V | 91, 100 | JCR/M14V35W | 97 |
| G25T8 | 96 | H1155-BP | 67 | HPL575LL/120V | 91, 100 | JDR75/FL | 53 |
| G30T8 | 96 | H1155CVSU2 | 62 | HPL575LL/240V | 91, 100 | JDR75/MF | 53 |
| G36T5/4P | 96 | H1155CVSU-BP | 62 | HPL750/77V | 91, 101 | JDR75/SP | 53 |
| G36T5L | 96 | H1155CVXL2 | 63 | HPL750/115V | 91, 100 | JDR100/FL | 53 |
| G40T10 | 96 | H1155CVXL-BP | 63 | HPL750/120V | 91, 100 | JDR100/MF | 53 |
| G55T8 | 96 | H1155LL | 67 | HPL750/230V | 91, 100 | JDR130V50W | 53 |
| G64T5/4P | 96 | H1155LL-BP | 68 | HPL750/240V | 91, 100 | JF02XE | 86 |
| G64T5L | 96 | H1155PVP2 | 64 | HPL750LL/115V | 91, 101 | JF03XE | 86 |
| GBD | 54 | H1155PVP-BP | 64 | HPL750LL/120V | 91, 101 | JF07XE | 86 |
| GBE | 54 | H1156 | 67, 89 | HPL750LL/230V | 91, 101 | JF08XE | 86 |
| GBF | 54 | H1156-BP2 | 67, 89 | HPR36 | 85 | JF13XE | 86 |
| GBF-FR | 54 | H1157 | 68, 89 | HPR40 | 85 | JF14XE | 86 |
| GBJ | 54 | H1157-BP | 68 | HPR44 | 85 | JF14XE/F | 86 |
| GBK | 54 | H1253 | 67 | HPR50 | 85 | JF16XE | 86 |
| GCA | 98 | H1253-BP | 67 | HPR51 | 85 | JF260050XE | 86 |
| GDA | 100 | H4351 | 70 | HPR52 | 86 | K12 | 86 |
| GLA | 100 | H4352 | 70 | HPR53 | 86 | K15 | 86 |
| GLC | 100 | H4651 | 70 | HPR55 | 86 | K222 | 86 |
| GTL-2 | 95 | H4651CVXL | 63 | IR53PAR30/FL | 50 | KK10XE | 86 |
| GTL-3 | 93, 95 | H4656 | 70 | IR53PAR30LN/NFL | 50 | KO10XE | 86 |
| H3C | 66 | H4656CVXL | 70 | IR53PAR30LN/SP | 50 | KO10XE/F | 86 |
| H7/70W/24V | 67 | H4656PVP | 64, 70 | IR53PAR30LN/WFL | 50 | KO16XE | 86 |
| H11B | 68 | H4666 | 70 | IR53PAR30/NFL | 50 | KO16XE/F | 86 |
| H11B-BP | 68 | H4666CVXL | 70 | IR53PAR30/SP | 50 | KO20XE | 86 |
| H11BCVSU2 | 62 | H4666PVP | 71 | IR53PAR38/FL | 50 | KO20XE/F | 86 |
| H11BCVSU-BP | 62 | H4701 | 70 | IR71PAR38/FL | 50 | KO23XE | 86 |
| H11BPVP2 | 64 | H4703 | 70 | IR71PAR38/SP | 50 | KO23XE/F | 86 |
| H11BPVP-BP | 64 | H5001 | 70 | JC12V5W-FR | 55 | KPR2 | 86 |
| H21W | 85 | H5006 | 70 | JC12V20W | 55 | KPR2-BP | 86 |
| H33CD-400 | 49 | H6024 | 70 | JC12V20WH20 | 56 | KPR3 | 86 |
| H33GL-400/DX | 49 | H6024CVXL | 63 | JC12V30W | 55 | KPR4 | 86 |
| H37KB-250 | 49 | H6024PVP | 64 | JC12V30WH20 | 56 | KPR13 | 86 |
| H37KC-250/DX | 49 | H6054 | 70 | JC12V35WH20 | 56 | KPR102 | 86 |
| H38AV-100/DX | 49 | H6054CVXL | 70 | JC12V50WH20 | 56 | KPR103 | 86 |
| H38JA-100/DX | 49 | H6054HO/H6554 | 71 | JC12V75WH20 | 56 | KPR118 | 86 |
| H38MP-100/DX | 49 | H6054PVP | 64, 70 | JC12V100WH20 | 56 | KPR130 | 86 |
| H39KB-175 | 49 | H7100 | 67 | JC24V300W | 99 | LED-6-BA9S-W | 28 |
| H39KC-175/DX | 49 | H7100-BP | 67 | JCD6V10WH20 | 55 | LED-6-T1.75 WEDGE-W | 28 |
| H43AV-75/DX | 49 | H7100-Super White | 67 | JCD6V20WH20 | 55 | LED-6-T1.75 WEDGE-Y | 28 |
| H46DL-40/50/DX | 49 | H7100-SUPER WHITE-BP | 67 | JCD12V5WH20 | 55 | LED6WG25/827K-DIM-G4 | 22 |
| H1155CVSU2 | 63 | H7550 | 69 | JCD12V10WH20 | 55 | LED6WG25/830K-DIM-G4 | 22 |
| H1155CVSU-BP | 62 | H7600 | 69 | JCD12V20WH20 | 55 | LED6WG25/840K-DIM-G4 | 22 |
| H1155PVP2 | 64 | H7604 | 70 | JCD12V35WH20 | 55 | LED7WA19/240/827K-DIM-G4A | 21 |
| H1155PVP-BP | 64 | H7606 | 70 | JCD24V20WH20 | 55 | LED7WA19/240/827K-G4A | 21 |
| H355CVSU2 | 63 | H7609 | 70 | JCD130V20WG6.35 | 56 | LED7WA19/240/830K-DIM-G4A | 21 |
| H355CVSU-BP | 63 | H7610 | 70 | JCD130V20WG8 | 56 | LED7WA19/240/830K-G4A | 21 |
| H355PVP2 | 64 | H7614 | 70 | JCD130V25WG6.35 | 56 | LED7WA19/240/840K-DIM-G4A | 21 |
| H355PVP-BP | 64 | H7616 | 69 | JCD130V25WG9 | 56 | LED7WA19/240/840K-G4A | 21 |
| H755 | 67 | H7619 | 70 | JCD130V25WG9 | 56 | LED7WA19/240/850K-DIM-G4A | 21 |
| H755-BP | 67 | H7635 | 70 | JCD130V25WG9/F | 56 | LED7WGU10/20/830-DIM-G4 | 22 |
| H755CVSU2 | 63 | H7921-1 | 70 | JCD130V35WG6.35 | 56 | LED7WGU10/40/830-DIM-G4 | 22 |
| H755CVSU-BP | 63 | H7935-1 | 70 | JCD130V35WG8 | 56 | LED7WMR16/20/830-DIM-G4 | 22 |
| H755CVXL2 | 63 | H9405 | 70 | JCD130V40WG9 | 56 | LED7WMR16/40/830-DIM-G4 | 22 |
| H755CVXL-BP | 63 | H9406 | 70 | JCD130V40WG9/F | 56 | LED7WPAR20/FL/827K-DIM-G4A | 22 |
| H755LL | 67 | H9411 | 70 | JCD130V50WG6.35 | 56 | LED7WPAR20/FL/830K-DIM-G4A | 22 |
| H755LL-BP | 67 | H9414 | 70 | JCD130V50WG8 | 56 | LED7WPAR20/FL/840K-DIM-G4A | 22 |
| H755PVP2 | 64 | H9415 | 69 | JCD130V50WG9 | 56 | LED7WPAR20/NFL/827K-DIM-G4A | 22 |
| H755PVP-BP | 64 | H9420 | 70 | JCD130V50WG9/F | 56 | LED7WPAR20/NFL/830K-DIM-G4A | 22 |
| H835 | 67 | H9421 | 70 | JCD130V60WG9 | 56 | LED7WPAR20/NFL/840K-DIM-G4A | 22 |
| H835-BP | 67 | HM201 | 69 | JCD130V60WG9/F | 56 | LED9WT8F/24/835K-G4A | 23 |
| H965 | 68 | HM202 | 68 | JCD130V75WG6.35 | 56 | LED9WT8F/24/835K-G4D | 23 |
| H965-BP | 68 | HPL375/115V | 91, 99 | JCD130V75WG8 | 56 | LED9WT8F/24/840K-G4A | 23 |
| H1042 | 67 | HPL375LL/115V | 91, 99 | JCD130V75WG9 | 56 | LED9WT8F/24/840K-G4D | 23 |
| H1042-BP | 67 | HPL550/77V | 91, 100 | JCD130V75WG9/F | 56 | LED9WT8F/24/850K-G4A | 23 |
| H1042CVSU2 | 62 | HPL550LL/77V | 91, 100 | JCD130V100WG8 | 56 | LED9WT8F/24/850K-G4D | 23 |
| H1042CVSU-BP | 62 | HPL575/115V | 91, 100 | JCR120V150WB | 98 | LED10WA19/240/827K-DIM-G4A | 21 |
| H1042PVP2 | 64 | HPL575/120V | 91, 100 | JCR/M12V75W | 97 | LED10WA19/240/827K-G4A | 21 |
| H1042PVP-BP | 64 | HPL575/230V | 91, 100 | JCR/M12V100W | 97 | LED10WA19/240/830K-DIM-G4A | 21 |

| | | | | | | | |
|-----------------------------------|----|--------------------------------|--------|----------------------------------|----|-------------------------|--------|
| LED10WA19/240/830K-G4A..... | 21 | LED17WPAR38/NFL/827K-DIM-G4A.. | 23 | LEDP-8WPAR20/NFL/830-DIM..... | 25 | LU100/NC..... | 49 |
| LED10WA19/240/840K-DIM-G4A..... | 21 | LED17WPAR38/NFL/830K-DIM-G4A.. | 23 | LEDP-8WPAR20/NFL/841-DIM..... | 25 | LU150/55..... | 48 |
| LED10WA19/240/840K-G4A..... | 21 | LED17WPAR38/NFL/840K-DIM-G4A.. | 23 | LEDP-8WR20/827-DIM3..... | 24 | LU150/55/MED..... | 48 |
| LED10WA19/240/850K-DIM-G4A..... | 21 | LED18WT8F/48/835K-G4A..... | 23 | LEDP-8WR20/830-DIM3..... | 24 | LU150/55/NC..... | 49 |
| LED10WA19/300/827K-DIM-G4..... | 20 | LED18WT8F/48/835K-G4D..... | 23 | LEDP-8WR20/841-DIM3..... | 24 | LU150/100..... | 48 |
| LED10WA19/300/827K-GU24-DIM-G4.. | 20 | LED18WT8F/48/840K-G4A..... | 23 | LEDP-9T8/24/41K..... | 24 | LU200..... | 48 |
| LED10WA19/300/830K-DIM-G4..... | 20 | LED18WT8F/48/840K-G4D..... | 23 | LEDP-9T8/24/50K..... | 24 | LU250..... | 48 |
| LED10WA19/300/830K-GU24-DIM-G4.. | 20 | LED18WT8F/48/850K-G4A..... | 23 | LEDP-10WA19/827-DIM3..... | 23 | LU250/D..... | 48 |
| LED10WA19/300/840K-DIM-G4..... | 20 | LED18WT8F/48/850K-G4D..... | 23 | LEDP-10WA19/830-DIM3..... | 23 | LU250/NC..... | 49 |
| LED10WA19/300/840K-GU24-DIM-G4.. | 20 | LED-24-BA9S-G..... | 28 | LEDP-10WA19/841-DIM3..... | 23 | LU400..... | 48 |
| LED11WBR30/827K-DIM-G4..... | 21 | LED-24-BA9S-R..... | 28 | LEDP-11WR30/827-DIM..... | 24 | LU400/D..... | 48 |
| LED11WBR30/830K-DIM-G4..... | 21 | LED-24-BA9S-W..... | 28 | LEDP-11WR30/830-DIM..... | 24 | LU400/ED28/NC..... | 49 |
| LED11WBR30/840K-DIM-G4..... | 21 | LED-24-BA9S-Y..... | 28 | LEDP-11WR30/GU24/827-DIM..... | 24 | LU400/NC..... | 49 |
| LED-12-DCBAY-R..... | 28 | LED-24-FESTOON-W..... | 28 | LEDP-11WR30/GU24/830-DIM..... | 24 | LU600..... | 48 |
| LED-12-DCBAY-W..... | 28 | LED-24-MF-R..... | 28 | LEDP-12WA19/827-DIM..... | 23 | LU1000..... | 48 |
| LED-12-FESTOON-W..... | 28 | LED-24-MF-W..... | 28 | LEDP-12WA19/830-DIM..... | 23 | MH50/C/U/MED..... | 45, 47 |
| LED-12-SCBAY-R..... | 28 | LED-24-MF-Y..... | 28 | LEDP-12WA19/841-DIM..... | 23 | MH50/U/MED..... | 45, 47 |
| LED-12-SCBAY-W..... | 28 | LED-24-MG-R..... | 28 | LEDP-13WPAR30/FL/827-DIM..... | 25 | MH70/C/U/MED..... | 45, 47 |
| LED12WA19/300/827K-DIM-G4..... | 20 | LED-24-MG-W..... | 28 | LEDP-13WPAR30/FL/830-DIM..... | 25 | MH70/U/MED..... | 45, 47 |
| LED12WA19/300/827K-GU24-DIM-G4.. | 20 | LED-24-MG-Y..... | 28 | LEDP-13WPAR30/FL/841-DIM..... | 25 | MH100/C/U/MED..... | 46, 47 |
| LED12WA19/300/830K-DIM-G4..... | 20 | LED-24-PSB-G..... | 28 | LEDP-13WPAR30/NFL/827-DIM..... | 25 | MH100/U/MED..... | 46, 47 |
| LED12WA19/300/830K-GU24-DIM-G4.. | 20 | LED-24-PSB-R..... | 28 | LEDP-13WPAR30/NFL/830-DIM..... | 25 | MH150/C/U/MED..... | 46, 48 |
| LED12WA19/300/840K-DIM-G4..... | 20 | LED-24-PSB-W..... | 28 | LEDP-13WPAR30/NFL/841-DIM..... | 25 | MH150/U/MED..... | 46, 48 |
| LED12WA19/300/840K-GU24-DIM-G4.. | 20 | LED-24-PSB-Y..... | 28 | LEDP-13WR40/827-DIM3..... | 24 | MH175/C/U..... | 46 |
| LED12WA19/300/927K-DIM-G4..... | 20 | LED-24-T1.75 WEDGE-G..... | 28 | LEDP-13WR40/830-DIM3..... | 24 | MH175/C/U/MED..... | 46 |
| LED12WA19/300/927K-GU24-DIM-G4.. | 20 | LED-24-T1.75 WEDGE-R..... | 28 | LEDP-13WR40/841-DIM3..... | 24 | MH175/U..... | 46 |
| LED12WA19/300/930K-DIM-G4..... | 20 | LED-24-T1.75 WEDGE-W..... | 28 | LEDP-14T8/36/41K..... | 24 | MH175/U/MED..... | 46 |
| LED12WA19/300/930K-GU24-DIM-G4.. | 20 | LED-24-T1.75 WEDGE-Y..... | 28 | LEDP-14T8/36/50K..... | 24 | MH200/C/U..... | 46, 48 |
| LED12WPAR30/FL/827K-DIM-G4A..... | 22 | LED-120-MB-G..... | 28 | LEDP-15WPAR30/NFL/827-DIM..... | 25 | MH200/U..... | 46, 48 |
| LED12WPAR30/FL/830K-DIM-G4A..... | 22 | LED-120-MB-R..... | 28 | LEDP-15WPAR30/NFL/830-DIM..... | 25 | MH250/BU/PS..... | 48 |
| LED12WPAR30/FL/840K-DIM-G4A..... | 22 | LED-120-MB-W..... | 28 | LEDP-15WPAR30SN/FL/830-DIM..... | 25 | MH250/C/U..... | 46 |
| LED12WPAR30/NFL/827K-DIM-G4A..... | 22 | LED-120-MB-Y..... | 28 | LEDP-15WPAR30SN/FL/841-DIM..... | 25 | MH250/U..... | 46 |
| LED12WPAR30/NFL/830K-DIM-G4A..... | 22 | LED-120-PSB-G..... | 28 | LEDP-15WPAR30SN/NFL/830-DIM..... | 25 | MH250/U/T15..... | 46 |
| LED12WPAR30/NFL/840K-DIM-G4A..... | 22 | LED-120-PSB-R..... | 28 | LEDP-15WPAR30SN/NFL/841-DIM..... | 25 | MH320/U..... | 46, 48 |
| LED12WPAR30S/FL/827-DIM-G4A..... | 22 | LED-120-PSB-W..... | 28 | LEDP-18T8/48/30K..... | 24 | MH350/C/HOR..... | 48 |
| LED12WPAR30S/FL/830-DIM-G4A..... | 22 | LED-120-PSB-Y..... | 28 | LEDP-18T8/48/41K..... | 24 | MH350/HOR..... | 46, 48 |
| LED12WPAR30S/FL/840-DIM-G4A..... | 22 | LED-194-R..... | 28 | LEDP-18T8/48/50K..... | 24 | MH400/BU/PS..... | 48 |
| LED12WPAR30S/NFL/827-DIM-G4A..... | 22 | LED-194-W..... | 28 | LEDP-18T8U6/41K..... | 25 | MH400/C/BU/PS..... | 48 |
| LED12WPAR30S/NFL/830-DIM-G4A..... | 22 | LED-DK6-12W827K-DIM-G4..... | 10 | LEDP-18T8U6/50K..... | 25 | MH400/C/U..... | 46 |
| LED12WPAR30S/NFL/840-DIM-G4A..... | 22 | LED-DK6-12W830K-DIM-G4..... | 10 | LEDP-18WR40/827-DIM3..... | 24 | MH400/C/U/ED28..... | 46 |
| LED13WBR40/827K-DIM-G4..... | 21 | LED-DK6-12W840K-DIM-G4..... | 10 | LEDP-18WR40/830-DIM3..... | 24 | MH400/U..... | 46 |
| LED13WBR40/830K-DIM-G4..... | 21 | LED-DK6-16W927K-DIM-G4..... | 10 | LEDP-18WR40/841-DIM3..... | 24 | MH400/U/ED28..... | 46 |
| LED13WBR40/840K-DIM-G4..... | 21 | LED-DK6-16W930K-DIM-G4..... | 10, 11 | LEDP-20WPAR38/FL/827-DIM..... | 26 | MH400/U/T15..... | 46 |
| LED-14-BA9S-G..... | 28 | LED-DK6-19W827K-DIM-G4..... | 10, 11 | LEDP-20WPAR38/FL/830-DIM..... | 26 | MH1000/C/U..... | 46 |
| LED-14-BA9S-R..... | 28 | LED-DK6-19W830K-DIM-G4..... | 10, 11 | LEDP-20WPAR38/FL/841-DIM..... | 26 | MH1000/U..... | 46 |
| LED-14-BA9S-W..... | 28 | LED-DK6-19W840K-DIM-G4..... | 10, 11 | LEDP-20WPAR38/NFL/827-DIM..... | 26 | MH1000/U/BT37..... | 46 |
| LED-14-T1.75 WEDGE-W..... | 28 | LEDP-3WB11/827-DIM..... | 24 | LEDP-20WPAR38/NFL/830-DIM..... | 26 | MH1500/U..... | 46 |
| LED14WBR30/927K-DIM-G4..... | 21 | LEDP-3WB11/830-DIM..... | 24 | LEDP-20WPAR38/NFL/841-DIM..... | 26 | MH-DE70/TD/UVS/3K..... | 47 |
| LED14WBR30/930K-DIM-G4..... | 21 | LEDP-5WB11/827-DIM..... | 24 | LEDP-22T8/60/41K..... | 24 | MH-DE70/TD/UVS/4K..... | 47 |
| LED14WPAR38/FL/827K-DIM-G4A..... | 23 | LEDP-6WGU10/830-DIM..... | 25 | LEDP-22T8/60/50K..... | 24 | MH-DE150/TD/UVS/3K..... | 47 |
| LED14WPAR38/FL/830K-DIM-G4A..... | 23 | LEDP-6WGU10/841-DIM..... | 25 | LEDP-24T8/72/41K..... | 24 | MH-DE150/TD/UVS/4K..... | 47 |
| LED14WPAR38/FL/840K-DIM-G4A..... | 23 | LEDP-6WMR16/827-DIM..... | 25 | LEDP-24T8/72/50K..... | 24 | MH-SE70/UVS/3K..... | 47 |
| LED14WPAR38/NFL/827K-DIM-G4A..... | 23 | LEDP-6WMR16/830-DIM..... | 25 | LEDP-1383/30K..... | 28 | MH-SE150/UVS/3K..... | 47, 48 |
| LED14WPAR38/NFL/830K-DIM-G4A..... | 23 | LEDP-6WMR16/841-DIM..... | 25 | LEDP-1383/41K..... | 28 | MH-SE150/UVS/4K..... | 47, 48 |
| LED14WPAR38/NFL/840K-DIM-G4A..... | 23 | LEDP-6WPAR16/FL/830-DIM..... | 25 | LS-DP22-46W-35K-L1-W-N-U..... | 8 | ML-2100..... | 92, 97 |
| LED16WBR40/927K-DIM-G4..... | 21 | LEDP-6WPAR16/FL/841-DIM..... | 25 | LS-DP22-46W-41K-L1-W-N-U..... | 8 | MP50/U/MED/3K..... | 46, 47 |
| LED16WBR40/930K-DIM-G4..... | 21 | LEDP-7WPAR20/FL/841-DIM..... | 25 | LS-DP22-46W-50K-L1-W-N-U..... | 8 | MP70/C/U/MED/3K..... | 46, 47 |
| LED17WA21/300/827K-DIM-G4..... | 21 | LEDP-7WPAR20/NFL/827-DIM..... | 25 | LS-SP22-45W-35K-L1-W-N-U..... | 8 | MP70/C/U/MED/4K..... | 46, 47 |
| LED17WA21/300/827K-GU24-DIM-G4.. | 21 | LEDP-7WPAR20/NFL/841-DIM..... | 25 | LS-SP22-45W-41K-L1-W-N-U..... | 8 | MP70/U/MED/3K..... | 46 |
| LED17WA21/300/830K-DIM-G4..... | 21 | LEDP-8WA19/827-DIM3..... | 23 | LS-SP22-45W-50K-L1-W-N-U..... | 8 | MP70/U/MED/4K..... | 46, 47 |
| LED17WA21/300/830K-GU24-DIM-G4.. | 21 | LEDP-8WA19/830-DIM3..... | 23 | LU35/MED..... | 48 | MP100/C/U/MED/3K..... | 46, 47 |
| LED17WA21/300/840K-DIM-G4..... | 21 | LEDP-8WA19/841-DIM3..... | 23 | LU50..... | 48 | MP100/C/U/MED/4K..... | 46, 47 |
| LED17WA21/300/840K-GU24-DIM-G4.. | 21 | LEDP-8WA19/850-DIM3..... | 23 | LU50/MED..... | 48 | MP100/U/MED/3K..... | 46, 47 |
| LED17WBR40/827K-DIM-G4..... | 21 | LEDP-8WG25/827-DIM..... | 24 | LU70..... | 48 | MP100/U/MED/4K..... | 46, 47 |
| LED17WBR40/830K-DIM-G4..... | 21 | LEDP-8WG25/830-DIM..... | 24 | LU70/D/MED..... | 48 | MP150/C/U/MED/3K..... | 46, 48 |
| LED17WBR40/840K-DIM-G4..... | 21 | LEDP-8WPAR20/FL/827-DIM..... | 25 | LU70/MED..... | 48 | MP150/C/U/MED/4K..... | 46, 48 |
| LED17WPAR38/FL/827K-DIM-G4A..... | 23 | LEDP-8WPAR20/FL/830-DIM..... | 25 | LU70/NC..... | 49 | MP150/U/MED/3K..... | 46 |
| LED17WPAR38/FL/830K-DIM-G4A..... | 23 | LEDP-8WPAR20/FL/841-DIM..... | 25 | LU100..... | 48 | MP150/U/MED/4K..... | 46 |
| LED17WPAR38/FL/840K-DIM-G4A..... | 23 | LEDP-8WPAR20/NFL/827-DIM..... | 25 | LU100/MED..... | 48 | MP200/C/V/4K..... | 46, 48 |

| | | | | | | | |
|--------------------|--------|-------------------|----|-------------------|----|-------------------|--------|
| MP250/BU/P | 46, 48 | Q20MR8/NSP/CG | 51 | Q1000T3/CL/240V | 55 | SP13/41K-DIM | 32 |
| MP320/BU | 46, 48 | Q35MR8/NFL/CG | 51 | Q1000T3/CL/277V | 55 | SP13/50K | 33 |
| MP350/BU | 46, 48 | Q50CL/DC-130V | 54 | Q1500T3/CL/120V | 55 | SP13/65K | 33 |
| MP400/BU/ED28/P | 47, 48 | Q50CL/MC-130V | 54 | Q1500T3/CL/208V | 55 | SP13A19/27K | 30 |
| MP400/BU/P | 47, 48 | Q75CL-28V | 97 | Q1500T3/CL/220V | 55 | SP13A19/41K | 30 |
| NE51H-R | 88 | Q75CL-120V | 54 | Q1500T3/CL/240V | 55 | SP14/R20/27K | 32 |
| NE51-R | 88 | Q75CL-130V | 54 | Q1500T3/CL/277V | 55 | SP14/R20/41K | 32 |
| P21/5W | 86 | Q75CL/DC-28V | 97 | QT9/27 | 36 | SP15A/27K-GU24 | 30 |
| P25-1 | 86 | Q75CL/DC-120V | 54 | QT9/35 | 36 | SP15G25/27K | 31 |
| P129362-228 | 95 | Q75MC-120V | 54 | QT9/41 | 36 | SP15G25/27K-GU24 | 31 |
| PAR20/9/30K | 31 | Q100CL/DC/2V-120V | 54 | QT13/27 | 36 | SP15G25/41K | 31 |
| PAR20/9/35K | 31 | Q100CL/DC/2V-130V | 54 | QT13/27-4P | 36 | SP15/R30/27K | 32 |
| PAR20/9/41K | 31 | Q100CL/DC-120V | 54 | QT13/30 | 36 | SP15/R30/27K-DIM | 32 |
| PAR20/9/50K | 31 | Q100CL/MC/2V-120V | 54 | QT13/30-4P | 36 | SP15/R30/27K-GU24 | 32 |
| PAR30LN/15/30K | 31 | Q100CL/MC/2V-130V | 54 | QT13/35 | 36 | SP15/R30/41K | 32 |
| PAR30LN/15/35K | 31 | Q100CL/MC-120V | 54 | QT13/35-4P | 36 | SP15/R30/41K-DIM | 32 |
| PAR30LN/15/41K | 31 | Q100DC/2V-120V | 54 | QT13/41 | 36 | SP15/R30/50K-DIM | 32 |
| PAR30LN/15/50K | 31 | Q100/DC-120V | 54 | QT13/41-4P | 36 | SP15/R30/65K | 32 |
| PAR38/23/27K | 31 | Q100MC/2V-120V | 54 | QT13/50 | 36 | SP15/R30/65K-DIM | 32 |
| PAR38/23/30 | 31 | Q100/MC-120V | 54 | QT13/50-4P | 36 | SP18/27-4P | 34 |
| PAR38/23/30K | 31 | Q100T3/CL/120V | 55 | QT13/65 | 36 | SP18/27-GU24 | 33 |
| PAR38/23/41K | 32 | Q100W/S120V | 55 | QT13/65-4P | 36 | SP18/27K-GU24-DIM | 33 |
| PAR38/23/50K | 32 | Q100W/S130V | 55 | QT13/G24D1/30 | 36 | SP18/41-GU24 | 33 |
| PC37 | 86 | Q150CL/DC-120V | 54 | QT13/G24D1/35 | 36 | SP19/27K | 33 |
| PC37-BP | 86 | Q150CL/DC-130V | 54 | QT13/G24D1/50 | 36 | SP19/27K-DIM | 32 |
| PC74 | 86 | Q150CL/MC/2V-130V | 54 | QT13/G24D1/65 | 36 | SP19/35K | 33 |
| PC74-BP | 86 | Q150CL/MC-120V | 54 | QT18/27 | 36 | SP19/41K | 33 |
| PC119 | 87 | Q150CL/MC-130V | 54 | QT18/27-4P | 36 | SP19/41K-DIM | 32 |
| PC168 | 86 | Q150DC-120V | 54 | QT18/30 | 36 | SP19/50K | 33 |
| PC168-BP | 86 | Q150MC-120V | 54 | QT18/30-4P | 36 | SP19/65K | 33 |
| PC194 | 86 | Q150T3/CL/120V | 55 | QT18/35 | 36 | SP23/27-GU24 | 33 |
| PC194-BP | 86 | Q150T4/CL/25 | 98 | QT18/35-4P | 36 | SP23/27K | 33 |
| PH/111A | 91, 97 | Q150W/S120V | 55 | QT18/41 | 36 | SP23/27K-DIM | 32 |
| PH/140 | 91, 97 | Q150W/S130V | 55 | QT18/41-4P | 36 | SP23/27K-GU24-DIM | 33 |
| PH/211 | 91, 97 | Q200W/S120V | 55 | QT18/50 | 36 | SP23/35K | 33 |
| PH/212 | 91, 98 | Q200W/S130V | 55 | QT18/50-4P | 36 | SP23/41-GU24 | 33 |
| PM-2X32T8-UNV-IS | 42 | Q200W/S220V | 55 | QT26/27 | 36 | SP23/41K | 33 |
| PM-2X32T8-UNV-IS-H | 42 | Q235T4/3-33V | 95 | QT26/27-4P | 36 | SP23/41K-DIM | 32 |
| PM-2X32T8-UNV-IS-L | 42 | Q250CL/DC-120V | 54 | QT26/30 | 36 | SP23/50K | 33 |
| PM-2X54T5-UNV-PS | 42 | Q250CL/DC-130V | 54 | QT26/30-4P | 37 | SP23/65K | 33 |
| PM-3X32T8-UNV-IS | 42 | Q250CL/MC-120V | 54 | QT26/35 | 37 | SP23/R40/27K | 32 |
| PM-3X32T8-UNV-IS-H | 42 | Q250CL/MC-130V | 54 | QT26/35-4P | 37 | SP23/R40/27K-DIM | 32 |
| PM-3X32T8-UNV-IS-L | 42 | Q250DC-120V | 54 | QT26/41 | 37 | SP23/R40/41K | 32 |
| PM-4X32T8-UNV-IS | 42 | Q250DC-130V | 54 | QT26/41-4P | 37 | SP23/R40/41K-DIM | 32 |
| PM-4X32T8-UNV-IS-L | 42 | Q250MC-120V | 54 | QT26/50 | 37 | SP23/R40/50K-DIM | 32 |
| PM-4X54T5-UNV-PS | 42 | Q250MC-130V | 54 | QT26/50-4P | 37 | SP23/R40/65K | 32 |
| PR2 | 86 | Q250T3/CL/120V | 55 | QT26/65 | 37 | SP26/27-4P | 34 |
| PR2-BP | 86 | Q250W/S120V | 55 | QT26/65-4P | 37 | SP26/27-GU24 | 33 |
| PR3 | 86 | Q300T3/CL/120V | 55 | SE1274 | 87 | SP27/27K | 33 |
| PR3-BP | 87 | Q300T3/CL/130V | 55 | SE1274-BP | 87 | SP27/35K | 33 |
| PR4 | 87 | Q300T3/CL/220V | 55 | SP5B10/E12/27K | 30 | SP27/41K | 33 |
| PR6 | 87 | Q300T3/CL/240V | 55 | SP5B10/E12/41K | 30 | SP27/50K | 33 |
| PR7 | 87 | Q300W/S120V | 55 | SP5B13/E26/27K | 31 | SP30/955K | 90 |
| PR9 | 87 | Q300W/S130V | 55 | SP5B13/E26/41K | 31 | SP32/27K | 33 |
| PR12 | 86 | Q400W/S130V | 55 | SP7B10/E12/27K | 30 | SP32/35K | 33 |
| PR12-BP | 86 | Q500CL/DC-120V | 54 | SP7B10/E12/41K | 30 | SP32/41K | 33 |
| PR13 | 86 | Q500CL/MC-120V | 54 | SP9A19/27K | 30 | SP32/50K | 33 |
| PR13-BP | 86 | Q500CL/MC-130V | 54 | SP9A19/41K | 30 | SP42/27K | 33 |
| PR15 | 86 | Q500DC-120V | 54 | SP9G25/27K | 31 | SP42/35K | 33 |
| PR16 | 86 | Q500/MC-120V | 54 | SP9G25/41K | 31 | SP42/41K | 33 |
| PR18 | 86 | Q500/MC-130V | 54 | SP11A/27K-GU24 | 30 | SP42/50K | 33 |
| PR20 | 86 | Q500T3/CL/120V | 55 | SP13/27-4P | 34 | SP50/955K | 90 |
| PR30 | 87 | Q500T3/CL/130V | 55 | SP13/27-GU24 | 32 | SP65/41/MED | 31, 33 |
| PS13W | 88 | Q500T3/CL/220V | 55 | SP13/27K | 33 | SP65/50/MED | 31, 33 |
| PSX26W | 89 | Q500T3/CL/240V | 55 | SP13/27K-DIM | 32 | SP85/41/MED | 31, 33 |
| PSY24WSV | 89 | Q750T3/CL/120V | 55 | SP13/27K-GU24-DIM | 32 | SP85/50/MED | 31, 34 |
| PSY24WY | 89 | Q750T3/CL/240V | 55 | SP13/35K | 33 | SP105/41/MED | 31, 34 |
| Q10MR8/NSP/CG | 51 | Q1000T3/CL/120V | 55 | SP13/41-GU24 | 33 | SP105/41/MOG | 31, 34 |
| Q20MR8/NFL/CG | 51 | Q1000T3/CL/220V | 55 | SP13/41K | 33 | SP105/41/MOG-277V | 31, 34 |

SP105/50/MED31, 34
 SP180/41/MOG.....31, 34
 SP180/50/MOG.....31, 34
 TT18/27 35
 TT18/30..... 35
 TT18/35..... 35
 TT18/41 35
 TT18/65..... 35
 TT26/27 35
 TT26/30..... 35
 TT26/35..... 35
 TT26/41 35
 TT26/50..... 35
 TT26/65..... 35
 TT32/27 35
 TT32/30..... 35
 TT32/35..... 35
 TT32/41 36
 TT32/50..... 36
 TT32/65..... 36
 TT42/27 36
 TT42/30..... 36
 TT42/35..... 36
 TT42/41 36
 TT42/50..... 36
 TT42/65..... 36
 WK7692, 99
 WK76-UV92, 99
 WK92.....92, 101
 WK92-UV92, 101
 WK93.....92, 98
 WK95.....92, 99
 WK96.....92, 101
 WK96-UV92, 101
 WK98.....92, 101
 WK98-UV92, 101
 WK101.....92, 101
 WK120HD92, 99
 WK120HD-UV.....92, 99
 WK140HD92, 99
 WK140HD-UV.....92, 99
 XPR3..... 87



Terms, Conditions, & Shipping Procedures

Effective: January 15th, 2013.

Supersedes all past terms and conditions of Price books and Sales Supplements.

Prices: As Shown and subject to change without notice.

Distributor Status: Distributors must purchase a minimum of \$2500 annually in order to maintain distributor status.

Small Order Charge: Orders under \$150.00 will be assessed a \$10.00 small order charge (SOC).

Payment Terms: Net 30 days, from date of shipment as it appears on invoice. Postmark date on envelope will determine if payment has been made within terms. All orders received are subject to review and approval by our credit department. Orders received from customers with delinquent accounts may be subject to shipping delays, so please keep your account current.

Freight: NOTE: SoLux and EiKO products may be combined to meet prepaid freight requirements. EiKO Global, LLC will select the carrier of its choice.

1. All orders of \$750.00 or more will be shipped FREE FREIGHT F.O.B. destination via regular ground UPS, FedEx or USPS within the continental United States. Orders less than \$750.00 will be shipped F.O.B. origin.
2. UPS Second Day Air Blue – At the request of the distributor, orders will be billed at the UPS Second Day Air Rate.
3. UPS Next Day Air Red Label – At the request of the distributors, orders will be billed at the UPS Red Label Air rate.
4. Shipments made at the choice of the distributors, other than above, will be shipped F.O.B. shipping point.
5. Additional charges will apply for residential delivery.
6. **Alaska, Hawaii and Puerto Rico** – Orders of \$1,000.00 or more will be shipped free freight F.O.B. to a freight forwarder.
7. EiKO will no longer ship freight collect using the customer's account number.

We will cover the above items under normal Continental United States Policy. Therefore, you can achieve free freight to a border destination and then pick up the expense of forwarding the freight to your destination in Alaska, Hawaii or Puerto Rico. As an example, if you are a customer in Hawaii, you can have the goods for orders over \$1000.00 shipped free freight to a freight forwarder. It would then be your responsibility to cover the freight to Hawaii.

Return Authorization:

1. You must contact EiKO Global, LLC for authorization to return defective products and shipment errors.
2. Return authorization will not be issued unless the distributor provides a **valid invoice number** showing when goods were purchased. A copy of this invoice must be included with the return.
3. **Goods must be less than one year old to be eligible for return.**
4. Where the request for return is neither defective merchandise nor error made by EiKO Global, LLC, the following policy will apply:

A restocking charge of 20% will be charged on all authorized and acceptable goods. If goods are not returned in resalable condition they will be returned to the sender at the expense of the sender and no credit will be issued.

NOTE: All returns must have a return number on the outside of the box or they will be refused.

Shipment Discrepancies: All shipment discrepancies, damage, etc, must be reported within 10 days of the shipment date shown on the invoice.

General: We reserve the right to, at any time and without notice, discontinue or substitute brands.

Minimum Order Requirements for Linear Fluorescent Lamps: In order to avoid breakage, the minimum order quantity for T8 & T12 linear fluorescent lamps four feet or longer is 360. The minimum order quantity for programmed start T5 linear fluorescent lamps is 100. Mixing SKUs to meet the minimum order is allowed. Orders under \$750 will be charged \$70 LTL freight.

***Important Note About Minimum Advertised Pricing (MAPP):** In order to avoid predatory pricing and to maintain the integrity of the products, SoLux products purchased through EiKO Global, LLC may not be advertised for sale (Internet, electronic, print media, mailings or otherwise) by you, a sub-distributor or any other agent, below the minimum advertised price established in the current Distributor Net Price Schedule. This minimum advertised price will be known as and referred to as the MAPP price. Failure to comply with MAPP pricing requirements will result in the loss of your access to SoLux products.

EiKO Global, LLC: 23220 W. 84th St, Shawnee, KS 66227 • Ph: 1.800.852.2217 • F: 1.913.441.6679 • Email: eiko@eiko.com
EiKO CANADA: 81 King St, Barrie, ON L4N 6B5, Canada • Ph: 1.705.721.5189 • F: 1.705.721.7855 • Email: orderdesk@eiko.com

selection.
solutions.
simplicity.
eiko.com



EiKO Global, LLC

23220 W. 84th St, Shawnee, KS 66227

Ph: 1.800.852.2217 • F: 1.913.441.6679 • email: eiko@eiko.com

EiKO Canada

81 King St, Barrie, ON L4N 6B5 Canada

Ph: 1.705.721.5189 • F: 1.705.721.7855 • email: orderdesk@eiko.com