



For 30 Years

EiKO®

1978 2008

Selection. Solutions. Simplicity.





Selections. Solutions. Simplicity.

Three reasons why EiKO shines!



Selection:

We provide a broad range of products – over 3,000 active SKU's – that allow us to compete for market share with our client's #1 suppliers. Our website is the best source for complete product information.



Solutions:

We help our clients to prosper and grow. We solve problems for clients because we understand their business and their marketplace. An example is our commitment to distribution centers that assure 48 hour delivery anywhere in the U.S.



Simplicity:

Our customers can expect a timely response from us because we are easy to do business with. Our company culture engages our employees in the business. Each employee is focused on fulfilling customer expectations.

Welcome to the **EiKO** Catalog!

Inside you'll find the complete **EiKO** Line Card, a cross-referencing guide to assist you in determining which lamp type you need, and, of course, a categorized listing of our products with specification information, indexed to allow you to locate your lamp quickly and easily.

Take a moment to flip through this catalog and reacquaint yourself with our extensive product line. Don't see the lamp type you're looking for? Give us a call - we may be able to source it for you or to suggest viable alternatives. Or visit our website at www.eiko-ltd.com for the latest updates and news on upcoming products.

Selections. Solutions. Simplicity. EiKO!

IMPORTANT NOTICE:

This catalog contains data accumulated up to the last update. Additional information is constantly being uncovered through research and testing, which may modify the data given herein. This is particularly true of newer lamps. Accordingly, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The data and suggested applications contained in this catalog, as well as any additional information our representatives may be able to furnish, are for general information only and are not intended and should not be taken as representations or warranties as to the suitability of a lamp for any particular application or use in any particular equipment, nor are our representatives authorized to make any such representations or give any such warranties. Applications and conditions of use are many and varied, and beyond our control. We cannot have the same degree of knowledge that the purchaser has with respect to the design of his equipment and the conditions of its use. Therefore, it is up to the purchaser to determine the suitability of a lamp for his intended application or use and to assume the responsibility for that determination.

EiKO, Ltd. desires to supply the best possible products at all times. For this reason, EiKO, Ltd. reserves the right to make changes in its products and to introduce new lamps or discontinue existing ones without notice.

The specifications and information in this catalog are believed to be accurate. However, no warranty is made or implied as to the accuracy of this information. EiKO, Ltd. does not accept or assume responsibility of liability for errors, changes, omissions, or for harm resulting therefrom.

In order to insure that you have the latest information and product specifications, please visit us on the web at www.eiko.com.

EiKO Lamp & Bulb Line Card

Fluorescent – Retail – Office – Building – Warehouse – High Bay – Special Application

- Linear T5, T8, T12
- U Bend T8
- Circuline T9
- High CRI SBCFL
- Compact
- Self Ballasted Compact
- Starters
- High Watt/High Bay SBCFL
- Germicidal
- Blacklight - Blacklight Blue
- 2700K to 6500K

HID – Retail – Parking Lot – Warehouse – High Bay – Street – Building

- **Metal Halide:**
 - Reduced Jacket
 - High CRI
 - Open & Closed Fixture Rated
 - Pulse Start
 - Single & Double Ended
 - Colors
- **High Pressure Sodium**
 - 35 to 1000 watt
 - Medium & Mogul Base
 - Clear & Coated
- **Mercury Vapor**

Halogen – Retail – Residential – Commercial – Industrial – Spot Lighting

- PAR 38, 30, 30LN & 20
- MR 8, 11, 16
- Bi-Pin
- Single Ended Quartz
- Double Ended Quartz
- Tubular Quartz Heat
- Aluminum Coated
- Miniature
- A-Line
- Automotive Forward Lighting
- Automotive Fog & Driving
- Motorcycle, ATV & Snowmobile
- SoLux® True Daylight

Incandescent – Residential – Retail – Industrial – Commercial

- A-Line Household, A15, A19, A21 sizes
- R & BR 20, 30 & 40
- Rough Service vibration resistant
- Coated Safety Lamps
- T Types
- Torpedos
- Bent Tip
- Globe
- Fan

Miniature – Extensive Selection! Automotive – Electronic – Electrical – Industrial

- Sub miniature
- Miniature
- Wedge base
- Bayonet based
- Bi-pin
- Wire lead
- Gas filled
- Neon
- Flashlight
- Automotive
- Motorcycle, ATV & Snowmobile
- Boxed & Blister Carded

LED – Growing Line!

- Based
- Miniature
- String Lights
- PAR & MR16

Sealed Beams – Automotive – Tractor – Stage Studio – Electrical – Landscape – Pool

- Round PAR 36, 46 & 56
- Rectangular
- Halogen
- Incandescent

Specialty – Comprehensive Selection!

- **Stage & Studio:**
 - High Pressure Discharge
 - Halogen
 - Sealed Beam
- **AV/Photo:**
 - Flashtubes
 - Modeling
 - Photoflood
 - High CRI Fluorescent
 - Enlarger
 - Overhead/Slide/LCD Projector
- **Health Care:**
 - Ophthalmic
 - Scientific
 - Germicidal
 - Dental

Table of Contents

| | |
|--------------------------------|---|
| Cross Referencing Tables | 4 |
|--------------------------------|---|

Large Lamps

| | |
|--|----|
| Self Ballasted Compact Fluorescent | 20 |
| Spiral • DuoTube® • QuadTube® • TripleTube • FML Compact Fluorescent | 21 |
| Linear Fluorescent..... | 24 |
| Circuline & U-Bend Fluorescent | 26 |
| Germicidal Linear Fluorescent..... | 27 |
| ArcMaster™ HID..... | 28 |
| R & BR Incandescent..... | 31 |
| A-Line Incandescent..... | 31 |
| Decorative Incandescent..... | 32 |
| A-Line Halogen..... | 33 |
| Halogen PAR..... | 33 |
| MR8 Supreme | 34 |
| MR11 Supreme..... | 35 |
| MR11 Standard..... | 35 |
| MR16 Supreme..... | 35 |
| MR16 Standard..... | 36 |
| SoLux® MR16..... | 38 |
| SoLux® Fixtures..... | 38 |
| Bi-Pin Halogen..... | 39 |
| Quartz Halogen..... | 40 |
| Quartz Heat | 42 |
| Halogen Miniature | 42 |
| Based LED..... | 42 |
| LED PAR & MR16..... | 44 |
| LED String Lights | 44 |

Specialty Lamps

| | |
|---|----|
| Lamps by ANSI Code..... | 44 |
| Audio Visual / Photographic..... | 48 |
| ColorMaster™ Digital Imaging..... | 49 |
| LCD Replacement Lamps..... | 50 |
| ArcMaster™ High Pressure Discharge..... | 55 |
| Stage & Studio..... | 55 |
| Health Care | 58 |

Miniature and Automotive Lamps

| | |
|-------------------------------------|----|
| Miniature | 60 |
| Automotive..... | 80 |
| Sealed Beam..... | 84 |
| Motorcycle / ATV / Snowmobile | 86 |

| | |
|--------------------|----|
| Index | 89 |
|--------------------|----|

Cross Referencing for Automotive Miniatures and General Lighting

General Overview

Cross referencing a light bulb (technically called a “lamp”) can be done in two ways:

- By matching the known part number of your lamp to a part number of another manufacturer known to have the same specifications.
- By matching the specifications of your lamp to the specifications of a known part number.

Step 1: What is the lamp type?

1) Do you have an Automotive Miniature or a General Lighting lamp?

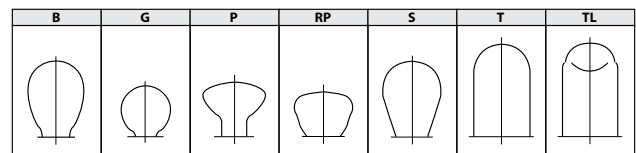
- **Miniatures** are usually just that: small, miniature lamps. They are typically designed to provide light for instrument panels or for other focused-light uses.
- **General Lighting** lamps are larger in size and designed to light larger areas.

► For Automotive Miniatures:

Step 2: What is the bulb shape?

1) Identify the shape of the bulb.

- “Bulb” refers to the glass portion of the lamp.
- Refer to the diagram for common bulb shapes.



Step 3: What is the base type?

1) Identify the base type - see page 5.

- The base supports the lamp in the socket and conducts electricity to the filament.
- Refer to the diagrams on the facing page for common base types.


























































Step 4: What is the voltage and wattage?

1) Determine the voltage.

2) Determine the wattage.

- This information can usually be found stamped on the base of the bulb.
- If only given amps, remember this conversion: **Amps x Volts = Watts**.

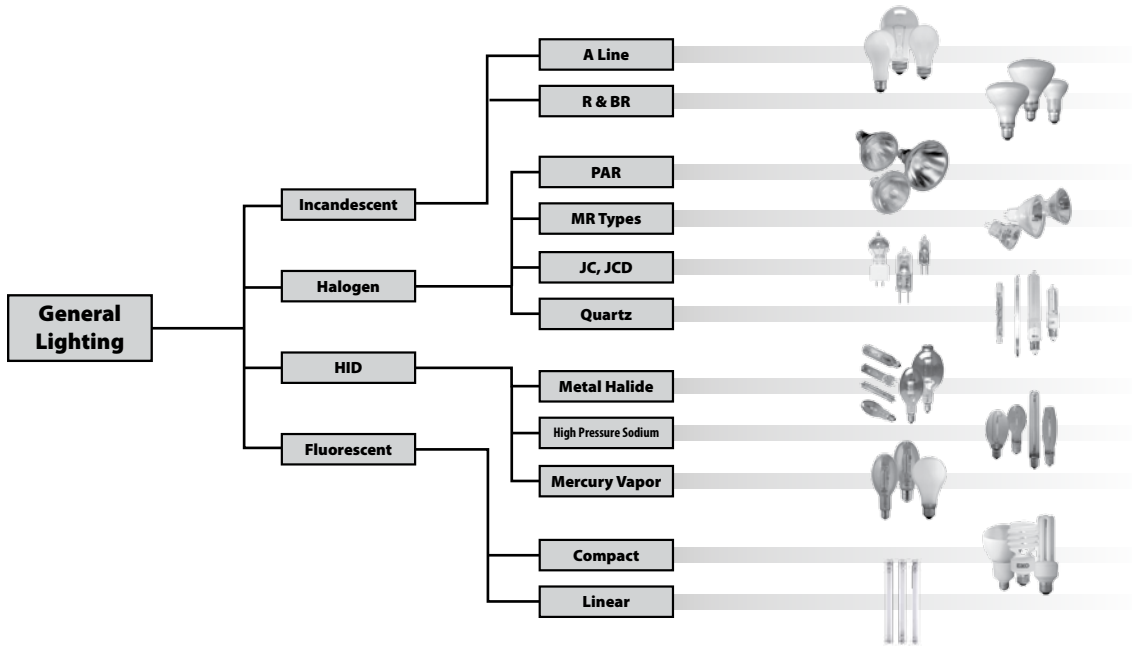
Common Miniature Base Types

| | | | | | | |
|--|---|--|--|---|---|---|
|   Axial Prefocus |   BA7S |   BA9s - Miniature Bay |   BA15s - SC Bayonet |   BA20d |   BA20s |   BAY15d - DC Bayonet Indexed |
|  D.F. Wedge |  End Cap  Fuse Cap SF6/6 |  European Bayonet BA55 |  European Bayonet BA7S |  Festoon Cap |  Glass Wedge T1 3/4 |  Glass Wedge T3 3/4 |
|  Glass Wedge T5 |  HB1/HB5 Axial Prefocus |  HB2 P43t-38 H4 P43t |  HB3 Right Angle Prefocus |  HB4 Right Angle Prefocus |  Knurled Screw |  Micro-Midget Flanged T 3/4 |
|  Midget Flanged T1 3/4 |  Midget Grooved T1 3/4 |  Midget Screw E5 |  Miniature Bayonet BA9S |  Miniature Flanged P13.5s (HPR) |  Miniature Screw E10 |  Miniature Wedge |
|  P14.5s |  P15-3 Double P15D-3 |  P15-3 Single P15S-3 |  P15D |  P15S |  P36t |  P43t |
|  P45t |  PK22s |  PX43t |  Right Angle Prefocus |  Rigid Loop |  S.F. Wedge |  Special-Midget Flanged T1 3/4 |
|  Special Screw |  Sub-Midget Flanged T1 |  T 3/4 Bi-Pin |  T1 Bi-Pin |  T1 1/4 Bi-Pin |  T1 3/4 Bi-Pin |  X511 |

► **For General Lighting:**

Step 2: What is the lamp family and sub-family?

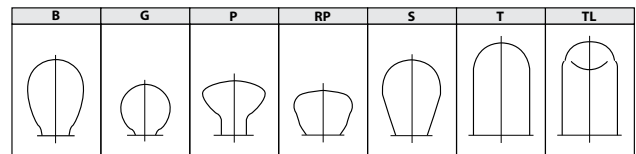
1) Use the chart below to determine to which family your lamp belongs.



Step 3: What is the bulb shape?

1) Identify the shape of the bulb.

- “Bulb” refers to the glass portion of the lamp.
- Refer to the diagram for common bulb shapes.



Step 4: What is the base type?

1) Identify the base type - see page 7.

- The base supports the lamp in the socket and conducts electricity to the filament.
- Refer to the diagrams on the facing page for common base types.












































Step 5: What is the voltage and wattage?

1) Determine the voltage.

2) Determine the wattage.

- This information can usually be found stamped on the base of the bulb.
- If only given amps, remember this conversion: **Amps x Volts = Watts.**

Common General Lighting Base Types

| | | | | | | |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| Candelabra Screw E12 | DC Bayonet BA15D | DC Bayonet - Indexed BAY15D | DC European Bayonet BA22D | DC Prefocus | European Screw E14 | Festoon Cap |
|  |  |  |  |  |  |  |
| G4 | G6.35 | Glass Wedge T1 3/4 | Glass Wedge T3 1/4 | Glass Wedge T5 | Intermediate Screw E17 | Medium Screw E26 |
|  |  |  |  |  |  |  |
| Miniature Screw E10 | Mogul Screw E39 | Rigid Loop | SC Bayonet BA15S | SC Bayonet - Indexed BAY15S | SC Prefocus | Slide #1 |
|  |  |  |  |  |  |  |
| Slide #2 | Slide #3 | Slide #5 | Slide #6 | T1 Bi-Pin | T1 1/4 Bi-Pin | T1 3/4 Bi-Pin |
|  |  |  |  |  |  |  |
| G-23 | GX23 | GX23-2 | G24d-1 | G24d-2 | G24d-3 | GX32d-2 |
|  |  |  |  |  |  |  |
| GX32d-3 | G24q-1 | G24q-2 | G24q-3 | GX24q-2 | GX24q-3 | GX24q-4 |
|  | | | | | | |
| 2G11 | | | | | | |

Step 6: What is the color temperature (fluorescents, SoLux)?

1) Determine the color temperature at which the lamp burns.

• Usually represented in one of three ways:

1) Descriptive

- Warm White (WW), Cool White (CW), Daylight (D)

2) Degrees Kelvin (by hundreds)

- 27, 41, 65, etc. (27=2700 degrees Kelvin)

3) Color Rendering Index (CRI) + degrees Kelvin

- 735, 841 (735 = a CRI of approx. 75% and a color temp of 3500 degrees Kelvin)

Step 7: What is the beam spread (MR8, MR11, MR16)?

1) Determine the beam spread (light pattern) of the lamp.

| | |
|--------------|------------------|
| Narrow Spot | NSP - 10 degrees |
| Spot | SP - 17 degrees |
| Narrow Flood | NFL - 24 degrees |
| Medium Flood | MFL - 26 degrees |
| Flood | FL - 36 degrees |
| Wide Flood | WFL - 55 degrees |

Finding EIKO's Part Number

The easiest way to see if EIKO carries a lamp matching your description is to visit our website and conduct a short, simple search.

Visit us at www.eiko-ltd.com.

1) Place your pointer over the "Search" link at the top quick link bar and select "Advanced Search" from the pull down menu.

2) Enter as much of the description as you have and click "Search."

A list of lamps matching your description will result. Clicking on an individual item number will give you a more detailed description of each lamp.

If you have another manufacturer's part number...

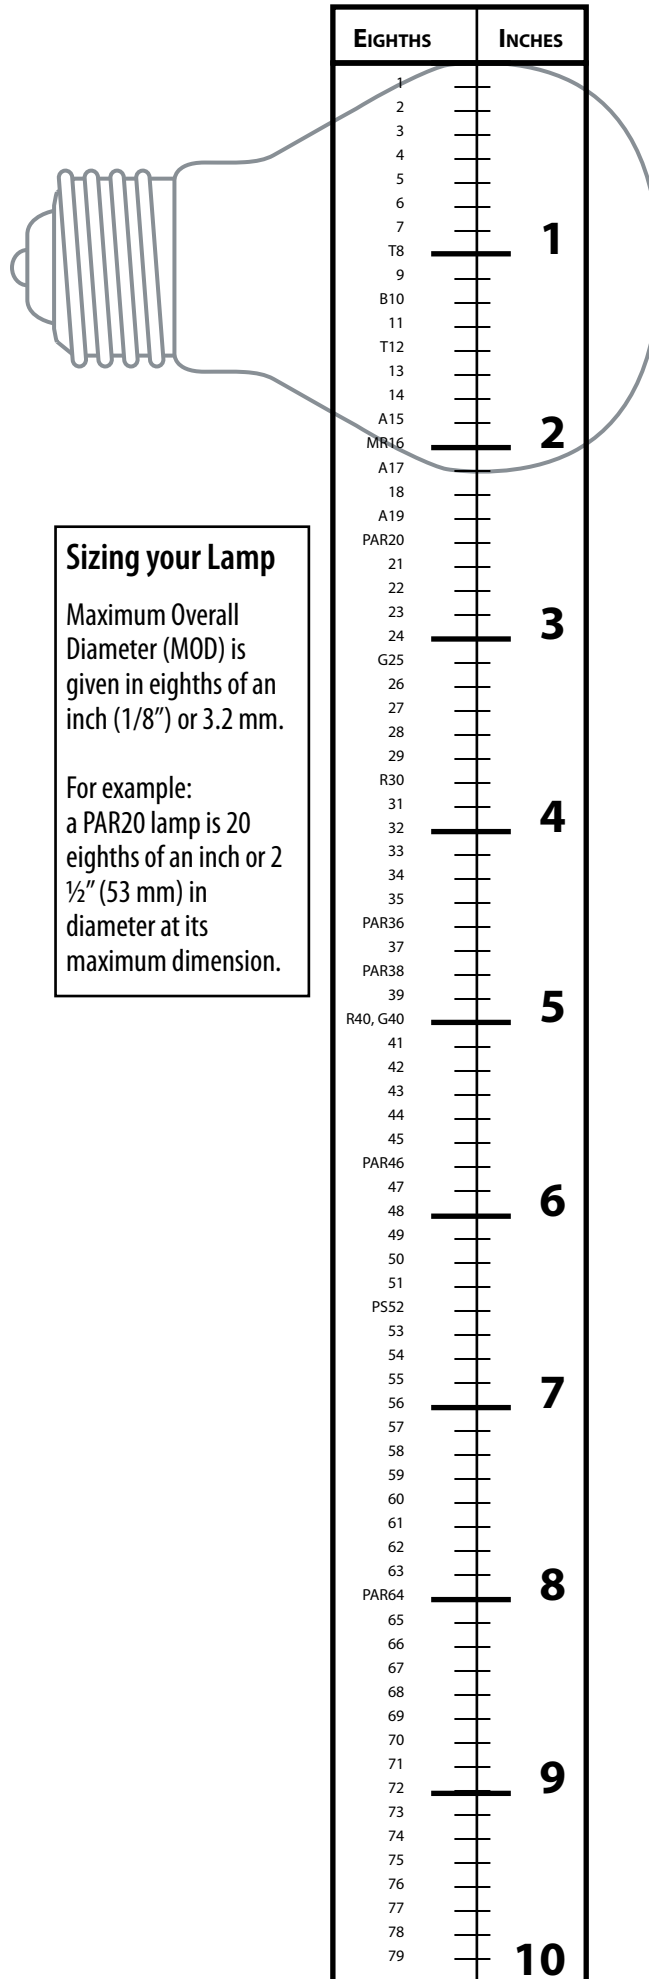
1) Select "Basic Search" from the Search pull down menu on the website.

2) Enter the part number and check the "Cross Reference Part Number:"

- If we have a match already entered in our system, the EIKO part number will be displayed. This database is updated and maintained by EIKO employees on a regular basis and will become more complete over time.

3) If a match cannot be found, look up the part number in the other manufacturer's catalogue (either online or hardcopy) and find the lamp specifications.

- Using the specifications, cross the lamp to an EIKO part number using the above instructions.



Sizing your Lamp

Maximum Overall Diameter (MOD) is given in eighths of an inch (1/8") or 3.2 mm.

For example:
 a PAR20 lamp is 20 eighths of an inch or 2 1/2" (53 mm) in diameter at its maximum dimension.



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR COMPACT FLUORESCENT LAMPS

Adaptors for Duo and Quad Tubes - Cross Reference

| EiKO | Philips | GE | Osram |
|------|---------|----|-------|
| A13 | NA | NA | NA |

T4 Duo Tube - 2 Pin Base - Beveled End - Cross Reference

| EiKO | Philips (PL-S) | GE (Biax) | Osram (Dulux S) |
|---------|----------------|-----------------|-----------------|
| DT5/27 | PL-S 5W/27 | F5BX/SPX/27/827 | CF5DS/827 |
| DT5/35 | NA | NA | NA |
| DT5/41 | NA | F5BX/SPX/41/840 | CF5DS/841 |
| DT5/50 | NA | NA | NA |
| DT5/65 | NA | NA | NA |
| DT7/27 | PL-S 7W/27 | F7BX/SPX27/827 | CF7DS/827 |
| DT7/35 | PL-S 7W/35 | F7BX/SPX35/835 | CF7DS/835 |
| DT7/41 | PL-S 7W/41 | F7BX/SPX41/840 | CF7DS/841 |
| DT7/50 | PL-S 7W/50 | NA | CF7DS/850 |
| DT7/65 | NA | NA | NA |
| DT9/27 | PL-S 9W/27 | F9BX/SPX/27/827 | CF9DS/827 |
| DT9/35 | PL-S 9W/35 | F9BX/SPX/35/835 | CF9DS/835 |
| DT9/41 | PL-S 9W/41 | F9BX/SPX/41/840 | CF9DS/841 |
| DT9/50 | PL-S 9W/50 | NA | CF9DS/850 |
| DT9/65 | NA | NA | NA |
| DT13/27 | PL-S 13W/27 | F13BX/SPX27/827 | CF13DS/827 |
| DT13/30 | PL-S 13W/30 | NA | CF13DS/830 |
| DT13/35 | PL-S 13W/35 | F13BX/SPX35/835 | CF13DS/835 |
| DT13/41 | PL-S 13W/41 | F13BX/SPX41/840 | CF13DS/841 |
| DT13/50 | PL-S 13W/50 | F13BX/SPX50/850 | CF13DS/850 |
| DT13/65 | NA | NA | NA |

T5 Duo Tube - 2G11 Base - H Type End - Cross Reference

| EiKO | Philips (PL-L) | GE (Biax) | Osram (Dulux L) |
|------------|----------------|-----------------|-----------------|
| DT18/30/RS | PL-L 18W/30 | F18BX/SPX30/RS | FT18DL/830/RS |
| DT18/35/RS | NA | F18BX/SPX35/RS | FT18DL/835/RS |
| DT18/41/RS | PL-L 18W/41 | F18BX/SPX41/RS | FT18DL/841/RS |
| DT18/50/RS | NA | NA | NA |
| DT24/30/RS | PL-L 24W/30 | F27/24BX/SPX30 | FT24DL/830 |
| DT24/35/RS | NA | F27/24BX/SPX35 | FT24DL/835 |
| DT24/41/RS | PL-L 24W/41 | F27/24BX/SPX41 | FT24DL/841 |
| DT24/50/RS | NA | NA | NA |
| DT24/65/RS | NA | NA | NA |
| DT36/30/RS | PL-L 36W/30 | F39/36BX/SPX/30 | FT36DL/830 |
| DT36/35/RS | PL-L 36W/35 | F39/36BX/SPX/35 | FT36DL/835 |
| DT36/41/RS | PL-L 36W/41 | F39/36BX/SPX/41 | FT36DL/841 |
| DT36/50/RS | NA | NA | NA |
| DT36/65/RS | NA | NA | NA |
| DT40/30/RS | PL-L 40W/30/RS | F40/30BX/SPX30 | FT40DL/830/RS |
| DT40/35/RS | PL-L 40W/35/RS | F40/30BX/SPX35 | FT40DL/835/RS |
| DT40/41/RS | PL-L 40W/41/RS | F40/30BX/SPX41 | FT40DL/841/RS |
| DT40/50/RS | NA | NA | NA |
| DT40/65/RS | NA | NA | NA |
| DT50/30/RS | PL-L 50W/30/RS | F50BX/SPX30/RS | NA |
| DT50/35/RS | PL-L 50W/35/RS | F50BX/SPX35/RS | NA |
| DT50/41/RS | NA | F50BX/SPX41/RS | NA |
| DT50/50/RS | NA | NA | NA |
| DT50/65/RS | NA | NA | NA |
| DT55/30/RS | NA | NA | FT55DL/830 |
| DT55/35/RS | NA | NA | FT55DL/835 |
| DT55/41/RS | NA | NA | FT55DL/841 |
| DT55/50/RS | NA | NA | NA |
| DT55/65/RS | NA | NA | NA |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR COMPACT FLUORESCENT LAMPS

T4 Quad Tube - 2 Pin Base - Beveled End - Cross Reference

| EiKO | Philips (PL-C) | GE (Double Biax) | Osram (Dulux D) |
|---------------|-----------------|----------------------|-----------------|
| QT9/27 | NA | F9DBX23T4/SPX/27/827 | CF9DD/827 |
| QT9/30 | NA | NA | CF9/DD/830 |
| QT9/35 | NA | NA | CF9/DD/835 |
| QT13/27 | PL-C 13W/27/USA | F13DBX23T4/SPX27 | CF13DD/827 |
| QT13/30 | PL-C 13W/30/USA | F13DBX23T4/SPX30 | CF13DD/830 |
| QT13/35 | PL-C 13W/35/USA | F13DBX23T4/SPX35 | CF13DD/835 |
| QT13/41 | PL-C 13W/41/USA | F13DBX23T4/SPX41 | CF13DD/841 |
| QT13/50 | NA | NA | NA |
| QT13/65 | NA | NA | NA |
| QT13/G24D1/27 | PL-C 13W/27 | F13DBXT4/SPX27 | NA |
| QT13/G24D1/30 | PL-C 13W/30 | F13DBXT4/SPX30 | NA |
| QT13/G24D1/35 | NA | F13DBXT4/SPX35 | NA |
| QT13/G24D1/41 | NA | F13DBXT4/SPX41 | NA |
| QT13/G24D1/50 | NA | NA | NA |
| QT13/G24D1/65 | NA | NA | NA |
| QT18/27 | PL-C 18W/27 | F18DBXT4/SPX27 | CF18DD/827 |
| QT18/30 | PL-C 18W/30 | F18DBXT4/SPX30 | CF18DD/830 |
| QT18/35 | PL-C 18W/35 | F18DBXT4/SPX35 | CF18DD/835 |
| QT18/41 | PL-C 18W/41 | F18DBXT4/SPX41 | CF18DD/841 |
| QT18/50 | NA | NA | NA |
| QT18/65 | NA | NA | NA |
| QT26/27 | PL-C 26W/27 | F26DBXT4/SPX27 | CF26DD/827 |
| QT26/30 | PL-C 26W/30 | F26DBXT4/SPX30 | CF26DD/830 |
| QT26/35 | PL-C 26W/35 | F26DBXT4/SPX35 | CF26DD/835 |
| QT26/41 | PL-C 26W/41 | F26DBXT4/SPX41 | CF26DD/841 |
| QT26/50 | NA | NA | NA |
| QT26/65 | NA | NA | NA |

T4 Quad Tube - 4 Pin Base - Beveled End - Cross Reference

| EiKO | Philips (PL-C) | GE (Double Biax) | Osram (Dulux D) |
|------------|----------------|-------------------|-----------------|
| QT13/27-4P | PL-C 13W/27/4P | F13DBX/SPX27/4P | CF13DD/E/827 |
| QT13/30-4P | PL-C 13W/30/4P | F13DBX/SPX30/4P | CF13DD/E/830 |
| QT13/35-4P | PL-C 13W/35/4P | F13DBX/SPX35/4P | CF13DD/E/835 |
| QT13/41-4P | PL-C 13W/41/4P | F13DBX/SPX41/4P | CF13DD/E/841 |
| QT13/50-4P | NA | NA | NA |
| QT13/65-4P | NA | NA | NA |
| QT18/27-4P | PL-C 18W/27/4P | F18DBX/SPX27/4P | CF18DD/E/827 |
| QT18/30-4P | PL-C 18W/30/4P | F18DBX/SPX30/4P | CF18DD/E/830 |
| QT18/35-4P | PL-C 18W/35/4P | F18DBX/SPX35/4P | CF18DD/E/835 |
| QT18/41-4P | PL-C 18W/41/4P | F18DBX/SPX41/4P | CF18DD/E/841 |
| QT18/50-4P | NA | NA | NA |
| QT18/65-4P | NA | NA | NA |
| QT26/27-4P | PL-C 26W/27/4P | F26DBXT4/SPX27/4P | CF26DD/E/827 |
| QT26/30-4P | PL-C 26W/30/4P | F26DBXT4/SPX30/4P | CF26DD/E/830 |
| QT26/35-4P | PL-C 26W/35/4P | F26DBXT4/SPX35/4P | CF26DD/E/835 |
| QT26/41-4P | PL-C 26W/41/4P | F26DBXT4/SPX41/4P | CF26DD/E/841 |
| QT26/50-4P | NA | NA | NA |
| QT26/65-4P | NA | NA | NA |

T4 Triple Tube - 4 Pin Base - Beveled End - Cross Reference

| EiKO | Philips (PL-T) | GE (Triple Biax) | Osram (Dulux T/E/IN) |
|---------|---------------------|-------------------|----------------------|
| TT18/27 | NA | F18TBX/SPX27/A/4P | CF18DT/E/IN/827 |
| TT18/30 | PL-T 18W/30/4P/ALTO | F18TBX/SPX30/A/4P | CF18DT/E/IN/830 |
| TT18/35 | PL-T 18W/35/4P/ALTO | F18TBX/SPX35/A/4P | CF18DT/E/IN/835 |
| TT18/41 | PL-T 18W/41/4P/ALTO | F18TBX/SPX41/A/4P | CF18DT/E/IN/841 |
| TT18/50 | NA | NA | NA |
| TT18/65 | NA | NA | NA |
| TT26/27 | NA | F26TBX/SPX27/A/4P | CF26DT/E/IN/827 |
| TT26/30 | PL-T 26W/30/4P/ALTO | F26TBX/SPX30/A/4P | CF26DT/E/IN/830 |
| TT26/35 | PL-T 26W/35/4P/ALTO | F26TBX/SPX35/A/4P | CF26DT/E/IN/835 |
| TT26/41 | PL-T 26W/41/4P/ALTO | F26TBX/SPX41/A/4P | CF26DT/E/IN/841 |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR COMPACT FLUORESCENT LAMPS

T4 Triple Tube - 4 Pin Base - Beveled End - Cross Reference (Continued)

| EiKO | Philips (PL-T) | GE (Triple Biac) | Osram (Dulux T/E/IN) |
|---------|---------------------|-------------------|----------------------|
| TT26/50 | NA | NA | NA |
| TT26/65 | NA | NA | NA |
| TT32/27 | NA | F32TBX/SPX27/A/4P | CF32D/T/E/IN/827 |
| TT32/30 | PL-T 32W/30/4P/ALTO | F32TBX/SPX30/A/4P | CF32D/T/E/IN/830 |
| TT32/35 | PL-T 32W/35/4P/ALTO | F32TBX/SPX35/A/4P | CF32D/T/E/IN/835 |
| TT32/41 | PL-T 32W/41/4P/ALTO | F32TBX/SPX41/A/4P | CF32D/T/E/IN/841 |
| TT32/50 | NA | NA | NA |
| TT32/65 | NA | NA | NA |
| TT42/30 | PL-T 42W/30/4P/ALTO | NA | CF42DT/E/IN/830 |
| TT42/35 | PL-T 42W/30/4P/ALTO | NA | CF42DT/E/IN/835 |
| TT42/41 | PL-T 42W/30/4P/ALTO | NA | CF42DT/E/IN/841 |
| TT42/50 | NA | NA | NA |
| TT42/65 | NA | NA | NA |

R30 & R40 Reflector Flood - Cross Reference

| EiKO | Philips | GE | Osram |
|------------|------------------|----------------|--------------------|
| R30/15/27K | Flood SLS/R30 15 | FLE15TBX/L/R30 | CF15EL/R30/830/MED |
| R30/15/41K | NA | NA | NA |
| R30/15/65K | NA | NA | NA |
| R30/20/27K | Flood SLS/R30 20 | NA | NA |
| R30/20/41K | NA | NA | NA |
| R30/20/65K | NA | NA | NA |
| R40/23/27K | Flood SLS/R40 20 | FLE20TBX/L/R40 | CF20EL/R40/830/MED |
| R40/23/41K | NA | NA | NA |
| R40/23/65K | NA | NA | NA |

CROSS-REFERENCING FOR LINEAR FLUORESCENT LAMPS

T5 Lamps - Miniature BiPin Base - Cross Reference

| EiKO | Philips | GE | Osram |
|----------|----------|----------|----------|
| F4T5/CW | F4T5/CW | F4T5/CW | F4T5/CW |
| F4T5/D | NA | NA | NA |
| F4T5/W | NA | NA | NA |
| F6T5/CW | F6T5/CW | F6T5/CW | F6T5/CW |
| F6T5/D | F6T5/D | F6T5/D | NA |
| F6T5/W | NA | NA | NA |
| F6T5/WW | NA | NA | F6T5/WW |
| F8T5/CW | F8T5/CW | F8T5/CW | F8T5/CW |
| F8T5/D | F8T5/D | F8T5/D | NA |
| F8T5/W | NA | NA | NA |
| F8T5/WW | F8T5/WW | F8T5/WW | F8T5/WW |
| F13T5/CW | F13T5/CW | F13T5/CW | F13T5/CW |
| F13T5/WW | NA | F13T5/WW | F13T5/WW |

T8 Lamps - Medium BiPin Base - Aquarium - Cross Reference

| EiKO | Philips | GE | Osram |
|---------|---------|---------|-------|
| F8T5/AQ | NA | F8T5/AR | NA |

T8 Lamps - Medium BiPin Base - Black Light & Black Light Blue - Cross Reference

| EiKO | Philips | GE | Osram |
|----------|----------|----------|------------|
| F4T5/BL | NA | F4T5/BL | NA |
| F4T5/BLB | F4T5/BLB | NA | F4T5/BLB |
| F6T5/BL | NA | NA | F6T5/350BL |
| F6T5/BLB | F6T5/BLB | NA | NA |
| F8T5/BL | NA | NA | F8T5/350BL |
| F8T5/BLB | F8T5/BLB | F8T5/BLB | F8T5/BLB |

T3 Lamps - Intermediate Screw Base - Germicidal - Cross Reference

| EiKO | Philips | GE | Osram |
|------|---------|----|-------|
| GTL3 | NA | NA | NA |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR LINEAR FLUORESCENT LAMPS

T5 Lamps - Miniature BiPin Base - Germicidal - Cross Reference

| EiKO | Philips | GE | Osram |
|------|---------|------|-------|
| G4T5 | NA | NA | NA |
| G6T5 | NA | NA | NA |
| G8T5 | NA | G8T5 | G8T5 |

T8 Lamps - Medium BiPin Base - Cross Reference

| EiKO | Philips | GE | Osram |
|----------|----------|----------|----------|
| F10T8/CW | NA | NA | NA |
| F13T8/CW | F13T8/CW | F13T8/CW | F13T8/CW |
| F14T8/CW | NA | F14T8/CW | F14T8/CW |
| F14T8/D | NA | NA | F14T8/D |
| F15T8/CW | F15T8/CW | F15T8/CW | F15T8/CW |
| F15T8/D | F15T8/D | F15T8/D | F15T8/D |
| F15T8/W | NA | NA | NA |
| F15T8/WW | F15T8/WW | F15T8/WW | F15T8/WW |

T8 Lamps - Medium BiPin Base - Aquarium - Cross Reference

| EiKO | Philips | GE | Osram |
|----------|------------|-------------|-----------------|
| F15T8/AQ | F15T8/AGRO | F15T8/AR/FS | F15T8/GRO/AQ/RP |

T8 Lamps - Medium BiPin Base - Black Light & Black Light Blue - Cross Reference

| EiKO | Philips | GE | Osram |
|-----------|-----------|-----------|-------------|
| F15T8/BL | F15T8/BL | F15T8/BL | F15T8/350BL |
| F15T8/BLB | F15T8/BLB | F15T8/BLB | F15T8/BLB |

T8 Lamps - Medium BiPin Base - Germicidal - Cross Reference

| EiKO | Philips | GE | Osram |
|-------|---------|-------|-------|
| G10T8 | NA | NA | NA |
| G15T8 | NA | G15T8 | G15T8 |

T9 Circuline Lamps - Rapid Start - Cross Reference

| EiKO | Philips | GE | Osram |
|-----------|--------------|-----------|--------------|
| FC8T9/CW | FC8T9/HL CW | FC8T9/CW | FC8T9/CW/RS |
| FC8T9/D | FC8T9/D | FC8T9/D | FC8T9/D/RS |
| FC12T9/CW | FC12T9/HL CW | FC12T9/CW | FC12T9/CW/RS |
| FC12T9/D | FC12T9/D | FC12T9/D | FC12T9/D/RS |
| FC16T9/CW | FC16T9/HL CW | FC16T9/CW | FC16T9/CW/RS |
| FC16T9/D | NA | FC16T9/D | FC16T9/D/RS |

T12 Lamps - Medium BiPin - Cross Reference

| EiKO | Philips | GE | Osram |
|-----------|---------------|-----------|-----------|
| F14T12/CW | F14T12/CW | F14T12/CW | F14T12/CW |
| F15T12/CW | F15T12/CW | F15T12/CW | F15T12/CW |
| F15T12/D | F15T12/D | NA | F15T12/D |
| F20T12/CW | F20T12/41U | F20T12/CW | F20T12/CW |
| F20T12/D | F20T12/D/ALTO | F20T12/D | F20T12/D |
| F20T12/WW | F20T12/30U | F20T12/WW | F20T12/WW |

T8 Lamps - Medium BiPin U-Bend - Cross Reference

| EiKO | Philips | GE | Osram |
|---------------|---------------------|-----------------|--------------------|
| F32T8/735K/U6 | FB32T8/6 TL735 ALTO | F32T8/SP35/U/6 | FBO32/735/ECO |
| F32T8/741K/U6 | FB32T8/6 TL741 ALTO | F32T8/SP41/U/6 | FBO32/741/ECO |
| F32T8/750K/U6 | FB32T8/6 TL750 ALTO | N/A | FBO32/750/ECO |
| F32T8/835K/U6 | FB32T8/6 TL835 ALTO | F32T8/SPX35/U/6 | FBO32/835/6 |
| F32T8/841K/U6 | FB32T8/6 TL841 ALTO | F32T8/SPX41/U/6 | FBO32/841/6 |
| F32T8/850K/U6 | FB32T8/6 TL850 ALTO | F32T8/SPX50/U/6 | N/A |
| F31T8/830/U | N/A | F31T8/SPX30/U | FBO29/830XP/SS/ECO |
| F31T8/835/U | N/A | F31T8/SPX35/U | FBO29/835XP/SS/ECO |
| F31T8/841/U | N/A | F31T8/SPX41/U | FBO29/841XP/SS/ECO |
| F31T8/850/U | N/A | N/A | N/A |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HID LAMPS

Metal Halide - Double Ended - Enclosed Rated Fixtures - World Lamp - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Venture | Iwasaki |
|---------------------|----------------------|----------------|----------------------|-----------------|--------------------|---------|
| MH-DE70/TD/UVS/3K | HQI-DE 70/WDX-E | NA | ARC70/TD/730/R7S | HQI-DE 70/WDX-E | MH-DE 70W/UVS/3K | NA |
| MH-DE70/TD/UVS/4K | HQI-DE 70/NDX | MHN70/TD/840 | ARC70/TD/742/R7S | HQI-DE70/NDX | MH-DE 70W/UVS/4K | NA |
| MH-DE150/TD/UVS/3K | HQI-DE 150/WDX | NA | ARC150/TD/730/R7S-24 | HQI-DE 150/WDX | MH-DE 150W/UVS/3K | NA |
| MH-DE150/TD/UVS/4K | HQI-DE 150/NDX | MHN/150/TD/840 | ARC150/TD/742/R7S-24 | HQI-DE 150/NDX | MH-DE 150W/UVS/4K | NA |
| MH-DE150/TD/UVS/6K | NA | NA | NA | NA | MH-DE 150W/UVS/6K | NA |
| MH-DE150/TD/UVS/10K | NA | NA | NA | NA | MH-DE 150W/UVS/10K | NA |
| MH-DE250/TD/3K | NA | NA | NA | HQI-DE 250/WDX | MH-DE 250W/3K/Fc2 | NA |
| MH-DE250/TD/4K | HQI-DE 250/NDX (Fc2) | NA | NA | HQI-DE 250/NDX | MH-DE 250W/4K/Fc2 | NA |
| MH-DE250/TD/3K/RSC | NA | NA | NA | NA | MH-DE 250W/3K/RSC | NA |
| MH-DE250/TD/4K/RSC | HQI-DE 250/NDX (RSC) | NA | NA | NA | MH-DE 250W/4K/RSC | NA |
| MH-DE400/TD/3K | NA | NA | NA | NA | MH-DE 400W/UVS/3K | NA |
| MH-DE400/TD/4K | HQI-DE400/NDX | NA | NA | NA | MH-DE 400W/UVS/4K | NA |

Colored Metal Halide - Double Ended - UV Shield - Enclosed Rated Fixtures - World Lamp - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Venture | Iwasaki |
|---------------------|-------------|---------|----|-------|--------------------|---------|
| MH-DE150/TD/UVS/BDX | NA | NA | NA | NA | MH-DE 150W/UVS/BDX | NA |
| MH-DE150/TD/UVS/GDX | NA | NA | NA | NA | MH-DE 150W/UVS/GDX | NA |
| MH-DE150/TD/UVS/PDX | NA | NA | NA | NA | MH-DE 150W/UVS/PDX | NA |

HIT Metal Halide - Enclosed Rated Fixtures - World Lamp - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Venture | Iwasaki |
|-----------------|----------------|---------------|--------------------|----------------|---------------------|---------|
| MH-SE70/UVS/3K | HQI-SE 70/WDX | CDM70/T6/830 | NA | HQI-SE 70/WDX | HIT 70W/G12/UVS/3K | NA |
| MH-SE70/UVS/4K | HQI-SE 70/NDX | NA | NA | HQI-SE 70/NDX | HIT 70W/G12/UVS/4K | NA |
| MH-SE150/UVS/3K | HQI-SE 150/WDX | CDM150/T6/830 | ARC150/T/U/830/G12 | HQI-SE 150/WDX | HIT 150W/G12/UVS/3K | NA |
| MH-SE150/UVS/4K | HQI-SE 150/NDX | NA | ARC150/T/U/840/G12 | HQI-SE 150/NDX | HIT 150W/G12/UVS/4K | NA |

Standard Medium Base (E26) Metal Halide - Enclosed Fixtures - North American Style - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Venture | Iwasaki |
|---------------|----------------|-------------|----------------|---------------|-----------------|--------------|
| MH50/C/U/MED | MVR50/C/U/MED | NA | MVR50/C/U/MED | MP50/C/U/MED | MH 50W/C/U | MF50X/U/MED |
| MH50/U/MED | MVR50/U/MED | NA | MVR50/U/MED | MP50/U/MED | MH 50W/U | M50X/U/MED |
| MH70/C/U/MED | MVR70/C/U/MED | MH70/C/U/M | MVR70/C/U/MED | MH70/C/U/MED | MH 70W/C/U | MF70X/U/MED |
| MH70/U/MED | MVR70/U/MED | MH70/U/M | MVR70/U/MED | MH70/U/MED | MH 70W/U | M70X/U/MED |
| MH100/C/U/MED | MVR100/C/U/MED | MH100/C/U/M | MVR100/C/U/MED | MH100/C/U/MED | MH 100W/C/U | MF100X/U/MED |
| MH100/U/MED | MVR100/U/MED | MH100/U/M | MVR100/U/MED | MH100/U/MED | MH 100W/U | M100X/U/MED |
| MH150/C/U/MED | MVR150/C/U/MED | MH150/C/U/M | MVR150/C/U/MED | MH150/C/U/MED | MH 150W/C/U/PS | MF150X/U/MED |
| MH150/U/MED | MVR150/U/MED | MH150/U/M | MVR150/U/MED | MH150/U/MED | MH 150W/U/PS | M150X/U/MED |
| MH175/C/U/MED | MVR175/C/U/MED | MH175/C/U/M | MVR175/C/U/MED | M175/C/U/MED | MH 175W/C/U/MED | MF175X/U/MED |
| MH175/U/MED | MVR175/U/MED | MH175/U/M | MVR175/U/MED | M175/U/MED | MH 175W/U/MED | M175X/U/MED |

Standard Mogul Base (E39) Metal Halide - Enclosed Fixtures - North American Style - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Venture | Iwasaki |
|------------|-------------|------------|-------------|--------------|--------------|------------|
| MH175/U | MVR175/U | MH175/U | MVR175/U | M175/U | MH 175W/U | M175X/U |
| MH175/C/U | MVR175/C/U | MH175/C/U | MVR175/C/U | M175/C/U | MH 175W/C/U | MF175X/U |
| MH250/U | MVR250/U | MH250/U | MVR250/U | M250/U | MH 250W/U | M250X/U |
| MH250/C/U | MVR250/C/U | MH250/C/U | MVR250/C/U | M250/C/U | MH 250W/C/U | MF250X/U |
| MH400/U | MVR400/U | MH400/U | MVR400/U | M400/U | MH 400W/U | M400X/U |
| MH400/C/U | MVR400/C/U | MH400/C/U | MVR400/C/U | M400/C/U | MH 400W/C/U | MF400X/U |
| MH1000/U | MVR1000/U | MH1000/U | MVR1000/U | M1000/U | MH 1000W/U | M1000BX/U |
| MH1000/C/U | MVR1000/C/U | MH1000/C/U | MVR1000/C/U | M1000/C/U | MH 1000W/C/U | MF1000BX/U |
| MH1500/U | MVR1500/U | MH1500BU | MVR1500/U | M1500/BU-HOR | MH 1500W/U | M1500B/BUH |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HID LAMPS

High Pressure Sodium - North American Style - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Iwasaki |
|----------------|-------------|-------------|----------------|----------------|------------------|
| LU35/MED | C35S76/M | C35S76/M | LU35/MED | LU35/MED | LU35/MED |
| LU35/D/MED | C35S76/D/M | C35S76/D/M | LU35/D/MED | LU35/D/MED | LU35/D/MED |
| LU50/MED | C50S68/M | C50S68/M | LU50/MED | LU50/MED | LU50/MED |
| LU50/D/MED | C50S68/D/M | C50S68/D/M | LU50/D/MED | LU50/D/MED | LU50/D/MED |
| LU50 | C50S68 | C50S68 | LU50 | LU50 | LU50 |
| LU50/D | C50S68/D | C50S68/D | LU50/D | LU50/D | LU50/D |
| LU70/MED | C70S62/M | C70S62/M | LU70/MED | LU70/MED | LU70/MED |
| LU70/D/MED | C70S62/D/M | C70S62/D/M | LU70/D/MED | LU70/D/MED | LU70/D/MED |
| LU70 | C70S62 | C70S62 | LU70 | LU70 | LU70 |
| LU70/D | C70S62/D | C70S62/D | LU70/D | LU70/D | LU70/D |
| LU100/MED | C100S54/M | C100S54/M | LU100/MED | LU100/MED | LU100/MED |
| LU100/D/MED | C100S54/D/M | C100S54/D/M | LU100/D/MED | LU100/D/MED | LU100/D/MED |
| LU100 | C100S54 | C100S54 | LU100 | LU100 | LU100 |
| LU100/D | C100S54/D | C100S54/D | LU100/D | LU100/D | LU100/D |
| LU150/55/MED | C150S55/M | C150S55/M | LU150/55/MED | LU150/55/MED | LU150/55/MED |
| LU150/55/D/MED | C150S55/D/M | C150S55/D/M | LU150/55/D/MED | LU150/55/D/MED | LU150/55/D/MED |
| LU150/55 | C150S55 | C150S55 | LU150/55 | LU150/55 | LU150/55 |
| LU150/55/D | C150S55/D | C150S55/D | LU150/55/D | LU150/55/D | LU150/55/D |
| LU150/100 | C150S56 | C150S56 | LU150/100 | LU150/100 | LU150/100/BT90 |
| LU150/100/D | C150S56/D | C150S56/D | LU150/100/D | NA | LU150/100/D/BT90 |
| LU200 | C200S66 | C200S66 | LU200 | LU200 | LU200/T15 |
| LU250 | C250S50 | C250S50 | LU250 | LU250 | LU250/T15 |
| LU250/D | C250S50/D | C250S50/D | LU250/D | LU250/D | LU250/D |
| LU310 | C310S67 | C310S67 | LU310 | LU310 | LU310 |
| LU400 | C400S51 | C400S51 | LU400 | LU400 | LU400/T15 |
| LU400/D | C400S51/D | C400S51/D | LU400/D | LU400/D | LU400/D |
| LU600 | C600S106 | C600S106 | LU600 | LU600 | NA |
| LU1000 | C1000S52 | C1000S52 | LU1000 | LU1000 | LU1000B/T25 |

Mercury - North American Style - Cross Reference

| EiKO | Common Code | Philips | GE | Osram | Iwasaki |
|----------------|-----------------|----------------|-----------------|-------------------|----------|
| H46DL-40/50/DX | HR40/50/DX45-46 | H46DL-40-50/DX | HR40/50/DX45-46 | H45/46DL-40/50/DX | HF50PD/H |
| H38JA-100/DX | HR100DX38 | H38JA-100/DX | HR100DX38 | H38JA-100/DX | HF100PD |
| H38MP-100/DX | HR100DX38/A23 | H38MP-100/DX | HR100DX38/A23 | NA | NA |
| H39KC-175/DX | HR175DX39 | H39KC-175/DX | HR175DX39 | H39KC-175/DX | HF175PD |
| H39KB-175 | HR175A39 | H39KC-175/DX | HR175A39 | H39KB-175 | H175 |
| H37KC-250/DX | HR250DX37 | H37KC-250/DX | HR250DX37 | H37KC-250/DX | HF250PD |
| H37KB-250 | HR250A37 | H37KB-250 | HR250A37 | H37KB-250 | H250 |
| H33GL-400/DX | HR400DX33 | H33GL-400/DX | HR400DX33 | H33GL-400/DX | HF400PD |
| H33CD-400 | HR400A33 | H33CD-400 | HR400A33 | H33CD-400 | H400 |

CROSS-REFERENCING FOR HEALTH CARE LAMPS

ANSI Coded Lamps - Cross Reference

| EIKO | American Optical | Bausch & Lomb | Leitz | Nikon | Olympus | Osram | Phillips | Reichert | Swift | Unitron | Vickers | Volpe | Wilder | Zeiss |
|------|------------------|-----------------------------|---------------------|-------|---------|-------|----------|----------|-------|---------|---------|-----------|---------|--------------|
| BFM | BFM | | | | | | | | | | | | | |
| BLC | | 31-31-71-03, 31-31-71-05 | | | 8B-152 | | | | | | | | | |
| BRL | | | 500-182 | 76516 | | 64610 | 7027 | | | | | | | |
| DDL | | | | | | | | | | | | 23500-014 | | |
| EFN | | | | | | 64615 | 6853 | | | | | | | 3800-79-9030 |
| EFP | | | 098-145 | | | 64627 | 6834 | | | | | | | 3800-79-9040 |
| EFR | | | | | | 64634 | 6423 | | | | | 10001-111 | 997-053 | 31-01-98 |
| EHJ | | | 037-723, 590-910 | | | 64655 | 7748 | | | | | | | |
| EJA | | | 902-063 | | | | | | | | | | | |
| EJY | 1180 & 1182 | | | | | | | | | | | | | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HEALTH CARE LAMPS

ANSI Coded Lamps - Cross Reference (Continued)

| EiKO | American Optical | Bausch & Lomb | Leitz | Nikon | Olympus | Osram | Phillips | Reichert | Swift | Unitron | Vickers | Volpe | Wilder | Zeiss |
|---------|------------------|---------------|---------------------|-------|---------|-------|----------|-----------|-------|---------|-----------|-------|---------|--------------|
| EKE | | 31-31-52 | 902-058 | | | | | | | | | | | |
| ESA/FHD | 624 | | 050-550, 907-090 | | | 64225 | 7387 | | | | | | | |
| ESB/FHE | 1120 | | 500-245 | 79099 | | 64250 | 7388 | | | | | | 362-658 | 3801-20-7030 |
| EVA | | | | | | 64623 | 7724 | | | | | | | |
| EVB/BRJ | | | | | | 64633 | 6550 | | | | | | | |
| FCR | 2052 | | 500-974 | 76513 | | 64625 | 7023 | 9-8600-15 | | | M32-05-45 | | 193-049 | 3800-59-1660 |
| FCS | | | 037-717 | 71826 | | 64640 | 7158 | | | | | | | |
| FDX | 2052 | | | | | | | | | | | | | |

General - Cross Reference

| EiKO | American Optical | Bausch & Lomb | Leitz | Nikon | Olympus | Osram | Phillips | Reichert | Swift | Unitron | Vickers | Volpe | Wilder | Zeiss |
|-----------------|------------------|---------------|---------|-------|---------|-------|----------|----------|---------|---------|---------|-------|---------|---------------|
| 1460 | 1460 | | | | | | 1460 | | | | | | | |
| 1460X | 1460X | 31-31-75 | | | | | 1460X | | | | | | | |
| 15511/ 102CL | | 15511-102CL | | | | | | | | | | | | |
| 1630 | 1630 | | | | | | 1630 | | | | | | | |
| 1631X | 1631X | | | | | | 1631X | | | | | | | |
| 1634 | | 31-31-37 | | | | | 1634 | | | | | | | |
| 71818 | | | | 71818 | | | | | | | | | | |
| 76907 | | | | 76907 | | | | | | | | | | |
| 77903 | | | | 77903 | | | | | | | | | | |
| 77904 | | | | 77904 | | | | | | | | | | |
| 77910 | | | | 77910 | | | | | | | | | | |
| 8001 | | | 610-025 | | | 8001 | 6100M | | | | | | | |
| 8013 | | | | | | 8013 | | | | | | | | |
| 8014 | | | | | | 8014 | | | | | | | | |
| 8017 | | | 620-068 | | | 8017 | 13811W | | | | | | | 3800-29-9020D |
| 8018 | | | 500-012 | | | 8018 | 13347W | | | | | | 166-324 | |
| 8022 | | | | | | 8022 | | | | | | | | |
| 8100 | | | 500-011 | | | 8100 | 6106M | | | | | | | |
| EI-2201 | | | | | | | | | MA-2201 | | | | | |
| EI-722 | | | | | | | | | MA-722 | | | | | |
| EI-737 | | | | | | | | | MA-737 | | | | | |
| EI-738 | | | | | | | | | MA-738 | | | | | |
| EI-77Z | | | | | | | | | | | | | | BT77Z |
| EI-886 | | | | | | | | | MA-886 | | | | | |
| EI-B153 | | | | | 8-B153 | | | | | | | | | |
| EI-M102 | | | | | 8-M102 | | | | | | | | | |
| EI-M103 | | | | | 8-M103 | | | | | | | | | |
| EL-12B | | | | | | | | | | EL-12B | | | | |
| EL-1B | | | | | | | | | | EL-1B | | | | |
| EL-2B | | | | | | | | | | EL-2B | | | | |
| EL-3B | | | | | | | | | | EL-3B | | | | |

Slit Lamp - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------------|---------------------|----------|-----------------------|
| 41382 | Bausch & Lomb | Thorp | 71-71-50 |
| 41358 | Bausch & Lomb | OSL-2000 | 71-61-86 |
| 41358 | Bausch & Lomb | PSL-3000 | 71-61-86 |
| JC12V50WH20 | Burton | 2000 | L2000 |
| 41340 | Haag-Streit | 900-930 | 366 |
| 64260 | Marko | G II | MR1045 |
| 64260 | Marko | G IV | MR1045 |
| 64260 | Marko | GXX | MR1045 |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HEALTH CARE LAMPS

Slit Lamp - Cross Reference (Continued)

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|-----------------------|-----------------------|
| 64260 | Marko | IV | MR1045 |
| 41318 | Mentor | 6 Volt | 1008 |
| 41358 | Mentor | G-10 | 22-4010 |
| 41358 | Mentor | GH-10 | 22-4010 |
| 41358 | Mentor | GH-12 | 22-4010 |
| 41358 | Mentor | S-10 | 22-4010 |
| 41358 | Mentor | SH-10 | 22-4010 |
| 41376 | Neitz | SL-J (Main Bulb) | L-9 |
| 41308 | Nikon | Black Zoom Photo | 78079 |
| 64260 | Nikon | CS-2 | 79761 |
| 64260 | Nikon | FS-2 | 79761 |
| 64260 | Nikon | FS-3 | 79761 |
| 64260 | Nikon | NS-1 | 79761 |
| 41366 | Topcon | SL-1 | 40300-25500 |
| 41366 | Topcon | SL-1A | 40300-25500 |
| 41366 | Topcon | SL-1D | 40300-25500 |
| 41368 | Topcon | SL-1E | 40340-20700 |
| 41368 | Topcon | SL-2D | 40340-20700 |
| 41368 | Topcon | SL-2E | 40340-20700 |
| 41318 | Topcon | SL-3D | 40310-25600 |
| 41338 | Topcon | SL-3D (Fixation Bulb) | 40310-40770 |
| 41318 | Topcon | SL-3E | 40310-25600 |
| 41368 | Topcon | SL-4E | 40340-20700 |
| 41318 | Topcon | SL-5D | 40310-25600 |
| 41318 | Topcon | SL-6E | 40310-25600 |
| 41368 | Topcon | SL-7E | 40340-20700 |
| 41368 | Topcon | TRC-45AN | 40340-20700 |
| 41368 | Topcon | TRC-NW2 | 40340-20700 |
| 41368 | Woodlyn | 45500 | 45570 |
| 41358 | Woodlyn | CR Series | 41358 |
| 41358 | Woodlyn | HR Series | 41358 |
| 41368 | Woodlyn | SMM3 | 45570 |
| 41368 | Woodlyn | SMM5 | 45570 |
| 64260 | Zeiss | 30SL/M | 3801-20-7040 |
| 41344 | Zeiss | 100/16 | 39-01-53 |
| 41344 | Zeiss | 125/16 | 39-01-53 |

Auto Refractor - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|------------------------|-----------------------|
| 79726 | Nikon | NR2000 (Fixation Bulb) | 79726 |
| 79726 | Nikon | NR5000 (Fixation Bulb) | 79726 |
| 79726 | Nikon | NR7000 (Fixation Bulb) | 79726 |

Keratometer - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|----------|---------------------|-----------------------|-----------------------|
| 15S11/14 | Bausch & Lomb | 71/21/35 | 71-71-84 |
| 15S11-IF | Bausch & Lomb | | |
| 80-A | Burton | Fluorescent Ring 2040 | 80-A |
| 25S11-2C | Woodlyn | 55000 | 25S11-2C |
| 78 | | Fluorescent Ring | 78 |
| 80-B | | Fluorescent Ring | 80-B |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HEALTH CARE LAMPS

Vertometer - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|----------|---------------------|-------------|-----------------------|
| 15S11/13 | Bausch & Lomb | 70 (1950's) | 21-65-21 |
| 25S11/5C | Bausch & Lomb | 70 | 71-26-62 |

Headlamp - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|----------|---------------------|-------|-----------------------|
| 25S11-2C | Bausch & Lomb | | |

Radioscope - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|--------------|---------------------|-------------|-----------------------|
| 1493 | Marco | 5005 | MR5010 |
| 25T10/IF-120 | Bausch & Lomb | Ortho-Reton | 71-71-93 |

Screenoscope - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|-------|-----------------------|
| 41360 | Topcon | SS-3 | 42025-51010 |

Ophthalmometer - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|---------------|---------------------|------------------|-----------------------|
| 1468 or 1468X | Reichert | AO/CLC | 11581 |
| 41316 | Topcon | OM-1 | 40100-11530 |
| 41360 | Topcon | OM-2 | 42025-51010 |
| 41314 | Topcon | OM-3 | 40120-10080 |
| 41314 | Topcon | OM-4 (Main bulb) | 40120-10080 |

Ophthalmoscope - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|------------------------|-----------------------|
| 1884 | Bausch & Lomb | Professional | 71-71-99 |
| L51 | Neitz/Kowa | IOA Binocular Indirect | L51 |
| 1460 | Reichert | 1460 | 11063 |
| 41364 | Topcon | ID-10 | 41560-80020 |

Lensometer - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|----------|---------------------|---------------|-----------------------|
| 10S11/NF | American Optical | | 11163 |
| 41304 | American Optical | 11210 | 11211 |
| 41304 | American Optical | 11360 | 11211 |
| 15S11/87 | American Optical | | 12603 |
| 10S11N | American Optical | | 12604 |
| 15S11/14 | Bausch & Lomb | 70 | 70 Clear (15W) |
| 25S11-2C | Bausch & Lomb | 70 | 70 Clear (25W) |
| 15S11/F | Bausch & Lomb | 70 (21-65-70) | 70 Frost (15W) |
| 25S11-5C | Bausch & Lomb | 70 | 70 Frost (25W) |
| 41346 | Marco | 101 | 4007 |
| 41380 | Neitz | LM-P2 | L-19 |
| 41306 | Nikon | PL-1 | 77904 |
| 41308 | Nikon | PL-2 | 78079 |
| 41348 | Topcon | | T-23-Clear |
| 41350 | Topcon | | T-23-Frost |
| 41360 | Topcon | LM-2B | 42025-51010 |
| 41360 | Topcon | LM-3B | 42025-51010 |
| 41360 | Topcon | LM-3BC | 42025-51010 |
| 41360 | Topcon | LM-5 | 42025-51010 |
| 41360 | Topcon | LM-5E | 42025-51010 |
| 41360 | Topcon | LM-6 | 42025-51010 |
| 41360 | Topcon | LM-T3 | 42025-51010 |
| 41360 | Topcon | LM-T5 | 42025-51010 |
| 41312 | Topcon | LMP3 | 42409-30060 |
| 41312 | Topcon | LMP4 | 42409-30060 |
| 41310 | Topcon | LMP5 | 42320-10550 |
| 41310 | Topcon | LMP6 | 42320-10550 |
| 41346 | Woodlyn | 60000 | 41346 |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

CROSS-REFERENCING FOR HEALTH CARE LAMPS

Perimeter - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|-----------------------------|-----------------------|
| 1507 | Bausch & Lomb | | 71-71-80 |
| 1489 | Bausch & Lomb | Auto-Plot | 1489 |
| 41328 | Haag-Streit Goldman | 940-0750 | 510-250 |
| 41328 | Marco | Projection (late Model) | 2007-6 |
| 41326 | Topcon | SBP-11 (Main Bulb) | 43100-14800 |
| 41320 | Topcon | SBP-11 (Chart Illumination) | 40101-20570 |
| 41330 | Topcon | SBP-20 (Main Bulb) | 43108-18200 |
| 41320 | Topcon | SBP-20 (Chart Illumination) | 40101-20570 |

Retinoscope - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|-------|---------------------|------------|-----------------------|
| 41336 | Bausch & Lomb | | 71-71-55 |
| 41352 | Bausch & Lomb | | 71-75-62 |
| 41336 | Copeland | Streak | 71-71-55 |
| 41374 | Neitz | R-1 Streak | L-04 |
| 41370 | Nikon | Streak | 88052 |
| 41354 | Reichert | Fulvue | 11496 |

Projection - Cross Reference

| EiKO | System Manufacturer | Model | Manufacturer Lamp No. |
|----------|---------------------|-----------------------|-----------------------|
| 15S11/14 | Bausch & Lomb | 71/21/35 | 71-71-84 |
| 15S11-F | Bausch & Lomb | | |
| 80-A | Burton | Fluorescent Ring 2040 | 80-A |
| 25S11-2C | Woodlyn | 55000 | 25S11-2C |
| 78 | | Fluorescent Ring | 78 |
| 80-B | | Fluorescent Ring | 80-B |

CROSS-REFERENCING FOR HIGH PRESSURE DISCHARGE LAMPS

| EiKO ArcMaster™ Code | Osram Code | Philips Code | GE Code | Ushio Code | Radium Code |
|----------------------|-----------------|--------------|---------------|-----------------|----------------|
| ESR150-SE-NHR | | | | | |
| ESR400-SE-NHR | HSR 400/60 | MSR 400 | | USR-400 NHR | RSR 400W |
| ESR575-SE-NHR | HSR 575/60 | | | USR-575 GX9.5 | RSR 575W |
| ESR700-SE-NHR | HSR 700/60 | MSR 700 | | USR-700-NHR | RSR 700W |
| ESR1200-SE-NHR | HSR 1200/60 | MSR 1200 | | USR-1200 SE G22 | RSR 1200W |
| ESD150-SE-D | HSD 150/70 | | | | |
| ESD200-SE-D | HSD 200/60 | MSD 200 | | USD-200 NHR | RSD 200W |
| ESD250-SE-D | HSD 250/60 | MSD 250 | | USD-250 NHR | RSD 250W/60 |
| ESD575-SE-D | HSD575/72 | MSD 575 | | USD-575 NHR | RSD 575W |
| ESD250/2-SE-D8.5 | HSD 250/78 | MSD 250/2 | CSD 250/2/SE | USD-250/2 NHR | RSD 250W/78 |
| ESD575/2-SE-D7.2 | HSR 575/72 | MSR 575/2 | CSR 575/2/SE | USD-575/2 NHR | RSR 575W/72 |
| ESD575/2-SE-D8.5 | | | | | |
| ESR200-SE-HR | HMI 200W/SE | MSR 200 HR | CSR125/SE/HR | | RSI 200W/SE |
| ESR400-SE-HR | HMI 400W/SE | MSR 400 HR | CSR400/SE/HR | | RSI 400W/SE |
| ESR575-SE-HR | HMI 575W/SE | MSR 575 HR | CSR575/SE/HR | USR-575 BE SE | RSI 575W/SE |
| ESR800-SE-HR | | | | | |
| ESR1200-SE-HR | HMI 1200 SE | MSR 1200 HR | CSR1200/SE/HR | USR-1200 SE G38 | RSI 1200W/SE |
| ESR2500-SE-HR | HMI 2500 SE | MSR 2500 HR | CSR2500/SE/HR | USR-2500 SE | RSI 2500W/SE |
| ESI575-DE | HMI 575W/GS | MSI 575W | CSR575/DE | UMI-575 | RSI 575W |
| ESI1200-DE | HMI 1200W GS | MSI 1200W | CSR1200/DE | UMI-1200 | RSI 1200W |
| ESI1200-DE-S | HTI 1200W/D7/60 | MSI 1200W/S | CSR1200/S/DE | | |
| ESI2500-DE | HMI 2500W GS | MSI 2500W | CSR2500/DE | UMI-2500 | RSI 2500W |
| ESI4000-DE | HMI 4000W | MSI 4000W | CSR4000/DE | UMI-4000 | RSI 4000W |
| ESI6000-DE | HMI 6000W | MSI 6000W | CSR6000/DE | UMI-6000 | RSI 6000W |
| ESI12000-DE | HMI 12000W/GS | MSI 12000W | CSR12000/DE | UMI-12000 | RSI 12000W/230 |
| ESR700-SE-SA | HTI 705W/SE | MSR 700 SA | CSR700/SA | | |
| ESR600-SE-SA | HTI 600W/SE | | | | |
| ESR600-DE-SA | HTI 600W/DE | | | | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

SELF-BALLASTED COMPACT FLUORESCENT


Self Ballasted - Spiral



| Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL in./mm | Color Temp. | CRI |
|---------------|----------|-------|-----------------|-----------|------------|------------------|--------------|----------|-------|------------|-------------|-----|
| SP13/27K*† | 00031 | 13 | Med Screw (E26) | 1 | 24 | Std. 60W Incan. | 900 | 69.2 | 10000 | 4.10/104 | 2700 | 82 |
| SP13/35K* | 00032 | 13 | Med Screw (E26) | 1 | 24 | Std. 60W Incan. | 800 | 61.5 | 8000 | 4.10/104 | 3500 | 82 |
| SP13/41K† | 00033 | 13 | Med Screw (E26) | 1 | 24 | Std. 60W Incan. | 782 | 60.2 | 8000 | 4.10/104 | 4100 | 82 |
| SP15/65K | 49321 | 15 | Med Screw (E26) | 1 | 24 | Std. 60W Incan. | 950 | 63.3 | 8000 | 5.0/127 | 6500 | 82 |
| SP19/27K*† | 00034 | 19 | Med Screw (E26) | 1 | 24 | Std. 75W Incan. | 1200 | 63.2 | 10000 | 4.73/120 | 2700 | 82 |
| SP19/35K* | 00035 | 19 | Med Screw (E26) | 1 | 24 | Std. 75W Incan. | 1200 | 63.2 | 10000 | 4.73/120 | 3500 | 82 |
| SP19/41K† | 00036 | 19 | Med Screw (E26) | 1 | 24 | Std. 75W Incan. | 1140 | 60 | 8000 | 4.73/120 | 4100 | 82 |
| SP23/27K*† | 49325 | 23 | Med Screw (E26) | 1 | 24 | Std. 100W Incan. | 1600 | 70 | 10000 | 4.96/126 | 2700 | 82 |
| SP23/35K* | 81171 | 23 | Med Screw (E26) | 1 | 24 | Std. 100W Incan. | 1536 | 66.8 | 10000 | 4.96/126 | 3500 | 82 |
| SP23/41K | 49326 | 23 | Med Screw (E26) | 1 | 24 | Std. 100W Incan. | 1472 | 64 | 8000 | 4.96/126 | 4100 | 82 |
| SP27/27K* | 05412 | 27 | Med Screw (E26) | 1 | 24 | Std. 110W Incan. | 1750 | 65 | 10000 | 5.47/139 | 2700 | 80 |
| SP27/35K | 05413 | 27 | Med Screw (E26) | 1 | 24 | Std. 110W Incan. | 1700 | 63 | 10000 | 5.47/139 | 3500 | 80 |
| SP27/41K | 05414 | 27 | Med Screw (E26) | 1 | 24 | Std. 110W Incan. | 1700 | 63 | 10000 | 5.47/139 | 4100 | 80 |
| SP27/50K | 05415 | 27 | Med Screw (E26) | 1 | 24 | Std. 110W Incan. | 1650 | 61 | 10000 | 5.47/139 | 5000 | 80 |
| SP32/27K* | 05416 | 32 | Med Screw (E26) | 1 | 24 | Std. 130W Incan. | 2100 | 66 | 10000 | 5.63/143 | 2700 | 80 |
| SP32/35K | 05417 | 32 | Med Screw (E26) | 1 | 24 | Std. 130W Incan. | 2100 | 66 | 10000 | 5.63/143 | 3500 | 80 |
| SP32/41K | 05418 | 32 | Med Screw (E26) | 1 | 24 | Std. 130W Incan. | 2050 | 64 | 10000 | 5.63/143 | 4100 | 80 |
| SP32/50K | 05419 | 32 | Med Screw (E26) | 1 | 24 | Std. 130W Incan. | 2000 | 63 | 10000 | 5.63/143 | 5000 | 80 |
| SP42/27K* | 05420 | 42 | Med Screw (E26) | 1 | 24 | Std. 150W Incan. | 2800 | 67 | 10000 | 7.13/181 | 2700 | 80 |
| SP42/35K | 05421 | 42 | Med Screw (E26) | 1 | 24 | Std. 150W Incan. | 2750 | 65 | 10000 | 7.13/181 | 3500 | 80 |
| SP42/41K | 05422 | 42 | Med Screw (E26) | 1 | 24 | Std. 150W Incan. | 2750 | 65 | 10000 | 7.13/181 | 4100 | 80 |
| SP42/50K | 05423 | 42 | Med Screw (E26) | 1 | 24 | Std. 150W Incan. | 2650 | 63 | 10000 | 7.13/181 | 5000 | 80 |

* Energy Star rated for superior energy efficiency
† TCLP Compliant

Self Ballasted - High Watt Spiral



| Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|-------------------|----------|-------|-----------------|-----------|------------|-------------|--------------|----------|------|---------|-------------|-----|
| SP85/41/MED | 81183 | 85 | Med Screw (E26) | 1 | 1 | 400W Incan. | 5500 | 64.7 | 8000 | 11 | 4100 | 84 |
| SP85/50/MED† | 81181 | 85 | Med Screw (E26) | 1 | 1 | 400W Incan. | 5500 | 64.7 | 8000 | 11 | 5000 | 84 |
| SP105/41/MED† | 81184 | 105 | Med Screw (E26) | 1 | 1 | 500W Incan. | 6900 | 65.7 | 8000 | 11.5 | 4100 | 84 |
| SP105/41/MOG | 81185 | 105 | Mog Screw (E39) | 1 | 1 | 500W Incan. | 6900 | 65.7 | 8000 | 12 | 4100 | 84 |
| SP105/41/MOG-277V | 04412 | 105 | Mog Screw (E39) | 1 | 1 | 500W Incan. | 6900 | 65.7 | 8000 | 12 | 4100 | 84 |
| SP105/50/MED | 81180 | 105 | Med Screw (E26) | 1 | 1 | 500W Incan. | 6900 | 65.7 | 8000 | 11.5 | 5000 | 84 |

† TCLP Compliant



EiKO Certified Green lamps are environmentally friendly in their manufacturing, construction, operation and/or disposal.

Look for lamps that are ENERGY STAR® rated, TCLP compliant, feature long life or high lumens per watt to provide quality light output with a minimum environmental footprint.




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

SELF-BALLASTED COMPACT FLUORESCENT


Self Ballasted - GU24 Base Spiral

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL mm. | Color Temp. | CRI |
|---|---------------|----------|-------|------|-----------|------------|-------------|--------------|----------|-------|---------|-------------|-----|
| | SP13/27-GU24 | 05255 | 13 | GU24 | 1 | 1 | 60W Incan. | 800 | 61.5 | 10000 | 82 | 2700 | 82 |
| | SP18/27-GU24 | 05256 | 18 | GU24 | 1 | 1 | 75W Incan. | 1100 | 61.1 | 10000 | 90 | 2700 | 82 |
| | SP26/27-GU24 | 05258 | 26 | GU24 | 1 | 1 | 100W Incan. | 1600 | 62 | 10000 | 95 | 2700 | 82 |


Self Ballasted PAR Fluorescent

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-----------------|-----------|------------|------------|--------------|----------|--------|---------|-------------|------|
| | PAR38/20/27K | 05531 | 20 | Med Screw (E26) | 1 | 1 | 75W Incan. | 960 | 48 | 10,000 | | | 2700 |

Self Ballasted - R30 & R40 Reflector Flood


|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-----------------|-----------------|-----------|-------------|-------------|--------------|----------|------|---------|-------------|-----|
| | R30/15/27K | 49365 | 15 | Med Screw (E26) | 1 | 1 | 60W Incan. | 750 | 50 | 8000 | 5.25 | 2700 | 82 |
| | R30/15/41K | 49366 | 15 | Med Screw (E26) | 1 | 1 | 60W Incan. | 750 | 50 | 8000 | 5.25 | 4100 | 82 |
| | R30/15/65K | 49367 | 15 | Med Screw (E26) | 1 | 1 | 60W Incan. | 750 | 50 | 8000 | 5.25 | 6500 | 82 |
| | R30/20/27K | 49368 | 20 | Med Screw (E26) | 1 | 1 | 75W Incan. | 950 | 47.5 | 8000 | 6.25 | 2700 | 82 |
| | R30/20/41K | 49369 | 20 | Med Screw (E26) | 1 | 1 | 75W Incan. | 950 | 47.5 | 8000 | 6.25 | 4100 | 82 |
| | R30/20/65K | 49370 | 20 | Med Screw (E26) | 1 | 1 | 75W Incan. | 950 | 47.5 | 8000 | 6.25 | 6500 | 82 |
| | R40/23/27K | 49371 | 23 | Med Screw (E26) | 1 | 1 | 100W Incan. | 1150 | 50 | 8000 | 6.5 | 2700 | 82 |
| | R40/23/41K | 49372 | 23 | Med Screw (E26) | 1 | 1 | 100W Incan. | 1150 | 50 | 8000 | 6.5 | 4100 | 82 |
| R40/23/65K | 49373 | 23 | Med Screw (E26) | 1 | 1 | 100W Incan. | 1150 | 50 | 8000 | 6.5 | 6500 | 82 | |

Self Ballasted - A11 & A15


|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-----------------|-----------|------------|------------|--------------|----------|------|---------|-------------|-----|
| | A11/30K | 05581 | 11 | Med Screw (E26) | 1 | 1 | 40W Incan. | 460 | 41.8 | 8000 | 5.75 | 3000 | 82 |
| | A15/27K | 49356 | 15 | Med Screw (E26) | 1 | 1 | 60W Incan. | 825 | 55 | 8000 | 5.75 | 2700 | 82 |
| | A15/30K | 05564 | 15 | Med Screw (E26) | 1 | 1 | 60W Incan. | 825 | 55 | 8000 | 5.75 | 3000 | 82 |

SPIRAL • DUOTUBE® • QUADTUBE® • TRIPLETUBE • FML COMPACT FLUORESCENT

4-Pin Spiral

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Replaces | Initial Lum. | Lum/Watt | Life | MOL mm. | Color Temp. | CRI |
|---|---------------|----------|-------|--------|-----------|------------|-------------|--------------|----------|-------|---------|-------------|-----|
| | SP13/27-4P | 05251 | 13 | G24q-1 | 1 | 1 | 60W Incan. | 860 | 66.2 | 10000 | 95 | 2700 | 82 |
| | SP18/27-4P | 05250 | 18 | G24q-2 | 1 | 1 | 75W Incan. | 1100 | 61.1 | 10000 | 112 | 2700 | 82 |
| | SP26/27-4P | 05252 | 26 | G24q-3 | 1 | 1 | 100W Incan. | 1600 | 61.5 | 10000 | 120 | 2700 | 82 |

Adapters for Duo and Quad Tubes

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. |
|---|---------------|----------|-------|------|-----------------|------------|
| | A13 | 15552 | | | Med Screw (E26) | 1 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com


SPIRAL • DUOTUBE® • QUADTUBE® • TRIPLETUBE • FML COMPACT FLUORESCENT

T4 DuoTube® - 2 Pin Base - Beveled End  TCLP Compliant



| Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---------------|----------|-------|------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|-----|
| DT5/27 | 15554 | 5 | G23 | 1 | 50 | 250 | 210 | 50 | 10000 | 4.2 | 2700 | 82 |
| DT5/35 | 49204 | 5 | G23 | 1 | 50 | 250 | 210 | 50 | 10000 | 4.2 | 3500 | 82 |
| DT5/41 | 49205 | 5 | G23 | 1 | 50 | 250 | 210 | 50 | 10000 | 4.2 | 4100 | 82 |
| DT5/50 | 49206 | 5 | G23 | 1 | 50 | 250 | 210 | 50 | 10000 | 4.2 | 5000 | 82 |
| DT5/65 | 49207 | 5 | G23 | 1 | 50 | 250 | 210 | 50 | 10000 | 4.2 | 6500 | 82 |
| DT7/27 | 15556 | 7 | G23 | 1 | 50 | 400 | 330 | 57.1 | 10000 | 5.3 | 2700 | 82 |
| DT7/35 | 49208 | 7 | G23 | 1 | 50 | 400 | 330 | 57.1 | 10000 | 5.3 | 3500 | 82 |
| DT7/41 | 49209 | 7 | G23 | 1 | 50 | 400 | 330 | 57.1 | 10000 | 5.3 | 4100 | 82 |
| DT7/50 | 49210 | 7 | G23 | 1 | 50 | 400 | 330 | 57.1 | 10000 | 5.3 | 5000 | 82 |
| DT7/65 | 49211 | 7 | G23 | 1 | 50 | 400 | 330 | 57.1 | 10000 | 5.3 | 6500 | 82 |
| DT9/27 | 15558 | 9 | G23 | 1 | 50 | 600 | 500 | 66.7 | 10000 | 6.6 | 2700 | 82 |
| DT9/35 | 49212 | 9 | G23 | 1 | 50 | 600 | 500 | 66.7 | 10000 | 6.6 | 3500 | 82 |
| DT9/41 | 49213 | 9 | G23 | 1 | 50 | 600 | 500 | 66.7 | 10000 | 6.6 | 4100 | 82 |
| DT9/50 | 49214 | 9 | G23 | 1 | 50 | 600 | 500 | 66.7 | 10000 | 6.6 | 5000 | 82 |
| DT9/65 | 49215 | 9 | G23 | 1 | 50 | 600 | 500 | 66.7 | 10000 | 6.6 | 6500 | 82 |
| DT13/27 | 15560 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 2700 | 82 |
| DT13/30 | 49216 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 3000 | 82 |
| DT13/35 | 15575 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 3500 | 82 |
| DT13/41 | 49217 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 4100 | 82 |
| DT13/50 | 49218 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 5000 | 82 |
| DT13/65 | 49219 | 13 | GX23 | 1 | 50 | 825 | 710 | 63.5 | 10000 | 7.3 | 6500 | 82 |

T5 DuoTube® - 2G11 Base - 4 Pin - use w/ Rapid Start  TCLP Compliant



| Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---------------|----------|-------|------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|-----|
| DT18/30/RS | 49283 | 18 | 2G11 | 1 | 50 | 1250 | 1130 | 62.8 | 20000 | 9.0 | 3000 | 82 |
| DT18/35/RS | 49284 | 18 | 2G11 | 1 | 50 | 1250 | 1130 | 62.8 | 20000 | 9.0 | 3500 | 82 |
| DT18/41/RS | 49285 | 18 | 2G11 | 1 | 50 | 1250 | 1130 | 62.8 | 20000 | 9.0 | 4100 | 82 |
| DT18/50/RS | 49286 | 18 | 2G11 | 1 | 50 | 1250 | 1130 | 62.8 | 20000 | 9.0 | 5000 | 82 |
| DT24/30/RS | 49288 | 24 | 2G11 | 1 | 50 | 1800 | 1620 | 67.5 | 20000 | 12.9 | 3000 | 82 |
| DT24/35/RS | 49289 | 24 | 2G11 | 1 | 50 | 1800 | 1620 | 67.5 | 20000 | 12.9 | 3500 | 82 |
| DT24/41/RS | 49290 | 24 | 2G11 | 1 | 50 | 1800 | 1620 | 67.5 | 20000 | 12.9 | 4100 | 82 |
| DT24/50/RS | 49291 | 24 | 2G11 | 1 | 50 | 1800 | 1620 | 67.5 | 20000 | 12.9 | 5000 | 82 |
| DT24/65/RS | 49292 | 24 | 2G11 | 1 | 50 | 1800 | 1620 | 67.5 | 20000 | 12.9 | 6500 | 82 |
| DT36/30/RS | 49293 | 36 | 2G11 | 1 | 50 | 2900 | 2610 | 72.5 | 20000 | 16.6 | 3000 | 82 |
| DT36/35/RS | 49294 | 36 | 2G11 | 1 | 50 | 2900 | 2610 | 72.5 | 20000 | 16.6 | 3500 | 82 |
| DT36/41/RS | 49295 | 36 | 2G11 | 1 | 50 | 2900 | 2610 | 72.5 | 20000 | 16.6 | 4100 | 82 |
| DT36/50/RS | 49296 | 36 | 2G11 | 1 | 50 | 2900 | 2610 | 72.5 | 20000 | 16.6 | 5000 | 82 |
| DT36/65/RS | 49297 | 36 | 2G11 | 1 | 50 | 2900 | 2610 | 72.5 | 20000 | 16.6 | 6500 | 82 |
| DT40/30/RS | 49298 | 40 | 2G11 | 1 | 50 | 3300 | 2970 | 74.3 | 20000 | 22.5 | 3000 | 82 |
| DT40/35/RS | 49299 | 40 | 2G11 | 1 | 50 | 3300 | 2970 | 74.3 | 20000 | 22.5 | 3500 | 82 |
| DT40/41/RS | 49300 | 40 | 2G11 | 1 | 50 | 3300 | 2970 | 74.3 | 20000 | 22.5 | 4100 | 82 |
| DT40/50/RS | 49301 | 40 | 2G11 | 1 | 50 | 3300 | 2970 | 74.3 | 20000 | 22.5 | 5000 | 82 |
| DT40/65/RS | 49302 | 40 | 2G11 | 1 | 50 | 3300 | 2970 | 74.3 | 20000 | 22.5 | 6500 | 82 |
| DT50/30/RS | 49303 | 50 | 2G11 | 1 | 50 | 4300 | 3870 | 77.4 | 14000 | 22.5 | 3000 | 82 |
| DT50/35/RS | 49304 | 50 | 2G11 | 1 | 50 | 4300 | 3870 | 77.4 | 14000 | 22.5 | 3500 | 82 |
| DT50/41/RS | 49305 | 50 | 2G11 | 1 | 50 | 4300 | 3870 | 77.4 | 14000 | 22.5 | 4100 | 82 |
| DT50/50/RS | 49306 | 50 | 2G11 | 1 | 50 | 4300 | 3870 | 77.4 | 14000 | 22.5 | 5000 | 82 |
| DT50/65/RS | 49307 | 50 | 2G11 | 1 | 50 | 4300 | 3870 | 77.4 | 14000 | 22.5 | 6500 | 82 |
| DT55/30/RS | 49308 | 55 | 2G11 | 1 | 50 | 4800 | 4320 | 78.5 | 14000 | 21.1 | 3000 | 82 |
| DT55/35/RS | 49309 | 55 | 2G11 | 1 | 50 | 4800 | 4320 | 78.5 | 14000 | 21.1 | 3500 | 82 |
| DT55/41/RS | 49310 | 55 | 2G11 | 1 | 50 | 4800 | 4320 | 78.5 | 14000 | 21.1 | 4100 | 82 |
| DT55/50/RS | 49311 | 55 | 2G11 | 1 | 50 | 4800 | 4320 | 78.5 | 14000 | 21.1 | 5000 | 82 |
| DT55/65/RS | 49312 | 55 | 2G11 | 1 | 50 | 4800 | 4320 | 78.5 | 14000 | 21.1 | 6500 | 82 |





23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

SPIRAL • DUOTUBE® • QUADTUBE® • TRIPLETUBE • FML COMPACT FLUORESCENT


T4 TripleTube® - 4 Pin Base - Amalgam - Beveled End  TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---------|---|----------|---------|---------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|------|
| |  | TT18/27 | 49259 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 2700 |
| TT18/30 | | 49260 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 3000 | 82 |
| TT18/35 | | 49261 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 3500 | 82 |
| TT18/41 | | 49262 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 4100 | 82 |
| TT18/50 | | 49263 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 5000 | 82 |
| TT18/65 | | 49264 | 18 | GX24q-2 | 1 | 50 | 1200 | 1020 | 56.7 | 10000 | 4.8 | 6500 | 82 |
| TT26/27 | | 49265 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 2700 | 82 |
| TT26/30 | | 49266 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 3000 | 82 |
| TT26/35 | | 49267 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 3500 | 82 |
| TT26/41 | | 49268 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 4100 | 82 |
| TT26/50 | | 49269 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 5000 | 82 |
| TT26/65 | | 49270 | 26 | GX24q-3 | 1 | 50 | 1800 | 1530 | 58.8 | 10000 | 5.2 | 6500 | 82 |
| TT32/27 | | 49271 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 2700 | 82 |
| TT32/30 | | 49272 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 3000 | 82 |
| TT32/35 | | 49273 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 3500 | 82 |
| TT32/41 | | 49274 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 4100 | 82 |
| TT32/50 | | 49275 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 5000 | 82 |
| TT32/65 | | 49276 | 32 | GX24q-3 | 1 | 50 | 2200 | 1870 | 58.4 | 10000 | 5.8 | 6500 | 82 |
| TT42/27 | | 49277 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 2700 | 82 |
| TT42/30 | | 49278 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 3000 | 82 |
| TT42/35 | 49279 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 3500 | 82 | |
| TT42/41 | 49280 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 4100 | 82 | |
| TT42/50 | 49281 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 5000 | 82 | |
| TT42/65 | 49282 | 42 | GX24q-4 | 1 | 50 | 3200 | 2720 | 64.8 | 10000 | 6.4 | 6500 | 82 | |

T4 QuadTube® - FML Series  TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|----------|---|----------|-------|---------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|------|
| |  | FML18/65 | 05148 | 18 | GX10q-4 | 1 | 50 | 1400 | 1080 | 60 | 10000 | 5.1 | 6500 |
| FML27/27 | | 49313 | 27 | GX10q-4 | 1 | 50 | 1400 | 1260 | 46.7 | 10000 | 5.7 | 2700 | 82 |
| FML27/41 | | 49314 | 27 | GX10q-4 | 1 | 50 | 1400 | 1260 | 46.7 | 10000 | 5.7 | 4100 | 82 |
| FML27/65 | | 49315 | 27 | GX10q-4 | 1 | 50 | 1400 | 1260 | 46.7 | 10000 | 5.7 | 6500 | 82 |
| FML36/27 | | 49316 | 36 | GX10q-6 | 1 | 50 | 2600 | 2340 | 46.7 | 10000 | 10.0 | 2700 | 82 |
| FML36/41 | | 49317 | 36 | GX10q-6 | 1 | 50 | 2600 | 2340 | 46.7 | 10000 | 10.0 | 4100 | 82 |
| FML36/65 | | 49318 | 36 | GX10q-6 | 1 | 50 | 2600 | 2340 | 46.7 | 10000 | 10.0 | 6500 | 82 |

T4 QuadTube® - 2 Pin Base - Beveled End  TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---------------|---|----------|-------|--------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|------|
| |  | QT9/27 | 15562 | 9 | G23-2 | 1 | 50 | 550 | 470 | 52.2 | 10000 | 4.3 | 2700 |
| QT9/30 | | 49220 | 9 | G23-2 | 1 | 50 | 550 | 470 | 52.2 | 10000 | 4.3 | 3000 | 82 |
| QT9/35 | | 49221 | 9 | G23-2 | 1 | 50 | 550 | 470 | 52.2 | 10000 | 4.3 | 3500 | 82 |
| QT13/27 | | 15564 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 2700 | 82 |
| QT13/30 | | 49222 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 3000 | 82 |
| QT13/35 | | 15576 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 3500 | 82 |
| QT13/41 | | 49084 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 4100 | 82 |
| QT13/50 | | 49223 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 5000 | 82 |
| QT13/65 | | 49224 | 13 | GX23-2 | 1 | 50 | 810 | 685 | 52.7 | 10000 | 4.6 | 6500 | 82 |
| QT13/G24D1/27 | | 49225 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 2700 | 82 |
| QT13/G24D1/30 | | 49226 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 3000 | 82 |
| QT13/G24D1/35 | | 49227 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 3500 | 82 |
| QT13/G24D1/41 | | 49228 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 4100 | 82 |
| QT13/G24D1/50 | | 49229 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 5000 | 82 |
| QT13/G24D1/65 | | 49230 | 13 | G24d-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.5 | 6500 | 82 |
| QT18/27 | | 15566 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 2700 | 82 |
| QT18/30 | | 49231 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 3000 | 82 |
| QT18/35 | | 49232 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 3500 | 82 |

Continued on next page ►►





23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

SPIRAL • DUOTUBE® • QUADTUBE® • TRIPLETUBE • FML COMPACT FLUORESCENT

T4 QuadTube - 2 Pin Base - Beveled End (Continued)  TCLP Compliant


|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|--------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|-----|
| | QT18/41 | 49233 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 4100 | 82 |
| | QT18/50 | 49234 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 5000 | 82 |
| | QT18/65 | 49235 | 18 | G24d-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.9 | 6500 | 82 |
| | QT26/27 | 15568 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 2700 | 82 |
| | QT26/30 | 49236 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 3000 | 82 |
| | QT26/35 | 49237 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 3500 | 82 |
| | QT26/41 | 49238 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 4100 | 82 |
| | QT26/50 | 49239 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 5000 | 82 |
| | QT26/65 | 49240 | 26 | G24d-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.7 | 6500 | 82 |

T4 QuadTube - 4 Pin Base - Beveled End  TCLP Compliant


|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Initial Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|--------|-----------|------------|--------------|-----------|----------|-------|---------|-------------|-----|
| | QT13/27-4P | 49241 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 2700 | 82 |
| | QT13/30-4P | 49242 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 3000 | 82 |
| | QT13/35-4P | 49243 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 3500 | 82 |
| | QT13/41-4P | 49244 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 4100 | 82 |
| | QT13/50-4P | 49245 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 5000 | 82 |
| | QT13/65-4P | 49246 | 13 | G24q-1 | 1 | 50 | 900 | 765 | 58.8 | 10000 | 5.0 | 6500 | 82 |
| | QT18/27-4P | 49247 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 2700 | 82 |
| | QT18/30-4P | 49248 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 3000 | 82 |
| | QT18/35-4P | 49249 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 3500 | 82 |
| | QT18/41-4P | 49250 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 4100 | 82 |
| | QT18/50-4P | 49251 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 5000 | 82 |
| | QT18/65-4P | 49252 | 18 | G24q-2 | 1 | 50 | 1150 | 980 | 54.4 | 10000 | 5.8 | 6500 | 82 |
| | QT26/27-4P | 49253 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 2700 | 82 |
| | QT26/30-4P | 49254 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 3000 | 82 |
| | QT26/35-4P | 49255 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 3500 | 82 |
| | QT26/41-4P | 49256 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 4100 | 82 |
| | QT26/50-4P | 49257 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 5000 | 82 |
| | QT26/65-4P | 49258 | 26 | G24q-3 | 1 | 50 | 1710 | 1460 | 56.2 | 10000 | 6.4 | 6500 | 82 |

LINEAR FLUORESCENT

Fluorescent Lamp Starters

|  | Ordering Code | Bar Code | Cart. Qty. | Wattage Covered |
|---|-----------------------|----------|------------|-----------------|
| | FS2 - Aluminum | 49550 | 25 | 14, 15, 20 W |
| | FS4 - Aluminum | 49551 | 25 | 30, 40 W |
| | FS5 - Aluminum | 49552 | 25 | 4, 6, 8 W |
| | FS12 - Aluminum | 49553 | 25 | 32 W |
| | FSU - 120V - Aluminum | 49554 | 25 | 4-30 W |
| | FSU - 220V - Aluminum | 49555 | 25 | 4-30 W |

T5 - Standard  TCLP Compliant

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|------|-----------|------------|-------------|------------|----------|---------|---------|-------------|-----|
| | F14T5/835 | 81147 | 14 | G5 | 1 | 25 | Standard | 1350 | 96.4 | 35,000* | 22 | 3500 | 85 |
| | F14T5/841 | 81148 | 14 | G5 | 1 | 25 | Standard | 1350 | 96.4 | 35,000* | 22 | 4100 | 85 |
| | F21T5/835 | 81149 | 21 | G5 | 1 | 25 | Standard | 2100 | 100 | 35,000* | 34 | 3500 | 85 |
| | F21T5/841 | 81150 | 21 | G5 | 1 | 25 | Standard | 2100 | 100 | 35,000* | 34 | 4100 | 85 |
| | F28T5/835 | 81151 | 28 | G5 | 1 | 25 | Standard | 2900 | 103.6 | 35,000* | 46 | 3500 | 85 |
| | F28T5/841 | 81152 | 28 | G5 | 1 | 25 | Standard | 2900 | 103.6 | 35,000* | 46 | 4100 | 85 |

* 35,000 hours w/ 12 hour starts and programmed soft start ballast. 25,000 hours w/ other ballasts and shorter starts.



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LINEAR FLUORESCENT

T5 - High Output TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|------|-----------|------------|-------------|------------|----------|---------|---------|-------------|-----|
| | F24T5/HO/835 | 81154 | 24 | G5 | 1 | 25 | High Output | 2000 | 83.3 | 35,000* | 22 | 3500 | 85 |
| | F24T5/HO/841 | 81155 | 24 | G5 | 1 | 25 | High Output | 2000 | 83.3 | 35,000* | 22 | 4100 | 85 |
| | F39T5/HO/835 | 81156 | 39 | G5 | 1 | 25 | High Output | 3500 | 89.7 | 35,000* | 34 | 3500 | 85 |
| | F39T5/HO/841 | 81157 | 39 | G5 | 1 | 25 | High Output | 3500 | 89.7 | 35,000* | 34 | 4100 | 85 |
| | F54T5/HO/835 | 81158 | 54 | G5 | 1 | 25 | High Output | 5000 | 92.6 | 35,000* | 46 | 3500 | 85 |
| | F54T5/HO/841 | 81159 | 54 | G5 | 1 | 25 | High Output | 5000 | 92.6 | 35,000* | 46 | 4100 | 85 |
| | F54T5/HO/850 | 81160 | 54 | G5 | 1 | 25 | High Output | 4850 | 89.8 | 35,000* | 46 | 5000 | 85 |

* 35,000 hours w/ 12 hour starts and programmed soft start ballast. 25,000 hours w/ other ballasts and shorter starts.

T5 - Miniature Bipin TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---------|---------------|----------|-------------------|-------------------|-----------|------------|-------------|------------|-----------|----------|------|---------|-------------|-----|
| | F4T5/CW | 15500 | 4 | Min. Bipin - (G5) | 1 | 100 | Cool White | 135 | 100 | 25 | 6000 | 6 | 4100 | 60 |
| | F4T5/D | 15501 | 4 | Min. Bipin - (G5) | 1 | 100 | Daylight | 115 | 92 | 23 | 6000 | 6 | 6500 | 75 |
| | F4T5/W | 15502 | 4 | Min. Bipin - (G5) | 1 | 100 | White | 140 | 104 | 26 | 6000 | 6 | 3500 | 55 |
| | F6T5/CW | 15505 | 6 | Min. Bipin - (G5) | 1 | 50 | Cool White | 295 | 235 | 39.2 | 7500 | 9 | 4100 | 60 |
| | F6T5/D | 15506 | 6 | Min. Bipin - (G5) | 1 | 50 | Daylight | 230 | 185 | 30.8 | 7500 | 9 | 6500 | 75 |
| | F6T5/W | 15508 | 6 | Min. Bipin - (G5) | 1 | 50 | White | 270 | 215 | 35.8 | 7500 | 9 | 3500 | 55 |
| | F6T5/WW | 15507 | 6 | Min. Bipin - (G5) | 1 | 50 | Warm White | 275 | 220 | 36.7 | 7500 | 9 | 3000 | 52 |
| | F8T5/CW | 15510 | 8 | Min. Bipin - (G5) | 1 | 50 | Cool White | 400 | 320 | 40 | 7500 | 12 | 4100 | 60 |
| | F8T5/D | 15511 | 8 | Min. Bipin - (G5) | 1 | 50 | Daylight | 330 | 265 | 33.1 | 7500 | 12 | 6500 | 75 |
| | F8T5/W | 15513 | 8 | Min. Bipin - (G5) | 1 | 50 | White | 400 | 320 | 40 | 7500 | 12 | 3500 | 55 |
| | F8T5/WW | 15512 | 8 | Min. Bipin - (G5) | 1 | 50 | Warm White | 410 | 330 | 41.3 | 7500 | 12 | 3000 | 52 |
| | F13T5/CW | 15517 | 13 | Min. Bipin - (G5) | 1 | 50 | Cool White | 850 | 705 | 54.2 | 7500 | 21 | 4100 | 60 |
| | F13T5/WW | 15518 | 13 | Min. Bipin - (G5) | 1 | 50 | Warm White | 870 | 720 | 55.4 | 7500 | 21 | 3000 | 60 |
| F13T5/D | 15531 | 13 | Min. Bipin - (G5) | 1 | 50 | Daylight | 700 | 460 | 35.4 | 7500 | 21 | 6500 | 75 | |

T8 Universal Start - Medium Bipin TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|-------------------|-----------|------------|------------------|------------|-----------|---------|---------|-------------|-----|
| | F32T8/730K | 49584 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 70+ CRI | 2850 | NA | 25,000* | 48 | 3000 | 75 |
| | F32T8/735K | 49585 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 70+ CRI | 2850 | NA | 25,000* | 48 | 3500 | 75 |
| | F32T8/741K | 49586 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 70+ CRI | 2850 | NA | 25,000* | 48 | 4100 | 75 |
| | F32T8/830K | 49587 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 80+ CRI | 2950 | NA | 25,000* | 48 | 3000 | 83 |
| | F32T8/835K | 49588 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 80+ CRI | 2950 | NA | 25,000* | 48 | 3500 | 83 |
| | F32T8/841K | 49589 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 80+ CRI | 2950 | NA | 25,000* | 48 | 4100 | 83 |
| | F32T8/850K | 81174 | 32 | Med Bipin - (G13) | 36 | 360 | Tri Phos 80+ CRI | 2950 | NA | 25,000* | 48 | 5000 | 83 |

* 25,000 hours w/ 12 hour starts and programmed soft start ballast. 20,000 hours w/ other ballasts and shorter starts.

T8 - Medium Bipin TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|-------------------|-----------|------------|-------------|------------|-----------|----------|------|---------|-------------|-----|
| | F10T8/CW | 15524 | 10 | Med Bipin - (G13) | 1 | 25 | Cool White | 480 | 425 | 42.5 | 7500 | 13 | 4100 | 60 |
| | F13T8/CW | 15529 | 13 | Med Bipin - (G13) | 1 | 25 | Cool White | 565 | 480 | 36.9 | 7500 | 12 | 4100 | 60 |
| | F14T8/CW | 15519 | 14 | Med Bipin - (G13) | 1 | 25 | Cool White | 685 | 580 | 41.4 | 7500 | 15 | 4100 | 60 |
| | F14T8/D | 15520 | 14 | Med Bipin - (G13) | 1 | 25 | Daylight | 645 | 545 | 38.9 | 7500 | 15 | 6500 | 75 |
| | F15T8/CW | 15521 | 15 | Med Bipin - (G13) | 1 | 25 | Cool White | 825 | 725 | 48.3 | 7500 | 18 | 4100 | 60 |
| | F15T8/D | 15522 | 15 | Med Bipin - (G13) | 1 | 25 | Daylight | 700 | 615 | 41 | 7500 | 18 | 6500 | 75 |
| | F15T8/W | 15525 | 15 | Med Bipin - (G13) | 1 | 25 | White | 800 | 725 | 48.3 | 7500 | 18 | 3500 | 55 |
| | F15T8/WW | 15523 | 15 | Med Bipin - (G13) | 1 | 25 | Warm White | 845 | 745 | 49.7 | 7500 | 18 | 3000 | 52 |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LINEAR FLUORESCENT

T8 Rapid Start - Medium Bipin TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|------------|---------------|----------|-------------------|-------------------|-----------|------------------|------------------|------------|-----------|---------|---------|-------------|-----|
| | F17T8/730K | 49572 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 1325 | NA | 25,000* | 24 | 3000 | 75 |
| | F17T8/735K | 49573 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 1325 | NA | 25,000* | 24 | 3500 | 75 |
| | F17T8/741K | 49574 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 1325 | NA | 25,000* | 24 | 4100 | 75 |
| | F17T8/830K | 49575 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 1400 | NA | 25,000* | 24 | 3000 | 83 |
| | F17T8/835K | 49576 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 1400 | NA | 25,000* | 24 | 3500 | 83 |
| | F17T8/841K | 49577 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 1400 | NA | 25,000* | 24 | 4100 | 83 |
| | F17T8/850K | 48055 | 17 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 1400 | NA | 25,000* | 24 | 5000 | 83 |
| | F25T8/730K | 49578 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 2125 | NA | 25,000* | 36 | 3000 | 75 |
| | F25T8/735K | 49579 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 2125 | NA | 25,000* | 36 | 3500 | 75 |
| | F25T8/741K | 49580 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 70+ CRI | 2125 | NA | 25,000* | 36 | 4100 | 75 |
| | F25T8/830K | 49581 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 2225 | NA | 25,000* | 36 | 3000 | 83 |
| | F25T8/835K | 49582 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 2225 | NA | 25,000* | 36 | 3500 | 83 |
| | F25T8/841K | 49583 | 25 | Med Bipin - (G13) | 1 | 24 | Tri Phos 80+ CRI | 2225 | NA | 25,000* | 36 | 4100 | 83 |
| | F28T8/830K | 05264 | 28 | Med Bipin - (G13) | 1 | 36 | Tri Phos 80+ CRI | 2800 | NA | 25,000* | 48 | 3000 | 83 |
| | F28T8/835K | 05265 | 28 | Med Bipin - (G13) | 1 | 36 | Tri Phos 80+ CRI | 2800 | NA | 25,000* | 48 | 3500 | 83 |
| F28T8/841K | 05266 | 28 | Med Bipin - (G13) | 1 | 36 | Tri Phos 80+ CRI | 2800 | NA | 25,000* | 48 | 4100 | 83 | |
| F28T8/850K | 05267 | 28 | Med Bipin - (G13) | 1 | 36 | Tri Phos 80+ CRI | 2800 | NA | 25,000* | 48 | 5000 | 83 | |

* 25,000 hours w/ 12 hour starts and programmed soft start ballast. 20,000 hours w/ other ballasts and shorter starts.

T12 - Medium Bipin TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|-------------------|-----------|------------|-------------|------------|-----------|----------|-------|---------|-------------|-----|
| | F34T12/CW/RW | 50141 | 34 | Med Bipin - (G13) | 1 | 30 | Cool White | 2650 | 2300 | 77.9 | 20000 | 48 | 4100 | 63 |

CIRCULINE & U-BEND FLUORESCENT

Circuline T9 Rapid Start TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|----------|---------------|----------|--------------|--------------|-----------|------------|-------------|------------|-----------|----------|-------|---------|-------------|-----|
| | FC8T9/CW | 15604 | 22 | 4-Pin (G10q) | 1 | 20 | Circuline | 1100 | 825 | 37.5 | 12000 | 8-1/4 | 4100 | 60 |
| | FC8T9/D | 15532 | 22 | 4-Pin (G10q) | 1 | 20 | Circuline | 925 | 690 | 31.4 | 12000 | 8-1/4 | 6500 | 75 |
| | FC12T9/CW | 15606 | 32 | 4-Pin (G10q) | 1 | 20 | Circuline | 1950 | 1460 | 45.6 | 12000 | 12 | 4100 | 60 |
| | FC12T9/D | 15533 | 32 | 4-Pin (G10q) | 1 | 20 | Circuline | 1675 | 1260 | 39.4 | 12000 | 12 | 6500 | 75 |
| | FC16T9/CW | 15534 | 40 | 4-Pin (G10q) | 1 | 20 | Circuline | 2700 | 2030 | 50.8 | 12000 | 16 | 4100 | 60 |
| FC16T9/D | 15535 | 40 | 4-Pin (G10q) | 1 | 20 | Circuline | 2250 | 1690 | 42.3 | 12000 | 16 | 6500 | 75 | |

U-Bend 1 5/8" TCLP Compliant

| | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|--|---------------|----------|-------|--------|-----------|------------|------------|-----------|----------|--------|---------|-------------|-----|
| | F31T8/830/U | 05287 | 31 | Bi-pin | 1 | 20 | 2750 | 2475 | 88.7 | 20,000 | 22.5 | 3000K | 84 |
| | F31T8/835/U | 05288 | 31 | Bi-pin | 1 | 20 | 2750 | 2475 | 88.7 | 20,000 | 22.5 | 3500K | 84 |
| | F31T8/841/U | 05289 | 31 | Bi-pin | 1 | 20 | 2750 | 2745 | 88.7 | 20,000 | 22.5 | 4100K | 84 |
| | F31T8/850/U | 05290 | 31 | Bi-pin | 1 | 20 | 2625 | 2365 | 88.7 | 20,000 | 22.5 | 5000K | 84 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


CIRCULINE & U-BEND FLUORESCENT

U-Bend 6" TCLP Compliant


|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Init. Lum. | Mean Lum. | Lum/Watt | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|------|-----------|------------|------------|-----------|----------|-------|---------|-------------|-----|
| | F32T8/735K/U6 | 49590 | 32 | G13 | 1 | 20 | 2650 | 2370 | 82.8 | 20000 | 22.5 | 3500K | 75 |
| | F32T8/741K/U6 | 02401 | 32 | G13 | 1 | 20 | 2650 | 2370 | 82.8 | 20000 | 22.5 | 4100K | 75 |
| | F32T8/750K/U6 | 02402 | 32 | G13 | 1 | 20 | 2600 | 2325 | 86.3 | 20000 | 22.5 | 5000K | 75 |
| | F32T8/835K/U6 | 02403 | 32 | G13 | 1 | 20 | 2800 | 2535 | 87.5 | 20000 | 22.5 | 3500K | 85 |
| | F32T8/841K/U6 | 02404 | 32 | G13 | 1 | 20 | 2800 | 2535 | 87.5 | 20000 | 22.5 | 4100K | 85 |
| | F32T8/850K/U6 | 02405 | 32 | G13 | 1 | 20 | 2750 | 2500 | 85.9 | 20000 | 22.5 | 5000K | 85 |

GERMICIDAL LINEAR FLUORESCENT


T5 - Miniature Bipin - Black Light & Black Light Blue (Peak Emission 365 nm)

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-------------------|-----------|------------|------------------|------------|-----------|------|---------|-------------|-----|
| | F4T5/BL | 15503 | 4 | Min. Bipin - (G5) | 1 | 100 | Black Light | N/A | N/A | 6000 | 6 | N/A | N/A |
| | F4T5/BLB | 15504 | 4 | Min. Bipin - (G5) | 1 | 100 | Black Light Blue | N/A | N/A | 6000 | 6 | N/A | N/A |
| | F6T5/BL | 15528 | 6 | Min. Bipin - (G5) | 1 | 50 | Black Light | N/A | N/A | 7500 | 9 | N/A | N/A |
| | F6T5/BLB | 15509 | 6 | Min. Bipin - (G5) | 1 | 50 | Black Light Blue | N/A | N/A | 7500 | 9 | N/A | N/A |
| | F8T5/BL | 15515 | 8 | Min. Bipin - (G5) | 1 | 50 | Black Light | N/A | N/A | 7500 | 12 | N/A | N/A |
| | F8T5/BLB | 15516 | 8 | Min. Bipin - (G5) | 1 | 50 | Black Light Blue | N/A | N/A | 7500 | 12 | N/A | N/A |


T8 - Medium Bipin - Black Light & Black Light Blue (Peak Emission 365 nm)

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-------------------|-----------|------------|----------------|------------|-----------|------|---------|-------------|-----|
| | F15T8/BL | 15526 | 15 | Med Bipin - (G13) | 1 | 25 | Black Light | N/A | N/A | 7500 | 18 | N/A | N/A |
| | F15T8/BLB | 15527 | 15 | Med Bipin - (G13) | 1 | 25 | Black Lt. Blue | N/A | N/A | 7500 | 18 | N/A | N/A |


T5 - Miniature Bipin - Aquarium (Peak Emission 658 nm)

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-------------------|-----------|------------|-------------|------------|-----------|------|---------|-------------|-----|
| | F8T5/AQ | 15514 | 8 | Min. Bipin - (G5) | 1 | 50 | Aquarium | 100 | 90 | 7500 | 12 | N/A | N/A |

T8 - Medium Bipin - Aquarium

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Description | Init. Lum. | Mean Lum. | Life | MOL in. | Color Temp. | CRI |
|---|---------------|----------|-------|-------------------|-----------|------------|-------------|------------|-----------|------|---------|-------------|-----|
| | F15T8/AQ | 15530 | 15 | Med Bipin - (G13) | 1 | 25 | Aquarium | 240 | 216 | 7500 | 18 | N/A | 67 |

Germicidal Lamps - T5, T6, T8, T10 (Peak Emission 254 nm)

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Bulb | Special Desc. | Life | MOL mm | MOD mm |
|---|---------------|----------|-------|------|-----------|------------|------|-----------------------------|------|--------|--------|
| | G4T5 | 41300 | 4 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 6000 | 134.5 | 15.5 |
| | G6T5 | 41302 | 6 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 6000 | 210.5 | 15.5 |
| | G8T5 | 41384 | 8 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 6000 | 287.0 | 15.5 |
| | G10T8 | 41386 | 10 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 6000 | 330 | 25.5 |
| | G15T8 | 41388 | 15 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 8000 | 436 | 25.5 |
| | G20T10 | 00202 | 20 | G13 | 1 | 50 | T-10 | Germicidal (254nm), Preheat | 8000 | 588.5 | 32.5 |
| | G25T8 | 00203 | 25 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 8000 | 436 | 25.5 |
| | G30T8 | 00204 | 30 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 8000 | 893 | 25.5 |
| | G40T10 | 00214 | 40 | G13 | 1 | 50 | T-10 | Germicidal (254nm), Preheat | 8000 | 1198 | 32.5 |
| | GTL-2 | 00215 | 2 | E17 | 1 | 50 | T-6 | Germicidal (254nm), Preheat | 2000 | 55 | 20 |
| | GTL3 | 41568 | 3 | E17 | 1 | 50 | T-6 | Germicidal (254nm), Preheat | 2000 | 63 | 20 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


GERMICIDAL LINEAR FLUORESCENT

Germicidal Lamps - T5, T8 - for Air & Water Purification (Peak Emission 254 nm)

|  | Ordering Code | Bar Code | Watts | Base | Pkg. Qty. | Cart. Qty. | Bulb | Special Desc. | Life | MOL mm | MOD mm |
|---|---------------|----------|------------------|------------------|-----------|------------|-----------------------------|-----------------------------|-------|--------|--------|
| | G10T5L | 00205 | 16 | Single Pin 7.9mm | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 357 | 15.5 |
| G10T5/4P | 00216 | 16 | 4 Pin | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 357 | 15.5 | |
| G11T5 | 00217 | 11 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 8000 | 210.5 | 15.5 | |
| G14T5/4P | 00219 | 14 | 4 Pin | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 8000 | 287 | 15.5 | |
| G16T5 | 00221 | 16 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 8000 | 287 | 15.5 | |
| G20T5 | 00222 | 20 | G5 | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 8000 | 400 | 15.5 | |
| G25T8 | 00203 | 25 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 8000 | 436 | 25.5 | |
| G36T5L | 00206 | 39 | Single Pin 7.9mm | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 842 | 15.5 | |
| G36T5/4P | 00223 | 39 | 4 Pin | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 842 | 15.5 | |
| G55T8 | 00224 | 55 | G13 | 1 | 50 | T-8 | Germicidal (254nm), Preheat | 8000 | 893 | 25.5 | |
| G64T5L | 00207 | 65 | Single Pin 7.9mm | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 1554 | 15.5 | |
| G64T5/4P | 00225 | 65 | 4 Pin | 1 | 50 | T-5 | Germicidal (254nm), Preheat | 9000 | 1554 | 15.5 | |


ArcMaster™ HID

Metal Halide - Double Ended - Enclosed Rated Fixtures - World Lamp - Pulse Start

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Init. Lum. | Life | Color Temp. | CRI |
|--|---------------------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|------------|-------|-------------|-----|
| | MH-DE70/TD/UVS/3K* | 15406 | 70 | T-6 | RSC | 4.5 | 1 | 25 | M85/M98 | HOR +45 | 5200 | 10000 | 3000 | 70 |
| MH-DE70/TD/UVS/4K* | 15407 | 70 | T-6 | RSC | 4.5 | 1 | 25 | M85/M98 | HOR +45 | 5500 | 10000 | 4200 | 70 | |
| MH-DE150/TD/UVS/3K* | 15408 | 150 | T-7 | RSC | 4.25 | 1 | 25 | M81/M102 | HOR +45 | 11250 | 10000 | 3000 | 70 | |
| MH-DE150/TD/UVS/4K* | 15409 | 150 | T-7 | RSC | 4.25 | 1 | 25 | M81/M102 | HOR +45 | 11250 | 10000 | 4200 | 70 | |
| MH-DE150/TD/UVS/6K* | 49173 | 150 | T-7 | RSC | 5.19 | 1 | 25 | M81/M102 | HOR +45 | 7000 | 5000 | 6000 | 70 | |
| MH-DE150/TD/UVS/10K* | 49174 | 150 | T-7 | RSC | 5.19 | 1 | 25 | M81/M102 | HOR +45 | 7000 | 5000 | 10000 | 70 | |
| MH-DE250/TD/3K | 49175 | 250 | T-8 | Fc2 | 6.38 | 1 | 25 | M80 | HOR +45 | 20000 | 10000 | 3000 | 70 | |
| MH-DE250/TD/4K | 15419 | 250 | T-8 | Fc2 | 6.38 | 1 | 25 | M80 | HOR +45 | 20000 | 10000 | 4200 | 70 | |


* UVS Items are UV Shielded

Colored Metal Halide - Double Ended UV Shield - Enclosed Fixtures - World Lamp - Pulse Start

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Init. Lum. | Life | Color |
|---|-----------------------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|------------|------|-------|
| | MH-DE150/TD/UVS/GDX* | 49181 | 150 | T-7 | RSC | 5.19 | 1 | 25 | M81/M102 | HOR +45 | NA | 5000 | Green |
| MH-DE150/TD/UVS/PDX* | 49182 | 150 | T-7 | RSC | 5.19 | 1 | 25 | M81/M102 | HOR +45 | NA | 5000 | Pink | |


* UVS Items are UV Shielded

HIT Metal Halide - Single Ended - Enclosed Fixtures - World Lamp - Pulse Start

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Init. Lum. | Life | Color Temp. | CRI |
|---|------------------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|------------|-------|-------------|-----|
| | MH-SE70/UVS/3K* | 49183 | 70 | T-7 | G12 | 4.25 | 1 | 25 | M85/98 | Universal | 5600 | 10000 | 3000 | 70 |
| MH-SE70/UVS/4K* | 49184 | 70 | T-7 | G12 | 4.25 | 1 | 25 | M85/98 | Universal | 5600 | 10000 | 4000 | 70 | |
| MH-SE150/UVS/3K* | 49185 | 150 | T-7 | G12 | 4.25 | 1 | 25 | M81/M102 | Universal | 14000 | 10000 | 3000 | 70 | |
| MH-SE150/UVS/4K* | 49186 | 150 | T-7 | G12 | 4.25 | 1 | 25 | M81/M102 | Universal | 14000 | 10000 | 4000 | 70 | |

* UVS Items are UV Shielded

Standard Medium Base (E26) Metal Halide - Enclosed Fixtures - North American Style

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|---|----------------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|-------|-------|
| | MH50/C/U/MED* | 49187 | 50 | ED-17 | E26 | 5.5 | 1 | 12 | M110 | Universal | Coated | 3000 | 3700 | 70 | 10000 |
| MH50/U/MED* | 49188 | 50 | ED-17 | E26 | 5.5 | 1 | 12 | M110 | Universal | Clear | 3200 | 4000 | 70 | 10000 | |
| MH70/C/U/MED* | 49189 | 70 | ED-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Coated | 5300 | 3700 | 70 | 15000 | |
| MH70/U/MED* | 15410 | 70 | ED-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Clear | 5600 | 4000 | 70 | 15000 | |
| MH100/C/U/MED* | 49190 | 100 | ED-17 | E26 | 5.5 | 1 | 12 | M90/M140 | Universal | Coated | 8500 | 5500 | 70 | 15000 | |
| MH100/U/MED* | 15411 | 100 | ED-17 | E26 | 5.5 | 1 | 12 | M90/M140 | Universal | Clear | 9000 | 4000 | 70 | 15000 | |

* Items are Pulse Start

Continued on next page >>



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

ArcMaster™ HID

Standard Medium Base (E26) Metal Halide - Enclosed Fixtures - North American Style

| | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|--|----------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|-----|-------|
| | MH150/C/U/MED* | 49191 | 150 | ED-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Coated | 13300 | 3700 | 70 | 15000 |
| | MH150/U/MED* | 15413 | 150 | ED-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Clear | 14000 | 4000 | 70 | 15000 |
| | MH175/C/U/MED | 49192 | 175 | ED-17 | E26 | 5.5 | 1 | 12 | M57 | Universal | Coated | 13300 | 3700 | 70 | 10000 |
| | MH175/U/MED | 15414 | 175 | ED-17 | E26 | 5.5 | 1 | 12 | M57 | Universal | Clear | 14000 | 4000 | 70 | 10000 |

* Items are Pulse Start

Standard Medium Base (E26) Metal Halide - Open Rated Fixtures - North American Style

| | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|-----------------|--------------------|----------|--------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|-------|-------|
| | MP50/U/MED/3K* | 44501 | 50 | EDX-17 | E26 | 5.5 | 1 | 12 | M110 | Universal | Clear | 3200 | 3000 | 70 | 10000 |
| | MP70/C/U/MED/27K* | 49505 | 70 | EDX-17 | E26 | 5.5 | 1 | 12 | M98 | Vertical | Coated | 5000 | 2700 | 70 | 15000 |
| | MP70/C/U/MED/3K* | 49506 | 70 | EDX-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Coated | 5000 | 3200 | 70 | 15000 |
| | MP70/U/MED/3K* | 49507 | 70 | EDX-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Clear | 5000 | 3200 | 70 | 15000 |
| | MP70/C/U/MED/4K* | 49508 | 70 | EDX-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Coated | 5000 | 3700 | 70 | 15000 |
| | MP70/U/MED/4K* | 49509 | 70 | EDX-17 | E26 | 5.5 | 1 | 12 | M98 | Universal | Clear | 5300 | 4000 | 70 | 15000 |
| | MP100/C/U/MED/27K* | 49510 | 100 | EDX-17 | E26 | 5.5 | 1 | 12 | M90 | Vertical | Coated | 8100 | 2700 | 70 | 15000 |
| | MP100/C/U/MED/3K* | 49511 | 100 | EDX-17 | E26 | 5.5 | 1 | 12 | M90 | Universal | Coated | 8100 | 3200 | 70 | 15000 |
| | MP100/U/MED/3K* | 49512 | 100 | EDX-17 | E26 | 5.5 | 1 | 12 | M90 | Universal | Clear | 8500 | 3200 | 70 | 15000 |
| | MP100/C/U/MED/4K* | 49513 | 100 | EDX-17 | E26 | 5.5 | 1 | 12 | M90 | Universal | Coated | 8100 | 3700 | 70 | 15000 |
| | MP100/U/MED/4K* | 49514 | 100 | EDX-17 | E26 | 5.5 | 1 | 12 | M90 | Universal | Clear | 8500 | 4000 | 70 | 15000 |
| | MP150/C/U/MED/3K* | 49516 | 150 | EDX-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Coated | 12600 | 3200 | 70 | 15000 |
| | MP150/U/MED/3K* | 49517 | 150 | EDX-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Clear | 13300 | 3200 | 70 | 15000 |
| | MP150/C/U/MED/4K* | 49518 | 150 | EDX-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Coated | 12600 | 3700 | 70 | 15000 |
| MP150/U/MED/4K* | 49519 | 150 | EDX-17 | E26 | 5.5 | 1 | 12 | M102 | Universal | Clear | 13300 | 4000 | 70 | 15000 | |

* Items are Pulse Start with UV Protection

Standard Tubular Type Medium Base (E26) Metal Halide - Open Rated Fixtures - North American Style

| | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|--|--------------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|-----|-------|
| | MTP150/U/MED/3K* | 49521 | 150 | T-13 | E26 | 5.75 | 1 | 12 | M102 | Universal | Clear | 13500 | 3000 | 70 | 15000 |
| | MTP150/C/U/MED/4K* | 49526 | 150 | T-13 | E26 | 5.75 | 1 | 12 | M102 | Universal | Coated | 10500 | 4300 | 85 | 15000 |

*Items are Pulse Start with UV Protection

Standard Mogul Base (E39) Metal Halide - Enclosed Fixtures - North American Style

| | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|----------|----------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|------|-------|
| | MH175/U | 49193 | 175 | B-28 | E39 | 8.3 | 1 | 6 | M57 | Universal | Clear | 14000 | 4000 | 70 | 10000 |
| | MH175/C/U | 49194 | 175 | B-28 | E39 | 8.3 | 1 | 6 | M57 | Universal | Coated | 13300 | 3700 | 70 | 10000 |
| | MH200/U* | 49529 | 200 | ED-28 | E39 | 8.3 | 1 | 12 | M136 | Universal | Clear | 21000 | 4000 | 65 | 15000 |
| | MH200/C/U* | 49530 | 200 | ED-28 | E39 | 8.3 | 1 | 12 | M136 | Universal | Coated | 20000 | 3700 | 70 | 15000 |
| | MH250/U | 49195 | 250 | B-28 | E39 | 8.3 | 1 | 6 | M58 | Universal | Clear | 21000 | 4000 | 70 | 10000 |
| | MH250/C/U | 49196 | 250 | B-28 | E39 | 8.3 | 1 | 6 | M58 | Universal | Coated | 20000 | 3700 | 70 | 10000 |
| | MH250/U/T15 | 49531 | 250 | T-15 | E39 | 9.75 | 1 | 6 | M58 | Universal | Clear | 21000 | 4000 | 65 | 10000 |
| | MH320/U* | 81052 | 320 | ED-28 | E39 | 8.3 | 1 | 6 | M132 | Universal | Clear | 33000 | 4000 | 65 | 20000 |
| | MH350/HOR* | 49532 | 350 | ED-28 | E39 | 8.3 | 1 | 12 | M131 | Hor +75 | Clear | 33000 | 4000 | 65 | 20000 |
| | MH350/C/HOR* | 49533 | 350 | ED-28 | E39 | 8.3 | 1 | 12 | M131 | Hor +75 | Coated | 31000 | 3700 | 70 | 20000 |
| | MH400/U | 49197 | 400 | ED-37 | E39 | 11.5 | 1 | 6 | M59 | Universal | Clear | 36000 | 4000 | 70 | 20000 |
| | MH400/C/U | 49198 | 400 | ED-37 | E39 | 8.3 | 1 | 6 | M59 | Universal | Coated | 34000 | 3700 | 70 | 20000 |
| | MH400/U/ED28 | 49463 | 400 | ED-28 | E39 | 8.3 | 1 | 6 | M59 | Universal | Clear | 36000 | 4000 | 65 | 20000 |
| | MH400/C/U/ED28 | 49556 | 400 | ED-28 | E39 | 8.3 | 1 | 6 | M59 | Universal | Coated | 34000 | 3700 | 70 | 20000 |
| | MH400/U/T15 | 49534 | 400 | T-15 | E39 | 9.75 | 1 | 6 | M59 | Universal | Clear | 36000 | 4000 | 65 | 15000 |
| | MH1000/U | 49199 | 1000 | BT-56 | E39 | 15.5 | 1 | 6 | M47 | Universal | Clear | 110000 | 4000 | 70 | 12000 |
| | MH1000/C/U | 49200 | 1000 | BT-56 | E39 | 15.5 | 1 | 6 | M47 | Universal | Coated | 105000 | 3700 | 70 | 12000 |
| | MH1000/U/BT37 | 49557 | 1000 | BT-37 | E39 | 11.5 | 1 | 6 | M47 | Universal | Clear | 110000 | 4000 | 65 | 12000 |
| MH1500/U | 49201 | 1500 | BT-56 | E39 | 15.5 | 1 | 6 | M48 | Universal | Clear | 155000 | 4000 | 70 | 3500 | |

*Items are Pulse Start




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

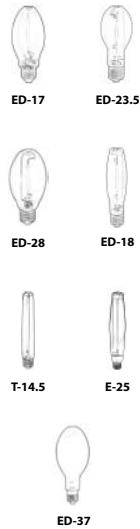
ArcMaster™ HID

Standard Mogul Base (EX39) Metal Halide - Open Fixture Rated - North American Style

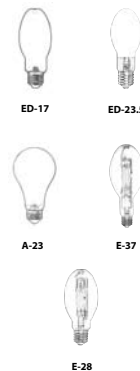
|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Coating | Init. Lum. | Color Temp. | CRI | Life |
|---|----------------|----------|-------|-----------|------|---------|-----------|------------|--------------|------------------|---------|------------|-------------|-----|-------|
| | MP200/C/V/4K* | 49537 | 200 | ED-28 | EX39 | 8.3 | 1 | 12 | M136 | Vertical +-15 | Coated | 19000 | 3700 | 70 | 15000 |
| | MP320/BU* | 81053 | 320 | ED-28 | EX39 | 8.3 | 1 | 12 | M132 | Vertical +-15 | Clear | 31000 | 4000 | 70 | 20000 |
| | MP350/BU* | 49538 | 350 | ED-28 | EX39 | 8.3 | 1 | 12 | M131 | Vertical +-15 | Clear | 33000 | 4000 | 65 | 20000 |
| | MP350/C/BU/3K* | 49539 | 350 | ED-28 | EX39 | 8.3 | 1 | 12 | M131 | Vertical +-15 | Coated | 33000 | 3200 | 70 | 20000 |
| | MP350/C/BU/4K* | 49540 | 350 | ED-28 | EX39 | 8.3 | 1 | 12 | M131 | Vertical +-15 | Coated | 35000 | 3700 | 70 | 20000 |

**Items are Pulse Start with UV Protection*

High Pressure Sodium - North American Style

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Init. Lum. | Life | Color Temp. | CRI |
|--|---------------|----------|---------|-----------|-------|---------|-----------|------------|--------------|------------------|------------|-------|-------------|-----|
| | LU35/MED | 15300 | 35 | ED-17 | E26 | 5.44 | 1 | 12 | S76 | Universal | 2250 | 16000 | 2100 | 21 |
| LU35/D/MED | 49154 | 35 | ED-17 | E26 | 5.44 | 1 | 12 | S76 | Universal | 2150 | 16000 | 2100 | 21 | |
| LU50/MED | 15302 | 50 | ED-17 | E26 | 5.44 | 1 | 12 | S68 | Universal | 4000 | 24000 | 2100 | 21 | |
| LU50 | 15304 | 50 | ED-23.5 | E39 | 7.75 | 1 | 6 | S68 | Universal | 4000 | 24000 | 2100 | 21 | |
| LU50/D | 49156 | 50 | ED-23.5 | E39 | 7.75 | 1 | 6 | S68 | Universal | 3800 | 24000 | 2100 | 21 | |
| LU70/MED | 15306 | 70 | ED-17 | E26 | 5.44 | 1 | 12 | S62 | Universal | 6300 | 24000 | 2100 | 21 | |
| LU70/D/MED | 49157 | 70 | ED-17 | E26 | 5.44 | 1 | 12 | S62 | Universal | 5860 | 24000 | 2100 | 21 | |
| LU70 | 15308 | 70 | ED-23.5 | E39 | 7.75 | 1 | 6 | S62 | Universal | 6300 | 24000 | 2100 | 21 | |
| LU70/D | 49158 | 70 | ED-23.5 | E39 | 7.75 | 1 | 6 | S62 | Universal | 5860 | 24000 | 2100 | 21 | |
| LU100/MED | 15310 | 100 | ED-17 | E26 | 5.44 | 1 | 12 | S54 | Universal | 9500 | 24000 | 2100 | 21 | |
| LU100/D/MED | 49159 | 100 | ED-17 | E26 | 5.44 | 1 | 12 | S54 | Universal | 8800 | 24000 | 2100 | 21 | |
| LU100 | 15312 | 100 | ED-23.5 | E39 | 7.75 | 1 | 6 | S54 | Universal | 9500 | 24000 | 2100 | 21 | |
| LU150/55/MED | 15314 | 150 | ED-17 | E26 | 5.44 | 1 | 12 | S55 | Universal | 16000 | 24000 | 2100 | 21 | |
| LU150/55/D/MED | 49161 | 150 | ED-17 | E26 | 5.44 | 1 | 12 | S55 | Universal | 15000 | 24000 | 2100 | 21 | |
| LU150/55 | 15316 | 150 | ED-23.5 | E39 | 7.75 | 1 | 6 | S55 | Universal | 16000 | 24000 | 2100 | 21 | |
| LU150/100 | 15318 | 150 | ED-28 | E39 | 8.31 | 1 | 6 | S56 | Universal | 16000 | 24000 | 2100 | 21 | |
| LU200 | 15319 | 200 | ED-18 | E39 | 9.75 | 1 | 6 | S66 | Universal | 22000 | 24000 | 2100 | 21 | |
| LU250 | 15320 | 250 | ED-18 | E39 | 9.75 | 1 | 6 | S50 | Universal | 28500 | 24000 | 2100 | 21 | |
| LU250/D | 49164 | 250 | ED-28 | E39 | 8.31 | 1 | 6 | S50 | Universal | 26000 | 24000 | 2100 | 21 | |
| LU400 | 15322 | 400 | ED-18 | E39 | 9.75 | 1 | 6 | S51 | Universal | 50000 | 24000 | 2100 | 21 | |
| LU400/D | 49166 | 400 | ED-37 | E39 | 11.5 | 1 | 6 | S51 | Universal | 47500 | 24000 | 2100 | 21 | |
| LU600 | 49167 | 600 | T-14.5 | E39 | 11.13 | 1 | 6 | S106 | Universal | 90000 | 24000 | 2100 | 21 | |
| LU1000 | 15324 | 1000 | E-25 | E39 | 15.06 | 1 | 6 | S52 | Universal | 140000 | 24000 | 2100 | 21 | |

Mercury Vapor - North American Style

|  | Ordering Code | Bar Code | Watts | Bulb Type | Base | MOL in. | Pkg. Qty. | Cart. Qty. | Ansi Ballast | Burning Position | Life | Color Temp. | CRI |
|---|----------------|----------|-------|-----------|-----------|---------|-----------|------------|--------------|------------------|-------|-------------|-----|
| | H46DL-40/50/DX | 15350 | 40/50 | ED-17 | MED (E26) | 5.12 | 1 | 12 | H45-46 | Universal | 8000 | 3200 | 45 |
| | H43AV-75/DX | 49564 | 75 | ED-17 | MED (E26) | 5.44 | 1 | 12 | H43 | Universal | 10000 | 3200 | 45 |
| | H38AV-100/DX | 00332 | 100 | ED-17 | MED (E26) | 5.43 | 1 | 12 | H38 | Universal | 12000 | 3900 | 45 |
| | H38JA-100/DX | 15353 | 100 | ED-23.5 | MOG (E39) | 7.5 | 1 | 12 | H38 | Universal | 12000 | 3200 | 45 |
| | H38MP-100/DX | 49168 | 100 | A-23 | MED (E26) | 5.44 | 1 | 12 | H38 | Universal | 12000 | 3700 | 45 |
| | H39KC-175/DX | 15355 | 175 | ED-28 | MOG (E39) | 8.31 | 1 | 12 | H39 | Universal | 12000 | 3700 | 45 |
| | H39KB-175 | 15356 | 175 | ED-28 | MOG (E39) | 8.31 | 1 | 12 | H39 | Universal | 12000 | 6800 | 20 |
| | H37KC-250/DX | 15357 | 250 | ED-28 | MOG (E39) | 8.31 | 1 | 12 | H37 | Universal | 18000 | 3700 | 45 |
| | H37KB-250 | 15358 | 250 | ED-28 | MOG (E39) | 8.31 | 1 | 12 | H37 | Universal | 18000 | 6700 | 20 |
| | H33GL-400/DX | 15359 | 400 | ED-37 | MOG (E39) | 11.5 | 1 | 12 | H33 | Universal | 18000 | 3700 | 45 |
| | H33CD-400 | 15360 | 400 | ED-37 | MOG (E39) | 11.5 | 1 | 12 | H33 | Universal | 18000 | 6500 | 20 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


R & BR INCANDESCENT

R20

|  | Ordering Code | Bar Code | Watts | Volts | Bulb Type | Base | Life | Lum. | Finish | MOL in. | Beam Pattern |
|---|----------------|----------|-------|-------|-----------|------|-------|------|--------|---------|--------------|
| | 30R20/FL-120V | 49791 | 30 | 120 | R20 | MED | 2000 | 245 | Frost | 3 1/16 | Flood |
| | 30R20/FL-130V* | 49792 | 30 | 130 | R20 | MED | 2000* | 245 | Frost | 3 1/16 | Flood |
| | 30R20/SP-130V* | 49793 | 30 | 130 | R20 | MED | 2000* | 245 | Clear | 3 1/16 | Spot |
| | 50R20/FL-120V | 49794 | 50 | 120 | R20 | MED | 2000 | 400 | Frost | 3 1/16 | Flood |
| | 50R20/SP-120V | 49810 | 50 | 120 | R20 | MED | 2000 | 400 | Clear | 3 1/16 | Spot |
| | 50R20/FL-130V* | 49795 | 50 | 130 | R20 | MED | 2000* | 400 | Frost | 3 1/16 | Flood |
| | 50R20/SP-130V* | 49796 | 50 | 130 | R20 | MED | 2000* | 400 | Clear | 3 1/16 | Spot |


* 130 volt lamps are rated at **5,000** hours when operated at 120 volts.

BR30

|  | Ordering Code | Bar Code | Watts | Volts | Bulb Type | Base | Life | Lum. | Finish | MOL in. | Beam Pattern |
|---|-----------------|----------|-------|-------|-----------|------|-------|------|--------|---------|--------------|
| | 45BR30/FL-120V | 49797 | 45 | 120 | BR30 | MED | 2000 | 390 | Frost | 5 3/8 | Flood |
| | 65BR30/FL-120V | 49798 | 65 | 120 | BR30 | MED | 2000 | 650 | Frost | 5 3/8 | Flood |
| | 65BR30/SP-120V | 49811 | 65 | 120 | BR30 | MED | 2000 | 650 | Clear | 5 3/8 | Spot |
| | 65BR30/FL-130V* | 49799 | 65 | 130 | BR30 | MED | 2000* | 650 | Frost | 5 3/8 | Flood |
| | 65BR30/SP-130V* | 49800 | 65 | 130 | BR30 | MED | 2000* | 650 | Clear | 5 3/8 | Spot |
| | 75BR30/FL-120V | 00298 | 75 | 120 | BR30 | MED | 2000 | 675 | Frost | 5 3/8 | Flood |

* 130 volt lamps are rated at **5,000** hours when operated at 120 volts.


BR40

|  | Ordering Code | Bar Code | Watts | Volts | Bulb Type | Base | Life | Lum. | Finish | MOL in. | Beam Pattern |
|---|------------------|----------|-------|-------|-----------|------|-------|------|--------|---------|--------------|
| | 65BR40/FL-120V | 49801 | 65 | 120 | BR40 | MED | 2000 | 650 | Frost | 6 9/16 | Flood |
| | 65BR40/FL-130V* | 49802 | 65 | 130 | BR40 | MED | 2000* | 650 | Frost | 6 9/16 | Flood |
| | 75BR40/FL-120V | 00299 | 75 | 120 | BR40 | MED | 2000 | 675 | Frost | 6 9/16 | Flood |
| | 120BR40/FL-120V | 49803 | 120 | 120 | BR40 | MED | 2000 | 1200 | Frost | 6 9/16 | Flood |
| | 120BR40/SP-120V | 49812 | 120 | 120 | BR40 | MED | 2000 | 1200 | Clear | 6 9/16 | Spot |
| | 120BR40/FL-130V* | 49804 | 120 | 130 | BR40 | MED | 2000* | 1200 | Frost | 6 9/16 | Flood |
| | 120BR40/SP-130V* | 49805 | 120 | 130 | BR40 | MED | 2000* | 1200 | Clear | 6 9/16 | Spot |


* 130 volt lamps are rated at **5,000** hours when operated at 120 volts.

A-LINE INCANDESCENT

A-15

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in/ mm | MOD in/ mm | Avg. Life | Coating |
|---|------------------|----------|------|------|---------|-------|----------|---------------|---------------|-----------|---------|
| | 40A15-130V | 44390 | A-15 | E26 | 130 | 40 | C-2V | 3.50/88.9 | 1.88/47.7 | 1500 | Clear |
| | 40A15/F-130V | 44392 | A-15 | E26 | 130 | 40 | C-2V | 3.50/88.9 | 1.88/47.7 | 1500 | Frosted |
| | 40A15-230/250V | 44394 | A-15 | E26 | 230-250 | 40 | C-2F | 3.50/88.9 | 1.88/47.7 | 1500 | Clear |
| | 40A15/F-230/250V | 44396 | A-15 | E26 | 230-250 | 40 | C-2F | 3.50/88.9 | 1.88/47.7 | 1500 | Frosted |

A-15 Fan Bulb VIBRATION RESISTANT

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in. | MOD in. | Avg. Life | Coating |
|---|------------------|----------|------|------|-------|-------|----------|---------|---------|-----------|---------|
| | 40A15CL/RS-130V* | 00292 | A-15 | E26 | 130 | 40 | C-9 | 3.5 | 1.9 | 2500 | Clear |
| | 40A15W/RS-130V* | 00293 | A-15 | E26 | 130 | 40 | C-9 | 3.5 | 1.9 | 2500 | White |
| | 60A15CL/RS-130V* | 00294 | A-15 | E26 | 130 | 40 | C-9 | 3.5 | 1.9 | 2500 | Clear |
| | 60A15W/RS-130V* | 00295 | A-15 | E26 | 130 | 40 | C-9 | 3.5 | 1.9 | 2500 | White |

* 130 volt lamps are rated at **6,000** hours when operated at 120 volts.




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


A-LINE INCANDESCENT

A-19

|  | Ordering Code | Bar Code | Watts | Volts | Bulb Type | Base | Life | Lum. | Lum/Watt | Filament | Finish | MOL in. | Pkg. Qty. | Cart. Qty. |
|---|------------------|----------|-------|-------|-----------|--------|-------|-------|----------|------------|--------|---------|-----------|------------|
| | 40A-130V* | 49819 | 40 | 130 | A19 | Medium | 2000* | 380 | 9.5 | CC-6 | Frost | 4.43 | 4 | 120 |
| 40A/CL-130V* | 49846 | 40 | 130 | A19 | Medium | 2000* | 390 | 9.75 | CC-6 | Clear | 4.43 | 4 | 120 | |
| 60A-130V* | 49823 | 60 | 130 | A19 | Medium | 2000* | 690 | 11.5 | CC-6 | Frost | 4.43 | 4 | 120 | |
| 60A/CL-130V* | 49848 | 60 | 130 | A19 | Medium | 2000* | 700 | 11.67 | CC-6 | Clear | 4.43 | 4 | 120 | |
| 60A/SW-130V* | 49849 | 60 | 130 | A19 | Medium | 2000* | 660 | 14 | CC-6 | Soft White | 4.43 | 4 | 120 | |
| 75A-130V* | 49825 | 75 | 130 | A19 | Medium | 2000* | 890 | 11.87 | CC-6 | Frost | 4.43 | 4 | 120 | |
| 75A/CL-130V* | 49850 | 75 | 130 | A19 | Medium | 2000* | 900 | 12 | CC-6 | Clear | 4.43 | 4 | 120 | |
| 75A/SW-130V* | 49851 | 75 | 130 | A19 | Medium | 2000* | 850 | 15.33 | CC-6 | Soft White | 4.43 | 4 | 120 | |
| 100A-130V* | 49827 | 100 | 130 | A19 | Medium | 2000* | 1270 | 12.7 | CC-6 | Frost | 4.43 | 4 | 120 | |
| 100A/CL-130V* | 49852 | 100 | 130 | A19 | Medium | 2000* | 1290 | 12.9 | CC-6 | Clear | 4.43 | 4 | 120 | |
| 150A-130V* | 49854 | 150 | 130 | A23 | Medium | 2000* | 2800 | 18.67 | CC-6 | Frost | 5.37 | 1 | 60 | |

* 130 volt lamps are rated at 5,000 hours when operated at 120 volts.


A-19 Rough Service

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Lumens | Filament | MOL in/mm | MOD in/mm | Avg. Life | Coating |
|---|-------------------|----------|------|------|-------|-------|--------|------------|------------|-----------|-----------------|---------|
| | 50A/RS-12V | 15812 | A-19 | E26 | 12 | 50 | 500 | C-6 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted |
| 75A/RS-12V | 15814 | A-19 | E26 | 12 | 75 | 750 | C-6 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted | |
| 100A/RS-12V | 15816 | A-19 | E26 | 12 | 100 | 1100 | C-6 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted | |
| 50A/RS | 15800 | A-19 | E26 | 130 | 50 | 500 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted | |
| 75A/RS | 15802 | A-19 | E26 | 130 | 75 | 750 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted | |
| 100A/RS | 15804 | A-19 | E26 | 130 | 100 | 1100 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Frosted | |
| 50A/RS/TF | 15806 | A-19 | E26 | 130 | 50 | 500 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Silicone Coated | |
| 75A/RS/TF | 15808 | A-19 | E26 | 130 | 75 | 750 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Silicone Coated | |
| 100A/RS/TF | 15810 | A-19 | E26 | 130 | 100 | 1100 | C-9 | 4.44/112.8 | 2.38/60.3 | 2500 | Silicone Coated | |
| 150A/RS | 00008 | A-19 | E26 | 130 | 150 | 1650 | C-9 | 4.96/126 | 2.63/66.7 | 2500* | Frosted | |

* Rated at 5,000 hours when operated at 120 volts.


DECORATIVE INCANDESCENT

Globe

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in. | MOD in. | Avg. Life | Coating |
|---|------------------------|----------|-------|------|-------|-------|----------|---------|---------|-----------|---------|
| | 25G16.5/CL-130V | 00270 | G16.5 | CS | 130 | 25 | C-7A | 4.4 | 2.1 | 1500 | Clear |
| 25G16.5/W-130V | 00271 | G16.5 | CS | 130 | 25 | C-7A | 4.4 | 2.1 | 1500 | White | |
| 40G16.5/CL-130V | 00272 | G16.5 | CS | 130 | 40 | CC-2V | 4.4 | 2.1 | 1500 | Clear | |
| 40G16.5/W-130V | 00273 | G16.5 | CS | 130 | 40 | CC-2V | 4.4 | 2.1 | 1500 | White | |
| 40G25/CL-130V* | 00274 | G25 | MED | 130 | 40 | CC-9 | 6.75 | 2.1 | 1500 | Clear | |
| 40G25/W-130V* | 00275 | G25 | MED | 130 | 40 | CC-9 | 6.75 | 2.1 | 1500 | White | |
| 60G25/CL-130V* | 00276 | G25 | MED | 130 | 60 | CC-9 | 6.75 | 2.1 | 1500 | Clear | |
| 60G25/W-130V* | 00277 | G25 | MED | 130 | 60 | CC-9 | 6.75 | 2.1 | 1500 | White | |

* 130 volt lamps are rated at 4,000 hours when operated at 120 volts.

Torpedo

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in. | MOD in. | Avg. Life | Coating |
|---|-----------------------|----------|------|------|-------|-------|----------|---------|---------|-----------|---------|
| | 15B9.5/CL-130V | 00278 | B9.5 | CS | 130 | 15 | C-7A | 3.5 | 1.2 | 1500 | Clear |
| 15B9.5-130V | 00279 | B9.5 | CS | 130 | 15 | C-7A | 3.5 | 1.2 | 1500 | Frost | |
| 25B9.5/CL-130V | 00281 | B9.5 | CS | 130 | 25 | CC-2V | 3.5 | 1.2 | 1500 | Clear | |
| 25B9.5-130V | 00282 | B9.5 | CS | 130 | 25 | CC-2V | 3.5 | 1.2 | 1500 | Frost | |
| 40B9.5/CL-130V | 00283 | B9.5 | CS | 130 | 40 | CC-2V | 3.5 | 1.2 | 1500 | Clear | |
| 40B9.5-130V | 00284 | B9.5 | CS | 130 | 40 | CC-2V | 3.5 | 1.2 | 1500 | Frost | |

* 130 volt lamps are rated at 4,000 hours when operated at 120 volts.




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

DECORATIVE INCANDESCENT

Bent Tip




| Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in. | MOD in. | Avg. Life | Coating |
|-----------------|----------|-------|------|-------|-------|----------|---------|---------|-----------|---------|
| 15CA8/CL-130V | 00285 | CA8 | CS | 130 | 15 | C-7A | 3.7 | 1 | 1500 | Clear |
| 15CA8-130V | 00286 | CA8 | CS | 130 | 15 | C-7A | 3.7 | 1 | 1500 | Frost |
| 25CA9.5/CL-130V | 00287 | CA9.5 | CS | 130 | 25 | CC-2V | 4 | 1.2 | 1500 | Clear |
| 25CA9.5-130V | 00288 | CA9.5 | CS | 130 | 25 | CC-2V | 4 | 1.2 | 1500 | Frost |
| 40CA9.5/CL-130V | 00289 | CA9.5 | CS | 130 | 40 | CC-2V | 4 | 1.2 | 1500 | Clear |
| 40CA9.5-130V | 00291 | CA9.5 | CS | 130 | 40 | CC-2V | 4 | 1.2 | 1500 | Frost |

* 130 volt lamps are rated at **4,000** hours when operated at 120 volts.

A-LINE HALOGEN

A-Line Halogen




| Ordering Code | Bar Code | Coating | Base | Volts | Watts | Filament | MOL in. | in. LCL | Avg. Life | Lumens |
|---------------|----------|------------|------|-------|-------|----------|---------|---------|-----------|--------|
| 60BT15/H/W | 81137 | soft white | E26 | 120 | 60 | CC-8 | 4 | 2.75 | 3000 | 840 |
| 60BT15/H/CL | 81138 | clear | E26 | 120 | 60 | CC-8 | 4 | 2.75 | 3000 | 900 |
| 75BT15/H/W | 81139 | soft white | E26 | 120 | 75 | CC-8 | 4 | 2.75 | 3000 | 1120 |
| 100BT15/H/W | 81140 | soft white | E26 | 120 | 100 | CC-8 | 4 | 2.75 | 3000 | 1670 |
| 150BT15/H/W | 81141 | soft white | E26 | 120 | 150 | CC-8 | 4 | 2.75 | 3000 | 2650 |

All lamps have a BT15 glass shape and are individually boxed 10 per case and 60 per master carton.

HALOGEN PAR

PAR 20



| Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lumens | Color Temp. | Avg. Life | Beam Angle ° |
|---------------------|----------|------|-------|-------|-----------|-----------|----------|--------|-------------|-----------|--------------|
| 50PAR20/H/SP-120V | 14033 | E26 | 120 | 50 | 3.25/82.6 | 2.56/65.0 | CC-8 | 550 | 2800 | 2000 | 15 |
| 50 PAR20/H/NFL-120V | 14035 | E26 | 120 | 50 | 3.25/82.6 | 2.56/65.0 | CC-8 | 550 | 2800 | 2000 | 25 |
| 50PAR20/H/SP-130V* | 14065 | E26 | 130 | 50 | 3.25/82.6 | 2.56/65.0 | CC-8 | 550 | 2800 | 2000* | 15 |
| 50PAR20/H/NFL-130V* | 14067 | E26 | 130 | 50 | 3.25/82.6 | 2.56/65.0 | CC-8 | 550 | 2800 | 2000* | 25 |

* 130 volt lamps are rated at **5,000** hours when operated at 120 volts.

PAR 30



| Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lumens | Color Temp. | Avg. Life | Beam Angle ° |
|---------------------|----------|------|-------|-------|-----------|-----------|----------|--------|-------------|-----------|--------------|
| 50PAR30/H/SP-120V | 14037 | E26 | 120 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 15 |
| 50PAR30/H/NFL-120V | 14039 | E26 | 120 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 25 |
| 50PAR30/H/FL-120V | 14041 | E26 | 120 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 35 |
| 50PAR30/H/SP-130V* | 14069 | E26 | 130 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000* | 15 |
| 50PAR30/H/NFL-130V* | 14071 | E26 | 130 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000* | 25 |
| 50PAR30/H/FL-130V* | 14073 | E26 | 130 | 50 | 3.63/92.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 35 |
| 75PAR30/H/SP-120V | 14043 | E26 | 120 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 15 |
| 75PAR30/H/NFL-120V | 14045 | E26 | 120 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 25 |
| 75PAR30/H/FL-120V | 14047 | E26 | 120 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 35 |
| 75PAR30/H/SP-130V* | 14075 | E26 | 130 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 15 |
| 75PAR30/H/NFL-130V* | 14077 | E26 | 130 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 25 |
| 75PAR30/H/FL-130V* | 14079 | E26 | 130 | 75 | 3.63/92.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 35 |

* 130 volt lamps are rated at **5,000** hours when operated at 120 volts.




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


HALOGEN PAR

PAR 30LN (Long Neck)

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lumens | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------------|----------|------|-------|------------|------------|-----------|----------|--------|-------------|-----------|--------------|
| | 50PAR30LN/H/SP-120V | 14101 | E26 | 120 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 15 |
| 50PAR30LN/H/NFL-120V | 14105 | E26 | 120 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 25 | |
| 50PAR30LN/H/FL-120V | 14109 | E26 | 120 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000 | 35 | |
| 50PAR30LN/H/SP-130V* | 14103 | E26 | 130 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000* | 15 | |
| 50PAR30LN/H/NFL-130V* | 14107 | E26 | 130 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000* | 25 | |
| 50PAR30LN/H/FL-130V* | 14111 | E26 | 130 | 50 | 4.69/119.1 | 3.82/97.0 | CC-8 | 660 | 2800 | 2000* | 35 | |
| 75PAR30LN/H/SP-120V | 14113 | E26 | 120 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 15 | |
| 75PAR30LN/H/NFL-120V | 14117 | E26 | 120 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 25 | |
| 75PAR30LN/H/FL-120V | 14121 | E26 | 120 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000 | 35 | |
| 75PAR30LN/H/SP-130V* | 14115 | E26 | 130 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 15 | |
| 75PAR30LN/H/NFL-130V* | 14119 | E26 | 130 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 25 | |
| 75PAR30LN/H/FL-130V* | 14123 | E26 | 130 | 75 | 4.69/119.1 | 3.82/97.0 | CC-8 | 1100 | 2800 | 2000* | 35 | |

* 130 volt lamps are rated at 5,000 hours when operated at 120 volts.


PAR 38

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lumens | Color Temp. | Avg. Life | Beam Angle ° |
|---|-------------------|----------|------|-------|------------|------------|------------|----------|--------|-------------|-----------|--------------|
| | 45PAR38/H/SP-120V | 14051 | E26 | 120 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000 | 15 |
| 45PAR38/H/FL-120V | 14053 | E26 | 120 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000 | 35 | |
| 45PAR38/H/WFL-120V | 14055 | E26 | 120 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000 | 50 | |
| 45PAR38/H/NSP-130V* | 14081 | E26 | 130 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000* | 8 | |
| 45PAR38/H/SP-130V* | 14083 | E26 | 130 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000* | 15 | |
| 45PAR38/H/FL-130V* | 14085 | E26 | 130 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000* | 35 | |
| 45PAR38/H/WFL-130V* | 14087 | E26 | 130 | 45 | 5.31/135.0 | 5.32/135.0 | CC-8 | 520 | 2800 | 2000* | 50 | |
| 65PAR38/H/FL-130V | 00238 | E26 | 130 | 65 | 5.31/135.0 | 4.75/120.7 | CC-8 | 880 | 2850 | 1750 | 35 | |
| 75PAR38/H/NSP-120V | 49541 | E26 | 120 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000 | 8 | |
| 75PAR38/H/SP-120V | 49543 | E26 | 120 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000 | 15 | |
| 75PAR38/H/FL-120V | 49545 | E26 | 120 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000 | 35 | |
| 75PAR38/H/WFL-120V | 49547 | E26 | 120 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000 | 50 | |
| 75PAR38/H/NSP-130V* | 49542 | E26 | 130 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000* | 8 | |
| 75PAR38/H/SP-130V* | 49544 | E26 | 130 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000* | 15 | |
| 75PAR38/H/FL-130V* | 49546 | E26 | 130 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000* | 35 | |
| 75PAR38/H/WFL-130V* | 49548 | E26 | 130 | 75 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1100 | 2850 | 2000* | 50 | |
| 90PAR38/H/NSP-120V | 14057 | E26 | 120 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000 | 8 | |
| 90PAR38/H/SP-120V | 14059 | E26 | 120 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000 | 15 | |
| 90PAR38/H/FL-120V | 14061 | E26 | 120 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000 | 35 | |
| 90PAR38/H/WFL-120V | 14063 | E26 | 120 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000 | 50 | |
| 90PAR38/H/NSP-130V* | 14089 | E26 | 130 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000* | 8 | |
| 90PAR38/H/SP-130V* | 14091 | E26 | 130 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000* | 15 | |
| 90PAR38/H/FL-130V* | 14093 | E26 | 130 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000* | 35 | |
| 90PAR38/H/WFL-130V* | 14095 | E26 | 130 | 90 | 5.31/135.0 | 5.32/135.0 | CC-8 | 1270 | 2900 | 2000* | 50 | |

* 130 volt lamps are rated at 5,000 hours when operated at 120 volts.

MR8 SUPREME

MR8 Supreme

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-----------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | 49406 | 49406 | GU4 | 6 | 10 | 1.56/39.5 | 0.99/25.2 | C-8 | 750 | 2950 | 2000 | 9 |
| 49407 | 49407 | GU4 | 12 | 20 | 1.56/39.5 | 0.99/25.2 | C-8 | 1700 | 3050 | 2000 | 10 | |
| 49408 | 49408 | GU4 | 12 | 20 | 1.56/39.5 | 0.99/25.2 | C-8 | 800 | 3050 | 2000 | 23 | |
| 49409 | 49409 | GU4 | 12 | 35 | 1.56/39.5 | 0.99/25.2 | C-8 | 2300 | 3050 | 2000 | 13 | |
| 49410 | 49410 | GU4 | 12 | 35 | 1.56/39.5 | 0.99/25.2 | C-8 | 1400 | 3050 | 2000 | 26 | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


MR11 SUPREME

MR11 Supreme


|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | FTA/SU | 49472 | GU4 | 12 | 12 | 1.56/39.5 | 1.41/35.8 | C-6 | 1300 | 2900 | 2000 | 8 |
| | FTB/SU | 49473 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-6 | 3750 | 2950 | 2000 | 8 |
| | FTC/SU | 49474 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-6 | 1360 | 2950 | 2000 | 19 |
| | FTD/SU | 49475 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-6 | 670 | 2950 | 2000 | 28 |
| | FTE/SU | 49476 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-6 | 4200 | 3050 | 3000 | 10 |
| | FTF/SU | 49477 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-6 | 2350 | 3050 | 3000 | 20 |
| | FTH/SU | 49478 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-6 | 1280 | 3050 | 3000 | 29 |

MR11 STANDARD


MR11

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | FTA | 15115 | GU4 | 12 | 12 | 1.38/35.0 | 1.39/35.3 | C-8 | 1300 | 2900 | 2000 | 10 |
| | FTB | 15120 | GU4 | 12 | 20 | 1.38/35.0 | 1.39/35.3 | C-8 | 3000 | 2900 | 2000 | 10 |
| | FTC | 15122 | GU4 | 12 | 20 | 1.38/35.0 | 1.39/35.3 | C-8 | 1400 | 2900 | 2000 | 20 |
| | FTD | 15124 | GU4 | 12 | 20 | 1.38/35.0 | 1.39/35.3 | C-8 | 600 | 2900 | 2000 | 30 |
| | FTE | 15126 | GU4 | 12 | 35 | 1.38/35.0 | 1.39/35.3 | C-8 | 6000 | 2950 | 2000 | 10 |
| | FTF | 15128 | GU4 | 12 | 35 | 1.38/35.0 | 1.39/35.3 | C-8 | 2600 | 2950 | 2000 | 20 |
| | FTH | 15130 | GU4 | 12 | 35 | 1.38/35.0 | 1.39/35.3 | C-8 | 1300 | 2950 | 2000 | 30 |

MR11 Front Glass


|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | FTB-FG | 15140 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-8 | 3000 | 2900 | 2000 | 10 |
| | FTC-FG | 15142 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-8 | 1400 | 2900 | 2000 | 20 |
| | FTD-FG | 15144 | GU4 | 12 | 20 | 1.56/39.5 | 1.41/35.8 | C-8 | 600 | 2900 | 2000 | 30 |
| | FTE-FG | 15146 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-8 | 6000 | 2950 | 2000 | 10 |
| | FTF-FG | 15148 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-8 | 2600 | 2950 | 2000 | 20 |
| | FTH-FG | 15150 | GU4 | 12 | 35 | 1.56/39.5 | 1.41/35.8 | C-8 | 1300 | 2950 | 2000 | 30 |

Aluminized Reflector GBF

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|-------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | GBF | 49664 | BA15d | 12 | 20 | 1.63/41.4 | 1.39/35.3 | C-6 | 400 | 3000 | 2000 | 32 |
| | GBF-FR | 49665 | BA15d | 12 | 20 | 1.63/41.4 | 1.39/35.3 | C-6 | 400 | 3000 | 2000 | 32 |

MR16 SUPREME

MR16 Supreme - 10,000 Hour Life

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|-------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| | FRB/SU/10LL | 49495 | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-6 | 7400 | 3050 | 10000 | 12 |
| | FMW/SU/10LL | 49497 | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-6 | 1100 | 3050 | 10000 | 38 |
| | EXT/SU/10LL | 49499 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 9500 | 3050 | 10000 | 13 |
| | EXZ/SU/10LL | 49500 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 3200 | 3050 | 10000 | 26 |
| | EXN/SU/10LL | 49501 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 1650 | 3050 | 10000 | 38 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MR16 SUPREME

MR16 Supreme - 6,000 Hour Life




| Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---------------|----------|-------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| ESX/SU | 49479 | GU5.3 | 12 | 20 | 1.99/50.5 | 2.00/50.8 | C-6 | 4000 | 2950 | 6000 | 9 |
| BBF/SU | 49480 | GU5.3 | 12 | 20 | 1.99/50.5 | 2.00/50.8 | C-6 | 880 | 2950 | 6000 | 23 |
| BAB/SU | 49481 | GU5.3 | 12 | 20 | 1.99/50.5 | 2.00/50.8 | C-6 | 500 | 2950 | 6000 | 38 |
| FRB/SU | 49483 | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-6 | 7800 | 3050 | 6000 | 12 |
| FRA/SU | 49484 | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-6 | 2300 | 3050 | 6000 | 23 |
| EXN/SU | 48489 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 1600 | 3050 | 6000 | 38 |
| EXT/SU | 49487 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 9800 | 3050 | 6000 | 13 |
| EXZ/SU | 49488 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 3200 | 3050 | 6000 | 26 |
| FNV/SU | 49490 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-6 | 700 | 3050 | 6000 | 60 |
| EYF/SU | 49491 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-6 | 12500 | 3050 | 6000 | 13 |
| EYJ/SU | 49492 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-6 | 4400 | 3050 | 6000 | 26 |
| EYC/SU | 49493 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-6 | 4200 | 3050 | 6000 | 38 |

All lamps feature front glass and 6000 Hour Life


MR16 STANDARD

MR16 Standard



| Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---------------|----------|-------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| BAB | 15030 | GU5.3 | 12 | 20 | 1.81/46.0 | 2.00/50.8 | C-8 | 460 | 2950 | 3000 | 36 |
| ESX | 15032 | GU5.3 | 12 | 20 | 1.75/44.5 | 2.00/50.8 | C-8 | 4300 | 3050 | 3000 | 12 |
| FMT | 15047 | GU5.3 | 12 | 35 | 1.81/46.0 | 2.00/50.8 | C-8 | 4800 | 2950 | 4000 | 12 |
| FMV | 15049 | GU5.3 | 12 | 35 | 1.81/46.0 | 2.00/50.8 | C-8 | 1800 | 2950 | 4000 | 24 |
| FMW | 15051 | GU5.3 | 12 | 35 | 1.81/46.0 | 2.00/50.8 | C-8 | 900 | 2950 | 4000 | 38 |
| EYP | 15034 | GU5.3 | 12 | 42 | 1.75/44.5 | 2.00/50.8 | C-8 | 991 | 3000 | 4000 | 38 |
| EYR | 15036 | GU5.3 | 12 | 42 | 1.75/44.5 | 2.00/50.8 | C-8 | 7070 | 3000 | 4000 | 12 |
| EYS | 15038 | GU5.3 | 12 | 42 | 1.75/44.5 | 2.00/50.8 | C-8 | 2800 | 3000 | 4000 | 24 |
| ENL | 15040 | GU5.3 | 12 | 50 | 1.75/44.5 | 2.00/50.8 | C-8 | 2500 | 3050 | 4000 | 30 |
| EXN | 15042 | GU5.3 | 12 | 50 | 1.77/45.0 | 2.00/50.8 | C-8 | 1800 | 3000 | 4000 | 38 |
| EXT | 15044 | GU5.3 | 12 | 50 | 1.77/45.0 | 2.00/50.8 | C-8 | 10,000 | 3000 | 4000 | 12 |
| EXZ | 15046 | GU5.3 | 12 | 50 | 1.77/45.0 | 2.00/50.8 | C-8 | 3000 | 3000 | 4000 | 24 |
| FNV | 00296 | GU5.3 | 12 | 50 | 1.75/44.5 | 2.00/50.8 | C-8 | 550 | 3000 | 3000 | 60 |
| FPA | 15056 | GU5.3 | 12 | 65 | 1.81/46.0 | 2.00/50.8 | C-8 | 11,500 | 3050 | 4000 | 12 |
| FPB | 15058 | GU5.3 | 12 | 65 | 1.81/46.0 | 2.00/50.8 | C-8 | 2000 | 3050 | 4000 | 38 |
| FPC | 15060 | GU5.3 | 12 | 65 | 1.81/46.0 | 2.00/50.8 | C-8 | 4100 | 3050 | 4000 | 24 |
| EYC | 15062 | GU5.3 | 12 | 75 | 1.75/44.5 | 2.00/50.8 | C-8 | 2000 | 3050 | 4000 | 38 |
| EYF | 15064 | GU5.3 | 12 | 75 | 1.75/44.5 | 2.00/50.8 | C-8 | 11,500 | 3050 | 4000 | 12 |
| EYJ | 15066 | GU5.3 | 12 | 75 | 1.75/44.5 | 2.00/50.8 | C-8 | 5500 | 3080 | 4000 | 24 |

MR16 Standard Front Glass



| Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---------------|----------|-------|-------|-------|-----------|-----------|----------|---------------------------|-------------|-----------|--------------|
| BAB-FG | 15070 | GU5.3 | 12 | 20 | 1.99/50.5 | 2.00/50.8 | C-8 | 460 | 2950 | 3000 | 36 |
| ESX-FG | 15072 | GU5.3 | 12 | 20 | 1.99/50.5 | 2.00/50.8 | C-8 | 4300 | 3050 | 3000 | 12 |
| EXN-FG | 15080 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | 1800 | 3000 | 4000 | 38 |
| EXN-FG-24V | 49565 | GU5.3 | 24 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | 1800 | 3000 | 4000 | 38 |
| EXT-FG | 15082 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | 10,000 | 3000 | 4000 | 12 |
| EXT-FG-24V | 49566 | GU5.3 | 24 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | 10,000 | 3000 | 4000 | 12 |
| EXZ-FG | 15084 | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | 3000 | 3000 | 4000 | 24 |
| EYC-FG | 15092 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-8 | 2000 | 3050 | 4000 | 38 |
| EYF-FG | 15094 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-8 | 11,500 | 3050 | 4000 | 12 |
| EYJ-FG | 15096 | GU5.3 | 12 | 75 | 1.99/50.5 | 2.00/50.8 | C-8 | 5500 | 3080 | 4000 | 24 |
| EYP-FG | 15074 | GU5.3 | 12 | 42 | 1.99/50.5 | 2.00/50.8 | C-8 | 991 | 3000 | 4000 | 38 |
| EYR-FG | 15076 | GU5.3 | 12 | 42 | 1.99/50.5 | 2.00/50.8 | C-8 | 7070 | 3000 | 4000 | 12 |
| EYS-FG | 15078 | GU5.3 | 12 | 42 | 1.99/50.5 | 2.00/50.8 | C-8 | 2800 | 3000 | 4000 | 24 |
| FMT-FG | 15053 | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-8 | 4800 | 2950 | 4000 | 12 |

Continued on next page ►►




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MR16 STANDARD


MR16 Standard Front Glass (Continued)

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|-------|-------|-------|-----------|-----------|-----------|---------------------------|-------------|-----------|--------------|
| | FMV-FG | 15055 | | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-8 | 1800 | 2950 | 4000 |
| FMW-FG | 15057 | | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-8 | 900 | 2950 | 4000 | 38 |
| FNC-FG (Yellow) | 15048 | | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | N/A | N/A | 4000 | 12 |
| FND-FG (Red) | 15050 | | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | N/A | N/A | 4000 | 12 |
| FNE-FG (Green) | 15052 | | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | N/A | N/A | 4000 | 12 |
| FNF-FG (Blue) | 15054 | | GU5.3 | 12 | 50 | 1.99/50.5 | 2.00/50.8 | C-8 | N/A | N/A | 4000 | 12 |
| FNV-FG | 00297 | | GU5.3 | 12 | 50 | 1.75/44.5 | 2.00/50.8 | C-8 | 550 | 3000 | 3000 | 60 |
| FPA-FG | 15086 | | GU5.3 | 12 | 65 | 1.99/50.5 | 2.00/50.8 | C-8 | 11,500 | 3050 | 4000 | 12 |
| FPB-FG | 15088 | | GU5.3 | 12 | 65 | 1.99/50.5 | 2.00/50.8 | C-8 | 2000 | 3050 | 4000 | 38 |
| FPC-FG | 15090 | | GU5.3 | 12 | 65 | 1.85/47.0 | 2.00/50.8 | C-8 | 4100 | 3050 | 4000 | 24 |
| FRA-FG | 49433 | | GU5.3 | 12 | 35 | 1.99/50.5 | 2.00/50.8 | C-8 | 2800 | 3050 | 4000 | 18 |


MR16 Intermediate Screw Base

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-------|-----------|-----------|-----------|---------------------------|-------------|-----------|--------------|
| | FSA | 15100 | | E17 | 120 | 75 | 2.75/69.6 | 2.00/50.8 | CC-8 | 5000 | 3000 | 2000 |
| FSB | 15102 | | E17 | 120 | 75 | 2.75/69.6 | 2.00/50.8 | CC-8 | 1800 | 3000 | 2000 | 20 |
| FSC | 15104 | | E17 | 120 | 100 | 2.75/69.6 | 2.00/50.8 | CC-8 | 7000 | 3000 | 2000 | 12 |
| FSD | 15106 | | E17 | 120 | 75 | 2.75/69.6 | 2.00/50.8 | CC-8 | 1300 | 3000 | 2000 | 30 |
| FSE | 15108 | | E17 | 120 | 100 | 2.75/69.6 | 2.00/50.8 | CC-8 | 2400 | 3000 | 2000 | 20 |
| FSF | 15110 | | E17 | 120 | 100 | 2.75/69.6 | 2.00/50.8 | CC-8 | 1750 | 3000 | 2000 | 30 |

MR16 Medium Screw Base


|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° |
|---|---------------|----------|------|-------|-------|-----------|-----------|-----------|---------------------------|-------------|-----------|--------------|
| | JDR75/SP | 10451 | | E26 | 120 | 75 | 2.84/72.0 | 2.00/50.8 | CC-8 | 5000 | 3000 | 2000 |
| JDR75/MF | 10452 | | E26 | 120 | 75 | 2.84/72.0 | 2.00/50.8 | CC-8 | 1800 | 3000 | 2000 | 20 |
| JDR75/FL | 10453 | | E26 | 120 | 75 | 2.84/72.0 | 2.00/50.8 | CC-8 | 1300 | 3000 | 2000 | 30 |
| JDR100/MF | | | E26 | 120 | 100 | 2.84/72.0 | 2.00/50.8 | CC-8 | 1800 | 3000 | 1500 | 20 |
| JDR100/FL | | | E26 | 120 | 100 | 2.84/72.0 | 2.00/50.8 | CC-8 | 1300 | 3000 | 1500 | 30 |

MR16 Silver & Black Coated Reflector

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Fil. | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° | Special Desc. |
|---|---------------|----------|-------|-------|-------|-----------|-----------|-----------|---------------------------|-------------|-----------|--------------|------------------|
| | BAB-BLACK | 81109 | | GU5.3 | 12 | 20 | 1.81/46.0 | 2.00/50.8 | C-8 | 460 | 2950 | 3000 | 38 |
| BAB-SILVER | 81108 | | GU5.3 | 12 | 20 | 1.81/46.0 | 2.00/50.8 | C-8 | 460 | 2950 | 3000 | 38 | Silver Reflector |
| EXN-BLACK | 81115 | | GU5.3 | 12 | 50 | 1.77/44.5 | 2.00/50.8 | C-8 | 1800 | 3000 | 4000 | 38 | Black Reflector |
| EXN-SILVER | 81114 | | GU5.3 | 12 | 50 | 1.77/44.5 | 2.00/50.8 | C-8 | 1800 | 3000 | 4000 | 38 | Silver Reflector |
| EXZ-BLACK | 81113 | | GU5.3 | 12 | 50 | 1.77/45.0 | 2.00/50.8 | C-8 | 3000 | 3000 | 4000 | 24 | Black Reflector |
| EXZ-SILVER | 81112 | | GU5.3 | 12 | 50 | 1.77/45.0 | 2.00/50.8 | C-8 | 3000 | 3000 | 4000 | 24 | Silver Reflector |
| FMW-BLACK | 81111 | | GU5.3 | 12 | 35 | 1.81/46.0 | 2.00/50.8 | C-8 | 900 | 2950 | 4000 | 38 | Black Reflector |
| FMW-SILVER | 81110 | | GU5.3 | 12 | 35 | 1.81/46.0 | 2.00/50.8 | C-8 | 900 | 2950 | 4000 | 38 | Silver Reflector |

MR16 STANDARD

Line Voltage MR16

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOD mm | MEL in. | Filament | Color Temp. |
|---|------------------|----------|------|-------|-------|--------|---------|------------|-------------|
| | EXN-FG-GU10-130V | 00305 | | GU10 | 130 | 50 | 50.8 | 2.06 | "8" shape* |
| BAB-FG-GU10-120V | 00306 | | GU10 | 120 | 50 | 50.8 | 2.06 | "8" shape* | 2550 |
| FMW-FG-GU10-130V | 00009 | | GU10 | 130 | 50 | 50.8 | 2.06 | "8" shape* | 2650 |

* See filament diagrams on page 33.



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

SOLUX® MR16

SoLux® MR16 - 3500K

| | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Fil. | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° | Common Code | CRI |
|--|---------------|----------|-------|-------|-------|-----------|-----------|------|---------------------------|-------------|-----------|--------------|------------------|-----|
| | 35006 | 35006 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 11,895 | 3500 | 4000 | 10 | Q35MR16/CG/35/10 | 98+ |
| | 35007 | 35007 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 5017 | 3500 | 4000 | 17 | Q35MR16/CG/35/17 | 98+ |
| | 35009 | 35009 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 2834 | 3500 | 4000 | 24 | Q35MR16/CG/35/24 | 98+ |
| | 35008 | 35008 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 1867 | 3500 | 4000 | 36 | Q35MR16/CG/35/36 | 98+ |
| | 18006 | 18006 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 12,482 | 3500 | 4000 | 10 | Q50MR16/CG/35/10 | 98+ |
| | 18007 | 18007 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 6911 | 3500 | 4000 | 17 | Q50MR16/CG/35/17 | 98+ |
| | 18008 | 18008 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 2285 | 3500 | 4000 | 36 | Q50MR16/CG/35/36 | 98+ |
| | 18009 | 18009 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 3715 | 3500 | 4000 | 24 | Q50MR16/CG/35/24 | 98+ |

SoLux® MR16 - 4100K

| | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Fil. | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° | Common Code | CRI |
|--|---------------|----------|-------|-------|-------|-----------|-----------|------|---------------------------|-------------|-----------|--------------|------------------|-----|
| | 35011 | 35011 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 9783 | 4100 | 4000 | 10 | Q35MR16/CG/41/10 | 98+ |
| | 35012 | 35012 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 3447 | 4100 | 4000 | 17 | Q35MR16/CG/41/17 | 98+ |
| | 35014 | 35014 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 2107 | 4100 | 4000 | 24 | Q35MR16/CG/41/24 | 98+ |
| | 35013 | 35013 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 1298 | 4100 | 4000 | 36 | Q35MR16/CG/41/36 | 98+ |
| | 18011 | 18011 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 10,295 | 4100 | 4000 | 10 | Q50MR16/CG/41/10 | 98+ |
| | 18012 | 18012 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 5726 | 4100 | 4000 | 17 | Q50MR16/CG/41/17 | 98+ |
| | 18013 | 18013 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 1622 | 4100 | 4000 | 36 | Q50MR16/CG/41/36 | 98+ |
| | 18014 | 18014 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 3263 | 4100 | 4000 | 24 | Q50MR16/CG/41/24 | 98+ |

SoLux® MR16 - 4700K

| | Ordering Code | Bar Code | Base | Volts | Watts | MOL in/mm | MOD in/mm | Fil. | Approx. Init. Max Beam CP | Color Temp. | Avg. Life | Beam Angle ° | Common Code | CRI |
|--|---------------|----------|-------|-------|-------|-----------|-----------|------|---------------------------|-------------|-----------|--------------|------------------|-----|
| | 35001 | 35001 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 7534 | 4700 | 4000 | 10 | Q35MR16/CG/47/10 | 99+ |
| | 35002 | 35002 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 2736 | 4700 | 4000 | 17 | Q35MR16/CG/47/17 | 99+ |
| | 35004 | 35004 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 1638 | 4700 | 4000 | 24 | Q35MR16/CG/47/24 | 99+ |
| | 35003 | 35003 | GU5.3 | 12 | 35 | 1.77/45 | 1.97/50 | C-8 | 663 | 4700 | 4000 | 36 | Q35MR16/CG/47/36 | 99+ |
| | 18001 | 18001 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 8081 | 4700 | 4000 | 10 | Q50MR16/CG/47/10 | 99+ |
| | 18002 | 18002 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 3998 | 4700 | 4000 | 17 | Q50MR16/CG/47/17 | 99+ |
| | 18003 | 18003 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 1390 | 4700 | 4000 | 36 | Q50MR16/CG/47/36 | 99+ |
| | 18004 | 18004 | GU5.3 | 12 | 50 | 1.77/45 | 1.97/50 | C-8 | 2306 | 4700 | 4000 | 24 | Q50MR16/CG/47/24 | 99+ |

SOLUX® FIXTURES

SoLux® Fixtures

| | Ordering Code | Description |
|-------|---|---|
| | 19101 | Single Arm Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19103 | Single Arm Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Titanium |
| | 19120 | Double Arm Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19105 | Double Arm Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Titanium |
| | 19123 | Floor Stand Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19107 | Floor Stand Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Titanium |
| | 19126 | Mobile Base Task Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19129 | Clip-on Digital Photo Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - White |
| | 19130 | Clip-on Digital Photo Lamp with 4100K / 50W / 36° SoLux Bulb - 120V Transformer - White |
| | 19131 | Clip-on Digital Photo Lamp with 3500K / 50W / 36° SoLux Bulb - 120V Transformer - White |
| | 19150 | Clip-on Digital Photo Lamp with 4700K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19151 | Clip-on Digital Photo Lamp with 4100K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| | 19152 | Clip-on Digital Photo Lamp with 3500K / 50W / 36° SoLux Bulb - 120V Transformer - Black |
| 19362 | Replacement Transformer - Black - 120V | |
| 19382 | Replacement Transformer - White - 120V | |
| 19132 | Retro Fixture with 4700K / 50W / 36° SoLux Bulb - 120V built-in Transformer - White | |

Continued on next page ►►




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


SOLUX® FIXTURES

SoLux® Fixtures


|  | Ordering Code | Description |
|---|---------------|---|
| | 19133 | Retro Fixture with 4100K / 50W / 36° SoLux Bulb - 120V built-in Transformer - White |
| | 19134 | Retro Fixture with 3500K / 50W / 36° SoLux Bulb - 120V built-in Transformer - White |
| | 19153 | Retro Fixture with 4700K / 50W / 36° SoLux Bulb - 120V built-in Transformer - Black |
| | 19154 | Retro Fixture with 4100K / 50W / 36° SoLux Bulb - 120V built-in Transformer - Black |
| | 19155 | Retro Fixture with 3500K / 50W / 36° SoLux Bulb - 120V built-in Transformer - Black |

BI-PIN HALOGEN

JC

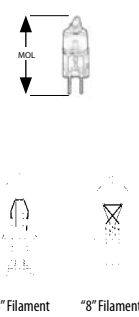
|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lum. | Color Temp. | Avg. Life |
|---|---------------|----------|---------|-------|-------|-------|------------|-----------|----------|------|-------------|-----------|
| | JC12V5W-FR | 81120 | T-3 | G4 | 12 | 5 | 1.38/35.00 | 0.36/9.0 | C-6 | 60 | 2720 | 2000 |
| | JC12V20W | 03510 | T-3 | G4 | 12 | 20 | 1.38/35.0 | 0.36/9.0 | C-6 | 350 | 3200 | 50 |
| | JC12V20WH20 | 15013 | T-3 | G6.35 | 12 | 20 | 1.73/44.0 | 0.46/11.5 | C-6 | 350 | 2850 | 2000 |
| | JC12V30W | 03520 | T-3 | G4 | 12 | 30 | 1.22/31.0 | 0.36/9.0 | C-6 | 800 | 3300 | 50 |
| | JC12V30WH20 | 15015 | T-3 1/2 | G6.35 | 12 | 30 | 1.73/44.0 | 0.46/11.5 | C-6 | 560 | 2900 | 2000 |
| | JC12V35WH20 | 15017 | T-3 1/2 | G6.35 | 12 | 35 | 1.73/44.0 | 0.46/11.5 | C-6 | 600 | 2900 | 2000 |
| | JC12V50WH20 | 15019 | T-5 | G6.35 | 12 | 50 | 1.73/44.0 | 0.46/11.5 | C-8 | 950 | 3000 | 2000 |
| | JC12V75WH20 | 15021 | T-3 1/4 | G6.35 | 12 | 75 | 1.73/44.0 | 0.46/11.5 | C-6 | 1600 | 3000 | 2000 |
| | JC12V100WH20 | 15023 | T-3 1/2 | G6.35 | 12 | 100 | 1.73/44.0 | 0.51/13.0 | C-6 | 2000 | 3000 | 2000 |
| | JC24V300W | 03530 | T-4 1/2 | G6.35 | 24 | 300 | 2.16/55.0 | 0.55/14.0 | C-6 | 9900 | 3400 | 50 |

JCD

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Lum. | Color Temp. | Avg. Life |
|---|----------------|----------|---------|-------|-------|-------|-----------|-----------|----------|------|-------------|-----------|
| | JCD6V10WH20 | 15001 | T-2 3/4 | G4 | 6 | 10 | 1.22/31.0 | 0.36/9.0 | C-6 | 150 | 2850 | 2000 |
| | JCD6V20WH20 | 15003 | T-2 3/4 | G4 | 6 | 20 | 1.22/31.0 | 0.36/9.0 | C-6 | 300 | 2900 | 2000 |
| | JCD12V5WH20 | 15005 | T-2 1/2 | G4 | 12 | 5 | 1.22/31.0 | 0.36/9.0 | C-6 | - | 2900 | 2000 |
| | JCD12V10WH20 | 15007 | T-2 3/4 | G4 | 12 | 10 | 1.22/31.0 | 0.36/9.0 | C-6 | 150 | 2900 | 2000 |
| | JCD12V20WH20 | 15009 | T-2 3/4 | G4 | 12 | 20 | 1.22/31.0 | 0.36/9.0 | C-6 | 300 | 2850 | 2000 |
| | JCD24V20WH20 | 15011 | T-3 1/4 | G4 | 24 | 20 | 1.22/31.0 | 0.44/11.0 | CC-6 | 280 | 2850 | 2000 |
| | JCD12V35WH20 | 49561 | T-3 1/2 | G4 | 12 | 35 | 1.22/31.0 | 0.36/9.0 | CC-6 | - | 2850 | 2000 |
| | JCD120V100W/A* | 03540 | T-4 1/2 | G6.35 | 20 | 100 | 1.97/50.0 | 0.55/14.0 | CC-6 | 2000 | 3000 | 150 |

* with ceramic seal cover

Line Voltage Bi-Pin

|  | Ordering Code | Bar Code | Base | Volts | Watts | MOD mm | MOL mm. | Filament | Lumens | Color Temp. |
|---|------------------|----------|-------|-------|-------|--------|---------|-----------|--------|-------------|
| | JCD130V20WG6.35 | 00307 | G6.35 | 130 | 20 | 13 | 36.5 | CC-6V | 130 | 2500 |
| | JCD130V25WG6.35 | 00308 | G6.35 | 130 | 25 | 13 | 36.5 | CC-6V | 170 | 2550 |
| | JCD130V35WG6.35 | 00309 | G6.35 | 130 | 35 | 13 | 45 | CC-2V | 380 | 2650 |
| | JCD130V50WG6.35 | 00311 | G6.35 | 130 | 50 | 13 | 45 | CC-2V | 600 | 2700 |
| | JCD130V75WG6.35 | 00312 | G6.35 | 130 | 75 | 13 | 45 | CC-7A | 930 | 2700 |
| | JCD130V100WG6.35 | 00313 | G6.35 | 130 | 100 | 13.5 | 50 | CC-7A | 1450 | 2750 |
| | JCD130V20WG8 | 00314 | G8 | 130 | 20 | 13 | 36.5 | CC-6V | 130 | 2500 |
| | JCD130V25WG8 | 00315 | G8 | 130 | 25 | 13 | 36.5 | CC-6V | 170 | 2550 |
| | JCD130V35WG8 | 00316 | G8 | 130 | 35 | 13 | 45 | CC-2V | 380 | 2650 |
| | JCD130V50WG8 | 00317 | G8 | 130 | 50 | 13 | 45 | CC-2V | 600 | 2700 |
| | JCD130V75WG8 | 00318 | G8 | 130 | 75 | 13 | 45 | CC-7A | 930 | 2700 |
| | JCD130V100WG8 | 00319 | G8 | 130 | 100 | 13 | 50 | CC-7A | 1450 | 2750 |
| | JCD130V25WG9 | 00321 | G9 | 130 | 25 | 13 | 46 | "4" shape | 180 | 2500 |
| | JCD130V40WG9 | 00322 | G9 | 130 | 40 | 13 | 46 | "4" shape | 400 | 2700 |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

BI-PIN HALOGEN

Line Voltage Bi-Pin (Continued)

| | Ordering Code | Bar Code | Base | Volts | Watts | MOD mm | MOL mm. | Filament | Lumens | Color Temp. |
|--|-----------------|----------|------|-------|-------|--------|---------|-----------|--------|-------------|
| | JCD130V50WG9 | 00323 | G9 | 130 | 50 | 13 | 46 | "4" shape | 550 | 2750 |
| | JCD130V60WG9 | 00324 | G9 | 130 | 60 | 13 | 49 | "4" shape | 720 | 2800 |
| | JCD130V75WG9 | 00325 | G9 | 130 | 75 | 13 | 49 | "4" shape | 900 | 2800 |
| | JCD130V25WG9/F* | 00326 | G9 | 130 | 25 | 13 | 46 | "4" shape | 170 | 2500 |
| | JCD130V40WG9/F* | 00327 | G9 | 130 | 40 | 13 | 46 | "4" shape | 380 | 2700 |
| | JCD130V50WG9/F* | 00328 | G9 | 130 | 50 | 13 | 46 | "4" shape | 500 | 2750 |
| | JCD130V60WG9/F* | 00329 | G9 | 130 | 60 | 13 | 49 | "4" shape | 680 | 2800 |
| | JCD130V75WG9/F* | 00331 | G9 | 130 | 75 | 13 | 49 | "4" shape | 850 | 2800 |

* /F denotes Frosted

QUARTZ HALOGEN

Single-Ended Quartz Halogen

| | Ordering Code | Bar Code | ANSI Code | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Lum. | Color Temp. | Avg. Life |
|----------------|-------------------|----------|-----------|---------|-------|-------|-----------|-----------|-----------|------|-------------|-----------|
| | Q75CL-120V | 15215 | | T-3 1/2 | E11 | 120 | 75 | 2.50/63.5 | 0.44/11.0 | 1200 | 2850 | 2000 |
| | Q75CL/DC-120V | 15217 | | T-3 1/2 | BA15d | 120 | 75 | 2.38/60.3 | 0.47/12.0 | 1350 | 3000 | 2000 |
| | Q75CL-130V | 49567 | | T-3 1/2 | E11 | 130 | 75 | 2.50/63.5 | 0.44/11.0 | 1200 | 2850 | 2000 |
| | Q75MC-120V | 15287 | | T-4 | E11 | 120 | 75 | 2.56/65.0 | 0.47/12.0 | 1170 | 2850 | 1000 |
| | Q100/DC-120V | 15220 | | T-4 | BA15d | 120 | 100 | 2.44/61.9 | 0.51/13.0 | 1500 | 2900 | 2000 |
| | Q100DC/2V-120V | 49596 | ETD | T-4 | BA15d | 120 | 100 | 2.44/61.9 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q100CL/DC-120V | 15219 | | T-4 | BA15d | 120 | 100 | 2.44/61.9 | 0.47/12.0 | 1500 | 2900 | 2000 |
| | Q100CL/DC/2V-120V | 49600 | ESR | T-4 1/4 | BA15d | 120 | 100 | 2.44/61.9 | 0.55/14.0 | 1500 | 2900 | 2000 |
| | Q100CL/DC/2V-130V | 15230 | | T-4 | BA15d | 130 | 100 | 2.44/61.9 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q100/MC-120V | 15234 | | T-4 | E11 | 120 | 100 | 2.84/72.0 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q100CL/MC/2V-120V | 49598 | ESN | T-4 | E11 | 120 | 100 | 2.76/70.0 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q100CL/MC/2V-130V | 15236 | | T-4 | E11 | 130 | 100 | 2.84/72.0 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q100CL/MC-120V | 15232 | | T-4 | E11 | 120 | 100 | 2.84/72.0 | 0.47/12.0 | 1500 | 2900 | 2000 |
| | Q100MC/2V-120V | 49599 | ETE | T-4 | E11 | 120 | 100 | 2.76/70.0 | 0.52/13.0 | 1500 | 2900 | 2000 |
| | Q150CL/MC-120V | 49601 | ETG | T-4 1/4 | E11 | 120 | 150 | 3.00/76.2 | 0.55/14.0 | 2600 | 2900 | 2000 |
| | Q150DC-120V | 49602 | ETF | T-4 | BA15d | 120 | 150 | 2.68/68.0 | 0.52/13.0 | 2700 | 2900 | 2000 |
| | Q150MC-120V | 49603 | ETH | T-4 1/4 | E11 | 120 | 150 | 3.00/76.2 | 0.55/14.0 | 2700 | 2900 | 2000 |
| | Q150CL/DC-120V | 49604 | ETC | T-4 | BA15d | 120 | 150 | 2.44/61.9 | 0.52/13.0 | 2800 | 2900 | 2000 |
| | Q150CL/DC-130V | 15250 | | T-4 | BA15d | 130 | 150 | 2.44/61.9 | 0.52/13.0 | 2800 | 2900 | 2000 |
| | Q150CL/MC/2V-130V | 15252 | | T-4 | E11 | 130 | 150 | 2.84/72.0 | 0.52/13.0 | 2800 | 2900 | 1000 |
| | Q250DC-120V | 49607 | ETB | T-4 1/4 | BA15d | 120 | 250 | 3.15/80.0 | 0.55/14.0 | 4700 | 2950 | 2000 |
| | Q250MC-120V | 49608 | ESM | T-4 | E11 | 120 | 250 | 3.19/81.0 | 0.52/13.0 | 4800 | 2900 | 2000 |
| | Q250MC-130V | 15270 | | T-4 | E11 | 130 | 250 | 3.19/81.0 | 0.52/13.0 | 4800 | 2900 | 2000 |
| | Q250CL/MC-120V | 49609 | EHT | T-4 | E11 | 120 | 250 | 3.15/80.0 | 0.52/13.0 | 5000 | 3000 | 2000 |
| | Q250CL/DC-120V | 49610 | ESS | T-4 1/4 | BA15d | 120 | 250 | 3.15/80.0 | 0.55/14.0 | 5000 | 3000 | 2000 |
| | Q250DC-130V | 15266 | | T-4 | BA15d | 130 | 250 | 3.0076.2 | 0.52/13.0 | 4800 | 3000 | 2000 |
| | Q250CL/DC-130V | 15264 | | T-4 | BA15d | 130 | 250 | 3.0076.2 | 0.52/13.0 | 5000 | 3000 | 2000 |
| | Q250CL/MC-130V | 15268 | | T-4 | E11 | 130 | 250 | 3.15/80.0 | 0.52/13.0 | 5000 | 3000 | 2000 |
| | Q325CL/MC-120V | 49611 | EHV | T-4 | E11 | 120 | 325 | 3.15/80.0 | 0.52/13.0 | 7800 | 3000 | 500 |
| | Q500CL/DC-120V | 15282 | | T-4 | BA15d | 120 | 500 | 3.75/95.3 | 0.59/15.0 | 8800 | 2950 | 1700 |
| | Q500DC-120V | 15284 | | T-4 | BA15d | 120 | 500 | 3.75/95.3 | 0.59/15.0 | 8800 | 2950 | 1700 |
| | Q500/MC-120V | 49612 | EYX | T-4 | E11 | 120 | 500 | 3.75/95.3 | 0.52/13.0 | 8800 | 2950 | 1700 |
| Q500CL/MC-120V | 49613 | EVR | T-4 | E11 | 120 | 500 | 3.75/95.3 | 0.55/14.0 | 8800 | 2950 | 1700 | |
| Q500/MC-130V | 49614 | EYV | T-4 | E11 | 130 | 500 | 3.75/95.3 | 0.52/13.0 | 8800 | 2950 | 1700 | |
| Q500CL/MC-130V | 49615 | EYW | T-4 | E11 | 130 | 500 | 3.75/95.3 | 0.52/13.0 | 8800 | 2950 | 1700 | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

QUARTZ HALOGEN



Double-Ended Quartz Halogen

|  | Ordering Code | Bar Code | Filament | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Lum. | Color Temp. | Avg. Life |
|---|----------------|----------|----------|---------|------|-------|-------------|------------|-----------|------|-------------|-----------|
| | Q100T3/CL/120V | 15159 | CC-8 | T-2 3/4 | R7s | 120 | 100 | 4.69/119.1 | 0.40/10.0 | 1400 | 2800 | 2000 |
| Q150T3/CL/120V | 15161 | CC-8 | T-2 3/4 | R7s | 120 | 150 | 4.69/119.1 | 0.40/10.0 | 2200 | 2850 | 2000 | |
| Q200T3/CL/120V | 15160 | C-8 | T-2 3/4 | R7s | 120 | 200 | 4.69/119.1 | 0.40/10.0 | 3000 | 2850 | 2000 | |
| Q250T3/CL/120V | 15162 | C-8 | T-2 3/4 | R7s | 120 | 250 | 4.69/119.1 | 0.40/10.0 | 3500 | 2850 | 2000 | |
| Q300T3/CL/120V | 15164 | C-8 | T-2 3/4 | R7s | 120 | 300 | 4.69/119.1 | 0.40/10.0 | 4800 | 2850 | 2000 | |
| Q300T3/CL/130V | 15166 | C-8 | T-2 3/4 | R7s | 130 | 300 | 4.69/119.1 | 0.40/10.0 | 4800 | 2850 | 2000 | |
| Q300T3/CL/220V | 15168 | C-8 | T-2 3/4 | R7s | 220 | 300 | 4.69/119.1 | 0.40/10.0 | 4500 | 2850 | 2000 | |
| Q500T3/CL/120V | 15170 | C-8 | T-3 1/8 | R7s | 120 | 500 | 4.69/119.1 | 0.40/10.0 | 10000 | 2900 | 2000 | |
| Q500T3/CL/130V | 15172 | C-8 | T-3 1/8 | R7s | 130 | 500 | 4.69/119.1 | 0.40/10.0 | 9500 | 2900 | 2000 | |
| Q500T3/CL/220V | 15174 | C-8 | T-3 1/8 | R7s | 220 | 500 | 4.69/119.1 | 0.40/10.0 | 9000 | 2900 | 2000 | |
| Q500T3/CL/240V | 15176 | C-8 | T-3 1/8 | R7s | 240 | 500 | 4.69/119.1 | 0.40/10.0 | 9000 | 2900 | 2000 | |
| Q750T3/CL/120V | 49568 | C-8 | T-3 1/8 | R7s | 120 | 750 | 7.50/190.5 | 0.40/10.0 | 15000 | 2900 | 2000 | |
| Q750T3/CL/240V | 15180 | C-8 | T-3 1/8 | R7s | 240 | 750 | 7.50/190.5 | 0.40/10.0 | 16500 | 2900 | 2000 | |
| Q1000T3/CL/120V | 49569 | C-8 | T-3 1/8 | R7s | 120 | 1000 | 10.06/255.6 | 0.40/10.0 | 21000 | 2900 | 2000 | |
| Q1000T3/CL/220V | 15182 | C-8 | T-3 1/8 | R7s | 220 | 1000 | 10.06/255.6 | 0.40/10.0 | 22000 | 2900 | 2000 | |
| Q1000T3/CL/240V | 15184 | C-8 | T-3 1/8 | R7s | 240 | 1000 | 10.06/255.6 | 0.40/10.0 | 21000 | 2900 | 2000 | |
| Q1000T3/CL/277V | 15186 | C-8 | T-3 1/8 | R7s | 277 | 1000 | 10.06/255.6 | 0.40/10.0 | 22000 | 2900 | 2000 | |
| Q1500T3/CL/120V | 49570 | CC-8 | T-3 1/8 | R7s | 120 | 1500 | 10.06/255.6 | 0.40/10.0 | 33000 | 2900 | 2000 | |
| Q1500T3/CL/208V | 15188 | C-8 | T-3 1/8 | R7s | 208 | 1500 | 10.06/255.6 | 0.40/10.0 | 32000 | 2900 | 2000 | |
| Q1500T3/CL/220V | 15190 | CC-8 | T-3 1/8 | R7s | 220 | 1500 | 10.06/255.6 | 0.40/10.0 | 32000 | 2900 | 2000 | |
| Q1500T3/CL/240V | 15192 | CC-8 | T-3 1/8 | R7s | 240 | 1500 | 10.06/255.6 | 0.40/10.0 | 32000 | 2900 | 2000 | |
| Q1500T3/CL/277V | 15194 | CC-8 | T-3 1/8 | R7s | 277 | 1500 | 10.06/255.6 | 0.40/10.0 | 34000 | 2900 | 2000 | |

Double-Ended Short Quartz Halogen

|  | Ordering Code | Bar Code | Filament | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Lum. | Color Temp. | Avg. Life |
|---|---------------|----------|----------|---------|------|-------|-----------|-----------|-----------|------|-------------|-----------|
| | Q100W/S120V | 15200 | C-8 | T-2 3/4 | R7s | 120 | 100 | 3.15/80.0 | 0.36/9.0 | 1300 | 2800 | 2000 |
| Q100W/S130V | 15202 | C-8 | T-2 3/4 | R7s | 130 | 100 | 3.15/80.0 | 0.36/9.0 | 1300 | 2800 | 2000 | |
| Q150W/S120V | 15206 | C-8 | T-2 3/4 | R7s | 120 | 150 | 3.15/80.0 | 0.36/9.0 | 2200 | 2850 | 2000 | |
| Q150W/S130V | 15208 | C-8 | T-2 3/4 | R7s | 130 | 150 | 3.15/80.0 | 0.36/9.0 | 2200 | 2850 | 2000 | |
| Q200W/S120V | 15211 | C-8 | T-2 3/4 | R7s | 120 | 200 | 3.15/80.0 | 0.40/10.0 | 3000 | 2850 | 2000 | |
| Q200W/S130V | 15213 | C-8 | T-2 3/4 | R7s | 130 | 200 | 3.15/80.0 | 0.40/10.0 | 3000 | 2850 | 2000 | |
| Q200W/S220V | 15209 | CC-8 | T-2 3/4 | R7s | 220 | 200 | 3.15/80.0 | 0.40/10.0 | 3000 | 2850 | 2000 | |
| Q250W/S120V | 49571 | CC-8 | T-2 3/4 | R7s | 120 | 250 | 3.15/80.0 | 0.40/10.0 | 3500 | 2850 | 2000 | |
| Q300W/S120V | 15214 | CC-8 | T-2 3/4 | R7s | 120 | 300 | 3.15/80.0 | 0.40/10.0 | 4100 | 2850 | 2000 | |
| Q300W/S130V | 15216 | CC-8 | T-2 3/4 | R7s | 130 | 300 | 3.15/80.0 | 0.40/10.0 | 4100 | 2850 | 2000 | |
| Q400W/S120V | 15218 | C-8 | T-3 1/8 | R7s | 120 | 400 | 3.15/80.0 | 0.40/10.0 | 5500 | 2850 | 2000 | |
| Q400W/S130V | 15221 | C-8 | T-3 1/8 | R7s | 130 | 400 | 3.15/80.0 | 0.40/10.0 | 5500 | 2850 | 2000 | |

Tubular Heat

|   | Ordering Code | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Color Temp. | Avg. Life | Special Description |
|--|---------------|----------|----------|---------|-------------|------------|-----------|----------|-------------|--------------------------------|---------------------|
| | 17002 | T-3 | 6" Leads | 115-125 | 375 | 8.82/224.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted |
| 17004 | T-3 | R7s | 115-125 | 375 | 8.70/221.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17006 | T-3 | 6" Leads | 115-125 | 500 | 8.82/224.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17008 | T-3 | 6" Leads | 115-125 | 500 | 8.82/224.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear | |
| 17010 | T-3 | R7s | 115-125 | 500 | 8.70/221.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17012 | T-3 | 6" Leads | 200-220 | 1000 | 13.78/350.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17014 | T-3 | 6" Leads | 230-250 | 1000 | 13.78/350.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17016 | T-3 | 6" Leads | 230-250 | 1000 | 11.89/302.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear | |
| 17018 | T-3 | 6" Leads | 230-250 | 1000 | 13.78/350.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear, High Temp. Construction | |
| 17022 | T-3 | 6" Leads | 144 | 1200 | 8.82/224.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear, High Temp. Construction | |
| 17024 | T-3 | 6" Leads | 200-220 | 1600 | 19.80/503.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17026 | T-3 | 6" Leads | 230-250 | 1600 | 19.80/503.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17028 | T-3 | 6" Leads | 277 | 1600 | 19.80/503.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted | |
| 17030 | T-3 | 6" Leads | 230-250 | 1600 | 19.80/503.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear | |

Continued on next page ►►





23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com






QUARTZ HEAT

Tubular Heat (Continued)

|   | Ordering Code | Bulb | Base | Volts | Watts | MOL in/mm | MOD in/mm | Filament | Color Temp. | Avg. Life | Special Description |
|--|---------------|----------|------|---------|---------|-------------|-------------|-----------|-------------|-----------|--------------------------------|
| | 17032 | T-3 | R7s | | 200-220 | 1600 | 19.63/498.5 | 0.40/10.0 | C-8 | 2400 | 5000 |
| 17034 | T-3 | R7s | | 230-250 | 1600 | 19.63/498.5 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted |
| 17040 | T-3 | 6" Leads | | 230-250 | 2000 | 13.78/350.0 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear, High Temp. Construction |
| 17042 | T-3 | 6" Leads | | 460-500 | 2500 | 28.82/732 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted |
| 17044 | T-3 | R7s | | 460-500 | 2500 | 28.62/727 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted |
| 17046 | T-3 | 6" Leads | | 460-500 | 2500 | 28.82/732 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear |
| 17048 | T-3 | 6" Leads | | 480 | 3650 | 41.6/1057 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear |
| 17050 | T-3 | 6" Leads | | 550-600 | 3800 | 41.8/1062 | 0.40/10.0 | C-8 | 2400 | 5000 | Frosted |
| 17052 | T-3 | 6" Leads | | 550-600 | 3800 | 41.8/1062 | 0.40/10.0 | C-8 | 2400 | 5000 | Clear, Vertical Burn |

HALOGEN MINIATURE


Halogen Miniatures

|  G4  BA9s  P13.5s  BA15s  BAY15d | Ordering Code | Base | Volts | Amps | Lumens or CP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Description |
|--|---------------|------|-------|--------|--------------|----------|-----------|-----------|-----------|---------------------|
| | 787 | G4 | | 6.0 | 1.67 | 16cp | C-6 | 1.00/25.4 | 0.30/7.6 | 100 |
| 788 | G4 | | 6.0 | 3.33 | 32cp | C-6 | 1.00/25.4 | 0.30/7.6 | 100 | |
| 891 | G4 | | 12.8 | 8W | 11.5cp | C-6 | 1.20/30.5 | 0.32/8.1 | 500 | |
| 778 | G4 | | 6.0 | 3.33 | 32cp | C-6 | 1.05/26.7 | 0.38/9.6 | 100 | |
| 789 | G4 | | 12.0 | 1.17 | 22cp | C-6 | 1.05/26.7 | 0.38/9.6 | 200 | |
| 64111 | BA9s | | 12.0 | 0.416 | 6.7cp | C-6 | 1.29/32.8 | 0.38/9.6 | 240 | |
| HPR52 | P13.5s | | 2.8 | 0.85 | 35 | C-6 | 1.25/31.8 | 0.38/9.6 | 10 | Flashlight |
| HPR53 | P13.5s | | 4.0 | 0.85 | 48 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | Flashlight |
| HPR44 | P13.5s | | 4.0 | 1.00 | 54 | C-6 | 1.25/31.8 | 0.38/9.6 | 300 | Flashlight |
| HPR55 | P13.5s | | 5.2 | 0.50 | 48 | C-6 | 1.25/31.8 | 0.38/9.6 | 15 | Flashlight |
| HPR50 | P13.5s | | 5.2 | 0.85 | 85 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | Flashlight |
| HPR36 | P13.5s | | 5.5 | 1.00 | 93 | C-6 | 1.25/31.8 | 0.38/9.6 | 40 | Flashlight |
| HPR40 | P13.5s | | 6.0 | 0.67 | 75 | C-6 | 1.25/31.8 | 0.38/9.6 | 50 | Flashlight |
| HPR51 | P13.5s | | 6.5 | 0.70 | 90 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | Flashlight |
| 796 | BA15s | | 12.8 | 35W | 60cp | C-6 | 2.50/63.5 | 0.48/12.2 | 300 | Halogen |
| 795 | BA15s | | 12.8 | 50W | 108cp | C-6 | 2.50/63.5 | 0.48/12.2 | 200 | Halogen |
| 795X | BA15s | | 12.8 | 50W | 108cp | C-8 | 2.50/63.5 | 0.48/12.2 | 200 | Halogen |
| H1156 | BA15s | | 12.8 | 50W | 108cp | C-6 | 2.50/63.5 | 0.56/14.2 | 250 | Halogen |
| H1157 | BAY15d | | 12.8 | 50/15W | 108/24cp | C-6/C-6 | 2.00/50.8 | .64/16.3 | 250/400 | Halogen |


*EiKO stocks over 1500 different miniature lamps.
Please refer to the our website at: www.eiko-ltd.com for complete information.*

BASED LED

S-8 BAY15d (DC Index Bayonet) Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|-----------------------|------------|----------|---------|-----------|-----------|----------|---------|--------------|------------------------------|
| | LED-12-DCBAY-W | N/A | | 00343 | 12AC/DC | 1.81/46 | 1.0/25 | Cluster | White | 25° |
| LED-12-DCBAY-R | N/A | | 00344 | 12AC/DC | 1.81/46 | 1.0/25 | Cluster | Red | 25° | DC Index Bayonet Base 12V S8 |

S-8 BA15s (SC Bayonet) Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|-----------------------|------------|----------|----------|-----------|-----------|----------|---------|--------------|------------------------|
| | LED-12-SCBAY-W | N/A | | 00341 | 12VAC/DC | 1.81/46 | 1.0/25 | Cluster | White | 30° |
| LED-12-SCBAY-R | N/A | | 00342 | 12VAC/DC | 1.81/46 | 1.0/25 | Cluster | Red | 30° | SC Bayonet Base 12V S8 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

BASED LED


SV.5 Festoon Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|------------------|------------|----------|-------|-----------|-----------|----------|-------|--------------|-------------|
| | LED-12-FESTOON-W | N/A | | 12VDC | 1.73/44 | 0.43/11 | Cluster | White | 30° | 10x44 Xenon |
| | LED-24-FESTOON-W | N/A | | 24VDC | 1.73/44 | 0.43/11 | Cluster | White | 30° | 10x44 Xenon |
| | | | | | | | | | | |


T-1¼ BA9S (Miniature Bayonet) Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|-----------------|-----------------|------------|------------|-----------|-----------|----------|-------|---|--|
| | LED-14-BA9S-G | 3573.09.144-003 | 81196 | 14AC/DC | 1.0/25 | 0.4/10 | Single | Green | 18° | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| | LED-14-BA9S-R | 1573.09.144-004 | 81197 | 14AC/DC | 1.0/25 | 0.4/10 | Single | Red | 18° | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| | LED-14-BA9S-W | 5100.09.144-004 | 81198 | 14AC/DC | 1.0/25 | 0.4/10 | Single | White | 18° | 756, 1813, 1815, 1816, 1889, 1891, 1892, 1893 |
| | LED-24-BA9S-G | 3573.09.128-002 | 81200 | 24-28AC/DC | 1.0/25 | 0.4/10 | Single | Green | 18° | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1829, 1843, 1864, 1873 |
| | LED-24-BA9S-R | 1573.09.128-002 | 81201 | 24-28AC/DC | 1.0/25 | 0.4/10 | Single | Red | 18° | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1829, 1843, 1864, 1873 |
| | LED-24-BA9S-W | 5100.09.128-002 | 81202 | 24-28AC/DC | 1.0/25 | 0.4/10 | Single | White | 18° | 24MB, 28MB, 313, 757, 1818, 1819, 1820, 1843, 1829, 1864, 1873 |
| | LED-120-MB-G | 3573.09.537-002 | 81188 | 110-130VAC | 1.0/25 | 0.4/10 | Single | Green | 18° | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| | LED-120-MB-R | 1573.09.537-002 | 81189 | 110-130VAC | 1.0/25 | 0.4/10 | Single | Red | 18° | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| | LED-120-MB-W | 5100.09.537-002 | 81190 | 110-130VAC | 1.0/25 | 0.4/10 | Single | White | 18° | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 |
| LED-120-MB-Y | 2513.09.537-002 | 81191 | 110-130VAC | 1.0/25 | 0.4/10 | Single | Yellow | 18° | 120MB, 120MB-6, 130MB, 8-3995, 949, 967 | |


T-1¼ Midget Flange Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|---------------|-----------------|----------|------------|-----------|-----------|----------|--------|--------------|--------------------------|
| | LED-24-MF-R | 3021.06.128-003 | 81204 | 24-28AC/DC | 0.63/16.0 | 0.24/6 | Single | Red | 40° | 327, 376, 385, 387, 7341 |
| | LED-24-MF-W | 3100.06.128-004 | 81205 | 24-28AC/DC | 0.63/16.0 | 0.24/6 | Single | White | 40° | 327, 376, 385, 387, 7341 |
| | LED-24-MF-Y | 3121.06.128-003 | 81206 | 24-28AC/DC | 0.63/16.0 | 0.24/6 | Single | Yellow | 40° | 327, 376, 385, 387, 7341 |

T-1¼ Midget Groove Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|---------------|-----------------|----------|-------------|-----------|-----------|----------|--------|--------------|----------|
| | LED-24-MG-R | 3021.57.128-002 | 81207 | 24-28 AC/DC | 0.63/16.0 | 0.24/6 | Single | Red | 40° | 334, 388 |
| | LED-24-MG-W | 3100.57.128-002 | 81208 | 24-28 AC/DC | 0.63/16.0 | 0.24/6 | Single | White | 40° | 334, 388 |
| | LED-24-MG-Y | 3121.57.128-002 | 81209 | 24-28 AC/DC | 0.63/16.0 | 0.24/6 | Single | Yellow | 40° | 334, 388 |

T-1¼ Sub Miniature Wedge Base

|  | Ordering Code | Old EiKO # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---|---------------------|-----------------|------------|------------|-----------|-----------|----------|--------|--------------|--------------------|
| | LED-6-T1.75WEDGE-R | 3021.01.105-002 | 81218 | 6AC/DC | 0.77/19.4 | 0.22/5.5 | Single | Red | 100° | 56, 79, 84, 86 |
| | LED-6-T1.75WEDGE-W | 3100.01.105-002 | 81219 | 6AC/DC | 0.77/19.4 | 0.22/5.5 | Single | White | 100° | 56, 79, 84, 86 |
| | LED-6-T1.75WEDGE-Y | 3121.01.105-002 | 81220 | 6AC/DC | 0.77/19.4 | 0.22/5.5 | Single | Yellow | 100° | 56, 79, 84, 86 |
| | LED-14-T1.75WEDGE-W | 3100.01.144-003 | 81199 | 14AC/DC | 0.77/19.4 | 0.22/5.5 | Single | White | 100° | 18, 37, 70, 73, 74 |
| | LED-24-T1.75WEDGE-G | 3221.01.128-503 | 81215 | 24-28AC/DC | 0.77/19.4 | 0.22/5.5 | Single | Green | 100° | 17, 85 |
| | LED-24-T1.75WEDGE-R | 3021.01.128-503 | 81215 | 24-28AC/DC | 0.77/19.4 | 0.22/5.5 | Single | Red | 100° | 17, 85 |
| | LED-24-T1.75WEDGE-W | 3100.01.128-503 | 81216 | 24-28AC/DC | 0.77/19.4 | 0.22/5.5 | Single | White | 100° | 17, 85 |
| LED-24-T1.75WEDGE-Y | 3121.01.128-503 | 81217 | 24-28AC/DC | 0.77/19.4 | 0.22/5.5 | Single | Yellow | 100° | 17, 85 | |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

BASED LED

T-2 Slide Base 5



| Ordering Code | Old Eiko # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---------------|-----------------|----------|------------|-----------|-----------|----------|--------|--------------|----------------------|
| LED-24-PSB-G | 3221.47.128-003 | 81211 | 24-28AC/DC | 1.1/28 | 0.27/6.8 | Single | Green | 100° | 24PSB5, 28PSB5 |
| LED-24-PSB-R | 3021.47.128-002 | 81210 | 24-28AC/DC | 1.1/28 | 0.27/6.8 | Single | Red | 100° | 24PSB5, 28PSB5 |
| LED-24-PSB-W | 3100.47.128-002 | 81212 | 24-28AC/DC | 1.1/28 | 0.27/6.8 | Single | White | 100° | 24PSB5, 28PSB5 |
| LED-24-PSB-Y | 3121.47.128-003 | 81213 | 24-28AC/DC | 1.1/28 | 0.27/6.8 | Single | Yellow | 100° | 24PSB5, 28PSB5 |
| LED-120-PSB-G | 5313.47.537-002 | 81194 | 110-130VAC | 1.1/28 | 0.27/6.8 | Single | Green | 100° | 120PSB5, 120PSB-Neon |
| LED-120-PSB-R | 1313.47.537-002 | 81192 | 110-130VAC | 1.1/28 | 0.27/6.8 | Single | Red | 100° | 120PSB5, 120PSB-Neon |
| LED-120-PSB-W | 3100.47.565-002 | 81195 | 110-130VAC | 1.1/28 | 0.27/6.8 | Single | White | 100° | 120PSB5, 120PSB-Neon |
| LED-120-PSB-Y | 3121.47.537-002 | 81193 | 110-130VAC | 1.1/28 | 0.27/6.8 | Single | Yellow | 100° | 120PSB5, 120PSB-Neon |


T-3¼ Miniature Wedge Base



| Ordering Code | Old Eiko # | Bar Code | Volts | MOL in/mm | MOD in/mm | LED Type | Color | View Angle ° | Replaces |
|---------------|------------|----------|---------|-----------|-----------|----------|-------|--------------|---------------------------|
| LED-194-R | N/A | 00346 | 14AC/DC | 1.1/28 | .40/10 | Single | Red | 30° | T 3¼ Min Wedge Based 1¼ V |
| LED-194-W | N/A | 00345 | 14AC/DC | 1.1/28 | .40/10 | Single | White | 30° | T 3¼ Min Wedge Based 1¼ V |

LED PAR & MR16

LED PAR



| Ordering Code | Bar Code | LEDs in Cluster | Volts | Bulb Shape | Base | Color | Avg. Life |
|----------------|----------|-----------------|----------|------------|------------------|-------|-----------|
| LEDC30/PAR20-W | 05512 | 30 | 120 | PAR20 | Med. Screw (E26) | White | 100,000* |
| LEDC70/PAR30-W | 05508 | 70 | 120 | PAR30 | Med. Screw (E26) | White | 100,000* |
| LEDC80/PAR38-W | 05524 | 80 | 120 | PAR38 | Med. Screw (E26) | White | 100,000* |
| LEDC18/MR16-W | 05520 | 18 | 12 AC/DC | MR16 | GU5.3 | White | 100,000* |

*Under optimal operating conditions.
Coming soon! High-power LED PARs.

LED STRING LIGHTS

LED String Lights



| Ordering Code | Lamps | Color | Length (ft.) |
|---------------|-------|------------|--------------|
| LEDC6-70B | 70 | Blue | 24 |
| LEDC6-70G | 70 | Green | 24 |
| LEDC6-70R | 70 | Red | 24 |
| LEDC6-70M | 70 | Multicolor | 24 |
| LEDC6-70W | 70 | White | 24 |

LAMPS BY ANSI CODE

Lamps by ANSI Code

| Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub | Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub |
|---------------|-------|-------|-------|-----------|--------------|---------------|-------|-------|-------|-----------|--------------|
| BAB | GU5.3 | 12 | 20 | 3000 | ESX | BFE | P28s | 120 | 750 | 200 | BFK |
| BAB-BLACK | GU5.3 | 12 | 20 | 3000 | | BFK/BFL | P28s | 120 | 750 | 200 | BFE |
| BAB-FG | GU5.3 | 12 | 20 | 3000 | ESX-FG | BFM | E14 | 120 | 25 | 500 | |
| BAB-SILVER | GU5.3 | 12 | 20 | 3000 | | BGB/BGK | P30d | 4 | 0.75A | 50 | |
| BAK | P30s | 4 | 0.75A | 200 | BRS | BHB | G7.9 | 120 | 250 | 25 | |
| BBA | E26 | 120 | 250 | 3 | | BKV | BA15s | 120 | 30 | 50 | BLR |
| BCA | E26 | 120 | 250 | 3 | | BLC | BA15d | 120 | 30 | 50 | |
| BCK | G17t | 120 | 500 | 50 | CZA/CZB | BLK | E12 | 120 | 30 | 50 | BLR |

Continued on next page →



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LAMPS BY ANSI CODE

Lamps by ANSI Code (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub | Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub |
|---------------|-------|-------|-------|-----------|--------------|---------------|----------|-------|-------|-----------|--------------|
| BLR | BA15s | 120 | 50 | 50 | BKV | DDN | R7s | 20 | 200 | 100 | |
| BLX | BA15d | 120 | 50 | 50 | BLC | DDS | GX5.3 | 21 | 80 | 1000 | |
| BMG/BMH | BA15d | 120 | 100 | 25 | BNF | DEB | P28s | 120 | 500 | 800 | DNS |
| BMY | BA15s | 120 | 100 | 50 | | DED | GX5.3 | 13.8 | 85 | 1000 | |
| BNF | BA15d | 120 | 75 | 25 | BMG | DEK | G17q | 120 | 500 | 25 | CBA |
| BRH | R7s | 120 | 1000 | 75 | DXN | DEP | G17q | 120 | 750 | 25 | DAY/DAK |
| BRK | P30s | 4 | 0.75A | 50 | | DFD | P28s | 120 | 1000 | 10 | DFT |
| BRL | G6.35 | 12 | 50 | 50 | | DFE | GX17q | 30 | 80 | 15 | DGB |
| BRN | G17t | 120 | 1200 | 20 | BRR | DFN/DFC | G17q | 120 | 150 | 15 | DJL |
| BTG | G17t | 120 | 1200 | 20 | BRN | DFT | P28s | 120 | 1000 | 25 | |
| BTL | P28s | 120 | 500 | 500 | BTM | DGH | P28s | 120 | 750 | 500 | DDY |
| BTN | P28s | 120 | 750 | 500 | BTP | DJL | G17q | 120 | 150 | 15 | DFN/DFC |
| BTP | P28s | 120 | 750 | 200 | BTN | DJT | GX5.3 | 13.8 | 50 | 1000 | |
| BTR | P28s | 120 | 1000 | 200 | BTP | DLG/DFZ | GX17q | 30 | 80 | 15 | |
| BVE | GZ9.5 | 120 | 625 | 75 | | DLG/DLS/DHX | GX17q | 21.5 | 150 | 10 | |
| BVR | BA15d | 120 | 30 | 25 | | DMX | P28s | 120 | 500 | 50 | DPJ |
| BVT | P40s | 120 | 1000 | 500 | BVV | DNE | G7.9 | 120 | 150 | 12 | |
| BVV | P40s | 120 | 1000 | 200 | BVT | DNF | GX7.9 | 21 | 150 | 25 | ELV |
| BVW | P40s | 120 | 2000 | 200 | | DNS/FMC | P28s | 120 | 500 | 200 | DNT |
| BWA | G38 | 120 | 2000 | 500 | | DNT/FMD | P28s | 120 | 750 | 200 | DNS |
| BWF | E39 | 120 | 2000 | 500 | | DNW | P28s | 120 | 500 | 500 | DMX |
| BWM | G9.5 | 120 | 750 | 200 | | DPT | E39 | 120 | 1000 | 50 | DRW |
| BWN | G9.5 | 120 | 1000 | 250 | | DPW | P40s | 120 | 1000 | 50 | DSB |
| BXB | P30s | 8.5 | 4A | 100 | | DPY | G38 | 120 | 5000 | 500 | |
| BXE | BA15s | 10 | 7.5A | 100 | | DRA | G6.35 | 120 | 300 | 300 | |
| BZW | BA15s | 120 | 50 | 50 | | DRA/5 | G6.35 | 125 | 300 | 300 | |
| CAL/CXP | G17q | 120 | 300 | 25 | CWD | DRB/DRC | P28s | 120 | 1000 | 25 | DRS |
| CAR | G17q | 120 | 150 | 15 | BEH | DRB/DRC/5 | P28s | 125 | 1000 | 25 | DRS |
| CAS/CAV | BA15s | 120 | 50 | 50 | CBJ/CBC | DRS | P28s | 120 | 1000 | 25 | DRB/DRC |
| CAX | BA15d | 120 | 50 | 50 | CAC | DRS/5 | P28s | 125 | 1000 | 25 | DRB/DRC-5 |
| CAX-130V | BA15d | 130 | 50 | 50 | CAC | DRW | E39 | 120 | 1000 | 25 | DPT |
| CBA | G17q | 120 | 500 | 50 | | DSB | P40s | 120 | 1000 | 25 | DTJ |
| CBJ/CBC | BA15s | 120 | 75 | 50 | CAS/CAV | DTA | P40s | 120 | 1500 | 100 | |
| CBX/CBS | BA15d | 120 | 75 | 50 | CAX | DTJ | P40s | 120 | 1500 | 25 | DSB |
| CDD | BA15s | 120 | 100 | 50 | CEM | DVS | R7s | 130 | 500 | 2000 | WQ500T3-130 |
| CDJ | BA15d | 120 | 100 | 50 | | DVY | G5.3 | 120 | 650 | 25 | DYH |
| CDS/CDX | BA15s | 120 | 100 | 50 | | DWT | R7s | 120 | 1000 | 2000 | |
| CEA/CEB/CDK | BA15d | 120 | 100 | 50 | | DWY/FAB | R7s | 120 | 650 | 25 | FAD |
| CEM | BA15s | 120 | 120 | 200 | CDD-5 | DWZ | R7s | 30 | 375 | 1000 | |
| CGW/CGT | BA15s | 120 | 200 | 25 | CEW | DXN | R7s | 120 | 1000 | 30 | DXW |
| CHK | BA15s | 120 | 150 | 500 | | DXW | R7s | 120 | 1000 | 150 | DXN |
| CLS/CLG | BA15s | 120 | 300 | 25 | CMV/CMT | DXX | R7s | 240 | 800 | 75 | |
| CLX/CMB | BA15d | 120 | 300 | 25 | | DYG | GZ9.5 | 30 | 250 | 15 | |
| CMV/CMT | BA15s | 120 | 300 | 25 | CLS/CLG | DYH | G5.3 | 120 | 600 | 75 | DVY |
| CTT/DAX | G17q | 120 | 1000 | 25 | CWA | DYH/5 | G5.3 | 125 | 600 | 75 | DVY-5 |
| CVX/CVS | P28s | 120 | 200 | 50 | | DYP | 2 Button | 120 | 600 | 75 | |
| CWA | G17q | 120 | 750 | 25 | CZA/CZB | DYP/5 | 2 Button | 125 | 600 | 75 | |
| CWZ | P40s | 120 | 1500 | 325 | | DYR | GZ9.5 | 220 | 650 | 50 | |
| CXK | P28s | 120 | 300 | 25 | CXY | DYS/DYV/BHC | GZ9.5 | 120 | 600 | 75 | |
| CXL/CXR | P30s | 8 | 50 | 25 | | DYS/DYV/BHC/5 | GZ9.5 | 125 | 600 | 75 | |
| CXZ | G38 | 120 | 1500 | 325 | | DYY/EGH | G17t | 120 | 500 | 50 | |
| CYC | BA15s | 120 | 300 | 25 | | DZA | G5.3 | 10.8 | 30 | 400 | |
| CYV | G38 | 120 | 1000 | 200 | | DZB | G5.3 | 12 | 100 | 50 | |
| CYX | G38 | 120 | 2000 | 250 | | DZE/FDS | G9.5 | 24 | 150 | 100 | |
| CZA/CZB | G17q | 120 | 500 | 25 | CAL/CXP | EAD | BA15d | 120 | 60 | 100 | |
| CZX/DAB | P28s | 120 | 500 | 25 | CXY | EAJ | BA15d | 12/12 | 35/25 | 300/300 | |
| DAT/DAK | G17q | 120 | 400 | 25 | CWD | EBV | E26 | 120 | 500 | 6 | ECT |
| DAY/DAK | G17q | 120 | 500 | 30 | DAT | EBW | E26 | 120 | 500 | 6 | |
| DCA | GX17q | 21 | 150 | 15 | | ECA | E26 | 120 | 250 | 20 | |
| DCH/DJA/DFP | G17q | 120 | 150 | 15 | DFN/DFC | ECT | E26 | 120 | 500 | 60 | EBV |
| DCX | E26 | 120 | 750 | 25 | CZS | EFM | GZ6.35 | 8 | 50 | 50 | |
| DDB | P28s | 120 | 750 | 25 | CZX/DAB | EFN | GZ6.35 | 12 | 75 | 50 | |
| DDJ/DZZ | G9.5 | 10 | 80 | 1000 | | FFP | GZ6.35 | 12 | 100 | 50 | |
| DDK | GX5.3 | 19 | 80 | 40 | | EFR | GZ6.35 | 15 | 150 | 50 | |
| DDL | GX5.3 | 20 | 150 | 500 | | EGC | P28s | 120 | 500 | 300 | EGE |
| DDM | GX5.3 | 19 | 80 | 50 | | EGE | P28s | 120 | 500 | 2000 | EGG |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LAMPS BY ANSI CODE

Lamps by ANSI Code (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub | Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub |
|---------------|-------|-------|-------|-----------|--------------|---------------|--------|-------|-------|-----------|--------------|
| EGF | P28s | 120 | 750 | 250 | EGJ | ESB/FHE | G4 | 6 | 20 | 100 | |
| EGG | P28s | 120 | 750 | 2000 | EGE | ESD | GY5.3 | 120 | 150 | 12 | |
| EGJ | P28s | 120 | 1000 | 400 | EGG | ESH | GY5.3 | 82 | 85 | 250 | |
| EGK | P28s | 120 | 1000 | 400 | EGJ | ESJ | GY5.3 | 82 | 85 | 40 | |
| EGN | G22 | 120 | 500 | 100 | | ESL | E11 | 120 | 150 | 1000 | ETG |
| EGR | G22 | 120 | 750 | 200 | EGT | ESM | E11 | 120 | 250 | 2000 | |
| EGT | G22 | 120 | 1000 | 200 | EGR | ESN | E11 | 120 | 100 | 750 | |
| EHA | GY9.5 | 120 | 500 | 50 | | ESP | BA15d | 120 | 150 | 1000 | |
| EHC/EHB | G9.5 | 120 | 500 | 300 | EHD | ESR | BA15d | 120 | 100 | 1000 | |
| EHD | G9.5 | 120 | 500 | 2000 | EHC | ESS | BA15d | 120 | 250 | 2000 | ETB |
| EHF | G9.5 | 120 | 750 | 300 | EHD | ESX | GU5.3 | 12 | 20 | 3000 | BAB |
| EHG | G9.5 | 120 | 750 | 2000 | EHD | ESX-FG | GU5.3 | 12 | 20 | 3000 | BAB |
| EHJ | G6.35 | 24 | 250 | 50 | | ESY | G6.35 | 120 | 150 | 200 | |
| EHM | R7s | 120 | 300 | 2000 | FCL | ETB | BA15d | 120 | 250 | 2000 | ESS |
| EHP | R7s | 120 | 300 | 2000 | | ETC | BA15d | 120 | 150 | 2000 | ESP |
| EHR | R7s | 120 | 400 | 2000 | | ETD | BA15d | 120 | 100 | 750 | |
| EHT | E11 | 120 | 250 | 2000 | | ETE | E11 | 120 | 100 | 750 | |
| EHV | E11 | 120 | 325 | 500 | | ETF | BA15d | 120 | 150 | 2000 | |
| EHZ | R7s | 120 | 300 | 2000 | EHM | ETG | E11 | 120 | 150 | 2000 | ESL |
| EJA | GX5.3 | 21 | 150 | 40 | EJL | ETH | E11 | 120 | 150 | 2000 | |
| EJG | R7s | 120 | 750 | 400 | EMD | ETJ | GY5.3 | 120 | 250 | 175 | |
| EJL | GX5.3 | 24 | 200 | 50 | EJA | EVA | GY6.35 | 12 | 100 | 1000 | |
| EJM | GX5.3 | 21 | 150 | 40 | | EVB/BRJ | G6.35 | 15 | 150 | 50 | |
| EJV | GX5.3 | 21 | 150 | 40 | EKE | EVC/FGX | G6.35 | 24 | 250 | 200 | |
| EJY | GX5.3 | 19 | 80 | 25 | EKG | EVD | G6.35 | 36 | 400 | 50 | |
| EKB | GZ9.5 | 120 | 420 | 75 | | EVR | E11 | 120 | 500 | 2000 | |
| EKD | GZ9.5 | 120 | 650 | 25 | DYS | EVW | GY5.3 | 82 | 250 | 50 | |
| EKE | GX5.3 | 21 | 150 | 200 | EJV | EWG | GY5.3 | 120 | 300 | 35 | |
| EKG | GX5.3 | 19 | 80 | 25 | ENW/ENC | EXN | GU5.3 | 12 | 50 | 4000 | EXZ |
| EKL | GY9.5 | 21 | 150 | 40 | | EXN-BLACK | GU5.3 | 12 | 50 | 4000 | |
| EKP/ENA | GX5.3 | 30 | 80 | 25 | | EXN-FG | GU5.3 | 12 | 50 | 4000 | EXZ-FG |
| EKX | GX5.3 | 24 | 200 | 50 | | EXN-FG-24V | GU5.3 | 24 | 50 | 4000 | |
| EKZ | GX5.3 | 10.8 | 30 | 200 | | EXN-SILVER | GU5.3 | 12 | 50 | 4000 | |
| ELA | G5.3 | 19 | 65 | 25 | DYT | EXR | GX5.3 | 82 | 300 | 35 | EXY |
| ELB | GX5.3 | 30 | 80 | 15 | ENZ | EXR/5 | GX5.3 | 86 | 300 | 35 | EXY-5 |
| ELC | GX5.3 | 24 | 250 | 50 | EJL | EXT | GU5.3 | 12 | 50 | 4000 | EXZ |
| ELC/5 | GX5.3 | 25 | 250 | 50 | EJL-5 | EXT-FG | GU5.3 | 12 | 50 | 4000 | EXZ-FG |
| ELC/E | GX5.3 | 24 | 250 | 50 | | EXT-FG-24V | GU5.3 | 24 | 50 | 4000 | |
| ELD/EJN | GX5.3 | 21 | 150 | 40 | | EXV | GX5.3 | 12 | 100 | 50 | |
| ELE | GX7.9 | 30 | 80 | 20 | | EXW | GX5.3 | 82 | 300 | 15 | EXR |
| ELH | GY5.3 | 120 | 300 | 35 | ENG | EXX | GY5.3 | 120 | 250 | 25 | |
| ELH/5 | GY5.3 | 125 | 300 | 35 | ENG-5 | EXY | GX5.3 | 82 | 250 | 200 | EXR |
| ELZ | GX7.9 | 21 | 150 | 60 | DNF | EXZ | GU5.3 | 12 | 50 | 4000 | EXN |
| EMC | GX5.3 | 12 | 100 | 200 | | EXZ-BLACK | GU5.3 | 12 | 50 | 4000 | |
| EMD | R7s | 120 | 750 | 400 | EJG | EXZ-FG | GU5.3 | 12 | 50 | 4000 | EXN-FG |
| EML | G5.3 | 24 | 175 | 125 | | EXZ-SILVER | GU5.3 | 12 | 50 | 4000 | |
| EMM/EKS | GX7.9 | 24 | 250 | 50 | | EYA | GY5.3 | 82 | 200 | 50 | |
| ENG | GY5.3 | 120 | 300 | 15 | ELH | EYB | G5.3 | 82 | 360 | 75 | |
| ENH | GY5.3 | 120 | 250 | 175 | ELH | EYB/5 | G5.3 | 86 | 360 | 75 | |
| ENH/5 | GY5.3 | 125 | 250 | 175 | ELH-5 | EYC | GU5.3 | 12 | 75 | 4000 | FPB |
| ENL | GU5.3 | 12 | 50 | 4000 | | EYC-FG | GU5.3 | 12 | 75 | 4000 | FPB-FG |
| ENW/ENC | GX5.3 | 19 | 80 | 200 | EKG | EYF | GU5.3 | 12 | 75 | 4000 | FPB |
| ENX | GY5.3 | 82 | 360 | 75 | | EYF-FG | GU5.3 | 12 | 75 | 4000 | FPA-FG |
| ENX/5 | GY5.3 | 86 | 360 | 75 | | EYH/FKT | G5.3 | 120 | 250 | 200 | |
| ENZ | GX5.3 | 30 | 50 | 25 | ELB | EYJ | GU5.3 | 12 | 75 | 4000 | |
| EPF | GX7.9 | 30 | 80 | 100 | ELE | EYJ-FG | GU5.3 | 12 | 75 | 4000 | |
| EPN | GX5.3 | 12 | 35 | 50 | | EYK | GY5.3 | 120 | 300 | 60 | |
| EPR | G17t | 120 | 500 | 50 | | EYL | GZ9.5 | 12 | 100 | 50 | FDT |
| EPT | GX5.3 | 10.8 | 42 | 8000 | | EYP | GU5.3 | 12 | 42 | 4000 | EYS |
| EPV | GX5.3 | 14.5 | 90 | 500 | | EYP-FG | GU5.3 | 12 | 42 | 4000 | EYS-FG |
| EPW | GY5.3 | 100 | 360 | 75 | | EYR | GU5.3 | 12 | 42 | 4000 | EYS |
| EPX | GX5.3 | 14.5 | 90 | 500 | | EYR-FG | GU5.3 | 12 | 42 | 4000 | EYS-FG |
| EPZ | GX5.3 | 13.8 | 50 | 1000 | | EYS | GU5.3 | 12 | 42 | 4000 | EYP |
| ERV | GX5.3 | 36 | 340 | 75 | | EYS-FG | GU5.3 | 12 | 42 | 4000 | EYP-FG |
| ESA/FHD | G4 | 6 | 10 | 100 | | EYT | E11 | 120 | 750 | 500 | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LAMPS BY ANSI CODE

Lamps by ANSI Code (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub | Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub |
|-----------------|---------|-------|-------|-----------|--------------|-------------------|----------|---------|-------|-----------|--------------|
| EYV | E11 | 130 | 500 | 2000 | | FNV-FG | GU5.3 | 12 | 50 | 3000 | |
| EYW | E11 | 130 | 500 | 2000 | | FPA | GU5.3 | 12 | 65 | 4000 | EYF |
| EYX | E11 | 120 | 500 | 2000 | | FPA-FG | GU5.3 | 12 | 65 | 4000 | EYC-FG |
| EZE | GX5.3 | 82 | 150 | 150 | | FPB | GU5.3 | 12 | 65 | 4000 | EYC |
| EZF/EZJ | GX5.3 | 68 | 225 | 500 | | FPB-FG | GU5.3 | 12 | 65 | 4000 | EYC-FG |
| FAD | R7s | 120 | 650 | 100 | | FPC | GU5.3 | 12 | 65 | 4000 | |
| FAL | R7s | 120 | 420 | 90 | | FPC-FG | GU5.3 | 12 | 65 | 4000 | |
| FAL/5 | R7s | 125 | 420 | 90 | | FRK | GY9.5 | 120 | 650 | 200 | |
| FBG/FBD | G5.3 | 120 | 500 | 50 | | FSA | E17 | 120 | 75 | 2000 | |
| FBX | R7s | 120 | 650 | 100 | | FSB | E17 | 120 | 75 | 2000 | |
| FBY | R7s | 120 | 1000 | 150 | | FSC | E17 | 120 | 100 | 2000 | |
| FCB | R7s | 120 | 600 | 75 | | FSD | E17 | 120 | 75 | 2000 | |
| FCB/5 | R7s | 125 | 600 | 75 | | FSE | E17 | 120 | 100 | 2000 | |
| FCL | R7s | 120 | 500 | 2000 | | FSF | E17 | 120 | 100 | 2000 | |
| FCM | R7s | 120 | 1000 | 300 | | FTA | GU4 | 12 | 12 | 2000 | |
| FCR | GY6.35 | 12 | 100 | 50 | | FTA/SU | GU4 | 12 | 12 | 2000 | |
| FCS | G6.35 | 24 | 150 | 50 | FDV | FTB | GU4 | 12 | 20 | 2000 | |
| FCZ | R7s | 120 | 500 | 2000 | | FTB/SU | GU4 | 12 | 20 | 2000 | |
| FDA | R7s | 120 | 400 | 250 | | FTB-FG | GU4 | 12 | 20 | 2000 | |
| FDB | R7s | 120 | 1500 | 400 | | FTC | GU4 | 12 | 20 | 2000 | |
| FDI | R7s | 120 | 500 | 400 | | FTC-FG | GU4 | 12 | 20 | 2000 | |
| FDJ | R7s | 120 | 500 | 400 | | FTD | GU4 | 12 | 20 | 2000 | |
| FDT | GZ9.5 | 12 | 100 | 50 | | FTD/SU | GU4 | 12 | 20 | 2000 | |
| FDV | G6.35 | 24 | 150 | 100 | FCS | FTD-FG | GU4 | 12 | 20 | 2000 | |
| FDX | GY6.35* | 12 | 100 | 50 | | FTE | GU4 | 12 | 35 | 2000 | |
| FEL | G9.5 | 120 | 1000 | 300 | | FTE/SU | GU4 | 12 | 35 | 3000 | |
| FEP | G9.5 | 220 | 1000 | 150 | | FTE-FG | GU4 | 12 | 35 | 2000 | |
| FER | R7s | 120 | 1000 | 500 | | FTF | GU4 | 12 | 35 | 2000 | |
| FEV | BA15d | 120 | 200 | 50 | | FTF/SU | GU4 | 12 | 35 | 3000 | |
| FEY | R7s | 120 | 2000 | 300 | | FTF-FG | GU4 | 12 | 35 | 2000 | |
| FFJ | R7s | 120 | 600 | 75 | FAL | FTH | GU4 | 12 | 35 | 2000 | |
| FFJ/5 | R7s | 125 | 600 | 75 | FAL | FTH/SU | GU4 | 12 | 35 | 3000 | |
| FFM | R7s | 120 | 420 | 75 | | FTH-FG | GU4 | 12 | 35 | 2000 | |
| FFN | GX16d | 120 | 1000 | 800 | | FTK | GY9.5 | 120 | 500 | 200 | |
| FFP | GX16d | 120 | 1000 | 800 | | FXL | GY5.3 | 82 | 410 | 50 | |
| FFR | GX16d | 120 | 1000 | 800 | | FXL/5 | GY5.3 | 86 | 410 | 150 | |
| FFS | GX16d | 120 | 1000 | 800 | | GBD | BA15d | 12 | 20 | 2000 | |
| FFT | R7s | 120 | 1000 | 300 | | GBE | BA15d | 12 | 20 | 2000 | |
| FGT | R7s | 120 | 1500 | 400 | | GBF | BA15d | 12 | 20 | 2000 | |
| FHM | R7s | 120 | 1000 | 300 | | GBF-FR | BA15d | 12 | 20 | 2000 | |
| FHS | GX5.3 | 82 | 300 | 70 | EXR | GBJ | BA15d | 12 | 50 | 2000 | |
| FHS/5 | GX5.3 | 86 | 300 | 70 | EXR-5 | GBK | BA15d | 12 | 20 | 2000 | |
| FHX | GX5.3 | 13.8 | 25 | 250 | ESX | GCA | G5.3 | 120 | 250 | 50 | |
| FJX | GX5.3 | 13.8 | 30 | 500 | | GCC | G5.3 | 12 | 100 | 200 | |
| FKW | GY9.5 | 120 | 300 | 200 | | GDA | R7s | 120 | 500 | 100 | |
| FLK | G9.5 | 120 | 575 | 300 | | JC24V300W | G6.35 | 24 | 300 | 50 | |
| FLT | GU4 | 13.8 | 25 | 500 | | JCD100V650WL | G6.35 | 100 | 650 | 150 | |
| FLW | GY6.35* | 24 | 300 | 50 | | JCD120V100W/A | G6.35 | 120 | 100 | 150 | |
| FML | GU5.3 | 13.8 | 50 | 1000 | | JCP100V650W | GY9.5 | 100 | 650 | 75 | |
| FMT | GU5.3 | 12 | 35 | 4000 | | JCR/120V150WB | GY5.3 | 120 | 150 | 100 | |
| FMT-FG | GU5.3 | 12 | 35 | 4000 | | JCR/M12-28 | GZ4 | 12 | 28 | 300 | |
| FMV | GU5.3 | 12 | 35 | 4000 | | JCR/M12V100W | G5.3 | 12 | 100 | 50 | |
| FMV-FG | GU5.3 | 12 | 35 | 4000 | | JCR/M12V20W | GZ4 | 12 | 20 | 50 | |
| FMW | GU5.3 | 12 | 35 | 4000 | | JCR/M12V75W | G5.3-4.8 | 12 | 75 | 50 | |
| FMW-BLACK | GU5.3 | 12 | 35 | 4000 | | JCR/M14V35W | GZ4 | 14 | 35 | 50 | |
| FMW-FG | GU5.3 | 12 | 35 | 4000 | | JCR100V300W | GY5.3 | 100 | 300 | 50 | |
| FMW-SILVER | GU5.3 | 12 | 35 | 4000 | | PH/111A | BA15s | 120 | 75 | 25 | |
| FNC-FG (Yellow) | GU5.3 | 12 | 50 | 4000 | | PH/113 | BA15s | 120 | 50 | 50 | |
| FND-FG (Red) | GU5.3 | 12 | 50 | 4000 | | PH/140 | E26 | 120 | 75 | 50 | |
| FNE-FG (Green) | GU5.3 | 12 | 50 | 4000 | | PH/211 | E26 | 115-125 | 75 | 100 | |
| FNF-FG (Blue) | GU5.3 | 12 | 50 | 4000 | | PH/212 | E26 | 115-125 | 150 | 100 | |
| FNT | G6.35 | 24 | 275 | 75 | EHJ | PH/213 | E26 | 115-125 | 250 | 3 | |
| FNV | GU5.3 | 12 | 50 | 3000 | | Q100CL/DC/2V-120V | BA15d | 120 | 100 | 1000 | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LAMPS BY ANSI CODE

Lamps by ANSI Code (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub | Ordering Code | Base | Volts | Watts | Avg. Life | Possible Sub |
|----------------|-------|---------|----------|-----------|--------------|---------------|------|----------|-------|-----------|--------------|
| Q100CL/MC-120V | E11 | 120 | 100 | 750 | | WK120HD-UV | | 450 | 400 | | |
| Q100DC/2V-120V | BA15d | 120 | 100 | 2000 | | WK140HD | | 450-500 | 400 | | |
| Q100MC/2V-120V | E11 | 120 | 100 | 750 | | WK140HD-UV | | 450-500 | 400 | | |
| Q150CL/DC-120V | BA15d | 120 | 150 | 2000 | | WK152 | | 400 | 10-30 | | |
| Q150CL/MC-120V | E11 | 120 | 150 | 2000 | | WK76 | | 600-1000 | 400 | | |
| Q150DC-120V | BA15d | 120 | 150 | 2000 | | WK76-UV | | 600-1000 | 400 | | |
| Q150MC-120V | E11 | 120 | 150 | 2000 | | WK92 | | 800 | 1000 | | |
| Q250CL/DC-120V | BA15d | 120 | 250 | 2000 | | WK92-UV | | 800 | 1000 | | |
| Q250CL/MC-120V | E11 | 120 | 250 | 2000 | | WK93 | | 400 | 200 | | |
| Q250DC-120V | BA15d | 120 | 250 | 2000 | | WK94 | | 800 | 400 | | |
| Q250MC-120V | E11 | 120 | 250 | 2000 | | WK95 | | 400 | 400 | | |
| Q325CL/MC-120V | E11 | 120 | 325 | 500 | | WK96 | | 900 | 2000 | | |
| Q500/MC-120V | E11 | 120 | 500 | 2000 | | WK96-UV | | 900 | 2000 | | |
| Q500CL/MC-120V | E11 | 120 | 500 | 2000 | | WK97 | | 900 | 400 | | |
| 25T8/DC | BA15d | 120 | 25 | 200 | | WK98 | | 600-1200 | 3200 | | |
| WK101 | | 450-900 | 600-1000 | | | WK98-UV | | 600-1200 | 3200 | | |
| WK120HD | | 450 | 400 | | | | | | | | |

AUDIO VISUAL / PHOTOGRAPHIC

Photo Lamps - Flashtubes

| Ordering Code | Bar Code | Volts | Watts | Photo System Mfg & Model No. / Lamp ID No. | Pkg. Qty. | Cart. Qty. |
|---------------|----------|----------|----------|---|-----------|------------|
| WK76 | 80150 | 600-1000 | 400 | Speedotron MW3R (24555) (MW3-1) | 1 | 1 |
| WK76-UV | 80160 | 600-1000 | 400 | Speedotron MW3-U (24556) (MW3C) | 1 | 1 |
| WK92 | 80100 | 800 | 1000 | Novatron - #2100 thru #2160 / 1000 w/s Heads | 1 | 1 |
| WK92-UV | 80110 | 800 | 1000 | Novatron - #2100 thru #2160 / 1000 w/s Heads UV | 1 | 1 |
| WK93 | 80120 | 400 | 200 | Photogenic C4-1 (A390) | 1 | 1 |
| WK94 | 80080 | 800 | 400 | Novatron - #2000 thru #2060 / 500 w/s Heads | 1 | 1 |
| WK94-UV | 80090 | 800 | 400 | Novatron - #2000 thru #2060 / 500 w/s Heads UV | 1 | 1 |
| WK95 | 80130 | 400 | 400 | Photogenic H4-1 (QC4) (DM7/FT300) (Ascor 060-601) (Ascor 060-603) | 1 | 1 |
| WK96 | 80060 | 900 | 2000 | Norman FQ3 Photogenic-EP287 | 1 | 1 |
| WK96-UV | 80070 | 900 | 2000 | Norman FQ3 Photogenic-EP287 | 1 | 1 |
| WK97 | 80140 | 900 | 400 | Photogenic H9-1 (MW7/FT306/B) | 1 | 1 |
| WK98 | 80190 | 600-1200 | 3200 | Speedotron MW8QV (14570) #102 | 1 | 1 |
| WK98-UV | 80200 | 600-1200 | 3200 | Speedotron MW8QVC (14571) | 1 | 1 |
| WK101 | 80205 | 450-900 | 600-1000 | Photogenic C4-5 | 1 | 1 |
| WK120HD | 80020 | 450 | 400 | Photogenic H4-6HD | 1 | 1 |
| WK120HD-UV | 80030 | 450 | 400 | Photogenic H4-6HD-UV Lumedyne #090-UV (DM15-UV) (Ascor 660-860) | 1 | 1 |
| WK140HD | 80040 | 450-500 | 400 | Norman 400B | 1 | 1 |
| WK140HD-UV | 80050 | 450-500 | 400 | Norman 400B-UV | 1 | 1 |
| WK152 | 80230 | 400 | 10-30 | FT152A-G.E. | 1 | 1 |



Photo Lamps - Modeling

| Ordering Code | Bar Code | Base | Volts | Watts | Pkg. Qty. | Cart. Qty. | Avg. Life |
|---------------|----------|-------|-------|-------|-----------|------------|-----------|
| EAD | 01920 | BA15d | 120 | 60 | 1 | 25 | 100 |
| EAJ | 01930 | BA15d | 12 | 35 | 1 | 25 | 300 |
| EAK | 01940 | | | | 1 | 25 | |
| EHT | 15256 | E11 | 120 | 250 | 1 | 25 | 2000 |
| ESL | 15240 | E11 | 120 | 150 | 1 | 25 | 1000 |
| ESM | 15258 | E11 | 120 | 250 | 1 | 25 | 2000 |
| ESN | 15222 | E11 | 120 | 100 | 1 | 25 | 750 |
| ESP | 15246 | BA15d | 120 | 150 | 1 | 25 | 1000 |
| ESR | 15226 | BA15d | 120 | 100 | 1 | 25 | 1000 |
| ESS | 15260 | BA15d | 120 | 250 | 1 | 25 | 2000 |
| ETB | 15262 | BA15d | 120 | 250 | 1 | 25 | 2000 |
| ETC | 15244 | BA15d | 120 | 150 | 1 | 25 | 2000 |

Continued on next page >>



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

AUDIO VISUAL / PHOTOGRAPHIC

Photo Lamps - Modeling (Continued)

| | Ordering Code | Bar Code | Base | Volts | Watts | Pkg. Qty. | Cart. Qty. | Avg. Life |
|--|---------------|----------|------------|-------|-------|-----------|------------|-----------|
| | ETD | 15228 | BA15d | 120 | 100 | 1 | 25 | 750 |
| | ETE | 15224 | E11 | 120 | 100 | 1 | 25 | 750 |
| | ETF | 15248 | BA15d | 120 | 150 | 1 | 25 | 2000 |
| | ETG | 15238 | E11 | 120 | 150 | 1 | 25 | 2000 |
| | ETH | 15242 | E11 | 120 | 150 | 1 | 25 | 2000 |
| | EVR | 15278 | E11 | 120 | 500 | 1 | 25 | 2000 |
| | 25T8/DC | 03750 | BA15d | 120 | 25 | 1 | 25 | 200 |
| | 150T10/H/F | 00197 | Med. Screw | 120 | 150 | 1 | | 2000 |
| | 250T10/H/F | 00197 | Med. Screw | 120 | 250 | 1 | | 1500 |

Photo Lamps for Enlargers and Printers

| | Ordering Code | Bar Code | Base | Volts | Watts | Pkg. Qty. | Cart. Qty. | Avg. Life |
|--|---------------|----------|-------|---------|-------|-----------|------------|-----------|
| | EJL | 02260 | GX5.3 | 24 | 200 | 1 | 10 | 50 |
| | EJV | 02290 | GX5.3 | 21 | 150 | 1 | 10 | 40 |
| | ELC | 02400 | GX5.3 | 24 | 250 | 1 | 10 | 50 |
| | ELC/E | 02420 | GX5.3 | 24 | 250 | 1 | 10 | 50 |
| | ELH | 02450 | GY5.3 | 120 | 300 | 1 | 10 | 35 |
| | ENH | 02570 | GY5.3 | 120 | 250 | 1 | 10 | 175 |
| | ESD | 02750 | GY5.3 | 120 | 150 | 1 | 10 | 12 |
| | ESJ | 02770 | GY5.3 | 82 | 85 | 1 | 10 | 40 |
| | EVW | 02820 | GY5.3 | 82 | 250 | 1 | 10 | 50 |
| | EYA | 02940 | GY5.3 | 82 | 200 | 1 | 10 | 50 |
| | FAL | 03020 | R7s | 120 | 420 | 1 | 25 | 90 |
| | FFJ | 03290 | R7s | 120 | 600 | 1 | 25 | 75 |
| | PH/111A | 03650 | BA15s | 120 | 75 | 1 | 25 | 25 |
| | PH/113 | 03660 | BA15s | 120 | 50 | 1 | 25 | 50 |
| | PH/140 | 03662 | E26 | 120 | 75 | 1 | 25 | 50 |
| | PH/211 | 03663 | E26 | 115-125 | 75 | 1 | 60 | 100 |
| | PH/212 | 03664 | E26 | 115-125 | 150 | 1 | 60 | 100 |
| | PH/213 | 03665 | E26 | 115-125 | 250 | 1 | 60 | 3 |
| | JCD100V650WL | 03550 | G6.35 | 100 | 650 | 1 | 25 | 150 |
| | JCD120V650WL | 03551 | | | | 1 | 25 | |
| | JCP100V650W | 03560 | GY9.5 | 100 | 650 | 1 | 25 | 75 |
| | JCR100V300W | 03630 | GY5.3 | 100 | 300 | 1 | 10 | 50 |

Photoflood Lamps

| | Ordering Code | Bar Code | Base | Volts | Watts | Pkg. Qty. | Cart. Qty. | Avg. Life |
|--|---------------|----------|------|-------|-------|-----------|------------|-----------|
| | BBA | 00040 | E26 | 120 | 250 | 1 | 60 | 3 |
| | BCA | 00050 | E26 | 120 | 250 | 1 | 60 | 3 |
| | EBV | 01950 | E26 | 120 | 500 | 1 | 60 | 6 |
| | EBW | 01960 | E26 | 120 | 500 | 1 | 60 | 6 |
| | ECA | 01970 | E26 | 120 | 250 | 1 | 60 | 20 |
| | ECT | 01980 | E26 | 120 | 500 | 1 | 60 | 60 |

COLORMASTER™ DIGITAL IMAGING

ColorMaster™ Digital Imaging Lamps

| | Ordering Code | Bar Code | Base | Volts | Watts | Pkg. Qty. | Cart. Qty. | Avg. Life | Lumens | CRI |
|--|---------------|----------|------|-------|-------|-----------|------------|-----------|--------|-----|
| | SP30/955K | 48045 | E26 | 120 | 30 | 1 | 25 | 10000 | 1500 | 93 |
| | SP50/955K | 05622 | E26 | 120 | 50 | 1 | 25 | 10000 | 2550 | 93 |
| | DT55/932K | 05471 | 2G11 | - | 55 | 1 | 50 | 14000 | 3735 | 90+ |
| | DT55/955K | 05466 | 2G11 | - | 55 | 1 | 50 | 14000 | 3555 | 90+ |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS

LCD Replacement Lamps

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|---------------------------------------|--------------|----------------|-------------------------------|--------------|
| CP860/960LAMP | MP8745 | 3M | R98-41111 | IQ300 | Barco |
| CPL750LAMP | MP8630 | 3M | R98-41761 | IQ350/400/500 | Barco |
| CPL850LAMP | MP8640 | 3M | 4638AA001 | LV-7325 | Canon |
| EP-1625 | MP8635,8635B,8725,8725B | 3M | 610-282-2755 | LV7525E | Canon |
| EP1750 | MP8650/8660 | 3M | 610-289-6939 | LV7320 | Canon |
| EP1830 | MP8610/8620 | 3M | 610-289-8422 | LV-5100/5110/7105 | Canon |
| EP1890 | MP8625 | 3M | 610-293-8210 | LV-S1/XL | Canon |
| EP1920 | MP8750 | 3M | 7463A001AA | LV-LP11/7350/7355 | Canon |
| EP2010 | MP8740 | 3M | 8276A001 | LV-S2 | Canon |
| EP5000 | MP8780 | 3M | 8441A001 | LV-LP15/X2 | Canon |
| EP7630LK | MP7630/7730 | 3M | 8814A001 | LV5200 | Canon |
| EP7630BLK | MP7730BAV | 3M | 9268A001 | LV7210/7215/7220/7225, LVLP18 | Canon |
| EP-7640ILK | MP7640ILK/S40 | 3M | 9431A001 | LV-S3/LP20 | Canon |
| EP7720LK | MP7720 | 3M | LV-LP17 | LV7555 | Canon |
| EP7740ILK | MP7740I | 3M | LV-LP19 | LV5210/5220 | Canon |
| EP7750LK | X50 | 3M | LV-LP22 | LV7565 | Canon |
| EP8746LK | MP8647/8746/8747 | 3M | RS-LP01 | Realis SX50 | Canon |
| EP8749LK | MP8649/8749 | 3M | RS-LP02 | Realis SX6/X600 | Canon |
| EP8765LK | MP8765 | 3M | RS-LP03 | Realis SX60 | Canon |
| EP8775ILK | MP8775I | 3M | 03-000678-01P | X9/S9 | Christie |
| LAMP-029 | MP7640/7740 | 3M | 03-000708-01P | LX65 | Christie |
| LKS10 | S10 | 3M | 03-900471-01P | L6 | Christie |
| LKS15 | S15 | 3M | 03-000761-01P | LW40U | Christie |
| CP335/345LAMP | X45 | 3M | 03-000866-01P | DS+25 | Christie |
| LKX55 | X55/S55 | 3M | 03-900520-01P | DS+60 | Christie |
| LKX75 | X75 | 3M | 610-309-2706 | LX25 | Christie |
| EC.J1001.001 | PD116/525 | Acer | 610-297-3891 | LX33 | Christie |
| 120VIP-LAMP | SL703S/705S/705X | BenQ | 610-306-5977 | LX45 | Christie |
| 5J.J2H01.001 | PB8263 | BenQ | 610-315-7689 | LX66 | Christie |
| 59J8101CG1 | PB8250/8260 | BenQ | 610-300-0862 | LU77 | Christie |
| 59.J9901.CG1 | PB6110/6210/PE5120 | BenQ | 610-305-5602 | LX32 | Christie |
| 60.J00720.001 | PB7763(PS)/7765PE | BenQ | L1515A | SB21 | Compaq |
| 60.J0804.CB2 | VP150X | BenQ | L1516A | XB31 | Compaq |
| CS.59J0Y.1B1 | PB6240 | BenQ | L1550A | MP1600 | Compaq |
| 60.J8618.CG1 | PB6100/6200 | BenQ | L1551A | MP1800 | Compaq |
| 150NSH-LAMP | DS550 | BenQ | L1552A | MP2800 | Compaq |
| 250UHP-LAMP | PB8120/8220/8230 | BenQ | L1553A | MP1200 | Compaq |
| 60.J3416.CG1 | DS650/660/DX650/660 | BenQ | L1554A | MP3800 | Compaq |
| 60.J5016.CB1 | PB7100/7200/7230 | BenQ | L1561A | MP4800/L90 | Compaq |
| CS.5JJ1B.1B1 | MP610 | BenQ | L1582A | XP8010 | Compaq |
| 610-264-1943 | 3600 | Boxlight | L1621A | MP3130 | Compaq |
| 610-264-1943 | 3600 (A) | Boxlight | L1624A | VP6110/6120 | Compaq |
| 610-265-8828 | 3650 | Boxlight | L1695A | VP6300 series | Compaq |
| 610-265-8828 | 6000 | Boxlight | L1709A | VP6111/6121 | Compaq |
| 610-265-8828 | 6001 | Boxlight | L1720A | MP3220/3222 | Compaq |
| 610-289-8422 | SP-6T/XP-5T | Boxlight | LAMP6180 | PS6180 | CTX |
| 610-293-8210 | SP-9T, XP-8T | Boxlight | 310-3472 | 1100MP | Dell |
| CD450M-930 | CD-450M/550M | Boxlight | 310-7522 | 1200MP | Dell |
| CP13T-930 | CP-13t,CP-33t | Boxlight | 310-3836 | 2100MP | Dell |
| CP310T-930 | CP300T/305T/306T/310T315T/12T/16T/19T | Boxlight | 310-4523 | 2200MP | Dell |
| CP455M-930 | CD-454/455m/CD-555m | Boxlight | 310-5513 | 2300MP | Dell |
| CP670K-930 | CP670K | Boxlight | 310-7578 | 2400MP | Dell |
| CP720E-930 | CP720e/745e | Boxlight | 310-2328 | 3200MP | Dell |
| CP731I-930 | CP-630I/731I | Boxlight | 310-5027 | 3300MP | Dell |
| LAMP-017 | MP-650I | Boxlight | 310-6747 | 3400MP | Dell |
| MP25T-930 | MP-20t,MP-25t | Boxlight | 310-4747 | 4100MP | Dell |
| MP30T-930 | MP-30t | Boxlight | SP-LAMP-018 | Imagepro 7300 | Dukane |
| MP35T-930 | MP-35t | Boxlight | LAMP-013 | Imagepro 7700 | Dukane |
| MP37T-930 | MP-36/37/38T | Boxlight | 456-204 | Imagepro 8030 | Dukane |
| SP-LAMP-LP2E | SP50M,XP60M | Boxlight | 456227 | Imagepro 8052 | Dukane |
| XD15C-930 | XD-15C | Boxlight | 080-DH20-00020 | EIP-10V | Eiki |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS

LCD Replacement Lamps (Continued)

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|---|--------------|-----------------|---|--------------|
| AH-35001 | EIP-3500 | Eiki | V13H010L27 | 74C/54C | Epson |
| 610-254-5609 | LC-330/LC-3310/LC-5000 | Eiki | V13H010L29 | POWERLITE HOME 10+,S1+/S1H | Epson |
| 610-257-6269 | LC-180/1810/4000/4200 | Eiki | V13H010L30 | 81P/61P/821P | Epson |
| 610-259-0562 | LC-350/LC-3510 | Eiki | V13H010L31 | 830P/835P | Epson |
| 610-259-5291 | LC-6000(UL)/6200/6210 | Eiki | V13H010L32 | 732C/737C/740C/745C/760C/765C | Epson |
| 610-260-7208 | LC-300 | Eiki | V13H010L33 | S3 | Epson |
| 610-260-7215 | LC150/1510 | Eiki | V13H010L34 | 62C/76C/82C/X3 | Epson |
| 610-264-1196 | LC-360/3610/4300(PAL)(S)(U)/4800 | Eiki | V13H010L36 | S4 | Epson |
| 610-264-1943 | LC-7000 (U) (UE) | Eiki | V13H010L37 | 6100I | Epson |
| 610-265-8828 | LC-SVGA860 (U) | Eiki | V13H010L38 | 1700 SERIES | Epson |
| 610-276-3010 | LC-SVGA870U/CGA980U | Eiki | CP840940LAMP | CP5840W(WA)/CPX940W(WA) | Hitachi |
| 610-279-5417 | LC-XGA980UE/982U | Eiki | CP860/960LAMP | CP-X960W(A)/S860W/X970W | Hitachi |
| 610-280-6939 | LC-NB2U(W)/XNB2U | Eiki | CP870LAMP | CPX870 | Hitachi |
| 610-282-2755 | LC-X982/983/984/990/999 | Eiki | CP885/880LAMP | CP-X880W.X885W | Hitachi |
| 610-284-4627 | LC-XT1 | Eiki | CP980985LAMP | CPX980W/985W | Hitachi |
| 610-287-5379 | LC-NB1 (U) (UW) | Eiki | CPL100LAMP | CPL500 | Hitachi |
| 610-289-8422 | LC-XM1/XM4/SM2 | Eiki | CPL850LAMP | CP-L850W | Hitachi |
| 610-290-7698 | LC-X1(U)(UA)(UL) | Eiki | CPRS55LAMP | CPRS55/RX60/HS980/HX990/PJ-LC7 | Hitachi |
| 610-292-4831 | LC-XT2 | Eiki | CPS210LAMP | CP-S210 | Hitachi |
| 610-293-2751 | LC-NB3W(E) | Eiki | CPS220LAMP | CP-S220,CP-X270 | Hitachi |
| 610-293-8210 | LC-XM2/SM3, LCX-M4 | Eiki | CPS225LAMP | CP-S225/X275(WAT) | Hitachi |
| 610-298-3135 | LC-X2 series/X3 series | Eiki | CPS235LAMP | CP-S235 | Hitachi |
| 610-301-6047 | LC-X5(L)/W4 | Eiki | CPS240/X250LAMP | CP-S240/X250/X255 | Hitachi |
| 610-301-7167 | LC-XG10/100 | Eiki | CPS317LAMP | CP-S317W/318W/328W,ED-S3170A | Hitachi |
| 610-307-7925 | LC-SB15/20/21/25/XB26 | Eiki | CP335/345LAMP | CP-S335,CP-X340/CPX345 | Hitachi |
| 610-308-3117 | LC-SD12 | Eiki | CPSX5500LAMP | CPSX5500/5600 | Hitachi |
| 610-309-2706 | LC-XB15/XB20/XB22 | Eiki | CPX1200LAMP | CP-X1200 | Hitachi |
| 610-314-9127 | LC-X70 | Eiki | CPX1250LAMP | CP-X1250 | Hitachi |
| 610-315-7689 | LC-X6 | Eiki | CPX251LAMP | CPX251 | Hitachi |
| 610-317-7167 | LC-XG200 | Eiki | CPX260LAMP | CPX260/HCP-700X | Hitachi |
| 610-323-0726 | LC-XB23/SB22 | Eiki | CPX275LAMP | CPX275W | Hitachi |
| 610-328-7362 | LC-X71 | Eiki | CPX325320LAMP | CPX320W/325W/310 | Hitachi |
| 610-330-7329 | LC-XG300/250 | Eiki | CPX327LAMP | CP-X327W,ED-X32370A | Hitachi |
| 1023661 | ELP3000 | Epson | CPX380LAMP | CP-S370,CP-X380/385/635i | Hitachi |
| ELPLP02 | 3500 | Epson | CPX430LAMP | CP-S420,CP-X430 | Hitachi |
| ELPLP03 | ELP-5000/7000 | Epson | CPX445LAMP | CP-X445/443/440 | Hitachi |
| ELPLP04 | ELP-5000XB/5100/7000XB/7100 | Epson | CPX605LAMP | CP-X605/608 | Hitachi |
| ELPLP05 | ELP5300 | Epson | CPX935LAMP | CP-X935W | Hitachi |
| ELPLP06 | EMP5500/7500 | Epson | CPX940LAMP | CP-X940W | Hitachi |
| ELPLP07 | 5550/5550C/7550 | Epson | CPX950LAMP | CPX950 | Hitachi |
| ELPLP08 | ELP-9000i | Epson | CPX955LAMP | CP-X955 | Hitachi |
| ELPLP09 | ELP-5350/7250/7350 | Epson | CPX990LAMP | CP-X990W/995W | Hitachi |
| ELPLP10B | ELP-500C,700C,EMP500 | Epson | DT00661 | PJ-TX100/10 | Hitachi |
| ELPLP10S | Powerlite 710C | Epson | UX21511 | 50V500,50V500A,60V500,60V500A | Hitachi |
| ELPLP11 | 8100/8200/8150/9100 | Epson | 73P2775 | E400 | IBM |
| ELPLP12 | POWERLITE 5600/5700/7600/7700 | Epson | 610-289-8422 | LP260 | Infocus |
| ELPLP13 | ELPLP13 POWERLITE 50C/70 | Epson | LAMP-031 | LP690 | Infocus |
| ELPLP14 | 503C/703C | Epson | SP-LAMP-002A | LS110 | Infocus |
| ELPLP15 | 811P/820P | Epson | SP-LAMP-003 | LP70 | Infocus |
| ELPLP18 | 720/730/735 | Epson | SP-LAMP-005 | LP240 | Infocus |
| ELPLP19 | 30C | Epson | SP-LAMP-006 | LP650, DP6500X, SP5700, SP7200, SP7205 & SP7210 | Infocus |
| ELPLP21 | 53/73/73C | Epson | SP-LAMP-007 | LP250 | Infocus |
| ELPLP25 | S1 | Epson | SP-LAMP-009 | X1(A), SP4800 | Infocus |
| V13H010L15 | ELPLP1515 POWERLITE 600P/800P/810P/820P | Epson | SP-LAMP-012 | LP820 | Infocus |
| V13H010L16 | 51C/71C | Epson | SP-LAMP-013 | LP120/210/220 | Infocus |
| V13H010L17 | TW100 | Epson | SP-LAMP-015 | LP840 | Infocus |
| V13H010I1D | EMP52/52C | Epson | SP-LAMP-016 | LP850/860 | Infocus |
| V13H010L21 | 53C/73C | Epson | SP-LAMP-017 | LP540,LP640,C160,C180,SP5000 | Infocus |
| V13H010L22 | Powerlite 7800p,7850p,7900p | Epson | SP-LAMP-018 | X2/X3 | Infocus |
| V13H010L23 | 8300 | Epson | SP-LAMP-019 | LP600 | Infocus |
| V13H010L25 | Powerlite S | Epson | SP-LAMP-021 | SP4805 | Infocus |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS

LCD Replacement Lamps (Continued)

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|-------------------------------|--------------|----------------|-------------------------------------|--------------|
| SP-LAMP-024 | IN24/26 | Infocus | LH01LP | HT410/510 | NEC |
| SP-LAMP-027 | IN42/C445 | Infocus | LH02LP | LT180 | NEC |
| SP-LAMP-LP1 | LP130 | Infocus | LT20LPE | LT20 | NEC |
| SP-LAMP-LP10 | LP1000 | Infocus | LT30LP | LT30 | NEC |
| SP-LAMP-LP12 | LP1200 | Infocus | LT35LP | LT35 | NEC |
| SP-LAMP-LP2E | LP280/290/C60/X540 | Infocus | LT40LP | LT84/140 | NEC |
| SP-LAMP-LP3 | LP330/335 | Infocus | LT50LP | LT85/150 | NEC |
| SP-LAMP-LP3F | LP340/350 | Infocus | LT51LP | LT75Z/150Z | NEC |
| SP-LAMP-LP4 | LP400/420/425 | Infocus | LT57LP | LT154/155/156/157/158 | NEC |
| SP-LAMP-LP4Z | LP425Z/435Z | Infocus | LT60LPK | LT220/240/245/260/265,HT1000 | NEC |
| SP-LAMP-LP5F | LP530/500 | Infocus | LT70LP | LT170 | NEC |
| SP-LAMP-LP620 | LP610/620 | Infocus | LT80LAMP | LT80 | NEC |
| SP-LAMP-LP630 | LP630 | Infocus | LT81/100LAMP | LT81/100 | NEC |
| SP-LAMP-LP7 | LP720/730 | Infocus | MT1035LAMP | MT1035 | NEC |
| SP-LAMP-LP755 | LP755 | Infocus | MT40LP | MT840/1040/1045(+) | NEC |
| SP-LAMP-LP770 | LP770 | Infocus | MT50LP | MT1050/1055/1056/850 | NEC |
| SP-LAMP-LP7E | LP725/735 | Infocus | MT60LP | MT1060/1060R/1065 | NEC |
| SP-LAMP-LP7P | LP750 | Infocus | MT60LPS | MT1060/1060R/1065 long life | NEC |
| SP-LAMP-LP9 | LP925/930 | Infocus | MT70LP | MT1075 | NEC |
| BHL5001SU | DLA-G15U/S15U/M15U | JVC | MT830/1030LAMP | GT2000/2000R/MT1030(+)/1035+/830(+) | NEC |
| BHL5002SU | DLA-G11U | JVC | MTLAMP600/800 | MT600/800 | NEC |
| BHL5006S | DLA-SX21U | JVC | MTLAMP820/1020 | MT1020/820 | NEC |
| G10LAMP-SU | DLAG10SU | JVC | NP01LP | NP1000/2000 | NEC |
| 915P020010 | WDS2525 | Mitsubishi | VT40LP | VT440/540 | NEC |
| VLT-EX100LP | EX100U | Mitsubishi | VT45LPK | VT45/45K | NEC |
| VLT-HC2LP | HC2 | Mitsubishi | VT50LP | VT650 | NEC |
| VLT-HC3LP | HC3 | Mitsubishi | VT60LP | VT46/460/465/560/660/660k | NEC |
| VLT-HC910LP | HC3000U | Mitsubishi | VT70LP | VT37/47/570 | NEC |
| VLT-HC900LP | HC900 | Mitsubishi | VT75LPE | LT280 LT380 VT676E VT470 VT670 | NEC |
| VLT-HC5000LP | HC5000 | Mitsubishi | VT77LP | VT770 | NEC |
| VLT-PX1LP | SA51,SA50UX,X700UX,X80U,SA51U | Mitsubishi | VT80LP | VT48 | NEC |
| VLT-SE1LP | SE1U | Mitsubishi | VT85LP | VT480/580/695 | NEC |
| VLT-SE2LP | SE2U | Mitsubishi | WT61LP | WT610 | NEC |
| VLT-X10LP | XD10U/SD10U | Mitsubishi | XT50LP | XT50LH | NEC |
| VLT-X30LP | X30U | Mitsubishi | XT51LH | XT5000/5100 | NEC |
| VLT-X120L9 | S120/X120 | Mitsubishi | 23.80109.001 | EZPro500/550 | Optoma |
| VLT-X200LP | LVP-X200A | Mitsubishi | BL-FU180B | TS400/TX700 | Optoma |
| VLT-X300LP | S250,S290,X250,X300 | Mitsubishi | SP80N01001 | EZPro 739/H27 | Optoma |
| VLT-X400LP | X390,X400 | Mitsubishi | SP80V01001 | EZPro 732/732h | Optoma |
| VLT-X500LP | S490,X490,X500 | Mitsubishi | SP80Y01001 | EP738 | Optoma |
| VLT-X70LP | LVP-S50(U)/51/X50U/X51/X70U | Mitsubishi | SP80507001 | EZPro 580 | Optoma |
| VLT-XD20LP | XD20A | Mitsubishi | SP80701001 | EzPro 600/680 | Optoma |
| VLT-XD110LP | XD110U/SD110U | Mitsubishi | SP81003001 | EZPRO 540/585 | Optoma |
| VLT-XD200LP | XD200LP | Mitsubishi | SP81101001 | EP610 | Optoma |
| VLT-XD205LP | SD205U/XD205U | Mitsubishi | SP81218001 | EP610H/615H | Optoma |
| VLT-XD300LP | XD300U | Mitsubishi | SP81416001 | EZPro 710 | Optoma |
| VLT-XD350LP | XD350U | Mitsubishi | SP81C01001 | EzPro 751/758 | Optoma |
| VLT-XD400LP | XD400U/450/ES100 | Mitsubishi | SP82902001 | EZPRO 705H/715H/718 | Optoma |
| VLT-XD50LP | XD50/XD60U | Mitsubishi | SP82F01001 | EP729 | Optoma |
| VLT-XD70LP | XD70U | Mitsubishi | SP82G01001 | EZPRO 716/719 | Optoma |
| VLT-XD2000LP | XD1000U/2000U | Mitsubishi | SP83401001 | EZPRO 730/735 | Optoma |
| VLT-XL1LP | SL1U,SL2U,XL1U | Mitsubishi | SP83601001 | EZPRO 750/753/755 | Optoma |
| VLT-XL2LP | XL2U/XL1XU | Mitsubishi | SP86302001 | EZPRO 737 | Optoma |
| VLT-XL30LP | SL25,XL25,XL30 | Mitsubishi | SP89601001 | EP759 | Optoma |
| VLT-XL5LP | LVP-XL5C(U) | Mitsubishi | SP86501001 | EP755A/H56a | Optoma |
| VLT-XL550LP | XL550U | Mitsubishi | SP86701001 | EP731 | Optoma |
| VLT-XL5950LP | XL5900/5950/5980 | Mitsubishi | SPL1501001 | EP757/756 | Optoma |
| VLT-SL6LP | XL9U | Mitsubishi | SPL3701001 | H77/79 | Optoma |
| VLT-XL8LP | SL4U,SL4SU,XL4U,XL8U | Mitsubishi | ET-LA057 | PTL557U/757U | Panasonic |
| GT50LP | GT50 Series/GT1150/2150 | NEC | ET-LA059 | PTL759U/758U | Panasonic |
| GT60LP | GT5000/6000* | NEC | ET-LA059X | PTL759UX | Panasonic |
| GT95LP | GT950 | NEC | ET-LA095 | PTL595U/PTL795U | Panasonic |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS

LCD Replacement Lamps (Continued)

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|--|--------------|---------------|-------------------------------|--------------|
| ET-LA097 | PTL797U/UL | Panasonic | 28-390 | U3-810/1100 | Plus |
| ET-LA097N | PTL797PWU/797PWUL/597/597UL | Panasonic | 28-640 | U2-1110 | Plus |
| ET-LA097NW | TWIN PAK OF ABOVE | Panasonic | 28-640 | U2-1130 | Plus |
| ET-LA097W | PTL797U (2PK) | Panasonic | 28-650 | U2-1080/870 | Plus |
| ET-LA097XW | PTL797PXU(L) | Panasonic | 28-631 | U3-880/U3-1080 | Plus |
| ET-LA201 | PT-L291U / L292U / MLP-1000 / MLP-2000 | Panasonic | 28-685 | UP-880/1100 | Plus |
| ET-LA390 | PT-L390U | Panasonic | 28-861 | UP-800 | Plus |
| ET-LA555 | PTL-L5/L555U | Panasonic | L114 | DP5600/5610 | Proxima |
| ET-LA556 | PTL556U/PT-L5 | Panasonic | L26 | Ultralight L51 | Proxima |
| ET-LA592 | PT-L592 | Panasonic | L84 | DP5500 | Proxima |
| ET-LA701 | PTL501/511/701/711/501U/701U/711U | Panasonic | L92 | DP5900/9200/9210 | Proxima |
| ET-LA702 | PTL501X/511X/701X/711X | Panasonic | LAMP-010 | DP6810/6870 DISCONTINUED | Proxima |
| ET-LA730 | PT-L520U/720U | Panasonic | LAMP-011 | DP5950/9250 | Proxima |
| ET-LA735 | PT-L735 | Panasonic | LAMP-013 | LX1/SV1/SV1+/SP1 | Proxima |
| ET-LA780 | PTL-750U/780U/L780NTU | Panasonic | LAMP-014 | DP9250+ | Proxima |
| ET-LA785 | PT-L785U | Panasonic | LAMP-016 | DP9240/9260(+) | Proxima |
| ET-LAB10 | PT-LB10/LB20VU | Panasonic | LAMP-017 | DP6850(+) | Proxima |
| ET-LAB30 | PT-LB30/LB60U | Panasonic | LAMP-018 | DP9300/9400, PRO AV 9310/9400 | Proxima |
| ET-LAB50 | PT-LB50 Series | Panasonic | LAMP-019 | Ultralight L52/LX2/L5C | Proxima |
| ET-LAC50 | PT-LC50 | Panasonic | LAMP-021 | DP9320/9400+/9410 | Proxima |
| ET-LAC75 | ET-LAC75/PTL-C55U | Panasonic | LAMP-022 | DS2/DX2 | Proxima |
| ET-LAC80 | PT-LC56/LC76/LC80 | Panasonic | LAMP-025 | DP9280 | Proxima |
| ET-LAD35 | PT-D3500U | Panasonic | LAMP-026 | DP6150 | Proxima |
| ET-LAD55 | PT-D5500U | Panasonic | LAMP-027 | X350 | Proxima |
| ET-LAD55L | PT-D5500 long life | Panasonic | LAMP-029 | S520 | Proxima |
| ET-LAD55LW | PT-D5500 long life twin pack | Panasonic | LAMP-030 | DP6860 | Proxima |
| ET-LAD55W | PT-D5500U twin pack | Panasonic | LAMP-031 | DP5155/6105/6155 | Proxima |
| ET-LAD7500 | PT-D7500U/7600U/7700U | Panasonic | LAMP-032 | DP9270/9290 | Proxima |
| ET-LAD7500W | PT-D7500U/7600U/7700U Twin Pack | Panasonic | SP-LAMP-001 | DP8000, LP790HB | Proxima |
| ET-LAD7700LW | PT-D7700US | Panasonic | SP-LAMP-003 | DP1000X | Proxima |
| ET-LAE100 | PT-AE100/L200U/300U | Panasonic | SP-LAMP-004 | PRO AV 9500/9550 | Proxima |
| ET-LAE700 | PT-AE700 | Panasonic | SP-LAMP-006 | DP6500x | Proxima |
| ET-LAE900 | PT-AE900U | Panasonic | SP-LAMP-007 | DP2000X/C10 | Proxima |
| ET-LAL6510 | PT-L6500/6510/6600 | Panasonic | SP-LAMP-008 | DP8000HB | Proxima |
| ET-LAL6510W | PT6500/6510/6600 (2PK) | Panasonic | SP-LAMP-010 | DP6870 | Proxima |
| ET-LAM1-C | PT-LM1U/LM2U | Panasonic | SP-LAMP-011 | DP9295 | Proxima |
| ET-LAX100 | PT-AX100 | Panasonic | SP-LAMP-012 | C420/DP8200X | Proxima |
| TY-LA1000 | PT-43LC14/50LC13/PT-52LCX65/PT60LCX64/ PT43LCX64/PT50LC14/PT60LC13/PT-61LCX65/ PT-44LCX65/PT50LCX63/PT60LC14/TY50LC13C/ PT-50LC13/PT50LCX64/PT60LCX63 | Panasonic | SP-LAMP-015 | C440 | Proxima |
| TY-LA1500 | PT-40LC12/45LC12 | Panasonic | SP-LAMP-016 | DP8500X/C450/C460 | Proxima |
| 482213410123 | PRO SCREEN LC4600B,LC4700 | Philips | SP-LAMP-017 | C160/C180 | Proxima |
| 482213410131 | LC4650/4750 | Philips | 610-254-5609 | PLC-220/300M/320M | Sanyo |
| 482213410134 | LCA3101 | Philips | 610-257-6269 | PLC-400N/500M/510M | Sanyo |
| 482269110755 | LC4031G, LC4041G (Hopper SV10, XG10) | Philips | 610-259-5291 | PLC-700M/750M | Sanyo |
| 867093108090 | SV20,LC3108,LC4043G | Philips | 610-260-7208 | PLC-200N | Sanyo |
| 867093109009 | LCA3109,XG20,HOPPER SV20 | Philips | 610-260-7215 | PLC-100 | Sanyo |
| 867093111009 | CBRIGHT SV1,SV2,XG1,XG2(also Impacts) | Philips | 610-265-8828 | PLC-5600N/8800N/8810N/XR70N | Sanyo |
| 867093112009 | LC1041/5231/5241 | Philips | 610-276-3010 | PLC-SP10N/XP10N | Sanyo |
| 867093115009 | LC4433/LCA3115 | Philips | 610-278-3896 | PLC-XU07N | Sanyo |
| 867093116009 | LC3031/3131/3132 bSure SV2 | Philips | 610-279-5417 | PLC-SP20N/XP10NA | Sanyo |
| 867093118009 | LC135/LC3141/LC3142/bSure XG1/XG2 | Philips | 610-280-6939 | PLC-SU20N/SU22N/XU22N | Sanyo |
| 867093121009 | LC1341/1345 | Philips | 610-282-2755 | PLC-XP17N/XP18/XP20N/XP21 | Sanyo |
| 867093122009 | LC3631,bClever SV1(LCA3122) | Philips | 610-285-4824 | PLC-XP30,PLV-60/60HT | Sanyo |
| 867093124009 | LC3136(LCA3124) | Philips | 610-287-5379 | PLC-SU07N | Sanyo |
| 610-305-5602 | PXG30 | Philips | 610-289-8422 | PLC-SW10/15/XW15 | Sanyo |
| LCA3112 | ProScreen PXG20 (LC1241) | Philips | 610-290-7698 | PLC-9000NL (N) (NA)/EF10N | Sanyo |
| LCA3125 | LC5341 bCool XG1 | Philips | 610-292-4831 | PLC-EF30N/UF10/XF40/XF41 | Sanyo |
| 28-061 | U4 series | Plus | 610-292-4848 | PLC-XF31 | Sanyo |
| 28-057 | U7 series | Plus | 610-293-2751 | PLCSU30/XU30/XU35 | Sanyo |
| 28-300 | U2-817/1200 | Plus | 610-293-5868 | PLC-XP40/40L/45/45L, PLV-70 | Sanyo |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS

LCD Replacement Lamps (Continued)

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|--|--------------|---------------|---|--------------|
| 610-293-8210 | PLC-SW20/XW20 | Sanyo | BQC-XGP20X/1 | XG-P20XE,XG-P20XU | Sharp |
| 610-297-3891 | PLC-XP41/41L/46/46L | Sanyo | BQC-XGP25X//1 | XGP25X | Sharp |
| 610-298-3135 | PLC-EF10NA/NAL/NZ/EF10NL/XF10N(NL)(NZ)/XF12N | Sanyo | BQC-XGV10WU/1 | XGV10XU(WU) | Sharp |
| 610-300-0862 | PLC-UF15/XF45 | Sanyo | BQC-XVH35U/1 | XV-H35U,XG-H440U | Sharp |
| 610-301-6047 | PLC-XF35N(L) | Sanyo | BQC-XVH37U/1 | XV-H37VU | Sharp |
| 610-301-7167 | PLC-XT10/15 | Sanyo | BQC-XVP15U//1 | XV-P15U | Sharp |
| 610-302-5933 | PLV-Z1 | Sanyo | BQC-XVZ1U/1 | XV-Z1U | Sharp |
| 610-303-5826 | PLC-SU25/XU36 | Sanyo | BQC-XVZ100005 | XV-Z12000 | Sharp |
| 610-305-1130 | PLV-HD10/100 | Sanyo | BQC-XVZ9000/1 | XV-Z9000U | Sharp |
| 610-305-5602 | PLC-XT10A/11/15A/16 | Sanyo | RLMPF0057CEZZ | XG-2000U | Sharp |
| 610-306-5977 | PLC-XP50(L),XP55(L) | Sanyo | A-1606-034-B | XL2000/2100 | Sony |
| 610-307-7925 | PLC-SU50S/SU51 | Sanyo | LMP-600 | VPL-S600/S900/SC50/SC60/X1000/X600/X900/CS0 | Sony |
| 610-308-1786 | PLC-SU60/XU60 | Sanyo | LMP-C120 | VPL-CS1/CS2/CX1 | Sony |
| 610-308-3117 | PLC-SW30 | Sanyo | LMP-C121 | VPL-CS3/CX2/CX3/CX4/CS4 | Sony |
| 610-309-2706 | PLC-XU25/47/XU50(NOT 50A)/51/55 | Sanyo | LMP-C132 | VPL-CX10 | Sony |
| 610-309-3802 | PLV-WF10 | Sanyo | LMP-C133 | CS10 | Sony |
| 610-314-9127 | PLC-XP51/56 | Sanyo | LMP-C150 | VPL-CS5/CX5/CS6/CX6/EX1 | Sony |
| 610-315-5647 | PLC-XU41 | Sanyo | LMP-C160 | VPL-CX11 | Sony |
| 610-315-7689 | PLC-EF60/XF60 | Sanyo | LMP-C161 | VPL-CX70/75 | Sony |
| 610-323-0726 | PLC-XU73 | Sanyo | LMP-C162 | VPL-CX20A/CS20A/ES3 | Sony |
| 610-325-2957 | PLV80 | Sanyo | LMP-C163 | VPL-CS21/CX21 | Sony |
| 610-328-7362 | PLC-XP57/20 | Sanyo | LMP-C190 | VPL-CX85 | Sony |
| 610-330-7329 | PLC-XT25/2L | Sanyo | LMP-E150 | VPL-ES2 | Sony |
| 9HJ7083119001 | PG-M15S/X | Sharp | LMP-E180 | VPL-ES1/DS100/CS7 | Sony |
| ANA20LP | PG-A20X | Sharp | LMP-F250 | VPL-FX50 | Sony |
| ANK2LP | XVZ2000/DT400 | Sharp | LMP-F300 | VPL-FX51 | Sony |
| ANM20LP | PG-M20X/25X | Sharp | LMP-H130 | VPL-HS51 | Sony |
| AN-MB60LP | PG-M60X | Sharp | LMP-H150 | VPL-HS3 | Sony |
| ANMB70LP | XG-MB70X | Sharp | LMP-H180 | VPL-HS20/HS10 | Sony |
| ANP25LP/1 | XGP25X | Sharp | LMP-M130 | VPD-MX10 | Sony |
| AN-PH50L1 | XGPH50X | Sharp | LMP-P120 | VPL-PX1 | Sony |
| ANXR1LP | XR1S,XR1X | Sharp | LMP-P200 | VPL-PX20/PX30/VW10 | Sony |
| AN-XR10LP/1 | XR-10S/X/MB50X | Sharp | LMP-P201 | PX21/31 | Sony |
| ANXR10L2 | XR10XL/SL | Sharp | LMP-P202 | VPL-PS10/PX10/PX11/PX15 | Sony |
| ANXR20LP/1 | XR-20S/X | Sharp | LMP-P260 | VPL-PX35/40/41/45 | Sony |
| BQC-PGA10X//1 | PGA-10X(S)(SSL) | Sharp | LMP-Q120 | VPL-FX200/FE100 Quad lamp | Sony |
| BQC-PGB10S//1 | PG-B10S | Sharp | LMP-S120 | VPL-FX200/FE100/FE110 | Sony |
| BQC-PGC20X/1 | PG-C20XU,XV-Z7000U | Sharp | PKPJ500 | VPL-V500Q | Sony |
| BQC-PGC30XU/1 | PG-C30XU | Sharp | PKPJ-800 | V800Q/S800Q | Sony |
| BQC-PGM10X1 | PG-M10S/10X | Sharp | XL2400 | XL2400 | Sony |
| BQC-XGC40XU/1 | XG-C40XU | Sharp | TLP-L1 | TLP-310/311/410/411 | Toshiba |
| BQC-XGC50X/1 | PG-C45S,PG-C45X,XG-C50X | Sharp | TLP-L2 | TLP-510/511/570/571,TY-G1/3 | Toshiba |
| BQC-XGC55X//1 | XGC-55X/60X | Sharp | TLP-L3 | TDP-T11/710/711,TY-G5/7 | Toshiba |
| BQC-XGE1000U1 | XG-E1000U,XV-595U | Sharp | TLP-L55 | TLP-250/251/260/261/550/551/561 | Toshiba |
| BQC-XGE1100U2 | XG-1100U | Sharp | TLP-L6 | TLP-450/451/470/650/651/670U/671U/651U | Toshiba |
| BQC-XGE1200U1 | XG-E1200U/XV-ZW90U | Sharp | TLP-L78 | TLP-380/780/781UF | Toshiba |
| BQC-XGE3000U1 | XGE3000U | Sharp | TLP-L79 | TLP-790U/791U | Toshiba |
| BQC-XGE3500U1 | XG-E3500 | Sharp | TLP-LB2 | TLP-B2 | Toshiba |
| BQC-XGE630U/1 | XG-E630U/670U | Sharp | TDP-LD1 | TDP-D1 | Toshiba |
| BQC-XGE650U/1 | XG-E650U | Sharp | TLP-LD2 | TDP-D2 | Toshiba |
| BQC-XGE690U/1 | XG-E690U | Sharp | TLP-LF6 | TLP-470F/471F/670UF/671UF/680U/681U | Toshiba |
| BQC-XGE690UB1 | XG-E690UB | Sharp | TLP-LP4 | TDP-P4 | Toshiba |
| BQC-XGE850U/1 | XGE850U | Sharp | TLP-LP5 | TDP-P5 | Toshiba |
| BQC-XGH400U | XG-H400U | Sharp | TLP-LT1 | TDP-S2 | Toshiba |
| BQC-XGNV1U/1 | XG-NV1U/PGD100U | Sharp | TLP-LU6 | TLP470UF,TLP471UF,TLP470A,TLP471A | Toshiba |
| BQC-XGNV2U//1 | XG-NV2U/NV3XB/U,PG-D210U | Sharp | TLP-LV1 | TLP-S30U/T50M | Toshiba |
| BQC-XGNV4SU/1 | PG-D120U/XG-NV4SU | Sharp | TLP-LV2 | TLP-S41U/T60MU/61MU/70MU/S70U | Toshiba |
| BQC-XGNV5XB/1 | XG-NVXB | Sharp | TLP-LV3 | TLP-S10U | Toshiba |
| BQC-XGNV5XU/1 | XGNV5XU | Sharp | TLP-LV4 | TDP-S20U | Toshiba |
| BQC-XGNV6XU/1 | XG-NV6XU/NV25B/XV-DW100U | Sharp | TLP-LV5 | TDP-S25 | Toshiba |
| BQC-XGNV7XU/1 | XG-NV7XU | Sharp | TLP-LV6 | TDP-S8U/T9U | Toshiba |
| BQC-XGP10XU/1 | XGP10U/P10XU | Sharp | TLP-LV8 | TDP-T45U | Toshiba |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

LCD REPLACEMENT LAMPS


LCD Replacement Lamps (Continued)

| Ordering Code | Projector Model # | Manufacturer | Ordering Code | Projector Model # | Manufacturer |
|---------------|---------------------|--------------|---------------|-------------------|--------------|
| TLP-LW3 | TDP-T80/90/91/98 | Toshiba | RLC-004 | PJ400 | Viewsonic |
| TLP-LW2 | TLP-T720 | Toshiba | RLC-013 | PJ656 | Viewsonic |
| TLP-LW5 | TDP-S80U/S81U | Toshiba | RLC-014 | PJ458D | Viewsonic |
| TLP-LW6 | TDP-T250/T300 | Toshiba | RLC-120-07A | PJ870 | Viewsonic |
| TLP-LW10 | TDP-T100/99U | Toshiba | RLC-130-07A | PJ350 | Viewsonic |
| TLP-LW11 | TLP-XC2500U | Toshiba | RLC-150-002 | PJ1200 | Viewsonic |
| TLP-LW13 | TDP-T350(U) | Toshiba | RLC-150-003 | PJ550/551 | Viewsonic |
| TLP-LX10 | TLP-X10/X11/X20/X21 | Toshiba | RLC-150-07A | PJ875/1075 | Viewsonic |
| TLP-LX40 | TLP-X4100U | Toshiba | RLC-160-03A | PJ750-1 | Viewsonic |
| TLP-LX45 | TLP-X4500U | Toshiba | RLC-250-03A | PJ1065 | Viewsonic |
| CPL850LAMP | PJ800 | Viewsonic | RLC-260-001 | PJ1000 | Viewsonic |
| PRJ-RLC-001 | PJ750-2 | Viewsonic | RLM-200-01A | PJ860-1 | Viewsonic |
| PRJ-RLC-002 | PJ1065-2 | Viewsonic | RLU-150-001 | PJ500/501/650 | Viewsonic |
| PRJ-RLC-004 | PJ250 | Viewsonic | RLU-150-03A | PJL855,PJL1035-2 | Viewsonic |
| PRJ-RLC-010 | PJ255D | Viewsonic | RLU-190-03A | PJ1060/PJ860-2 | Viewsonic |
| PRJ-RLC-008 | PJ510 | Viewsonic | RLU820 | PJ820 | Viewsonic |
| PRJ-RLC-011 | PJ1165 | Viewsonic | RLC-130-07A | XD-17K | Viewsonic |
| PRJ-RLC-015 | PJ502/552/562 | Viewsonic | | | |


Don't see the LCD lamp you need? Give us a call - we source it all!

STAGE & STUDIO


ArcMaster™ High Pressure Discharge - Single Ended, Universal Burn

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|---------------|----------|-------|-------|-----------|--------|-------------|-------|-----------|--------|-------|-------------|
| | ESR400-SE-NHR | 04000 | 400 | 67 | 650 | 33000 | 6200 | 92 | GX9.5 NHR | 112 | 6 | 700 |
| ESR575-SE-NHR | 04001 | 575 | 95 | 750 | 49000 | 5600 | 90 | GX9.5 | 125 | 7 | 700 | |
| ESR700-SE-NHR | 04002 | 700 | 72 | 1000 | 56000 | 5600 | 95 | G22 | 155 | 8 | 700 | |
| ESR1200-SE-NHR | 04003 | 1200 | 100 | 750 | 110000 | 6000 | 95 | G22 | 175 | 10 | 700 | |


ArcMaster™ High Pressure Discharge - Long Life, Single Ended, Universal Burn

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|---------------|----------|-------|-------|-----------|--------|-------------|-------|--------|--------|-------|-------------|
| | ESD150-SE-D | 04004 | 150 | 95 | 6000 | 9300 | 6200 | 60 | G12 | 105 | 5 | 500 |
| ESD200-SE-D | 04005 | 200 | 70 | 2000 | 13700 | 5600 | 70 | GY9.5 | 108 | 5 | 500 | |
| ESD250-SE-D | 04006 | 250 | 95 | 2000 | 18800 | 5800 | 80 | GY9.5 | 108 | 5 | 500 | |
| ESD575-SE-D | 04007 | 575 | 95 | 2000 | 49000 | 5600 | 90 | GX9.5 | 125 | 7 | 600 | |

ArcMaster™ High Pressure Discharge - High Color Temperature, Single Ended, Universal Burn

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|------------------|----------|-------|-------|-----------|--------|-------------|-------|-----------|--------|-------|-------------|
| | ESD250/2-SE-D8.5 | 04008 | 250 | 95 | 2000 | 18000 | 8500 | 65 | GY9.5 NHR | 108 | 5 | 500 |
| ESD575/2-SE-D7.2 | 04009 | 575 | 95 | 1000 | 45000 | 7200 | 85 | GX9.5 | 125 | 7 | 700 | |
| ESD575/2-SE-D8.5 | 04010 | 575 | 95 | 1000 | 44000 | 8500 | 80 | GX9.5 | 125 | 7 | 700 | |

ArcMaster™ High Pressure Discharge - Hot Restrike, Single Ended, Universal Burn

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|---------------|----------|-------|-------|-----------|--------|-------------|--------|--------|--------|-------|-------------|
| | ESR200-SE-HR | 04011 | 200 | 70 | 200 | 15000 | 5600 | 95 | GZY9.5 | 80 | 5 | 700 |
| ESR400-SE-HR | 04012 | 400 | 67 | 650 | 33000 | 6200 | 92 | GZZ9.5 | 110 | 6 | 700 | |
| ESR575-SE-HR | 04013 | 575 | 95 | 750 | 49000 | 5600 | 90 | G22 | 145 | 7 | 700 | |
| ESR800-SE-HR* | 04014 | 800 | 95 | 1000 | 64000 | 6000 | 95 | G22 | 145 | 7 | 700 | |
| ESR1200-SE-HR | 04015 | 1200 | 100 | 750 | 110000 | 6000 | 95 | G38 | 200 | 10 | 700 | |
| ESR2500-SE-HR | 04016 | 2500 | 115 | 500 | 240000 | 6000 | 95 | G38 | 240 | 14 | 700 | |

* UV Stop Lamp




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

STAGE & STUDIO

ArcMaster™ High Pressure Discharge - Hot Restrike, Double Ended

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|---------------|----------|-------|-------|-----------|---------|-------------|------|------------|------------|-------|-------------|
| | ESI575-DE | 04017 | | 575 | 95 | 750 | 49000 | 5600 | 70 | SfC10-4/15 | 136 | 7 |
| ESI1200-DE | 04018 | | 1200 | 100 | 750 | 110000 | 5600 | 80 | SfC15.5-6 | 220 | 10 | 800 |
| ESI1200-DE-S | 04019 | | 1200 | 100 | 750 | 95000 | 7200 | 77 | SfC10-4/11 | 136 | 7 | 800 |
| ESI2500-DE | 04020 | | 2500 | 115 | 500 | 240000 | 5600 | 90 | SfA21-12 | 355 | 20.5 | 800 |
| ESI4000-DE | 04021 | | 4000 | 200 | 500 | 380000 | 6000 | 85 | SfA21-12 | 405 | 34 | 800 |
| ESI6000-DE | 04022 | | 6000 | 123 | 350 | 570000 | 6000 | 90 | S25.5X60 | 450 | 22 | 900 |
| ESI12000-DE | 04023 | | 12000 | 160 | 500 | 1100000 | 6000 | 90 | S30X70 | 470 | 32 | 900 |

ArcMaster™ High Pressure Discharge - Short Arc, Universal Burn

|  | Ordering Code | Bar Code | Watts | Volts | Avg. Life | Lumens | Color Temp. | CRI | Endcap | MOL mm | AG mm | Max Temp. C |
|---|---------------|----------|-------|-------|-----------|--------|-------------|------|---------|--------|-------|-------------|
| | ESR600-SE-SA* | 04025 | | 600 | 95 | 300 | 48000 | 5300 | 90 | FaX1.5 | 84 | 5 |
| ESR700-SE-SA | 04024 | | 700 | 70 | 500 | 50000 | 6600 | 75 | GY9.5 | 85 | 4 | 1000 |
| ESR600-DE-SA* | 04026 | | 600 | 95 | 300 | 48000 | 5300 | 90 | Mo pins | 75 | 5 | 900 |

* 600 watt lamps are Hot Restrike with a voltage peak of 25kV

Stage & Studio

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|---------------|--------|-------|-------|-----------|---------------|----------|-------|-------|-----------|
| 64514 | GX6.35 | 120 | 300 | 75 | CXZ | G38 | 120 | 1500 | 325 |
| BAB | GU5.3 | 12 | 20 | 3000 | CYV | G38 | 120 | 1000 | 200 |
| BAB-FG | GU5.3 | 12 | 20 | 3000 | CYX | G38 | 120 | 2000 | 250 |
| BAB-BLACK | GU5.3 | 12 | 20 | 3000 | DEB | P28s | 120 | 500 | 800 |
| BAB-SILVER | GU5.3 | 12 | 20 | 3000 | DGH | P28s | 120 | 750 | 500 |
| BCM | G38 | 220 | 20000 | 350 | DMX | P28s | 120 | 500 | 50 |
| BFE | P28s | 120 | 750 | 200 | DNS/FMC | P28s | 120 | 500 | 200 |
| BFK/BFL | P28s | 120 | 750 | 200 | DNT/FMD | P28s | 120 | 750 | 200 |
| BLC | BA15d | 120 | 30 | 50 | DNW | P28s | 120 | 500 | 500 |
| BLX | BA15d | 120 | 50 | 50 | DPT | E39 | 120 | 1000 | 50 |
| BMG/BMH | BA15d | 120 | 100 | 25 | DPW | P40s | 120 | 1000 | 50 |
| BNF | BA15d | 120 | 75 | 25 | DPY | G38 | 120 | 5000 | 500 |
| BRH | R7s | 120 | 1000 | 75 | DRA | G6.35 | 120 | 300 | 300 |
| BRL | G6.35 | 12 | 50 | 50 | DRB/DRC | P28s | 120 | 1000 | 25 |
| BTL | P28s | 120 | 500 | 500 | DRS | P28s | 120 | 1000 | 25 |
| BTN | P28s | 120 | 750 | 500 | DRW | E39 | 120 | 1000 | 25 |
| BTP | P28s | 120 | 750 | 200 | DTA | P40s | 120 | 1500 | 100 |
| BTR | P28s | 120 | 1000 | 200 | DTJ | P40s | 120 | 1500 | 25 |
| BVR | BA15d | 120 | 30 | 25 | DVS | R7s | 130 | 500 | 2000 |
| BVT | P40s | 120 | 1000 | 500 | DVY | G5.3 | 120 | 650 | 25 |
| BVV | P40s | 120 | 1000 | 200 | DWT | R7s | 120 | 1000 | 2000 |
| BVW | P40s | 120 | 2000 | 200 | DWY/FAB | R7s | 120 | 650 | 25 |
| BWA | G38 | 120 | 2000 | 500 | DWZ | R7s | 30 | 375 | 1000 |
| BWF | E39 | 120 | 2000 | 500 | DXN | R7s | 120 | 1000 | 30 |
| BWM | G9.5 | 120 | 750 | 200 | DXW | R7s | 120 | 1000 | 150 |
| BWN | G9.5 | 120 | 1000 | 250 | DXX | R7s | 240 | 800 | 75 |
| CBJ/CBC | BA15s | 120 | 75 | 50 | DYG | GZ9.5 | 30 | 250 | 15 |
| CBX/CBS | BA15d | 120 | 75 | 50 | DYH | G5.3 | 120 | 600 | 75 |
| CDJ | BA15d | 120 | 100 | 50 | DYP | 2 Button | 120 | 600 | 75 |
| CDS/CDX | BA15s | 120 | 100 | 50 | DYR | GZ9.5 | 220 | 650 | 50 |
| CEA/CEB/CDK | BA15d | 120 | 100 | 50 | DYS/DYV/BHC | GZ9.5 | 120 | 600 | 75 |
| CEM | BA15s | 120 | 120 | 200 | DZA | G5.3 | 10.8 | 30 | 400 |
| CEW/CFC | BA15s | 120 | 150 | 25 | DZB | G5.3 | 12 | 100 | 50 |
| CGW/CGT | BA15s | 120 | 200 | 25 | EAD | BA15d | 120 | 60 | 100 |
| CHK | BA15s | 120 | 150 | 500 | EAJ | BA15d | 12/12 | 35/25 | 300/300 |
| CLS/CLG | BA15s | 120 | 300 | 25 | EGC | P28s | 120 | 500 | 300 |
| CLX/CMB | BA15d | 120 | 300 | 25 | EGE | P28s | 120 | 500 | 2000 |
| CMV/CMT | BA15s | 120 | 300 | 25 | EGF | P28s | 120 | 750 | 250 |
| CWZ | P40s | 120 | 1500 | 325 | EGG | P28s | 120 | 750 | 2000 |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

STAGE & STUDIO

Stage & Studio (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|---------------|-------|-------|-------|-----------|-------------------|--------|-------|-------|-----------|
| EGJ | P28s | 120 | 1000 | 400 | EYH/FKT | G5.3 | 120 | 250 | 200 |
| EGK | P28s | 120 | 1000 | 400 | EYS | GU5.3 | 12 | 42 | 4000 |
| EGN | G22 | 120 | 500 | 100 | EYS-FG | GU5.3 | 12 | 42 | 4000 |
| EGR | G22 | 120 | 750 | 200 | EYT | E11 | 120 | 750 | 500 |
| EGT | G22 | 120 | 1000 | 200 | EYV | E11 | 130 | 500 | 2000 |
| EHC/EHB | G9.5 | 120 | 500 | 300 | EYW | E11 | 130 | 500 | 2000 |
| EHD | G9.5 | 120 | 500 | 2000 | EYX | E11 | 120 | 500 | 2000 |
| EHF | G9.5 | 120 | 750 | 300 | FAD | R7s | 120 | 650 | 100 |
| EHG | G9.5 | 120 | 750 | 2000 | FBG/FBD | G5.3 | 120 | 500 | 50 |
| EHJ | G6.35 | 24 | 250 | 50 | FBX | R7s | 120 | 650 | 100 |
| EHM | R7s | 120 | 300 | 2000 | FBY | R7s | 120 | 1000 | 150 |
| EHP | R7s | 120 | 300 | 2000 | FCB | R7s | 120 | 600 | 75 |
| EHR | R7s | 120 | 400 | 2000 | FCL | R7s | 120 | 500 | 2000 |
| EHT | E11 | 120 | 250 | 2000 | FCM | R7s | 120 | 1000 | 300 |
| EHV | E11 | 120 | 325 | 500 | FCR | GY6.35 | 12 | 100 | 50 |
| EHZ | R7s | 120 | 300 | 2000 | FCS | G6.35 | 24 | 150 | 50 |
| EJG | R7s | 120 | 750 | 400 | FCZ | R7s | 120 | 500 | 2000 |
| EKB | GZ9.5 | 120 | 420 | 75 | FDA | R7s | 120 | 400 | 250 |
| EKD | GZ9.5 | 120 | 650 | 25 | FDB | R7s | 120 | 1500 | 400 |
| ELC/SH | GX5.3 | 24 | 250 | 500 | FDG | R7s | 120 | 500 | 400 |
| EMD | R7s | 120 | 750 | 400 | FDN | R7s | 120 | 500 | 400 |
| ENH | GY5.3 | 120 | 250 | 175 | FDT | GZ9.5 | 12 | 100 | 50 |
| ENL | GU5.3 | 12 | 50 | 4000 | FEL | G9.5 | 120 | 1000 | 300 |
| EPN | GX5.3 | 12 | 35 | 50 | FEP | G9.5 | 220 | 1000 | 150 |
| ESA/FHD | G4 | 6 | 10 | 100 | FER | R7s | 120 | 1000 | 500 |
| ESB/FHE | G4 | 6 | 20 | 100 | FEV | BA15d | 120 | 200 | 50 |
| ESL | E11 | 120 | 150 | 1000 | FEY | R7s | 120 | 2000 | 300 |
| ESM | E11 | 120 | 250 | 2000 | FFM | R7s | 120 | 420 | 75 |
| ESN | E11 | 120 | 100 | 750 | FFN | GX16d | 120 | 1000 | 800 |
| ESP | BA15d | 120 | 150 | 1000 | FFP | GX16d | 120 | 1000 | 800 |
| ESR | BA15d | 120 | 100 | 1000 | FFR | GX16d | 120 | 1000 | 800 |
| ESS | BA15d | 120 | 250 | 2000 | FFS | GX16d | 120 | 1000 | 800 |
| ESX | GU5.3 | 12 | 20 | 3000 | FFT | R7s | 120 | 1000 | 300 |
| ESX-FG | GU5.3 | 12 | 20 | 3000 | FGT | R7s | 120 | 1500 | 400 |
| ESY | G6.35 | 120 | 150 | 200 | FHM | R7s | 120 | 1000 | 300 |
| ETB | BA15d | 120 | 250 | 2000 | FKW | GY9.5 | 120 | 300 | 200 |
| ETC | BA15d | 120 | 150 | 2000 | FLK | G9.5 | 120 | 575 | 300 |
| ETD | BA15d | 120 | 100 | 750 | FPA | GU5.3 | 12 | 65 | 4000 |
| ETE | E11 | 120 | 100 | 750 | FPB | GU5.3 | 12 | 65 | 4000 |
| ETF | BA15d | 120 | 150 | 2000 | FRK | GY9.5 | 120 | 650 | 200 |
| ETG | E11 | 120 | 150 | 2000 | FTB | GU4 | 12 | 20 | 2000 |
| ETH | E11 | 120 | 150 | 2000 | FTC | GU4 | 12 | 20 | 2000 |
| EVD | G6.35 | 36 | 400 | 50 | FTD | GU4 | 12 | 20 | 2000 |
| EVR | E11 | 120 | 500 | 2000 | FTE | GU4 | 12 | 35 | 2000 |
| EXN | GU5.3 | 12 | 50 | 4000 | FTF | GU4 | 12 | 35 | 2000 |
| EXN-FG | GU5.3 | 12 | 50 | 4000 | FTH | GU4 | 12 | 35 | 2000 |
| EXN-BLACK | GU5.3 | 12 | 50 | 4000 | FTK | GY9.5 | 120 | 500 | 200 |
| EXN-SILVER | GU5.3 | 12 | 50 | 4000 | GCA | G5.3 | 120 | 250 | 50 |
| EXT | GU5.3 | 12 | 50 | 4000 | GCC | G5.3 | 12 | 100 | 200 |
| EXT-FG | GU5.3 | 12 | 50 | 4000 | GDA | R7s | 120 | 500 | 100 |
| EXV | GX5.3 | 12 | 100 | 50 | HPL575/115V | HPL | 115 | 575 | 300 |
| EXX | GY5.3 | 120 | 250 | 25 | HPL575/120V | HPL | 120 | 575 | 300 |
| EXZ | GU5.3 | 12 | 50 | 4000 | HPL575LL/115V | HPL | 115 | 575 | 2000 |
| EXZ-FG | GU5.3 | 12 | 50 | 4000 | HPL750/115V | HPL | 115 | 750 | 300 |
| EXZ-BLACK | GU5.3 | 12 | 50 | 4000 | JC12V20W | G4 | 12 | 20 | 50 |
| EXZ-SILVER | GU5.3 | 12 | 50 | 4000 | JC12V30W | G4 | 12 | 30 | 50 |
| EYC | GU5.3 | 12 | 75 | 4000 | JC12V5W | G4 | 12 | 5 | 2000 |
| EYC-FG | GU5.3 | 12 | 75 | 4000 | JCD120V100W/A | G6.35* | 120 | 100 | 150 |
| EYF | GU5.3 | 12 | 75 | 4000 | JCR/M12V20W | GU4 | 12 | 20 | 50 |
| EYF-FG | GU5.3 | 12 | 75 | 4000 | Q100CL/DC/2V-120V | BA15d | 120 | 100 | 1000 |

* w/ ceramic seal cover

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

STAGE & STUDIO

Stage & Studio (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|-------------------|-------|-------|-------|-----------|----------------|-------|-------|-------|-----------|
| Q100CL/MC/2V-120V | E11 | 120 | 100 | 750 | Q250CL/MC-120V | E11 | 120 | 250 | 2000 |
| Q100DC/2V-120V | BA15d | 120 | 100 | 2000 | Q250DC-120V | BA15d | 120 | 250 | 2000 |
| Q100MC/2V-120V | E11 | 120 | 100 | 750 | Q250MC-120V | E11 | 120 | 250 | 2000 |
| Q150CL/DC-120V | BA15d | 120 | 150 | 2000 | Q250MC-130V | E11 | 130 | 250 | 2000 |
| Q150CL/MC-120V | E11 | 120 | 150 | 2000 | Q500/MC-120V | E11 | 120 | 500 | 1700 |
| Q150DC-120V | BA15d | 120 | 150 | 2000 | Q500/MC-130V | E11 | 130 | 500 | 1700 |
| Q150MC-120V | E11 | 120 | 150 | 2000 | Q500CL/MC-120V | E11 | 120 | 500 | 1700 |
| Q250CL/DC-120V | BA15d | 120 | 250 | 2000 | Q500CL/MC-130V | E11 | 130 | 500 | 1700 |

HEALTH CARE

Health Care

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|---------------|---------------------|-------|-------|-----------|---------------|------------------------|-------|-------|-------------|
| 00200 | 8-32UNC-2A Thread | 2.5 | 0.38A | 15 | 10S11NF | Intermed. Screw E17 | 120 | | 1500 |
| 00600 | Thread | 2.5 | | | 11143 | G4 | 6 | | 1000 |
| 00900 | Thread | 2.5 | 0.38A | | 11807 | DC Prefocus | 6 | | 500 |
| 01007 | PK22s | 12 | 55 | 150 | 125T10P | P28s | 120 | 125 | 500 |
| 01200 | Flange | 2.5 | | | 13298 | GZ4 | 10 | 52 | 25 |
| 01800 | Thread | 2.5 | 0.45A | | 1460 | DC Prefocus | 6.5 | 2.75A | 100 |
| 02000 | DC Bayonet | 7 | 0.63A | 1000 | 1460X | DC Prefocus | 6.5 | 2.75A | 100 |
| 02200 | Thread | 2.5 | | | 1468X | DC Prefocus | 6 | | 500 |
| 02300 | Flange | 2.2 | 0.18A | | 1489 | SC Bayonet | 6.5 | | 125 |
| 02500 | Miniature Screw | 6 | | | 1493 | DC Bayonet | 6.4 | | 100 |
| 02600 | 2 Pin | 6 | | | 1507 | SC Prefocus | 12.5 | | 300 |
| 02900 | Miniature Screw | 2.5 | | | 150P25/10 | E26 | 120 | | 200 |
| 03000 | Flange | 3.5 | | 15 | 15S11/102CL | E26 | 120 | 15 | 500 |
| 03100 | 48 Grooves/Inch | 3.5 | | 20 | 15S11-13 | E12 | 120 | | 750 |
| 03300 | Flange | 2.5 | | | 15S11-14 | E12 | 120 | | 200 |
| 03400 | Flange | 2.5 | | | 15S11-87 | Intermed. Screw E17 | 120 | | 750 |
| 03600 | Miniature Screw | 2.5 | | | 15S11-F | E12 | 120 | | 250 |
| 03700 | | 3.5 | | | 1630 | DC Prefocus | 6.5 | 2.75A | 100 |
| 03900 | | 2.5 | | | 1631X | DC Prefocus | 6.5 | 2.75A | 100 |
| 04100 | Thread | 14.5 | | | 1634 | DC Prefocus | 20 | 1.04A | 200 |
| 04200 | GX5.3 | 12 | 35 | 50 | 1649 | DC Prefocus | 6.5 | 2.75A | 100 |
| 04400 | Flange | 2.5 | | | 16073 | G5.3 | 12 | 80 | 50 |
| 04500 | Flange | 3.5 | | | 25S11-2C | E12 | 120 | | 500 |
| 04600 | Thread | 3.5 | | | 25S11-5C | E12 | 120 | | 500 |
| 04700 | 1/8-72 Thread | 2.5 | 0.28A | 20 | 25T10/IF-120V | Medium Screw | 120 | 25 | 1500 |
| 04800 | 8-32UNC-2A Thread | 2.5 | 0.38A | 20 | 40S11N | Intermed. Screw E17 | 130 | 40 | 3500 @ 120V |
| 04900 | Flange | 3.5 | | 20 | 41304 | Intermed. Screw E17 | 120 | | 600 |
| 06000 | 10-32UNC-2A Thread | 3.5 | | 20 | 41306 | DC Bayonet | 6 | | 200 |
| 06100 | | 14.5 | | | 41308 | DC Prefoc/ Tri. Flange | 6 | | 100 |
| 06200 | Flange | 3.5 | | | 41310 | DC Bayonet | 6 | | 100 |
| 06300 | | 12 | | | 41312 | DC Bayonet | 7 | | 100 |
| 07200 | Flange | 2.5 | | | 41314 | Miniature Screw | 6 | | 200 |
| 07600 | Thread | 2.5 | | | 41316 | SC Bayonet | 6 | | 150 |
| 07800 | Thread | 6 | | | 41318 | E14 w/ Special Flange | 6 | | 100 |
| 08100 | G4 | 12 | | | 41318HH | E14 w/ Special Flange | 6 | | 100 |
| 08200 | Flange | 3.5 | | | 41320 | Miniature Screw | 6 | | 300 |
| 08300 | Flange | 3.5 | | | 41324 | DC Bayonet | 6 | | 600 |
| 08500 | Lumiview Lamp | | | | 41326 | SC Prefoc/ Tri. Flange | 6 | | 80 |
| 1096 | DC Prefocus | 6 | 4.5A | 500 | 41328 | E14 w/ Prefoc Flange | 6 | | 100 |
| 1096X | DC Prefocus | 6 | 4.5A | 500 | 41332 | DC Prefocus | 7 | | 100 |
| 10S11N | Intermed. Screw E17 | 120 | | 1500 | 41334 | G6.35 | 12 | 30 | 1000 |

See Cross-Referencing Section on pages 10-13.

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

HEALTH CARE

Health Care (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|---------------|-------------------------------------|-------|-------|-----------|---------------|-----------------------------|-------|-------|-----------|
| 41336 | 9 x 17 (M5 x 0.75) | 3 | | 10 | DDL | GX5.3 | 20 | 150 | 500 |
| 41338 | 5.5 x 15 (M4.5 x 0.5) | 6 | | 500 | DNE | G7.9 | 120 | 150 | 12 |
| 41340 | E14 w/ Special Prefocus Flange | 6 | | 100 | DNF | GX7.9 | 21 | 150 | 25 |
| 41344 | BA20D/26 Prefocus w/ Special Flange | 6 | | 100 | DZE/FDS | GY9.5 | 24 | 150 | 100 |
| 41346 | Intermediate Screw E17 | 120 | | 600 | EFM | GZ6.35 | 8 | 50 | 50 |
| 41348 | E26 | 120 | | 600 | EFN | GZ6.35 | 12 | 75 | 50 |
| 41350 | E26 | 120 | | 600 | EFF | GZ6.35 | 12 | 100 | 50 |
| 41352 | Special Screw | 2.5 | | 10 | EFR | GZ6.35 | 15 | 150 | 50 |
| 41354 | Special Screw | 2.7 | | 20 | EHJ | G6.35 | 24 | 250 | 50 |
| 41358 | E14 w/ Special Flange | 12 | | 30 | EHT | E11 | 120 | 250 | 2000 |
| 41360 | E26 | 110 | | 500 | EI-2201 | DC Bayonet | 115 | 20 | 500 |
| 41362 | BA15d | 120 | 50 | 50 | EI-722 | DC Bayonet | 120 | 30 | 500 |
| 41364 | Special Base | 6 | | 100 | EI-737 | DC Bayonet | 6 | 3A | 100 |
| 41366 | DC w/ Special Flange | 6 | | 80 | EI-738 | DC Bayonet | 6 | 5.0A | 100 |
| 41368 | G4 w/ Special Flange | 6 | | 100 | EI-74000 | X514 | 24 | 120 | 200 |
| 41370 | Special Base | 3 | | 100 | EI-77Z | DC w/ Special Flange | 6 | 15 | 100 |
| 41374 | Special Base | 4 | | 10 | EI-886 | DC Bayonet | 120 | 20 | 400 |
| 41376 | SC Prefocus | 12.5 | | 25 | EI-B153 | DC Bayonet | 120 | 20 | 300 |
| 41382 | SC Prefocus | 6 | | 50 | EI-M102 | SC Bayonet | 3 - 6 | 2A | 100 |
| 56016164 | DC Bayonet | 24 | 25 | 700 | EI-M103 | SC Bayonet | 6 - 9 | 2A | 100 |
| 56016678 | BX22D | 24 | 50 | 700 | EJA | GX5.3 | 21 | 150 | 40 |
| 56018366 | R7s | 22.8 | 75 | 800 | EJL | GX5.3 | 24 | 200 | 50 |
| 56018550 | DC Bayonet | 24 | 40 | 700 | EJM | GX5.3 | 21 | 150 | 40 |
| 56018566 | G6.35 | 22.8 | 50 | 1000 | EJV | GX5.3 | 21 | 150 | 40 |
| 56018769 | G6.35 | 22.8 | 40 | 1000 | EJY | GX5.3 | 19 | 80 | 25 |
| 64260 | PG22 Special | 12 | | 50 | EKE | GX5.3 | 21 | 150 | 200 |
| 64514 | GX6.35 | 120 | 300 | 75 | EL-12B | Miniature Bayonet | 6 | 15 | 100 |
| 71818 | P28s | 10 | 70 | 100 | EL-1B | SC Bayonet | 13.5 | 4A | 100 |
| 76907 | DC Bayonet | 6 | 15 | 100 | EL-2B | Miniature Bayonet | 8 | 12 | 100 |
| 778 | 2-Pin G-4 | 6 | 20 | 100 | EL-38 | Miniature Bayonet | 8 | 15 | 200 |
| 77903 | DC w/ Special Flange | 6 | 15 | 200 | EL-3B | Miniature Bayonet | 8 | 12 | 100 |
| 77904 | DC Bayonet | 6 | 30 | 200 | ELZ | GX7.9 | 21 | 150 | 60 |
| 77910 | DC Bayonet | 6 | 18 | 50 | ENL | GU5.3 | 12 | 50 | 4000 |
| 787 | 2-Pin G-4 | 6 | 10 | 100 | ENZ | GX5.3 | 30 | 50 | 25 |
| 788 | 2-Pin G-4 | 6 | 3.33A | 100 | EPV | GX5.3 | 14.5 | 90 | 500 |
| 789 | 2-Pin G-4 | 12 | 14 | 200 | ESA/FHD | G4 | 6 | 10 | 100 |
| 8001 | E14 | 6 | 4.35A | 100 | ESB/FHE | G4 | 6 | 20 | 100 |
| 8013 | DC Bayonet | 6 | 10 | 200 | ESD | GY5.3 | 120 | 150 | 12 |
| 8014 | SC Bayonet | 6 | 10 | 600 | ETJ | GY5.3 | 120 | 250 | 175 |
| 8017 | DC Bayonet | 6 | 15 | 1000 | EVA | GY6.35 | 12 | 100 | 1000 |
| 8018 | DC Bayonet | 6 | 15 | 100 | EVB/BRJ | G6.35 | 15 | 150 | 50 |
| 8022 | BA20d | 12 | 50 | 50 | F13T5/CW | G5 | - | 13 | 7500 |
| 80-A | 4 Pin | 60 | | 3000 | F13T5/D | G5 | - | 13 | 7500 |
| 80-B | 4 Pin | 60 | | 3000 | F14T8/CW | G13 | - | 14 | 7500 |
| 8100 | E14 | 6 | 30 | 600 | F14T8/D | G13 | - | 14 | 7500 |
| A1-010-28 | E11 | 24 | 40 | 600 | F15T8/CW | G13 | - | 15 | 7500 |
| A1-420-10 | E10 | 24 | 60 | 800 | F15T8/D | G13 | - | 15 | 7500 |
| A1-510-01 | E11 | 24 | 50 | 800 | F6T5/CW | G5 | - | 6 | 7500 |
| B1-010-28 | G8 | 24 | 50 | 100 | F6T5/D | G5 | - | 6 | 7500 |
| B5-011-32 | G8 | 24 | 100 | 100 | F8T5/CW | G5 | - | 8 | 7500 |
| BFM | E14 | 120 | 25 | 500 | F8T5/D | G5 | - | 8 | 7500 |
| BLC | BA15d | 120 | 30 | 50 | FCR | GY6.35 | 12 | 100 | 50 |
| BRL | G6.35 | 12 | 50 | 50 | FCS | G6.35 | 24 | 150 | 50 |
| BZW | BA15s | 120 | 50 | 50 | FDT | GZ9.5 | 12 | 100 | 50 |
| CAX | BA15d | 120 | 50 | 50 | FDX | G6.35 w/ Ceramic Seal Cover | 12 | 100 | 50 |
| CAX-130V | BA15d | 130 | 50 | 50 | FCS | G6.35 | 24 | 150 | 50 |
| CDD | BA15s | 120 | 100 | 50 | FDT | GZ9.5 | 12 | 100 | 50 |

See Cross-Referencing Section on pages 10-13.

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

HEALTH CARE

Health Care (Continued)

| Ordering Code | Base | Volts | Watts | Avg. Life | Ordering Code | Base | Volts | Watts | Avg. Life |
|---------------|------------------------------|-------|-------|-----------|----------------|-------|-------|-------|-----------|
| FDX | GY6.35 w/ Ceramic Seal Cover | 12 | 100 | 50 | JCR/M12V75W | G5.3 | 12 | 75 | 50 |
| G10T8 | G13 | - | 10 | 6000 | JCR/M14V35W | GU4 | 14 | 35 | 50 |
| G15T8 | G13 | - | 15 | 8000 | P129362-228 | GY9.5 | 22.8 | 220 | 500 |
| G4T5 | G5 | - | 4 | 7500 | Q75CL-28V | E10 | 28 | 75 | 2000 |
| G6T5 | G5 | - | 6 | 7500 | Q75CL/DC-28V | BA15d | 28 | 75 | 2000 |
| G8T5 | G5 | - | 8 | 7500 | Q150T4/CL/25 | R7s | 25 | 150 | 3000 |
| JC12V50WH20 | G6.35 | 12 | 50 | 2000 | Q235T4/3-33V | GY9.5 | 33 | 235 | 500 |
| JCR/M12V100W | G5.3 | 12 | 100 | 50 | Q250CL/MC-120V | E11 | 120 | 250 | 2000 |

See Cross-Referencing Section on pages 10-13.

MINIATURE

B-3½ Single Contact Miniature Flanged Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | Filament | MOL in/mm | MOD in/mm | Avg. Life | Replaces | Description | Typical Use |
|---------------|----------|---------|--------|-------|------|----------|-----------|-----------|-----------|----------|-------------|------------------------|
| KPR4 | 44003 | B-3 1/2 | P13.5s | 2.2 | 0.47 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | Krypton | |
| PR4 | 40108 | B-3 1/2 | P13.5s | 2.33 | 0.27 | C-2R | 1.25/31.8 | 0.45/11.5 | 10 | | | 2" C" Cells |
| PR2 | 40100 | B-3 1/2 | P13.5s | 2.38 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | | 2" D" Cells |
| KPR2 | 40041 | B-3 1/2 | P13.5s | 2.38 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | K2 | Krypton | |
| KPR102 | 40047 | B-3 1/2 | P13.5s | 2.4 | 0.7 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | K1 | Krypton | |
| PR6 | 40112 | B-3 1/2 | P13.5s | 2.47 | 0.3 | C-2R | 1.25/31.8 | 0.45/11.5 | 30 | | | 2" D" Industrial Cells |
| PR9 | 40116 | B-3 1/2 | P13.5s | 2.7 | 0.15 | C-2R | 1.25/31.8 | 0.45/11.5 | 45 | | | 2" D" Cells |
| PR3 | 40104 | B-3 1/2 | P13.5s | 3.57 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | | 3" D" Cells |
| KPR103 | 40049 | B-3 1/2 | P13.5s | 3.6 | 0.75 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | Krypton | |
| KPR3 | 40043 | B-3 1/2 | P13.5s | 3.6 | 0.91 | C-2R | 1.25/31.8 | 0.45/11.5 | 30 | K3 | Krypton | |
| PR7 | 40114 | B-3 1/2 | P13.5s | 3.7 | 0.3 | C-2R | 1.25/31.8 | 0.45/11.5 | 30 | | | 3" D" Industrial Cells |
| PR30 | 40106 | B-3 1/2 | P13.5s | 3.75 | 0.86 | C-2R | 1.25/31.8 | 0.45/11.5 | 40 | | | Rechargeable 3.75V |
| KPR130 | 40055 | B-3 1/2 | P13.5s | 3.85 | 1.2 | C-2R | 1.25/31.8 | 0.45/11.5 | 20 | | Krypton | |
| PR13 | 40086 | B-3 1/2 | P13.5s | 4.75 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | | 6.0V Lantern |
| KPR13 | 40045 | B-3 1/2 | P13.5s | 4.75 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 10 | K13 | Krypton | |
| K15 | 40061 | B-3 1/2 | P13.5s | 4.8 | 0.7 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | Krypton | |
| PR15 | 40090 | B-3 1/2 | P13.5s | 4.82 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 30 | | | 6.0V Lantern |
| PR12 | 40084 | B-3 1/2 | P13.5s | 5.95 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | | 5" D" Cells |
| K12 | 40059 | B-3 1/2 | P13.5s | 5.95 | 0.7 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | Krypton | |
| KPR118 | 40051 | B-3 1/2 | P13.5s | 7.2 | 0.55 | C-2R | 1.25/31.8 | 0.45/11.5 | 20 | K18 | Krypton | |
| PR18 | 40096 | B-3 1/2 | P13.5s | 7.2 | 0.55 | C-2R | 1.25/31.8 | 0.45/11.5 | 3 | | | 6" D" Cells |
| PR20 | 40102 | B-3 1/2 | P13.5s | 8.63 | 0.5 | C-2R | 1.25/31.8 | 0.45/11.5 | 15 | | | 7" D" Cells |
| PR16 | 40092 | B-3 1/2 | P13.5s | 12.5 | 0.25 | C-2R | 1.25/31.8 | 0.45/11.5 | 50 | | | Hand Spot 12.5V |



B-6 Single Contact Bayonet Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Description |
|---------------|----------|------|------------|-------|------|------|----------|-----------|-----------|-----------|---------------------|
| 1003 | 40155 | B-6 | SC Bayonet | 12.8 | 0.94 | 15 | C-6 | 1.75/44.5 | 0.79/20.1 | 200 | |
| 105 | 40163 | B-6 | SC Bayonet | 12.8 | 1.0 | 12 | C-6 | 1.75/44.5 | 0.79/20.1 | 500 | |
| 1309 | 40250 | B-6 | SC Bayonet | 28 | 0.52 | 15 | 2C-6 | 1.75/44.5 | 0.79/20.1 | 300 | Series Filaments |



B-6 Double Contact Bayonet Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|------|------------|-------|------|------|----------|-----------|-----------|-----------|
| 1004 | 40162 | B-6 | DC Bayonet | 12.8 | 1.0 | 12 | C-6 | 1.75/44.5 | 0.79/20.1 | 500 |
| 210 | 40454 | B-6 | DC Bayonet | 6.5 | 1.78 | 15 | C-6 | 1.75/44.5 | 0.79/20.1 | 100 |






23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


C-7 Candelabra Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Fila-ment | MOL in/mm | MOD in/mm | Avg. Life | Special Descrip-tion |
|---|---------------|----------|------------------|------------------|---------|-------|-----------|-----------|-----------|---------------|----------------------|
| | 4C7/120V | 40353 | C-7 | Candelabra Screw | 115-125 | 4 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | |
| 4C7/130V | 40351 | C-7 | Candelabra Screw | 130 | 4 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | | |
| 4C7/130V-B | 44304 | C-7 | Candelabra Screw | 130 | 4 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | Painted Blue | |
| 4C7/130V-P | 44308 | C-7 | Candelabra Screw | 130 | 4 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | Painted Pink | |
| 4C7/130V-W | 44312 | C-7 | Candelabra Screw | 130 | 4 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | Painted White | |
| 7C7/120V | 40874 | C-7 | Candelabra Screw | 115-125 | 7 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | | |
| 7C7/130V | 40875 | C-7 | Candelabra Screw | 130 | 7 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | | |
| 7C7/130V-W | 44318 | C-7 | Candelabra Screw | 130 | 7 | C-7A | 2.30/58.4 | 0.88/22.3 | 3000 | Painted White | |
| 10C7/120V | 40073 | C-7 | Candelabra Screw | 120 | 10 | C-7A | 2.30/58.4 | 0.88/22.3 | 5000+ | | |


C-7 Double Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|------------|---------|-------|----------|-----------|-----------|-----------|
| | 10C7DC/120V | 40154 | C-7 | DC Bayonet | 115-125 | 10 | C-7A | 2.13/54.1 | 0.88/22.3 | 5000+ |


Festoon 8mm - SV7mm Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|--|---------------|-------------|-------------|-------|-------|------|------|-----------|-----------|-----------|-----------|
| | DE3021 | 42216 | Festoon 8mm | SV7mm | 14 | 0.24 | 2.00 | C-8 | 1.10/28.0 | 0.32/8.0 | 1000 |
| DE3022 | 42308 | Festoon 8mm | SV7mm | 13 | 0.38 | 3.00 | C-8 | 1.15/29.2 | 0.32/8.0 | 1000 | |

Festoon 10mm - SV8.5mm Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Description |
|---|---------------|--------------|--------------|---------|-------|------|------|-----------|------------|-----------|-----------|---------------------|
| | 6418 | 40675 | Festoon 10mm | SV8.5mm | 12 | 0.4 | 3.6 | C-8 | 1.38/35.1 | 0.43/11.0 | 300 | ECE Type - CSW |
| 6411 | 40671 | Festoon 10mm | SV8.5mm | 12 | 0.83 | 8.0 | C-8 | 1.61/40.9 | 0.43/11.0 | 200 | | |
| 211-2/F | 42312 | Festoon 10mm | SV8.5mm | 12.8 | 0.97 | 12.0 | C-8 | 1.72/43.7 | 0.42/10.54 | 1000 | | |
| DE3423 | 42222 | Festoon 10mm | SV8.5mm | 13 | 0.39 | 4.0 | C-8 | 1.46/37.1 | 0.43/11.0 | 150 | | |
| DE3175 | 42298 | Festoon 10mm | SV8.5mm | 13 | 0.77 | 9.55 | C-8 | 1.23/31.3 | 0.40/10.0 | 400 | | |
| DE3425 | 42424 | Festoon 10mm | SV8.5mm | 13 | 0.77 | 9.55 | C-8 | 1.46/37.1 | 0.43/11.0 | 400 | | |

Festoon 10mm - SV8.5mm Base - Xenon

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Description |
|---|---------------|--------------|--------------|---------|-------|------|------|-----------|-----------|-----------|----------------|---------------------|
| | KE10XE/F | | Festoon 10mm | SV8.5mm | 13.5 | 0.37 | 4.0 | C-8 | 1.73/44.0 | 0.40/10.0 | 4000 | Xenon, Frosted |
| KE16XE/F | | Festoon 10mm | SV8.5mm | 13.5 | 0.74 | 9.55 | C-8 | 1.73/44.0 | 0.40/10.0 | 3000 | Xenon, Frosted | |
| KE20XE/F | | Festoon 10mm | SV8.5mm | 26 | 0.192 | 4.0 | C-8 | 1.73/44.0 | 0.40/10.0 | 3000 | Xenon, Frosted | |
| KE23XE/F | | Festoon 10mm | SV8.5mm | 26 | 0.385 | 9.55 | C-8 | 1.73/44.0 | 0.40/10.0 | 3000 | Xenon, Frosted | |
| KK14XE | 50058 | Festoon 10mm | SV8.5mm | 13 | 0.62 | 12.0 | C-8 | 1.22/31.0 | 0.40/10.0 | 500 | Xenon | |
| KK10XE | 50056 | Festoon 10mm | SV8.5mm | 13.5 | 0.37 | 4.0 | C-8 | 1.22/31.0 | 0.40/10.0 | 5000 | Xenon | |
| KN10XE | 50076 | Festoon 10mm | SV8.5mm | 13.5 | 0.37 | 4.0 | C-8 | 1.53/39.0 | 0.40/10.0 | 5000 | Xenon | |
| KO10XE | 50086 | Festoon 10mm | SV8.5mm | 13.5 | 0.37 | 4.0 | C-8 | 1.73/44.0 | 0.40/10.0 | 5000 | Xenon | |
| KO16XE | 50090 | Festoon 10mm | SV8.5mm | 13.5 | 0.74 | 9.55 | C-8 | 1.73/44.0 | 0.40/10.0 | 5000 | Xenon | |
| KK20XE | 50062 | Festoon 10mm | SV8.5mm | 26 | 0.192 | 4.0 | C-8 | 1.22/31.0 | 0.40/10.0 | 5000 | Xenon | |
| KL20XE | 50072 | Festoon 10mm | SV8.5mm | 26 | 0.192 | 4.0 | C-8 | 1.45/37.0 | 0.40/10.0 | 5000 | Xenon | |
| KN20XE | 50082 | Festoon 10mm | SV8.5mm | 26 | 0.192 | 4.0 | C-8 | 1.53/39.0 | 0.40/10.0 | 5000 | Xenon | |
| KO20XE | 50092 | Festoon 10mm | SV8.5mm | 26 | 0.192 | 4.0 | C-8 | 1.73/44.0 | 0.40/10.0 | 5000 | Xenon | |
| KL23XE | 50074 | Festoon 10mm | SV8.5mm | 26 | 0.385 | 9.55 | C-8 | 1.45/37.0 | 0.40/10.0 | 3000 | Xenon | |
| KO23XE | 50094 | Festoon 10mm | SV8.5mm | 26 | 0.385 | 9.55 | C-8 | 1.73/44.0 | 0.40/10.0 | 3000 | Xenon | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


G-3½ Miniature 2 Pin Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-----------------|-------|------|------|----------|-----------|-----------|-----------|
| | 10 | 40152 | G-3 1/2 | Miniature 2 Pin | 2.5 | 0.5 | 0.50 | C-6 | 0.94/23.9 | 0.43/11.0 | 3000 |
| | 12 | 40214 | G-3 1/2 | Miniature 2 Pin | 6.3 | 0.15 | 0.35 | C-6 | 0.94/23.9 | 0.43/11.0 | 5000 |
| | 19 | 41070 | G-3 1/2 | Miniature 2 Pin | 14.4 | 0.1 | 0.90 | C-6 | 0.94/23.9 | 0.43/11.0 | 1000 |


G-3½ Miniature Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-------------------|-------|-------|------|----------|-----------|-----------|-----------|
| | A-62 | 48000 | G-3 1/2 | BA-9S | 6.75 | 1.5W | 1.0 | C-2R | 0.94/23.9 | 0.43/11.0 | |
| | A-72 | 48002 | G-3 1/2 | BA-9S | 13.5 | 4W | 2.8 | C-2R | 0.94/23.9 | 0.43/11.0 | 4000 |
| | 130 | 49671 | G-3 1/2 | BA-9S | 6.3 | 0.15 | 0.32 | C-2R | 0.94/23.9 | 0.43/11.0 | 5000 |
| | 219 | 49701 | G-3 1/2 | Miniature Bayonet | 6.3 | 0.25 | 0.5 | C-2V | 0.94/23.9 | 0.43/11.0 | 5000 |
| | 51 | 40756 | G-3 1/2 | Miniature Bayonet | 7.5 | 0.22 | 1.00 | C-2R | 0.94/23.9 | 0.43/11.0 | 1000 |
| | 363 | 40640 | G-3 1/2 | Miniature Bayonet | 14 | 0.2 | 2.00 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| | 53 | 40761 | G-3 1/2 | BA-9S | 14.4 | 0.12 | 1.00 | C-2V | 0.94/23.9 | 0.43/11.0 | 1000 |
| | 1445 | 40271 | G-3 1/2 | Miniature Bayonet | 14.4 | 0.135 | 0.70 | C-2V | 0.94/23.9 | 0.43/11.0 | 2000 |
| | 1450 | 49624 | G-3 1/2 | Miniature Bayonet | 24 | 0.035 | 0.23 | C-2F | 0.94/23.9 | 0.43/11.0 | 3000 |
| | 356 | 40636 | G-3 1/2 | Miniature Bayonet | 28 | 0.17 | 3.50 | C-2V | 0.94/23.9 | 0.43/11.0 | 500 |
| | 265 | 49707 | G-3 1/2 | Miniature Bayonet | 28 | 0.08 | 0.75 | C-2F | 0.94/23.9 | 0.43/11.0 | 5000 |


G-3½ Miniature Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-----------------|-------|------|------|----------|-----------|-----------|-----------|
| | 123 | 40237 | G-3 1/2 | Miniature Screw | 1.25 | 0.3 | 0.10 | S-2 | 0.94/23.9 | 0.43/11.0 | 10 |
| | 131 | 40252 | G-3 1/2 | Miniature Screw | 1.3 | 0.1 | 0.03 | S-2 | 0.94/23.9 | 0.43/11.0 | 50 |
| | 359 | 49787 | G-3 1/2 | Miniature Screw | 1.35 | 0.06 | 0.02 | S-2 | 0.94/23.9 | 0.43/11.0 | 50 |
| | 233 | 49702 | G-3 1/2 | Miniature Screw | 2.33 | 0.27 | 0.42 | C-2R | 0.94/23.9 | 0.43/11.0 | 10 |
| | 245 | 49703 | G-3 1/2 | Miniature Screw | 2.46 | 0.5 | 0.9 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| | 14 | 40264 | G-3 1/2 | Miniature Screw | 2.47 | 0.3 | 0.50 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| | 365 | 49708 | G-3 1/2 | Miniature Screw | 3.69 | 0.5 | 1.6 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| | 13 | 40247 | G-3 1/2 | Miniature Screw | 3.7 | 0.3 | 0.98 | C-2R | 0.94/23.9 | 0.43/11.0 | 15 |
| | 50 | 40746 | G-3 1/2 | Miniature Screw | 7.5 | 0.22 | 1.00 | C-2R | 0.94/23.9 | 0.43/11.0 | 1000 |
| | 1449 | 40276 | G-3 1/2 | Miniature Screw | 14 | 0.2 | 2.00 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |
| | 52 | 40760 | G-3 1/2 | Miniature Screw | 14.4 | 0.1 | 0.75 | C-2V | 0.94/23.9 | 0.43/11.0 | 1000 |
| | 1447 | 49696 | G-3 1/2 | Miniature Screw | 18 | 0.15 | 1.5 | C-2V | 0.94/23.9 | 0.43/11.0 | 250 |

G-4½ Miniature 2 Pin Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-----------------|-------|------|------|----------|-----------|-----------|-----------|
| | 15 | 40290 | G-4 1/2 | Miniature 2 Pin | 7 | 0.4 | 2.0 | C-6 | 1.06/26.9 | 0.59/15.0 | 500 |

G-4½ Miniature Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|---------|-------------------|-------|------|------|----------|-----------|-----------|-----------|---------------|
| | 503 | 40752 | G-4 1/2 | Miniature Bayonet | 5.1 | 0.15 | 0.6 | C-2R | 1.07/27.2 | 0.59/15.0 | 100 | |
| | 455 | 40720 | G-4 1/2 | Miniature Bayonet | 6.5 | 0.5 | 1.9 | C-2R | 1.07/27.2 | 0.59/15.0 | 500 | Flasher |
| | 6253 | 40667 | G-4 1/2 | Miniature Bayonet | 12 | 0.5 | 4.2 | C-2V | 1.07/27.2 | 0.59/15.0 | 200 | |
| | 1895A | 40419 | G-4 1/2 | Miniature Bayonet | 14 | 0.27 | - | C-2F | 1.07/27.2 | 0.59/15.0 | 2000 | Painted Amber |
| | 1895B | 40719 | G-4 1/2 | Miniature Bayonet | 14 | 0.27 | - | C-2F | 1.07/27.2 | 0.59/15.0 | 2000 | Painted Blue |
| | 1895R | 40725 | G-4 1/2 | Miniature Bayonet | 14 | 0.27 | - | C-2F | 1.07/27.2 | 0.59/15.0 | 2000 | Painted Red |
| | 293 | 40550 | G-4 1/2 | Miniature Bayonet | 14 | 0.33 | 2.0 | C-2F | 1.07/27.2 | 0.59/15.0 | 5000 | |
| | 1895 | 40416 | G-4 1/2 | Miniature Bayonet | 14 | 0.27 | 2.0 | C-2F | 1.07/27.2 | 0.59/15.0 | 2000 | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

G-4½ Miniature Screw Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|------------|---------------|----------|-----------------|-----------------|-------|------|------|-----------|-----------|-----------|-----------|---------------|
| | 407 | 40698 | G-4 1/2 | Miniature Screw | 4.9 | 0.3 | 1.20 | C-2R | 1.07/27.2 | 0.59/15.0 | 50 | Flasher Lamp |
| 27 | 40539 | G-4 1/2 | Miniature Screw | 4.9 | 0.3 | 1.4 | C-2R | 1.07/27.2 | 0.59/15.0 | 30 | | |
| 425 | 40702 | G-4 1/2 | Miniature Screw | 5 | 0.5 | 2.30 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 | | |
| 502 | 40750 | G-4 1/2 | Miniature Screw | 5.1 | 0.15 | 0.60 | C-2R | 1.07/27.2 | 0.59/15.0 | 100 | | |
| 31 | 40574 | G-4 1/2 | Miniature Screw | 6.15 | 0.3 | 2.00 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 | | |
| 605 | 40826 | G-4 1/2 | Miniature Screw | 6.15 | 0.5 | 3.40 | C-2R | 1.07/27.2 | 0.59/15.0 | 15 | | |
| 428 | 40704 | G-4 1/2 | Miniature Screw | 12.5 | 0.25 | 2.40 | C-2V | 1.07/27.2 | 0.59/15.0 | 250 | | |
| 258 | 49706 | G-4 1/2 | Miniature Screw | 14 | 0.27 | - | C-2R | 1.07/27.2 | 0.59/15.0 | 500 | | |
| 432 | 49726 | G-4 1/2 | Miniature Screw | 18 | 0.25 | - | C-2V | 1.07/27.2 | 0.59/15.0 | 250 | | |

G-5 Miniature Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|--|---------------|----------|------|-------------------|-------|------|------|----------|-----------|-----------|-----------|
| | 1464 | 49697 | G-5 | Miniature Bayonet | 22 | .25 | 3.8 | C-6 | 1.19/30.2 | .62/15.8 | 250 |

G-6 Candelabra Screw Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|--------------|---------------|----------|------------------|------------------|-------|------|------|-----------|-----------|-----------|-----------|
| | 67K | 49711 | G-6 | Candelabra Screw | 13.5 | 0.59 | 4 | C-2R | 1.38/35.1 | 0.75/19.1 | 5000 |
| 509K | 40754 | G-6 | Candelabra Screw | 24 | 0.18 | 2.8 | C-2F | 1.38/35.1 | 0.75/19.1 | 1000 | |
| 1224K | 49692 | G-6 | Candelabra Screw | 32 | 0.16 | 4 | C-2F | 1.38/35.1 | 0.75/19.1 | 200 | |

G-6 Single Contact Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|-------------|---------------|----------|------------|------------|-------|------|---------|-----------|-----------|-----------|---|---------------|
| | 81 | 40958 | G-6 | SC Bayonet | 6.5 | 1.02 | 6.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 500 | |
| 63 | 40830 | G-6 | SC Bayonet | 7 | 0.63 | 3.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 1000 | | |
| 98 | 41048 | G-6 | SC Bayonet | 13 | 0.62 | 6.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 800 | | |
| 1155 | 40188 | G-6 | SC Bayonet | 13.5 | 0.59 | 4.0 | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 5000 | Series Filaments, Rated 5000 hrs at 14V | |
| 97A | 41046 | G-6 | SC Bayonet | 13.5 | 0.69 | - | C-6 | 1.44/36.6 | 0.75/19.1 | 5000 | Painted Amber, Rated 5000 hrs at 14V | |
| 631 | 40832 | G-6 | SC Bayonet | 14 | 0.63 | 6.0 | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 1000 | Series Filaments | |
| 1251 | 40242 | G-6 | SC Bayonet | 28 | 0.23 | 3.0 | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 2000 | Series Filaments | |
| 303 | 40562 | G-6 | SC Bayonet | 28 | 0.3 | 6.0 | CC-6 | 1.44/36.6 | 0.75/19.1 | 500 | | |
| 623 | 40828 | G-6 | SC Bayonet | 28 | 0.37 | 6.0 | 2C-6 | 1.44/36.6 | 0.75/19.1 | 1000 | Series Filaments | |

G-6 Double Contact Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|-------------|---------------|----------|------------|------------|-------|------|---------|-----------|-----------|-----------|------------------|---------------|
| | 82 | 40964 | G-6 | DC Bayonet | 6.5 | 1.02 | 6.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 500 | |
| 64 | 40835 | G-6 | DC Bayonet | 7 | 0.63 | 3.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 1000 | | |
| 90 | 41005 | G-6 | DC Bayonet | 13 | 0.58 | 6.0 | C-6 | 1.44/36.6 | 0.75/19.1 | 750 | | |
| 96 | 41041 | G-6 | DC Bayonet | 13.5 | 0.69 | 4 | C-2V | 1.44/36.6 | 0.75/19.1 | 5000 | | |
| 1178 | 49091 | G-6 | DC Bayonet | 13.5 | 0.69 | 4 | C-2V | 1.44/36.6 | 0.75/19.1 | 5000 | | |
| 1252 | 40244 | G-6 | DC Bayonet | 28 | 0.23 | 3.0 | C-6/C-6 | 1.44/36.6 | 0.75/19.1 | 2000 | Series Filaments | |
| 304 | 49103 | G-6 | DC Bayonet | 28 | 0.3 | 6 | C-2F | 1.44/36.6 | 0.75/19.1 | 500 | | |
| 624 | 40829 | G-6 | DC Bayonet | 28 | 0.37 | 6.0 | 2C-6 | 1.44/36.6 | 0.75/19.1 | 1000 | Series Filaments | |
| 1224 | 40234 | G-6 | DC Bayonet | 32 | 0.16 | 3.8 | C-2F | 1.44/36.6 | 0.75/19.1 | 200 | | |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

R-12 Single Contact Bayonet Base



| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---------------|----------|------|------------|-------|------|------|----------|-----------|-----------|-----------|---|
| 1383 | 40258 | R-12 | SC Bayonet | 13 | 1.5 | - | CC-8 | 2.63/66.8 | 1.55/39.4 | 300 | Top frosted, Bottom reflectorized |
| 1383TF | 40259 | R-12 | SC Bayonet | 13 | 1.5 | - | CC-8 | 2.63/66.8 | 1.55/39.4 | 300 | Top frosted, Bottom reflectorized, Silicon Coated |
| 1385 | 40262 | R-12 | SC Bayonet | 28 | 0.72 | - | CC-8 | 2.63/66.8 | 1.55/39.4 | 300 | Top frosted, Bottom reflectorized |

RP-11 Single Contact Bayonet Base




| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|-------|------------|-------|------|------|----------|-----------|-----------|-----------|
| 1133 | 40174 | RP-11 | SC Bayonet | 6.2 | 3.91 | 32 | C-6 | 2.25/7.2 | 1.42/36.1 | 200 |
| 1143 | 49635 | RP-11 | SC Bayonet | 12.5 | 1.98 | 32 | C-2R | 2.25/7.2 | 1.42/36.1 | 400 |
| 1143IF | 49636 | RP-11 | SC Bayonet | 12.5 | 1.98 | - | C-2R | 2.25/7.2 | 1.42/36.1 | 400 |
| 1195 | 40210 | RP-11 | SC Bayonet | 12.5 | 3.0 | 50 | C-2V | 2.25/7.2 | 1.42/36.1 | 300 |

RP-11 Double Contact Bayonet Base



| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|-------|------------|-------|------|------|----------|-----------|-----------|-----------|
| 1144 | 49637 | RP-11 | DC Bayonet | 12.5 | 1.98 | 32 | C-2R | 2.25/57.2 | 1.42/36.1 | 400 |
| 1196 | 40213 | RP-11 | DC Bayonet | 12.5 | 3.0 | 50 | C-2V | 2.25/57.2 | 1.42/36.1 | 300 |
| 1062 | 49618 | RP-11 | DC Bayonet | 40 | 0.92 | 50 | C-2V | 2.25/57.2 | 1.42/36.1 | 100 |

S-6 Candelabra Screw Base



| Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|------|------------------|-------|-------|------|----------|-----------|-----------|-----------|
| 6S6/6V | 40798 | S-6 | Candelabra Screw | 6 | 6 | 4.3 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/12V | 40784 | S-6 | Candelabra Screw | 12 | 6 | 3.8 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/18V | 49717 | S-6 | Candelabra Screw | 18 | 6 | 4.0 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/24V | 40792 | S-6 | Candelabra Screw | 24 | 6 | 4.2 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/30V | 40794 | S-6 | Candelabra Screw | 30 | 6 | 4.1 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/48V | 40796 | S-6 | Candelabra Screw | 48 | 6 | 3.7 | C-6 | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/60V | 40800 | S-6 | Candelabra Screw | 60 | 6 | 3.4 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 3S6/5-120V | 40552 | S-6 | Candelabra Screw | 120 | 3 | 0.9 | C-7A | 1.88/47.8 | 0.75/19.1 | 3000 |
| 6S6/120V | 40786 | S-6 | Candelabra Screw | 120 | 6 | 3.1 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 3S6/5-130V | 40554 | S-6 | Candelabra Screw | 130 | 3 | 0.9 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/130V | 40788 | S-6 | Candelabra Screw | 130 | 6 | 3.0 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/145V | 40789 | S-6 | Candelabra Screw | 145 | 6 | 1.4 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/155V | 40790 | S-6 | Candelabra Screw | 155 | 6 | 2.6 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 6S6/230V | 40791 | S-6 | Candelabra Screw | 230 | 6 | 0.9 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |
| 10S6/230V | 42446 | S-6 | Candelabra Screw | 230 | 10 | 4.8 | C-7A | 1.88/47.8 | 0.75/19.1 | 1500 |

S-6 Double Contact Bayonet Base



| Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|------|------------|-------|-------|------|----------|-----------|-----------|-----------|
| 6S6DC/6V | 40814 | S-6 | DC Bayonet | 6 | 6 | 4.3 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/12V | 40802 | S-6 | DC Bayonet | 12 | 6 | 3.8 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/24V | 40808 | S-6 | DC Bayonet | 24 | 6 | 4.2 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/30V | 40810 | S-6 | DC Bayonet | 30 | 6 | 4.1 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/32V | 40811 | S-6 | DC Bayonet | 32 | 6 | 4.0 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/48V | 40812 | S-6 | DC Bayonet | 48 | 6 | 3.7 | C-6 | 1.82/46.2 | 0.75/19.1 | 1500 |
| 6S6DC/60V | 40816 | S-6 | DC Bayonet | 60 | 6 | 3.4 | C-7A | 1.82/46.2 | 0.75/19.1 | 1500 |
| 3S6/5DC-120V | 40556 | S-6 | DC Bayonet | 120 | 3 | 0.9 | C-7A | 1.82/46.2 | 0.75/19.1 | 3000 |

Continued on next page ►►




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com


MINIATURE

S-6 Double Contact Bayonet Base (Continued)


|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|----------------------|----------|------|------------|------------|-------|------|----------|-----------|-----------|-----------|
| | 356/5DC-130V* | 40558 | | S-6 | DC Bayonet | 130 | 3 | 0.9 | C-7A | 1.82/46.2 | 0.75/19.1 |
| 656DC/130V* | 40806 | | S-6 | DC Bayonet | 130 | 6 | 3.0 | C-7A | 1.82/46.2 | 0.75/19.1 | 1500* |
| 656DC/145V | 40807 | | S-6 | DC Bayonet | 145 | 6 | 1.4 | C-7A | 1.82/46.2 | 0.75/19.1 | 1500 |
| 1056DC/250V | 40149 | | S-6 | DC Bayonet | 250 | 10 | 4.8 | C-7A | 1.82/46.2 | 0.75/19.1 | 1500 |

* 130 volt lamps are rated at **3,750** hours when operated at 120 volts.

S-8 Single Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|------|------------|------------|-------|------|----------|-----------|-----------|-----------|---------------------------|
| | 1651 | 40316 | | S-8 | SC Bayonet | 5 | 0.6 | 3 | C-6 | 2.00/50.8 | 1.04/26.4 | 20 |
| 1129 | 40170 | | S-8 | SC Bayonet | 6.4 | 2.63 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 200 | |
| 1619 | 49626 | | S-8 | SC Bayonet | 6.7 | 1.9 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 500 | |
| 87 | 40986 | | S-8 | SC Bayonet | 6.8 | 1.91 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| 93 | 41033 | | S-8 | SC Bayonet | 12.8 | 1.04 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 700 | |
| 1295 | 40246 | | S-8 | SC Bayonet | 12.5 | 3.0 | 50 | C-6 | 2.00/50.8 | 1.04/26.4 | 200 | |
| 1295NA | 42172 | | S-8 | SC Bayonet | 12.5 | 3.0 | 37 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | Hi-Temp Amber Paint |
| 1093 | 49684 | | S-8 | SC Bayonet | 12.8 | 1.19 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 1000 | |
| 1141 | 40176 | | S-8 | SC Bayonet | 12.8 | 1.6 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 1500 | |
| 1141LL | 42514 | | S-8 | SC Bayonet | 12.8 | 1.6 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 2000 | Long Life, Krypton Filled |
| 1141IF | 40115 | | S-8 | SC Bayonet | 12.8 | 1.6 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1000 | Inside Frosted |
| 1073 | 40165 | | S-8 | SC Bayonet | 12.8 | 1.8 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 200 | |
| 1156 | 40190 | | S-8 | SC Bayonet | 12.8 | 2.1 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | |
| 1156LL | 42516 | | S-8 | SC Bayonet | 12.8 | 2.1 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 2400 | Long Life, Krypton Filled |
| 1156A | 44030 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Painted Amber |
| 1156B | 00354 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Blue Paint |
| 1156G | 00352 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Green Paint |
| 1156P | 00355 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Purple Paint |
| 1156R | 00351 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Red Paint |
| 1156Y | 00353 | | S-8 | SC Bayonet | 12.8 | 2.1 | - | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Yellow Paint |
| 1156NA | 40193 | | S-8 | SC Bayonet | 12.8 | 2.1 | 24 | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | Hi-Temp Amber Paint |
| 2396 | 40504 | | S-8 | SC Bayonet | 12.8 | 2.23 | 40 | C-6 | 2.00/50.8 | 1.04/26.4 | 400 | |
| 199 | 40445 | | S-8 | SC Bayonet | 12.8 | 2.25 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | |
| 7506 | 42241 | | S-8 | SC Bayonet | 13.5 | 1.86 | 36.6 | C-6 | 2.00/50.8 | 1.04/26.4 | 350 | ECE Type - P21W |
| 7511 | 00233 | | S-8 | SC Bayonet | 28 | 1.00 | 35 | C-6 | 2.00/50.8 | 1.04/26.4 | 350 | ECE Type - P21W/24V |
| P21-W | 44009 | | S-8 | SC Bayonet | 13.5 | 1.86 | 36.6 | C-6 | 2.06/52.5 | 1.05/26.5 | 350 | E-Mark |
| P25-1 | 40082 | | S-8 | SC Bayonet | 13.5 | 1.86 | 36.6 | C-6 | 2.06/52.5 | 1.05/26.5 | 350 | E-Mark |
| 1591 | 40305 | | S-8 | SC Bayonet | 28 | 0.61 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 1000 | |
| 1691 | 40324 | | S-8 | SC Bayonet | 28 | 0.61 | 15 | 2C-6 | 2.00/50.8 | 1.04/26.4 | 1000 | Series Filaments |
| 2232 | 42384 | | S-8 | SC Bayonet | 28 | 0.643 | 18 | CC-8 | 2.00/50.8 | 1.04/26.4 | 2000 | Spiral lead |
| 307 | 40568 | | S-8 | SC Bayonet | 28 | 0.67 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| 1203 | 40232 | | S-8 | SC Bayonet | 28 | 0.71 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 400 | |
| 2233 | 42386 | | S-8 | SC Bayonet | 28 | 0.766 | 21 | CC-8 | 2.00/50.8 | 1.04/26.4 | 2000 | Spiral lead |
| 315 | 40580 | | S-8 | SC Bayonet | 28 | 0.9 | 32 | CC-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| 1683 | 40322 | | S-8 | SC Bayonet | 28 | 1.02 | 32 | 2C-6 | 2.00/50.8 | 1.04/26.4 | 500 | Series Filaments |

S-8 BAZ15D Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|------|--------|------|--------------|----------|-----------|-----------|-----------|
| | 7225 | 42237 | | S-8 | BAZ15D | 13.5 | 1.852/0.0370 | 35/1.2 | C-6 | 2.0/50.8 | 1.04/26.4 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


S-8 Double Contact Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|------|------------|---------|-----------|------|----------|-----------|-----------|------------|------------------|
| | | | | | | | | | | | | |
|  | 1130 | 40172 | S-8 | DC Bayonet | 6.4 | 2.63 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 200 | |
| | 1158 | 40202 | S-8 | DC Bayonet | 6.4/7 | 2.63/0.75 | 21/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 | |
| | 1493 | 40701 | S-8 | DC Bayonet | 6.4 | 2.75 | 23 | C-6 | 2.00/50.8 | 1.04/26.4 | 100 | |
| | 88 | 40992 | S-8 | DC Bayonet | 6.8 | 1.91 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| | 94 | 41037 | S-8 | DC Bayonet | 12.8 | 1.04 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 700 | |
| | 1152 | 40184 | S-8 | DC Bayonet | 12.8 | 1.34 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 500 | |
| | 1176 | 40204 | S-8 | DC Bayonet | 12.8/14 | 1.34/0.59 | 21/6 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1500 | |
| | 1076 | 40167 | S-8 | DC Bayonet | 12.8 | 1.8 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 200 | |
| | 1156DC | 44334 | S-8 | DC Bayonet | 12.8 | 2.1 | 32 | C-6 | 2.00/50.8 | 1.04/26.4 | 1200 | |
| | 306 | 40566 | S-8 | DC Bayonet | 28 | 0.51 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| | 1692 | 40326 | S-8 | DC Bayonet | 28 | 0.61 | 15 | 2C-6 | 2.00/50.8 | 1.04/26.4 | 1000 | Series Filaments |
| | 308 | 40570 | S-8 | DC Bayonet | 28 | 0.67 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 300 | |
| | 1204 | 49080 | S-8 | DC Bayonet | 28 | 0.71 | 21 | C-6 | 2.00/50.8 | 1.04/26.4 | 400 | |
| | 1638 | 40315 | S-8 | DC Bayonet | 28 | 1.02 | 32 | 2C-6 | 2.00/50.8 | 1.04/26.4 | 500 | |
| | 1228 | 49693 | S-8 | DC Bayonet | 32 | 0.45 | 15 | C-6 | 2.00/50.8 | 1.04/26.4 | 150 | |
| | 895 | 41004 | S-8 | DC Bayonet | 40 | 0.53 | 14 | CC-6 | 2.00/50.8 | 1.04/26.4 | 3800 | |
| | 7537 | 00234 | S-8 | DC Bayonet | 28/28 | 1.00/0.36 | 35/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300/2000 | |

S-8 Double Contact Index Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|------|------------------|-----------|-----------|--------|----------|-----------|-----------|--------------|--|
| | | | | | | | | | | | | |
|  | 1154 | 40186 | S-8 | DC Index Bayonet | 6.4/7 | 2.63/0.75 | 21/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 1000 | |
| | 1016 | 40166 | S-8 | DC Index Bayonet | 12.8/14 | 1.34/0.59 | 21/6 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300 / 1000 | |
| | 1034 | 40161 | S-8 | DC Index Bayonet | 12.8/14 | 1.8/0.59 | 32/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 200 / 5000 | |
| | 2057 | 40448 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | |
| | 2057LL | 42522 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400 / 10000 | Long Life |
| | 2057A | 42262 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.48 | - | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | Painted Amber |
| | 2057NA | 40455 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.48 | 24/1.5 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | Hi-Temp Amber Paint |
| | 2057NALL | 42524 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.48 | 24/1.5 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400 / 10000 | Hi-Temp Amber Paint, Long Life Krypton Filled |
| | 1157 | 40194 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.59 | 32/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | |
| | 1157LL | 42518 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.59 | 32/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400 / 10000 | Long Life Krypton Filled |
| | 1157A | 40197 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.59 | - | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | Painted Amber Glass |
| | 1157NA | 40199 | S-8 | DC Index Bayonet | 12.8/14 | 2.1/0.59 | 24/2.2 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | Hi-Temp Amber Paint |
| | 2397 | 42229 | S-8 | DC Index Bayonet | 12.8/14 | 2.23/0.48 | 40/2 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 2000 | |
| | 2357 | 40498 | S-8 | DC Index Bayonet | 12.8/14 | 2.23/0.59 | 40/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 | |
| | 2357LL | 42526 | S-8 | DC Index Bayonet | 12.8/14 | 2.23/0.59 | 40/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 800 / 10000 | Long Life Krypton Filled |
| | 2357A | 42304 | S-8 | DC Index Bayonet | 12.8/14 | 2.23/0.59 | - | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 | Painted Amber Glass |
| | 2357NA | 40501 | S-8 | DC Index Bayonet | 12.8/14 | 2.23/0.59 | 30/2.2 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 5000 | Hi-Temp Amber Paint |
| | 198 | 40443 | S-8 | DC Index Bayonet | 12.8/14 | 2.25/0.59 | 32/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 1200 / 5000 | |
| | 198LL | 42508 | S-8 | DC Index Bayonet | 12.8/14 | 2.25/0.59 | 32/3 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 2400 / 10000 | Long Life Krypton Filled |
| | 7528 | 42245 | S-8 | DC Index Bayonet | 13.5/13.5 | 1.86/0.44 | 35/2.8 | C-6/C-6 | 2.00/50.8 | 1.04/26.4 | 300/2000 | ECE Type - P21/5W |
| | P21/SW | 44011 | S-8 | DC Index Bayonet | 13.5/13.5 | 1.86/0.44 | 35/2.8 | C-6/C-6 | 2.06/52.5 | 1.05/26.5 | 300/2000 | E Mark |
| | P25-2 | 40083 | S-8 | DC Index Bayonet | 13.5/13.5 | 1.86/0.44 | 35/2.8 | C-6/C-6 | 2.06/52.5 | 1.05/26.5 | 300/2000 | E-Mark |
| | 1662 | 42382 | S-8 | DC Index Bayonet | 28/28 | 0.93/0.34 | 32/6 | CC-6/C-6 | 2.00/50.8 | 1.04/26.4 | 400 / 1000 | Filament connections reversed from normal DC Index |

S-8 Single Contact Prefocus Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Replaces |
|---|---------------|----------|------|-------------|-------|------|------|----------|-----------|-----------|-----------|----------|
| | | | | | | | | | | | | |
|  | 55A/S8 | 41702 | S-8 | SC Prefocus | 12 | 0.55 | 5.57 | C-8S | 2.09/53.1 | 1.04/26.4 | 500 | CM2374X |
| | 77A/S8 | 41704 | S-8 | SC Prefocus | 12 | 0.77 | 9.55 | C-8S | 2.09/53.1 | 1.04/26.4 | 500 | CM2033X |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


S-8 Double Contact Prefocus Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------------|-------------|-------|------|-------|-----------|-----------|-----------|-----------|-----------------|
| | 1096 | 40401 | S-8 | DC Prefocus | 6 | 4.5 | 30 | C-2R | 2.00/50.8 | 1.04/26.4 | 500 | |
| 1096X | 40403 | S-8 | DC Prefocus | 6 | 4.5 | 30 | C-2R | 2.00/50.8 | 1.04/26.4 | 500 | | Silver Contacts |
| 1468X | 40405 | S-8 | DC Prefocus | 6 | 4.5 | 30 | C-2R | 2.00/50.8 | 1.04/26.4 | 500 | | Silver Contacts |
| 1460 | 40279 | S-8 | DC Prefocus | 6.5 | 2.75 | 23 | C-6 | 2.00/50.8 | 1.04/26.4 | 100 | | |
| 1460X | 40281 | S-8 | DC Prefocus | 6.5 | 2.75 | 23 | C-6 | 2.00/50.8 | 1.04/26.4 | 100 | | Silver Contacts |
| 1630 | 40311 | S-8 | DC Prefocus | 6.5 | 2.75 | 23 | C-6 | 2.00/50.8 | 1.04/26.4 | 100 | | |
| 1631X | 40312 | S-8 | DC Prefocus | 6.5 | 2.75 | 23 | C-6 | 2.00/50.8 | 1.04/26.4 | 100 | | Silver Contacts |
| 1649 | 40705 | S-8 | DC Prefocus | 6.5 | 2.75 | 23 | FC-6Z | 2.00/50.8 | 1.04/26.4 | 100 | | |
| 1634 | 40313 | S-8 | DC Prefocus | 20 | 1.0 | 24 | CC-6 | 2.00/50.8 | 1.04/26.4 | 200 | | |


S-8 Plastic Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|---------------|---------------|------------|----------|---------|-----------|-----------|--------------|-------------|---|
| | 3057 | 40600 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200 / 5000 | |
| 3057A | 42621 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.48 | - | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 | | Painted Amber |
| 3057K | 42600 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000 / 10000 | | Long Life Krypton Filled |
| 3057NA | 40603 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.48 | 24/1.5 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200 / 5000 | | Hi-Temp Amber Paint |
| 3155 | 42288 | S-8 | Plastic Wedge | 12.8 | 1.6 | 21 | C-6 | 2.09/53.1 | 1.04/26.4 | 1500 | | |
| 3155K | 49718 | S-8 | Plastic Wedge | 12.8 | 1.44 | 21 | C-6 | 2.09/53.1 | 1.04/26.4 | 2000 | | Long Life Krypton Filled |
| 3156 | 42292 | S-8 | Plastic Wedge | 12.8 | 2.1 | 32 | C-6 | 2.09/53.1 | 1.04/26.4 | 1200 | | |
| 3156A | 49035 | S-8 | Plastic Wedge | 12.8 | 2.1 | - | C-6 | 2.09/53.1 | 1.04/26.4 | 1200 | | Painted Amber |
| 3156K | 42603 | S-8 | Plastic Wedge | 12.8 | 2.1 | 32 | C-6 | 2.09/53.1 | 1.04/26.4 | 2000 | | Long Life Krypton Filled |
| 3157 | 40610 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.59 | 32/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200 / 5000 | | |
| 3157A | 42624 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.59 | 24/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200/5000 | | Painted Amber |
| 3157K | 42606 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.59 | 32/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000 / 10000 | | Long Life Krypton Filled |
| 3157NA | 40613 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.59 | 24/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 1200 / 5000 | | Hi-Temp Amber Paint |
| 3357 | 42189 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 40/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | |
| 3357A | 49037 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 30/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | Painted Amber |
| 3357NA | 42195 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 30/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | Hi-Temp Amber Paint |
| 3457/3357 | 42192 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 40/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | |
| 3457A | 42597 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 30/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | Painted Amber |
| 3457/3357K | 42609 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 40/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 800 / 10000 | | Long Life |
| 3457/3357NA | 42198 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 30/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 400 / 5000 | | Hi-Temp Amber Paint |
| 3757NAK | 00183 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.59 | 24/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 2000 / 10000 | | Long Life Krypton Filled, Hi-Temp Amber Paint |
| 4057K | 05390 | S-8 | Plastic Wedge | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000/10000 | | Long Life Krypton Filled |
| 4114K | | S-8 | Plastic Wedge | 14.4/14.4 | 2.23/0.59A | 32/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 5000/10000 | | |
| 4157K | 81143 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 32/3 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 4000 / 10000 | | Long Life Krypton Filled |
| 4157NAK | 81136 | S-8 | Plastic Wedge | 12.8/14 | 2.23/0.59 | 24/2.2 | C-6/C-6 | 2.09/53.1 | 1.04/26.4 | 5000 / 10000 | | Long Life Krypton Filled, Hi-Temp Amber Paint |

S-8 Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|---------------|---------|----------|------|----------|-----------|-----------|-------------|
| | 2058U | 40451 | S-8 | Wire Terminal | 12.8/14 | 2.1/0.48 | 32/2 | C-6/C-6 | 1.81/46.0 | 1.04/26.4 | 1200 / 5000 |

S-11 Single Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|------------|-------|------|------|----------|-----------|-----------|-----------|
| | 311 | 40576 | S-11 | SC Bayonet | 28 | 1.29 | 50 | CC-2V | 2.38/60.5 | 1.35/34.3 | 300 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-3/4 Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|-------|---------------|---------------|------|-------|----------|-----------|-----------|-----------|
| | 2 | 40446 | | T-3/4 | Wire Terminal | 5 | 0.021 | 0.03 | C-2R | 0.20/5.1 | 0.09/2.3 |
| 6833 | 40864 | | T-3/4 | Wire Terminal | 5 | 0.06 | 0.05 | C-2R | 0.20/5.1 | 0.09/2.3 | 25000 |


T-1 Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|---------------|---------------|-------|------|----------|-----------|-----------|-----------|
| | 6022 | 40824 | | T-1 | Wire Terminal | 5 | 0.02 | 0.03 | C-2R | 0.25/6.4 | 0.13/3.2 |
| 680 | 40852 | | T-1 | Wire Terminal | 5 | 0.06 | 0.03 | C-2R | 0.25/6.4 | 0.13/3.2 | 60000 |
| 683 | 40856 | | T-1 | Wire Terminal | 5 | 0.06 | 0.05 | C-2R | 0.25/6.4 | 0.13/3.2 | 25000 |
| 715 | 40884 | | T-1 | Wire Terminal | 5 | 0.115 | 0.15 | C-2R | 0.25/6.4 | 0.13/3.2 | 40000 |
| 7219 | 42390 | | T-1 | Wire Terminal | 12 | 0.06 | 0.15 | C-2F | 0.25/6.4 | 0.13/3.2 | 10000 |
| 8111 | 40960 | | T-1 | Wire Terminal | 14 | 0.065 | 0.15 | C-2F | 0.25/6.4 | 0.13/3.2 | 10000 |
| 6838 | 40866 | | T-1 | Wire Terminal | 28 | 0.024 | 0.15 | CC-2F | 0.25/6.4 | 0.13/3.2 | 16000 |


T-1 Bi-Pin Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|--|---------------|----------|------|-------------------|-------------------|-------|------|----------|-----------|-----------|-----------|
| | 42005 | 42005 | | T-1 | Bi-Pin .050 (std) | 1.35 | 0.32 | 0.17 | C-2R | 0.38/9.7 | 0.13/3.2 |
| 42006 | 42006 | | T-1 | Bi-Pin .050 (std) | 2.7 | 0.32 | 0.70 | C-2R | 0.38/9.7 | 0.13/3.2 | 5 |
| 7683 | 40944 | | T-1 | Bi-Pin .050 (std) | 5 | 0.06 | 0.05 | C-2R | 0.38/9.7 | 0.13/3.2 | 25000 |
| 7714 | 40946 | | T-1 | Bi-Pin .050 (std) | 5 | 0.075 | 0.09 | C-2R | 0.38/9.7 | 0.13/3.2 | 25000 |
| 7715 | 40948 | | T-1 | Bi-Pin .050 (std) | 5 | 0.115 | 0.15 | C-2R | 0.38/9.7 | 0.13/3.2 | 40000 |
| 7839 | 40950 | | T-1 | Bi-Pin .050 (std) | 28 | 0.024 | 0.15 | CC-2F | 0.38/9.7 | 0.13/3.2 | 40000 |


T-1 Sub-Midget Flange Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|--------------------|--------------------|-------|------|----------|-----------|-----------|-----------|
| | 685 | 40872 | | T-1 | Sub-Midget Flanged | 5 | 0.06 | 0.05 | C-2R | 0.38/9.7 | 0.13/3.2 |
| 6839 | 40868 | | T-1 | Sub-Midget Flanged | 28 | 0.024 | 0.15 | CC-2F | 0.38/9.7 | 0.13/3.2 | 16000 |


T-1 1/4 Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|---------------|---------------|------|------|----------|-----------|-----------|-----------|
| | 2114 | 40464 | | T-1 1/4 | Wire Terminal | 6 | 0.06 | 0.13 | C-2R | 0.46/11.7 | 0.17/4.3 |
| 8610 | 40976 | | T-1 1/4 | Wire Terminal | 6.3 | 0.2 | 0.55 | C-2R | 0.46/11.7 | 0.17/4.3 | 5000 |
| 8640 | 40982 | | T-1 1/4 | Wire Terminal | 14 | 0.08 | 0.50 | C-2F | 0.46/11.7 | 0.17/4.3 | 1000 |
| 8627 | 40978 | | T-1 1/4 | Wire Terminal | 28 | 0.04 | 0.32 | C-2F | 0.46/11.7 | 0.17/4.3 | 1000 |

T-1 1/4 Bi-Pin Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-------------|-------------|------|------|----------|-----------|-----------|-----------|
| | 7646 | 49713 | | T-1 1/4 | Bi-Pin .100 | 14 | 0.08 | 0.5 | C-2R | 0.60/15.2 | 0.17/4.3 |
| 7632 | 40938 | | T-1 1/4 | Bi-Pin .100 | 28 | 0.04 | 0.32 | C-2F | 0.60/15.2 | 0.17/4.3 | 1000 |

T-1 1/2 MF Series

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|---------|-----------|------|------|----------|-----------|------------|-----------|
| | 2721MF | | | T-1 1/2 | MF Series | 12 | 0.1 | 0.48 | C-2V | 0.925/23.5 | 0.20/5.1 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-1½ Sub-Miniature Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-----------------------|-----------------------|-------|------|----------|-----------|-----------|-----------|
| | E79 | 49456 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 6 | 0.2 | 0.60 | C-2R | 0.80/20.3 | 0.20/5.1 |
| E84 | 49457 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 6.3 | 0.04 | 0.03 | C-2R | 0.80/20.3 | 0.20/5.1 | 20000 |
| E86 | 49459 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 6.3 | 0.2 | 0.40 | C-2F | 0.80/20.3 | 0.20/5.1 | 20000 |
| 2721 | 42231 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 12 | 0.1 | 0.48 | C-2V | 0.80/20.3 | 0.20/5.1 | 1000 |
| E37 | 49453 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 14 | 0.09 | 0.50 | C-2F | 0.80/20.3 | 0.20/5.1 | 2500 |
| E74 | 49455 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 14 | 0.1 | 0.70 | C-2F | 0.80/20.3 | 0.20/5.1 | 1000 |
| E73 | 49454 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 14 | 0.08 | 0.30 | C-2F | 0.80/20.3 | 0.20/5.1 | 15000 |
| E85 | 49458 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 28 | 0.04 | 0.30 | C-2F | 0.80/20.3 | 0.20/5.1 | 7000 |
| E17 | 49452 | | T-1 1/2 | W2x4.6d Sub-Min Wedge | 28 | 0.065 | 0.65 | C-2F | 0.80/20.3 | 0.20/5.1 | 5000 |


T-1¾ Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|---------------|---------------|-------|------|----------|-----------|-----------|-----------|
| | 2200 | 40488 | | T-1 3/4 | Wire Terminal | 5 | 0.06 | 0.05 | C-2R | 0.52/13.2 | 0.23/5.9 |
| 2181 | 49106 | | T-1 3/4 | Wire Terminal | 6.3 | 0.2 | 0.4 | C-2F | 0.52/13.2 | 0.23/5.9 | 20000 |
| 2112 | 49700 | | T-1 3/4 | Wire Terminal | 6.3 | 0.2 | 0.55 | C-2F | 0.52/13.2 | 0.23/5.9 | 5000 |
| 1869 | 49698 | | T-1 3/4 | Wire Terminal | 10 | 0.014 | - | C-2F | 0.52/13.2 | 0.23/5.9 | 50000 |
| 2174 | 40470 | | T-1 3/4 | Wire Terminal | 12 | 0.04 | 0.10 | C-2F | 0.52/13.2 | 0.23/5.9 | 10000 |
| 2182 | 40478 | | T-1 3/4 | Wire Terminal | 14 | 0.08 | 0.30 | C-2F | 0.52/13.2 | 0.23/5.9 | 40000 |
| 2162 | 40468 | | T-1 3/4 | Wire Terminal | 14 | 0.1 | 0.50 | C-2F | 0.52/13.2 | 0.23/5.9 | 10000 |
| 2176 | 40472 | | T-1 3/4 | Wire Terminal | 24 | 0.05 | 0.50 | C-2F | 0.52/13.2 | 0.23/5.9 | 1000 |
| 2187 | 40484 | | T-1 3/4 | Wire Terminal | 28 | 0.04 | 0.30 | C-2F | 0.52/13.2 | 0.23/5.9 | 10000 |


T-1¾ Sub-Miniature Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|-------------------------|-------------------------|-------|-------|----------|-----------|-----------|-----------|
| | 56 | 44326 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 5 | 0.115 | 0.15 | C-2R | 0.80/20.3 | 0.23/5.9 |
| 79 | 44328 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 6 | 0.2 | 0.60 | C-2R | 0.80/20.3 | 0.23/5.9 | 1000 |
| 84 | 40968 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 6.3 | 0.04 | 0.03 | C-2R | 0.80/20.3 | 0.23/5.9 | 20000 |
| 86 | 40974 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 6.3 | 0.2 | 0.40 | C-2F | 0.80/20.3 | 0.23/5.9 | 20000 |
| 86G | 00361 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 6.3 | 0.2 | 0.06 | C-2F | 0.80/20.3 | 0.23/5.9 | 20000 |
| 18 | 40350 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 14 | 0.04 | 0.13 | C-2F | 0.80/20.3 | 0.23/5.9 | 5000 |
| 37 | 40648 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 14 | 0.09 | 0.50 | C-2F | 0.80/20.3 | 0.23/5.9 | 2500 |
| 74 | 40928 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 14 | 0.1 | 0.70 | C-2F | 0.80/20.3 | 0.23/5.9 | 1000 |
| 70 | 40876 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 14 | 0.15 | 1.50 | C-2F | 0.80/20.3 | 0.23/5.9 | 100 |
| 73 | 40898 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 14 | 0.08 | 0.30 | C-2F | 0.80/20.3 | 0.23/5.9 | 15000 |
| 85 | 40972 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 28 | 0.04 | 0.30 | C-2F | 0.80/20.3 | 0.23/5.9 | 7000 |
| 17 | 44322 | | T-1 3/4 | W2.1x4.9d Sub-Min Wedge | 28 | 0.065 | 0.65 | C-2F | 0.80/20.3 | 0.23/5.9 | 5000 |

T-1¾ BA-7S Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|---------|-------|------|------|----------|-----------|-----------|-----------|
| | SE1274 | 40117 | | T-1 3/4 | BA-7S | 14.4 | 0.12 | 1.00 | C-2F | 0.80/20.3 | 0.23/5.9 |

T-1¾ Midget Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|---------|--------------|--------------|-------|------|----------|-----------|-----------|-----------|
| | 1769 | 40344 | | T-1 3/4 | Midget Screw | 2.5 | 0.2 | 0.20 | C-2R | 0.72/18.3 | 0.23/5.9 |
| 1768 | 40342 | | T-1 3/4 | Midget Screw | 6 | 0.2 | 0.60 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 |
| 1775 | 40346 | | T-1 3/4 | Midget Screw | 6.3 | 0.075 | 0.23 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 |
| 378 | 40662 | | T-1 3/4 | Midget Screw | 6.3 | 0.2 | 0.40 | C-2F | 0.72/18.3 | 0.23/5.9 | 20000 |
| 8362 | 42418 | | T-1 3/4 | Midget Screw | 14 | 0.08 | 0.30 | C-2F | 0.69/17.5 | 0.23/5.9 | 15000 |
| 373 | 40654 | | T-1 3/4 | Midget Screw | 14 | 0.08 | 0.50 | C-2F | 0.72/18.3 | 0.23/5.9 | 1500 |
| 399 | 40692 | | T-1 3/4 | Midget Screw | 28 | 0.04 | 0.30 | C-2F | 0.72/18.3 | 0.23/5.9 | 7000 |
| 335 | 40607 | | T-1 3/4 | Midget Screw | 28 | 0.04 | 0.34 | C-2F | 0.72/18.3 | 0.23/5.9 | 4000 |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

T-1¾ Midget Flange Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---------------|----------|---------|----------------|---------|-------|-------|----------|-----------|-----------|-----------|----------------|
| | | | | | | | | | | | |
| C7A | 40029 | T-1 3/4 | Midget Flanged | 105-125 | 0.7ma | | Neon | 0.94/23.9 | 0.23/5.9 | 25000 | |
| 251 | 40524 | T-1 3/4 | Midget Flanged | 2.47 | 0.3 | 0.45 | C-2R | 0.63/16.0 | 0.23/5.9 | 30 | |
| 345 | 40624 | T-1 3/4 | Midget Flanged | 6 | 0.04 | 0.03 | C-2V | 0.63/16.0 | 0.23/5.9 | 10000 | |
| A1H | 40006 | T-1 3/4 | Midget Flanged | 105-125 | 1.2ma | | Neon | 0.63/16 | 0.23/5.9 | 25000 | |
| C9A | 40030 | T-1 3/4 | Midget Flanged | 105-125 | 1.8ma | | Neon | 0.94/23.9 | 0.23/5.9 | 25000 | |
| 328 | 40598 | T-1 3/4 | Midget Flanged | 6 | 0.2 | 0.60 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 | 0.34CP at 5.0V |
| 380 | 40666 | T-1 3/4 | Midget Flanged | 6.3 | 0.04 | 0.02 | C-2V | 0.63/16.0 | 0.23/5.9 | 20000 | |
| 377 | 40660 | T-1 3/4 | Midget Flanged | 6.3 | 0.075 | 0.23 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 | |
| 381 | 40668 | T-1 3/4 | Midget Flanged | 6.3 | 0.2 | 0.40 | C-2F | 0.63/16.0 | 0.23/5.9 | 20000 | |
| 344 | 40622 | T-1 3/4 | Midget Flanged | 10 | 0.014 | 0.002 | C-2F | 0.63/16.0 | 0.23/5.9 | 50000 | |
| 394 | 40686 | T-1 3/4 | Midget Flanged | 12 | 0.04 | 0.12 | C-2F | 0.63/16.0 | 0.23/5.9 | 20000 | |
| 382 | 40670 | T-1 3/4 | Midget Flanged | 14 | 0.08 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 15000 | |
| 330 | 40599 | T-1 3/4 | Midget Flanged | 14 | 0.08 | 0.50 | C-2F | 0.63/16.0 | 0.23/5.9 | 1500 | |
| 8918 | 41002 | T-1 3/4 | Midget Flanged | 14 | 0.1 | 0.50 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 | |
| 370 | 40650 | T-1 3/4 | Midget Flanged | 18 | 0.04 | 0.15 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 | |
| 385 | 40672 | T-1 3/4 | Midget Flanged | 28 | 0.04 | 0.15 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 | |
| 387 | 40678 | T-1 3/4 | Midget Flanged | 28 | 0.04 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 | |
| 327 | 40596 | T-1 3/4 | Midget Flanged | 28 | 0.04 | 0.34 | C-2F | 0.63/16.0 | 0.23/5.9 | 4000 | |
| 376 | 40658 | T-1 3/4 | Midget Flanged | 28 | 0.06 | 0.34 | C-2F | 0.63/16.0 | 0.23/5.9 | 25000 | |
| 367 | 49709 | T-1 3/4 | Midget Flanged | 10 | 0.04 | 0.08 | C-2F | 0.63/16.0 | 0.23/5.9 | 5000 | |



T-1¾ Midget Groove Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|---------|----------------|-------|------|------|----------|-----------|-----------|-----------|
| 379 | 40664 | T-1 3/4 | Midget Grooved | 6.3 | 0.2 | 0.40 | C-2F | 0.63/16.0 | 0.23/5.9 | 20000 |
| 337 | 40616 | T-1 3/4 | Midget Grooved | 6.3 | 0.2 | 0.60 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 |
| 386 | 40674 | T-1 3/4 | Midget Grooved | 14 | 0.08 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 40000 |
| 388 | 40680 | T-1 3/4 | Midget Grooved | 28 | 0.04 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 25000 |
| 334 | 40606 | T-1 3/4 | Midget Grooved | 28 | 0.04 | 0.34 | C-2F | 0.63/16.0 | 0.23/5.9 | 4000 |



T-1¾ Bi-Pin Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---------------|----------|---------|--------|-------|-------|------|----------|-----------|-----------|-----------|
| 7328 | 42400 | T-1 3/4 | Bi-Pin | 6 | 0.2 | 0.60 | C-2R | 0.63/16.0 | 0.23/5.9 | 1000 |
| 7362 | | | | | | | | | | |
| 7377 | 49056 | T-1 3/4 | Bi-Pin | 6.3 | 0.075 | 0.23 | C-2R | 0.60/15.2 | 0.23/5.9 | 1000 |
| 7381 | 40920 | T-1 3/4 | Bi-Pin | 6.3 | 0.2 | 0.40 | C-2F | 0.63/16.0 | 0.23/5.9 | 20000 |
| 7349 | 42408 | T-1 3/4 | Bi-Pin | 6.3 | 0.2 | 0.55 | C-2R | 0.63/16.0 | 0.23/5.9 | 5000 |
| 7371 | 40910 | T-1 3/4 | Bi-Pin | 12 | 0.04 | 0.12 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 |
| 7382 | 40922 | T-1 3/4 | Bi-Pin | 14 | 0.08 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 40000 |
| 7330 | 40902 | T-1 3/4 | Bi-Pin | 14 | 0.08 | 0.50 | C-2F | 0.63/16.0 | 0.23/5.9 | 1500 |
| 7373 | 40912 | T-1 3/4 | Bi-Pin | 14 | 0.1 | 0.50 | C-2F | 0.63/16.0 | 0.23/5.9 | 10000 |
| 7374 | 49712 | T-1 3/4 | Bi-Pin | 28 | 0.04 | 0.15 | C-2F | 0.60/15.2 | 0.23/5.9 | 10000 |
| 7387 | 40926 | T-1 3/4 | Bi-Pin | 28 | 0.04 | 0.30 | C-2F | 0.63/16.0 | 0.23/5.9 | 25000 |
| 7327 | 40896 | T-1 3/4 | Bi-Pin | 28 | 0.04 | 0.34 | C-2F | 0.60/15.2 | 0.23/5.9 | 4000 |
| 7876 | 40954 | T-1 3/4 | Bi-Pin | 28 | 0.06 | 0.34 | C-2F | 0.60/15.2 | 0.23/5.9 | 25000 |



T-2 Candelabra Screw Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---------------|----------|------|------------------|-------|-------|---------|----------|-----------|-----------|-----------|---------------|
| 12RC | 40223 | T-2 | Candelabra Screw | 12 | 0.17 | 2000EFC | C-2F | 1.22/31.0 | 0.91/23.1 | 12000 | Reflector |
| 24RC | 40515 | T-2 | Candelabra Screw | 24 | 0.073 | 3000EFC | C-2F | 1.22/31.0 | 0.91/23.1 | 10000 | Reflector |
| 28RC | 40549 | T-2 | Candelabra Screw | 28 | 0.4 | 1500EFC | C-2F | 1.22/31.0 | 0.91/23.1 | 5000 | Reflector |
| 48RC | 40743 | T-2 | Candelabra Screw | 48 | 0.05 | - | C-2F | 1.22/31.0 | 0.91/23.1 | 10000 | Reflector |
| 120RC | 40253 | T-2 | Candelabra Screw | 120 | 0.025 | 1000EFC | CC-7A | 1.22/31.0 | 0.91/23.1 | 7500 | Reflector |
| 120RC-Neon | 40297 | T-2 | Candelabra Screw | 120 | 3.5ma | n/a | Neon | 1.22/31.0 | 0.91/23.1 | 10000 | Reflector |






23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-2 Miniature Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|------|-------------------|-------|-------|---------|----------|-----------|-----------|-----------|---------------|
| | 12RB | 44016 | T-2 | Miniature Bayonet | 12 | 0.17 | 2000EFC | C-2F | 1.16/29.5 | 0.91/23.1 | 12000 | Reflector |
| | 60RB | 40821 | T-2 | Miniature Bayonet | 60 | 0.05 | 1800EFC | CC-7A | 1.16/29.5 | 0.91/23.1 | 7500 | Reflector |
| | 120RB | 40231 | T-2 | Miniature Bayonet | 120 | 0.025 | 1000EFC | CC-7A | 1.16/29.5 | 0.91/23.1 | 7500 | Reflector |


T-2 Slide Base 5

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|--------------|-------|-------|---------|----------|-----------|-----------|-----------|
| | 6PSB5 | 40778 | T-2 | Slide Base 5 | 6 | 0.14 | 550EFC | C-2V | 1.11/28.2 | 0.27/6.9 | 20000 |
| | 10ESB5 | 44014 | T-2 | Slide Base 5 | 10 | 0.035 | 450EFC | C-6 | 0.92/23.4 | 0.27/6.9 | 10000 |
| | 12ESB5 | 40218 | T-2 | Slide Base 5 | 12 | 0.04 | 650EFC | C-2V | 0.92/23.4 | 0.27/6.9 | 7500 |
| | 12PSB5 | 40222 | T-2 | Slide Base 5 | 12 | 0.17 | 2000EFC | C-2F | 1.11/28.2 | 0.27/6.9 | 12000 |
| | 16ESB5 | 40291 | T-2 | Slide Base 5 | 16 | 0.04 | 800EFC | C-2F | 0.92/23.4 | 0.27/6.9 | 7500 |
| | 24CSB | 40513 | T-2 | Slide Base 5 | 24 | 0.017 | 100EFC | C-2F | 0.92/23.4 | 0.27/6.9 | 15000 |
| | 24ESB5 | 40507 | T-2 | Slide Base 5 | 24 | 0.04 | 850EFC | C-2F | 0.92/23.4 | 0.27/6.9 | 8000 |
| | 24PSB5 | 40512 | T-2 | Slide Base 5 | 24 | 0.073 | 3000EFC | C-2F | 1.11/28.2 | 0.27/6.9 | 10000 |
| | 28ESB5 | 40544 | T-2 | Slide Base 5 | 28 | 0.04 | 1500EFC | C-2F | 0.92/23.4 | 0.27/6.9 | 6000 |
| | 28PSB5 | 40548 | T-2 | Slide Base 5 | 28 | 0.04 | 1600EFC | C-2F | 1.11/28.2 | 0.27/6.9 | 5000 |
| | 48ESB5 | 40738 | T-2 | Slide Base 5 | 48 | 0.04 | 3000EFC | CC-2F | 0.92/23.4 | 0.27/6.9 | 5000 |
| | 48PSB5 | 40742 | T-2 | Slide Base 5 | 48 | 0.05 | 1800EFC | C-7A | 1.11/28.2 | 0.27/6.9 | 10000 |
| | 60PSB5 | 40822 | T-2 | Slide Base 5 | 60 | 0.05 | 2200EFC | CC-2F | 1.11/28.2 | 0.27/6.9 | 7500 |
| | 120PSB5 | 40230 | T-2 | Slide Base 5 | 120 | 0.025 | 1200EFC | CC-7A | 1.11/28.2 | 0.27/6.9 | 10000 |
| | 120PSB5-Neon | 40229 | T-2 | Slide Base 5 | 120 | 3.5ma | n/a | Neon | 1.12/28.5 | 0.27/6.9 | 10000 |
| | 155PSB5 | 40298 | T-2 | Slide Base 5 | 155 | 0.025 | 1200EFC | CC-7A | 1.11/28.2 | 0.27/6.9 | 10000 |


T-2 Slide Base 2

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|------|--------------|-------|-------|---------|----------|-----------|-----------|-----------|-------------------------------------|
| | 24E2 | 44018 | T-2 | Slide Base 2 | 24 | 0.035 | 600EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 7000 | |
| | 24EX | 44020 | T-2 | Slide Base 2 | 24 | 0.035 | 600EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 8000 | Rounded top, gray base, prick punch |
| | 24X | 40516 | T-2 | Slide Base 2 | 24 | 0.035 | 600EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 8000 | gray base, prick punch |
| | 48C2 | 49549 | T-2 | Slide Base 2 | 48 | 0.035 | 750EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 10,000 | |
| | 55C2 | 40765 | T-2 | Slide Base 2 | 55 | 0.05 | 1400EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 5000 | |


T-2 Slide Base 3

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|--------------|-------|-------|---------|----------|-----------|-----------|-----------|
| | 24E3 | 40509 | T-2 | Slide Base 3 | 24 | 0.035 | 600EFC | C-2F | 1.69/42.9 | 0.27/6.9 | 7000 |
| | 55C3 | 40768 | T-2 | Slide Base 3 | 55 | 0.05 | 1400EFC | CC-2F | 1.69/42.9 | 0.27/6.9 | 5000 |

T-2 Slide Base 6

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|--------------|-------|------|--------|----------|-----------|-----------|-----------|
| | 52A | 44324 | T-2 | Slide Base 6 | 24 | 0.03 | 430EFC | C-2F | 0.92/23.4 | 0.27/6.9 | 8000 |

T-2 SF6/6 Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life |
|---|---------------|----------|------|-------|-------|-------|------|----------|-----------|-----------|-----------|
| | 6609F | 40838 | T-2 | SF6/6 | 12 | 0.05 | 0.20 | C-8 | 1.26/32.0 | 0.24/6.1 | 5000 |
| | 6610F | 40840 | T-2 | SF6/6 | 12 | 0.055 | 0.25 | C-8 | 1.26/32.0 | 0.24/6.1 | 5000 |
| | 6612F | 40841 | T-2 | SF6/6 | 12 | 0.25 | 1.00 | C-8 | 1.26/32.0 | 0.24/6.1 | 5000 |
| | 6614F | 40842 | T-2 | SF6/6 | 14 | 0.05 | 0.16 | C-8 | 1.26/32.0 | 0.24/6.1 | 10000 |
| | 6615F | 40844 | T-2 | SF6/6 | 14 | 0.08 | 0.30 | C-8 | 1.26/32.0 | 0.24/6.1 | 10000 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-2 Wire Terminal Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Amps | Ext Res Reqd | Filament | MOL in/mm | MOD in/mm | Avg. Life | Replaces | Special Desc. |
|---|---------------|----------|---------------|---------------|---------|-------|-------|--------------|-----------|-----------|-----------|-----------|--------------------|---------------|
| | A1B | 40002 | T-2 | Wire Terminal | 105-125 | 1/25 | 0.3ma | 220K | Neon | 0.50/12.7 | 0.25/6.4 | 25000 | | |
| A1A | 40000 | T-2 | Wire Terminal | 105-125 | 1/12 | 0.6ma | 150K | Neon | 1.00/25.4 | 0.25/6.4 | 25000 | | NE-2 | |
| A2A | 40008 | T-2 | Wire Terminal | 105-125 | 1/15 | 0.7ma | 100K | Neon | 1.00/25.4 | 0.25/6.4 | 25000 | | NE-2A | |
| A2B | 40010 | T-2 | Wire Terminal | 105-125 | | 0.7ma | 100K | Neon | 0.75/19.1 | 0.25/6.4 | 25000 | | NE-2V 2 inch leads | |
| A9A | 40014 | T-2 | Wire Terminal | 105-125 | 1/12 | 0.7ma | 100K | Neon | 1.00/25.4 | 0.25/6.4 | 25000 | | NE-2E 2 inch leads | |
| A1C | 40004 | T-2 | Wire Terminal | 105-125 | 1/7 | 1.2ma | 47K | Neon | 0.50/12.7 | 0.25/6.4 | 25000 | | | |
| A3C | 40012 | T-2 | Wire Terminal | 105-125 | 1/4 | 1.8ma | 30K | Neon | 0.75/19.1 | 0.25/6.4 | 25000 | | NE-2U 2 inch leads | |
| C2A | 40024 | T-2 | Wire Terminal | 105-125 | 1/4 | 1.8ma | 30K | Neon | 1.00/25.4 | 0.25/6.4 | 25000 | | NE-2H | |


T-2¼ 2-Pin G-4 Base (Halogen)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-----------|-----------|-------|------|------|----------|-----------|-----------|-----------|---------------|
| | 787 | 41402 | T-2 1/4 | 2-Pin G-4 | | 6 | 1.67 | 16 | C-6 | 1.00/25.4 | 0.30/7.6 | 100 |
| 788 | 41404 | T-2 1/4 | 2-Pin G-4 | | 6 | 3.33 | 32 | C-6 | 1.00/25.4 | 0.30/7.6 | 100 | Halogen |


T-2¼ Printed Circuit Socket Base (Halogen)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|-----------|-----------|-------|------|------|----------|-----------|-----------|-----------|---------------|
| | 882 | 42100 | T-2 1/4 | PC Socket | | 12.8 | 0.35 | 3.8 | C-6 | 1.18/30.0 | 0.72/18.3 | 2000 |
| 2033 | 40711 | T-2 1/4 | PC Socket | | 13.5 | 0.22 | 2.5 | CC-6 | 1.18/30.0 | 0.72/18.3 | 2000 | Halogen |


T-2¼ Sub-Miniature Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|----------------|----------------|-------|-------|-------|----------|-----------|-----------|-----------|---------------|
| | 1230X | 49003 | T-2 1/4 | Sub-Mini Wedge | | 14 | 0.214 | 2.10 | C-2V | 0.85/21.6 | 0.27/6.9 | 1000 |
| 118F | 40685 | T-2 1/4 | Sub-Mini Wedge | | 14.4 | 0.124 | 0.07 | C-2F | 0.90/22.9 | 0.27/6.9 | 5000 | Frosted |

T-2¼ Special Wedge Base (Halogen)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|---------|---------------|-------|------|-------|----------|-----------|-----------|-----------|---------------|
| | 2040 | 42470 | T-2 1/4 | Special Wedge | | 12.8 | 0.625 | 3.0 | CC-6 | 1.29/32.8 | 0.38/9.6 | 500 |

T-2½ Miniature Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------------------|-------------------|-------|-------|------|----------|-----------|-----------|-----------|----------------------------|
| | 6MB | 40777 | T-2 1/2 | Miniature Bayonet | | 6 | 0.14 | 0.12 | C-2V | 1.19/30.2 | 0.33/8.4 | 20000 |
| 12MB | 40220 | T-2 1/2 | Miniature Bayonet | | 12 | 0.17 | 0.35 | C-2F | 1.19/30.2 | 0.33/8.4 | 12000 | |
| 24MB | 40510 | T-2 1/2 | Miniature Bayonet | | 24 | 0.073 | 0.50 | C-2F | 1.19/30.2 | 0.33/8.4 | 10000 | |
| 28MB | 40546 | T-2 1/2 | Miniature Bayonet | | 28 | 0.04 | 0.29 | C-2F | 1.19/30.2 | 0.33/8.4 | 5000 | |
| 48MB | 40740 | T-2 1/2 | Miniature Bayonet | | 48 | 0.05 | 0.50 | C-2F | 1.19/30.2 | 0.33/8.4 | 10000 | |
| 60MB | 40820 | T-2 1/2 | Miniature Bayonet | | 60 | 0.05 | 0.73 | CC-2F | 1.19/30.2 | 0.33/8.4 | 7500 | |
| 90MB | 40886 | T-2 1/2 | Miniature Bayonet | | 90 | 0.03 | 0.37 | CC-7A | 1.19/30.2 | 0.33/8.4 | 5000 | |
| 120MB | 40226 | T-2 1/2 | Miniature Bayonet | | 120 | 0.025 | 0.36 | CC-7A | 1.19/30.2 | 0.33/8.4 | 10000 | Substitute for 967 & 8-967 |
| 120MB/6 | 44022 | T-2 1/2 | Miniature Bayonet | | 120 | 0.052 | 1.43 | CC-7A | 1.19/30.2 | 0.33/8.4 | 3000 | 6 watt version |
| 130MB | 40249 | T-2 1/2 | Miniature Bayonet | | 130 | 0.025 | 0.36 | CC-7A | 1.19/30.2 | 0.33/8.4 | 10000 | |
| 155MB | 40296 | T-2 1/2 | Miniature Bayonet | | 155 | 0.025 | 0.40 | CC-7A | 1.19/30.2 | 0.33/8.4 | 10000 | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-2½ 2-Pin G-4 Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------|---------|-----------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 891 | 42116 | T-2 1/2 | 2-Pin G-4 | 12.8 | 8 | 11.5 | C-6 | 1.20/30.5 | 0.32/8.1 | 500 |


T-2¾ Special Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|---------|---------------|---------------|------|------|----------|-----------|-----------|-----------|---------------------|
| | | 24 | 42240 | T-2 3/4 | Special Wedge | 14 | 0.24 | 2.0 | C-2V | 0.91/23.1 | 0.34/8.7 | 1500 |
| | 24A | 42244 | T-2 3/4 | Special Wedge | 14 | 0.24 | 1.5 | C-2V | 0.91/23.1 | 0.34/8.7 | 1500 | Painted Amber |
| | 24NA | 49670 | T-2 3/4 | Special Wedge | 14 | 0.24 | 1.5 | C-2V | 0.91/23.1 | 0.34/8.7 | 1500 | Hi-Temp Amber Paint |


T-2¾ 2-Pin G-4 Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|---------|-----------|-----------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 778 | 41400 | T-2 3/4 | 2-Pin G-4 | 6 | 3.33 | 32 | C-6 | 1.05/26.7 | 0.38/9.6 | 100 |
| | 789 | 41406 | T-2 3/4 | 2-Pin G-4 | 12 | 1.17 | 22 | C-6 | 1.05/26.7 | 0.38/9.6 | 200 | Halogen |


T-2¾ Miniature Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|---------|-------------------|-------------------|-------|------|----------|-----------|-----------|-----------|---------------|
| | | 3893 | 40659 | T-2 3/4 | Miniature Bayonet | 12 | 0.33 | 2.8 | C-2R | 1.09/27.7 | 0.38/9.6 | 300 |
| | 64111 | 40689 | T-2 3/4 | Miniature Bayonet | 12 | 0.416 | 6.7 | C-6 | 1.29/32.8 | 0.38/9.6 | 240 | Halogen |


T-3 Miniature Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------|------|-----------------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 1477 | 40282 | T-3 | Miniature Screw | 24 | 0.17 | 3.3 | C-2V | 1.25/31.8 | 0.40/10.2 | 250 |

T-3 Double End Cap Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------|----------------|----------------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 211-2 | 40480 | T-3 | Double End Cap | 12.8 | 0.97 | 12.0 | C-8 | 1.72/43.7 | 0.38/9.6 | 1000 |
| | 214-2 | 42040 | T-3 | Double End Cap | 13.5 | 0.52 | 4.0 | C-8 | 1.72/43.7 | 0.38/9.6 | 1000 | |
| | 212-2 | 42256 | T-3 | Double End Cap | 13.5 | 0.74 | 6.0 | C-8 | 1.72/43.7 | 0.38/9.6 | 2000 | |
| | 211-2B | 42430 | T-3 | Double End Cap | 12.8 | 0.37 | - | C-8 | 1.72/43.7 | 0.43/11.0 | 1000 | Painted Blue |
| | 211-2R | 42434 | T-3 | Double End Cap | 12.8 | 0.37 | - | C-8 | 1.72/43.7 | 0.43/11.0 | 1000 | Painted Red |

T-3 Rigid Loop Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|-------|------------|------------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 561 | 40775 | T-3 | Rigid Loop | 12.8 | 0.97 | 12.0 | C-8 | 1.72/43.7 | 0.39/9.9 | 1000 |
| | 563 | 42058 | T-3 | Rigid Loop | 13.5 | 0.52 | 4.0 | C-8 | 1.72/43.7 | 0.39/9.9 | 1000 | |
| | 562 | 42052 | T-3 | Rigid Loop | 13.5 | 0.74 | 6.0 | C-8 | 1.72/43.7 | 0.39/9.9 | 2000 | |
| | 564 | 42070 | T-3 | Rigid Loop | 14 | 0.44 | 2.0 | C-8 | 1.72/43.7 | 0.39/9.9 | 2000 | |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-3 HPR Base (Halogen)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | Lumens | Filament | MOL in/mm | MOD in/mm | Avg. Life | Typ Use | Special Desc. |
|---|---------------|----------|------|-------------------------------|-------|------|--------|----------|-----------|-----------|-----------|-----------------|---------------|
| | HPR52 | 40052 | T-3 | SC Miniature Flanged (P13.5s) | 2.8 | 0.85 | 35 | C-6 | 1.25/31.8 | 0.38/9.6 | 10 | 2"D" Cells | Halogen |
| | HPR53 | 40058 | T-3 | SC Miniature Flanged (P13.5s) | 4 | 0.85 | 48 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | 3"D" Cells | Halogen |
| | HPR44 | 40034 | T-3 | SC Miniature Flanged (P13.5s) | 4 | 1.0 | 54 | C-6 | 1.25/31.8 | 0.38/9.6 | 300 | 3"NI CAD" Cells | Halogen |
| | HPR55 | 40070 | T-3 | SC Miniature Flanged (P13.5s) | 5.2 | 0.5 | 48 | C-6 | 1.25/31.8 | 0.38/9.6 | 15 | 4"C" Cells | Halogen |
| | HPR50 | 40040 | T-3 | SC Miniature Flanged (P13.5s) | 5.2 | 0.85 | 85 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | 4"D" Cells | Halogen |
| | HPR36 | 40031 | T-3 | SC Miniature Flanged (P13.5s) | 5.5 | 1.0 | 93 | C-6 | 1.25/31.8 | 0.38/9.6 | 40 | 4"D" Cells | Halogen |
| | HPR40 | 44000 | T-3 | SC Miniature Flanged (P13.5s) | 6 | 0.67 | 75 | C-6 | 1.25/31.8 | 0.38/9.6 | 50 | 6V Lantern | Halogen |
| | HPR51 | 40046 | T-3 | SC Miniature Flanged (P13.5s) | 6.5 | 0.7 | 90 | C-6 | 1.25/31.8 | 0.38/9.6 | 25 | 5"D" Cells | Halogen |

T-3 Miniature Bayonet Base (Neon)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Amps | Ext Res Req'd | Fila-ment | MOL in/mm | MOD in/mm | Replaces | Avg Life |
|---|---------------|----------|------|-------------------|---------|-------|-------|-----------------|-----------|-----------|-----------|----------|----------|
| | B1A | 40016 | T-3 | Miniature Bayonet | 105-125 | 1/4 | 0.3ma | 220K | Neon | 1.19/30.2 | 0.38/9.6 | NE51 | 25000 |
| | NE51-R | 40074 | T-3 | Miniature Bayonet | 105-125 | 1/4 | 0.3ma | (220K Internal) | Neon | 1.19/30.2 | 0.38/9.6 | | 25000 |
| | B2A | 40018 | T-3 | Miniature Bayonet | 105-125 | 1/4 | 1.2ma | 47K | Neon | 1.19/30.2 | 0.38/9.6 | NE51H | 25000 |
| | NE51H-R | 40076 | T-3 | Miniature Bayonet | 105-125 | 1/4 | 1.2ma | (47K Internal) | Neon | 1.19/30.2 | 0.38/9.6 | | 25000 |
| | 120MB-Neon | 40225 | T-3 | Miniature Bayonet | 120 | | 4.0ma | (18K Internal) | Neon | 1.19/30.2 | 0.38/9.6 | | 10000 |

T-3¼ Miniature Wedge Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Fila-ment | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|---------------|----------|------------------------|------------------------|-------|-------|------|-----------|-----------|-----------|---------------------|---------------------|
| | 159 | 40303 | T-3 1/4 | Miniature Wedge | 6.3 | 0.15 | 0.34 | C-2R | 1.06/26.9 | 0.40/10.2 | 5000 | |
| | 259 | 40534 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | 0.65 | C-2R | 1.06/26.9 | 0.40/10.2 | 5000 | |
| | 555 | 40783 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | 0.9 | C-2R | 1.06/26.9 | 0.40/10.2 | 3000 | |
| | 555-B | 16043 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | - | C-2R | 1.06/26.9 | 0.40/10.2 | 3000 | Painted Blue |
| | 555-G | 16044 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | - | C-2R | 1.06/26.9 | 0.40/10.2 | 3000 | Painted Green |
| | 555-R | 16045 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | - | C-2R | 1.06/26.9 | 0.40/10.2 | 3000 | Painted Red |
| | 555-Y | 16046 | T-3 1/4 | Miniature Wedge | 6.3 | 0.25 | - | C-2R | 1.06/26.9 | 0.40/10.2 | 3000 | Painted Yellow |
| | 147 | 40278 | T-3 1/4 | Miniature Wedge | 7 | 0.43 | 2.0 | C-2R | 1.06/26.9 | 0.40/10.2 | 1500 | |
| | 2821 | 42232 | T-3 1/4 | Miniature Wedge | 12 | 0.25 | 1.76 | C-2V | 1.06/26.9 | 0.40/10.2 | 1000 | ECE Type - W3W |
| | 1236X | 49013 | T-3 1/4 | Miniature Wedge | 12 | 0.3 | 3.6 | C-2V | 1.06/26.9 | 0.40/10.2 | 20000 | Xenon |
| | 2825 | 40637 | T-3 1/4 | Miniature Wedge | 12 | 0.4 | 4.0 | C-2R | 1.06/26.9 | 0.40/10.2 | 300 | ECE Type - W5W |
| | 1210X | 49015 | T-3 1/4 | Miniature Wedge | 12 | 0.833 | 10.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 2000 | Xenon |
| | 1211X | 49017 | T-3 1/4 | Miniature Wedge | 12 | 0.917 | 10.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 5000 | Xenon |
| | 558 | 40769 | T-3 1/4 | Miniature Wedge | 13 | 0.33 | - | C-2V | 1.06/26.9 | 0.40/10.2 | 500 | Lens End Bulb |
| | 192 | 40424 | T-3 1/4 | Miniature Wedge | 13 | 0.33 | 3.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 1000 | |
| | 1250X | 49019 | T-3 1/4 | Miniature Wedge | 13.5 | 0.37 | 5.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 500 | Xenon |
| | 1250X-2 | 49023 | T-3 1/4 | Miniature Wedge | 13.5 | 0.37 | 4.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 2000 | Xenon |
| | 1250X-5 | 49025 | T-3 1/4 | Miniature Wedge | 13.5 | 0.37 | 3.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 5000 | Xenon |
| | 3652 | 40655 | T-3 1/4 | Miniature Wedge | 13.5 | 0.37 | 6.0 | C-6 | 1.06/26.9 | 0.40/10.2 | 700 | |
| | 658 | 42272 | T-3 1/4 | Miniature Wedge | 14 | 0.08 | 0.31 | C-2F | 1.06/26.9 | 0.40/10.2 | 15000 | |
| | 161 | 40304 | T-3 1/4 | Miniature Wedge | 14 | 0.19 | 1.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 4000 | |
| | 158 | 40300 | T-3 1/4 | Miniature Wedge | 14 | 0.24 | 2.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 500 | |
| | 194 | 40427 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | 2.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | |
| | PC194 | 00231 | T-3 1/4 | Printed Circuit Socket | 14 | 0.27 | 2.0 | C-2F | 1.11/28.2 | 0.40/10.2 | 2500 | |
| | 194LL | 42504 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | 2.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 5000 | Long Life |
| | 194A | 40430 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | - | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | Painted Amber |
| | 194B | 42438 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | - | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | Painted Blue |
| | 194R | 42442 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | - | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | Painted Red |
| | 194NA | 40432 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | 1.5 | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | Hi-Temp Amber Paint |
| 124 | 40238 | T-3 1/4 | Miniature Wedge | 14 | 0.27 | 1.5 | C-2F | 1.06/26.9 | 0.40/10.2 | 5000 | | |
| 1440X | 49029 | T-3 1/4 | Miniature Wedge | 14 | 0.286 | 2.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 4000 | Xenon | |
| 193 | 40426 | T-3 1/4 | Miniature Wedge | 14 | 0.33 | 2.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 15000 | | |
| 168 | 40317 | T-3 1/4 | Miniature Wedge | 14 | 0.35 | 3.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 1500 | | |
| PC168 | 00229 | T-3 1/4 | Printed Circuit Socket | 14 | 0.35 | 3.0 | C-2F | 1.11/28.2 | 0.40/10.2 | 1500 | | |
| 168LL | 42502 | T-3 1/4 | Miniature Wedge | 14 | 0.35 | 3.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 3000 | Long Life | |
| 168NA | 00227 | T-3 1/4 | Miniature Wedge | 14 | 0.35 | 2.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 1500 | Hi-Temp Amber Paint | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

T-3¼ Miniature Wedge Base (Continued)

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Fila-ment | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|------------------|---------------|----------|---------|-----------------|-----------------|-------|-------|-----------|-----------|-----------|-----------|----------------|
| | 1450X | 49031 | | T-3 1/4 | Miniature Wedge | 14 | 0.357 | 2.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 5000 |
| 2841-BULK | | | T-3 1/4 | Miniature Wedge | 24 | 0.125 | 1.76 | C-2V | 1.06/26.9 | 0.40/10.2 | 1000 | ECE Type - W3W |
| 2450X | 50030 | | T-3 1/4 | Miniature Wedge | 24 | 0.208 | 4.4 | C-2V | 1.06/26.9 | 0.40/10.2 | 500 | Xenon |
| 2470X | 50032 | | T-3 1/4 | Miniature Wedge | 24 | 0.3 | 4.4 | C-2V | 1.06/26.9 | 0.40/10.2 | 12000 | Xenon |
| 2475X-1 | 50036 | | T-3 1/4 | Miniature Wedge | 24 | 0.313 | 5.2 | C-2V | 1.06/26.9 | 0.40/10.2 | 10000 | Xenon |
| 2410X-1 | 50038 | | T-3 1/4 | Miniature Wedge | 24 | 0.417 | 7.2 | C-2V | 1.06/26.9 | 0.40/10.2 | 10000 | Xenon |
| 585 | 40759 | | T-3 1/4 | Miniature Wedge | 28 | 0.04 | 0.3 | C-2F | 1.06/26.9 | 0.40/10.2 | 7000 | |
| 656 | 40836 | | T-3 1/4 | Miniature Wedge | 28 | 0.06 | 0.62 | C-2F | 1.06/26.9 | 0.40/10.2 | 2500 | |
| 657 | 40837 | | T-3 1/4 | Miniature Wedge | 28 | 0.08 | 0.62 | C-2F | 1.06/26.9 | 0.40/10.2 | 15000 | |
| 400 | 40696 | | T-3 1/4 | Miniature Wedge | 28 | 0.1 | 1.6 | C-2F | 1.06/26.9 | 0.40/10.2 | 1000 | |
| 464 | 40728 | | T-3 1/4 | Miniature Wedge | 28 | 0.17 | 3.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 1500 | |
| 655 | 49620 | | T-3 1/4 | Miniature Wedge | 28 | 0.20 | 3.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 7000 | |
| 2860X | 50042 | | T-3 1/4 | Miniature Wedge | 28 | 0.214 | 4.0 | C-2V | 1.06/26.9 | 0.40/10.2 | 1000 | Xenon |

T-3¼ Miniature Screw Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|-------------|---------------|----------|---------|-----------------|-----------------|------|------|----------|-----------|-----------|-----------|
| | 48 | 40732 | | T-3 1/4 | Miniature Screw | 2 | 0.06 | 0.04 | S-2 | 1.19/30.2 | 0.43/11.0 |
| 41 | 40700 | | T-3 1/4 | Miniature Screw | 2.5 | 0.5 | 0.50 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 |
| 40 | 40694 | | T-3 1/4 | Miniature Screw | 6.3 | 0.15 | 0.52 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 |
| 46 | 40726 | | T-3 1/4 | Miniature Screw | 6.3 | 0.25 | 0.90 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 |
| 1487 | 40284 | | T-3 1/4 | Miniature Screw | 14 | 0.2 | 1.40 | C-2V | 1.19/30.2 | 0.43/11.0 | 3000 |
| 1821 | 40370 | | T-3 1/4 | Miniature Screw | 28 | 0.17 | 3.4 | C-2F | 1.19/30.2 | 0.43/11.0 | 500 |

T-3¼ Miniature Wedge Base with Wire Leads

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|------|---------|---------------------------------|------|------|----------|-----------|-----------|-----------|---------------|
| | 193E-1 | 42381 | | T-3 1/4 | Miniature Wedge with Wire Leads | 14 | 0.33 | 2.0 | C-2F | 1.06/26.9 | 0.40/10.2 | 15000 |

T-3¼ Printed Circuit Socket

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|------|---------|-------------------------------|------|------|----------|-----------|-----------|-----------|---------------|
| | PC194 | 00231 | | T-3 1/4 | Printed Circuit Socket (B10d) | 14 | 0.27 | 2.0 | C-2F | 1.11/28.2 | 0.40/10.2 | 2500 |

T-3¼ Miniature Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|-------------|---------------|----------|---------|-------------------|-------------------|------|------|----------|-----------|-----------|-----------|---------------|
| | 49 | 40744 | | T-3 1/4 | Miniature Bayonet | 2 | 0.06 | 0.04 | C-6 | 1.19/30.2 | 0.43/11.0 | 1000 |
| 43 | 40706 | | T-3 1/4 | Miniature Bayonet | 2.5 | 0.5 | 0.5 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1490 | 40286 | | T-3 1/4 | Miniature Bayonet | 3.2 | 0.16 | 0.2 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1804 | 40352 | | T-3 1/4 | Miniature Bayonet | 4 | 0.06 | 0.07 | C-2R | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1906 | 40422 | | T-3 1/4 | Miniature Bayonet | 5 | 0.07 | 0.19 | C-6 | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1850 | 40394 | | T-3 1/4 | Miniature Bayonet | 5 | 0.09 | 0.25 | C-2R | 1.19/30.2 | 0.43/11.0 | 1500 | |
| 755 | 40932 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | 0.33 | C-2R | 1.19/30.2 | 0.43/11.0 | 20000 | |
| 1847 | 40390 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | 0.38 | C-2R | 1.19/30.2 | 0.43/11.0 | 5000 | |
| 47 | 40730 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | 0.5 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 47-B | 00025 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 47-G | 00026 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 47-R | 00027 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 47-Y | 00028 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.15 | | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1866 | 40400 | | T-3 1/4 | Miniature Bayonet | 6.3 | 0.25 | 0.65 | C-2R | 1.19/30.2 | 0.43/11.0 | 5000 | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

T-3¼ Miniature Bayonet Base (Continued)

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|------------------------|----------|---------|-------------------|-------|-------|------|----------|-----------|-----------|-----------|---------------------|
| 44 | 40716 | T-3 1/4 | Miniature Bayonet | 6.3 | 0.25 | 0.9 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1810 | 40356 | T-3 1/4 | Miniature Bayonet | 6.3 | 0.4 | 1.4 | C-2R | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 238 | 49704 | T-3 1/4 | Miniature Bayonet | 6.3 | 0.5 | 2.0 | C-2R | 1.19/30.2 | 0.43/11.0 | 2000 | |
| 1888 | 40406 | T-3 1/4 | Miniature Bayonet | 7 | 0.5 | 2.0 | C-2R | 1.19/30.2 | 0.43/11.0 | 1500 | |
| 1408 | 40268 | T-3 1/4 | Miniature Bayonet | 10 | 0.13 | 0.85 | C-2V | 1.19/30.2 | 0.43/11.0 | 250 | |
| 1816 | 40362 | T-3 1/4 | Miniature Bayonet | 13 | 0.33 | 3.0 | C-2V | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 756 | 40934 | T-3 1/4 | Miniature Bayonet | 14 | 0.08 | 0.31 | C-2F | 1.19/30.2 | 0.43/11.0 | 15000 | |
| 1815 | 40360 | T-3 1/4 | Miniature Bayonet | 14 | 0.2 | 1.4 | C-2V | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1891 | 40409 | T-3 1/4 | Miniature Bayonet | 14 | 0.24 | 2.0 | C-2F | 1.19/30.2 | 0.43/11.0 | 500 | |
| 256 | 49813 | T-3 1/4 | Miniature Bayonet | 14 | 0.27 | 1.6 | C-2R | 1.19/30.2 | 0.43/11.0 | 500 | |
| 1893 | 40413 | T-3 1/4 | Miniature Bayonet | 14 | 0.33 | 2.0 | C-2F | 1.19/30.2 | 0.43/11.0 | 7500 | |
| 1813 | 40358 | T-3 1/4 | Miniature Bayonet | 14.4 | 0.1 | 0.86 | C-2V | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1892 | 40412 | T-3 1/4 | Miniature Bayonet | 14.4 | 0.12 | 0.75 | C-2F | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1818 | 40364 | T-3 1/4 | Miniature Bayonet | 24 | 0.17 | 3.3 | C-2V | 1.19/30.2 | 0.43/11.0 | 250 | |
| 1843 | 40707 | T-3 1/4 | Miniature Bayonet | 28 | 0.022 | 0.2 | C-2F | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1819 | 40366 | T-3 1/4 | Miniature Bayonet | 28 | 0.04 | 0.34 | C-2F | 1.19/30.2 | 0.43/11.0 | 2500 | |
| 1829 | 40382 | T-3 1/4 | Miniature Bayonet | 28 | 0.07 | 1.0 | C-2F | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 757 | 40936 | T-3 1/4 | Miniature Bayonet | 28 | 0.08 | 0.62 | C-2F | 1.19/30.2 | 0.40/10.2 | 15000 | |
| 1820 | 40368 | T-3 1/4 | Miniature Bayonet | 28 | 0.1 | 1.6 | C-2F | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1820BTS | 49790 | T-3 1/4 | Miniature Bayonet | 28 | 0.1 | 1.6 | C-2F | 1.19/30.2 | 0.43/11.0 | 1000 | Bulb is Butt Sealed |
| 1864 | 40398 | T-3 1/4 | Miniature Bayonet | 28 | 0.17 | 3.0 | C-2F | 1.19/30.2 | 0.43/11.0 | 1500 | |
| 313 | 40578 | T-3 1/4 | Miniature Bayonet | 28 | 0.17 | 3.5 | C-2F | 1.19/30.2 | 0.43/11.0 | 500 | |
| 1873 | 40404 | T-3 1/4 | Miniature Bayonet | 28 | 0.2 | 3.0 | C-2F | 1.19/30.2 | 0.43/11.0 | 7000 | |
| 1822 | 40372 | T-3 1/4 | Miniature Bayonet | 36 | 0.1 | 2.1 | C-2F | 1.19/30.2 | 0.43/11.0 | 1000 | |
| 1828 | 40380 | T-3 1/4 | Miniature Bayonet | 37.5 | 0.05 | 0.65 | C-2F | 1.19/30.2 | 0.43/11.0 | 3000 | |
| 1835 | 40386 | T-3 1/4 | Miniature Bayonet | 55 | 0.05 | 1.1 | C-2F | 1.19/30.2 | 0.43/11.0 | 5000 | |
| 8-3995 | 44030 | T-3 1/4 | Miniature Bayonet | 120 | 0.025 | 0.36 | CC-7A | 1.19/30.2 | 0.43/10.9 | 7500 | |
| 967 | 40386 | T-3 1/4 | Miniature Bayonet | 120 | 0.025 | 0.36 | CC-7A | 1.19/30.2 | 0.43/11.0 | 7500 | |
| 949 | 49621 | T-3 1/4 | Miniature Bayonet | 130 | 0.022 | 0.4 | 2C-2F | 1.19/30.2 | 0.43/11.0 | 7000 | |
| 1028.09.527-501 | 49731 | T-3 1/4 | Miniature Bayonet | 120 | 0.02 | 0.2 | 2C-2F | 1.19/30.2 | 0.43/11.0 | | |




T-3¼ Rigid Loop Base (Xenon)

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|-------------------|----------|---------|------------|-------|-------|------|----------|-----------|-----------|-----------|----------------|
| JF02XE | 50114 | T-3 1/4 | Rigid Loop | 6 | 0.833 | 4.4 | C-8 | 1.72/43.7 | 0.40/10.0 | 20000 | Xenon |
| JF03XE | 50118 | T-3 1/4 | Rigid Loop | 12 | 0.417 | 4.8 | C-8 | 1.72/43.7 | 0.40/10.0 | 3000 | Xenon |
| JF07XE | 50124 | T-3 1/4 | Rigid Loop | 12 | 0.833 | 8.0 | C-8 | 1.72/43.7 | 0.40/10.0 | 20000 | Xenon |
| JF08XE | 50126 | T-3 1/4 | Rigid Loop | 12 | 1.0 | 12.0 | C-8 | 1.72/43.7 | 0.40/10.0 | 3000 | Xenon |
| JF135050XE | 50096 | T-3 1/4 | Rigid Loop | 13.5 | 0.37 | 4.0 | C-8 | 1.72/43.7 | 0.40/10.0 | 15000 | Xenon |
| JF135100XE | 50098 | T-3 1/4 | Rigid Loop | 13.5 | 0.74 | 9.55 | C-8 | 1.72/43.7 | 0.40/10.0 | 15000 | Xenon |
| JF14XE | 50134 | T-3 1/4 | Rigid Loop | 24 | 0.208 | 3.2 | C-8 | 1.72/43.7 | 0.40/10.0 | 20000 | Xenon |
| JF14XE/F | 49639 | T-3 1/4 | Rigid Loop | 24 | 0.208 | 3.2 | C-8 | 1.72/43.7 | 0.40/10.0 | 20000 | Xenon, Frosted |
| JF13XE | 50132 | T-3 1/4 | Rigid Loop | 24 | 0.208 | 4.4 | C-8 | 1.72/43.7 | 0.40/10.0 | 3000 | Xenon |
| JF16XE | 50136 | T-3 1/4 | Rigid Loop | 24 | 0.417 | 10.0 | C-8 | 1.72/43.7 | 0.40/10.0 | 3000 | Xenon |
| JF17XE | 50138 | T-3 1/4 | Rigid Loop | 24 | 0.417 | 7.2 | C-8 | 1.72/43.7 | 0.40/10.0 | 20000 | Xenon |
| JF260050XE | 50100 | T-3 1/4 | Rigid Loop | 26 | 0.192 | 4.0 | C-8 | 1.72/43.7 | 0.40/10.0 | 15000 | Xenon |
| JF260100XE | 50102 | T-3 1/4 | Rigid Loop | 26 | 0.385 | 9.55 | C-8 | 1.72/43.7 | 0.40/10.0 | 15000 | Xenon |



T-4 Single Contact Bayonet Base (Halogen)

| Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---------------|----------|------|------------|-------|-------|------|----------|-----------|-----------|-----------|---------------|
| 796 | 44023 | T-4 | SC Bayonet | 12.8 | 35 | 60 | C-6 | 2.50/63.5 | 0.48/12.2 | 300 | Halogen |
| 795 | 44019 | T-4 | SC Bayonet | 12.8 | 50 | 108 | C-6 | 2.50/63.5 | 0.48/12.2 | 200 | Halogen |
| 795X | 44021 | T-4 | SC Bayonet | 12.8 | 50 | 108 | C-8 | 2.50/63.5 | 0.48/12.2 | 200 | Halogen |





23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE

T-4 Double Contact Index Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|-------|------|--------|-----------|-------|----------|-----------|-----------|-----------|---------------|
| | | H1157 | 44040 | T-4 | BAY15d | 12.8/12.8 | 50/15 | 108/24 | C-6/C-6 | 2.00/50.8 | 0.51/13.0 | 250/400 |

T-4½ Single Contact Bayonet Base (Halogen)

| | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|-------|---------|------------|-------|------|----------|-----------|-----------|-----------|---------------|
| | | H1156 | 44038 | T-4 1/2 | SC Bayonet | 12.8 | 50 | 108 | C-6 | 2.08/53 | 0.56/14.2 | 250 |

T-4½ Miniature Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|--|---------------|----------|---------|-------------------|-------------------|------|------|----------|-----------|-----------|-----------|
| | | 957 | 41040 | T-4 1/2 | Miniature Bayonet | 9.84 | 0.5 | 4.6 | C-2R | 1.38/35.1 | 0.59/15.0 |
| | 1416 | 44340 | T-4 1/2 | Miniature Bayonet | 12.8 | 0.8 | 8.0 | C-2R | 1.38/35.1 | 0.59/15.0 | 1000 |
| | 1414 | 49695 | T-4 1/2 | Miniature Bayonet | 14 | 0.46 | 6.0 | C-2R | 1.38/35.0 | 0.59/15.0 | 500 |
| | 1495 | 40703 | T-4 1/2 | Miniature Bayonet | 28 | 0.3 | 6.0 | C-2F | 1.38/35.1 | 0.59/15.0 | 500 |

T-5 Single Contact Bayonet Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Fila-ment | MOL in/mm | MOD in/mm | Special Desc. | Avg Life |
|--|---------------|----------|-------|------------|------------|------|------|-----------|-----------|-----------|-------------------------------------|----------|
| | | 1876 | 49699 | T-5 | SC Bayonet | 3.5 | 2.5 | 6.5 | C-6 | 1.75/44.5 | 0.65/16.5 | |
| | 1489 | 40407 | T-5 | SC Bayonet | 6.5 | 2.75 | 24.0 | C-6U | 1.75/44.5 | 0.65/16.5 | Filament parallel with bayonet pins | 125 |
| | 5007 | 40647 | T-5 | SC Bayonet | 12 | 0.42 | 4 | C-2R | 1.55/39.4 | 0.65/16.5 | ECE Type - R5W | 200 |
| | 5008 | 40663 | T-5 | SC Bayonet | 12 | 0.83 | 10 | C-2R | 1.55/39.4 | 0.65/16.5 | ECE Type - R10W | 200 |

T-5 Miniature Wedge Base

| | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|--|---------------|----------|-------|-----------------|-----------------|------|------|----------|-----------|-----------|-----------|---------------|
| | | 909 | 41016 | T-5 | Miniature Wedge | 6 | 0.62 | 3.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 50 |
| | 914 | 41020 | T-5 | Miniature Wedge | 4 | 0.9 | 3.5 | C-2R | 1.49/37.9 | 0.62/15.8 | 50 | |
| | 939 | 49683 | T-5 | Miniature Wedge | 6 | 0.9 | 5 | C-6 | 1.49/37.9 | 0.62/15.8 | 200 | |
| | 927 | 49682 | T-5 | Miniature Wedge | 6 | 1.2 | 8 | C-2R | 1.49/37.9 | 0.62/15.8 | 50 | |
| | 908 | 41014 | T-5 | Miniature Wedge | 6 | 1.5 | 12.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 50 | |
| | 915 | 41021 | T-5 | Miniature Wedge | 12 | 0.75 | 11.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 50 | |
| | 901 | 42141 | T-5 | Miniature Wedge | 12.8 | 0.31 | 2.9 | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | |
| | 901A | 43201 | T-5 | Miniature Wedge | 12.8 | 0.31 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Amber |
| | 901B | 43204 | T-5 | Miniature Wedge | 12.8 | 0.31 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Blue |
| | 901G | 43207 | T-5 | Miniature Wedge | 12.8 | 0.31 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Green |
| | 901R | 43210 | T-5 | Miniature Wedge | 12.8 | 0.31 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Red |
| | 918 | 41025 | T-5 | Miniature Wedge | 12.8 | 0.56 | 6.5 | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | |
| | 918A | 43302 | T-5 | Miniature Wedge | 12.8 | 0.56 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Amber |
| | 918B | 43305 | T-5 | Miniature Wedge | 12.8 | 0.56 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Blue |
| | 918G | 43308 | T-5 | Miniature Wedge | 12.8 | 0.56 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Green |
| | 918R | 43311 | T-5 | Miniature Wedge | 12.8 | 0.56 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Red |
| | 923 | 41031 | T-5 | Miniature Wedge | 12.8 | 0.91 | 12.5 | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | |
| | 923G | 43408 | T-5 | Miniature Wedge | 12.8 | 0.91 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Green |
| | 923R | 43411 | T-5 | Miniature Wedge | 12.8 | 0.91 | - | C-2R | 1.49/37.9 | 0.62/15.8 | 500 | Painted Red |
| | 912LL | 42510 | T-5 | Miniature Wedge | 12.8 | 1.0 | 12.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 2000 | Long Life |
| | 922 | 41029 | T-5 | Miniature Wedge | 12.8 | 0.98 | 15.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 200 | |
| | 912 | 41017 | T-5 | Miniature Wedge | 12.8 | 1.0 | 12.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 1000 | |

Continued on next page ►►



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MINIATURE


T-5 Miniature Wedge Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---------------|----------|------|-----------------|-------|-------|------|----------|-----------|-----------|-----------|----------------------|
| | | | | | | | | | | | |
| 917 | 41024 | T-5 | Miniature Wedge | 12.8 | 1.2 | 10.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 1200 | |
| 920 | 42157 | T-5 | Miniature Wedge | 12.8 | 1.2 | 10.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 1200 | |
| 16120X | 50044 | T-5 | Miniature Wedge | 12.8 | 1.35 | 16 | C-2R | 1.53/38.9 | 0.62/15.8 | 10000 | Xenon |
| 921 | 41026 | T-5 | Miniature Wedge | 12.8 | 1.4 | 21.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 1000 | |
| 921LL | 42512 | T-5 | Miniature Wedge | 12.8 | 1.4 | 21.0 | C-2R | 1.49/37.9 | 0.62/15.8 | 2000 | Long Life |
| 921X | 50046 | T-5 | Miniature Wedge | 12.8 | 1.4 | 21.0 | C-2R | 1.53/38.9 | 0.62/15.8 | 3000 | Xenon |
| 921-FR | 49562 | T-5 | Miniature Wedge | 12.8 | 1.4 | | C-2R | 1.49/37.9 | 0.62/15.8 | 1000 | |
| 906 | 41012 | T-5 | Miniature Wedge | 13 | 0.69 | 6.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 1000 | |
| 906B | | | Miniature Wedge | | | | | | | | |
| 906G | 00356 | T-5 | Miniature Wedge | 13 | 0.69 | - | C-2F | 1.49/37.9 | 0.62/15.8 | 1000 | Hi Temp Green Paint |
| 906R | | | Miniature Wedge | | | | | | | | |
| 906Y | 00359 | T-5 | Miniature Wedge | 13 | 0.69 | - | C-2F | 1.49/37.9 | 0.62/15.8 | 1000 | Hi Temp Yellow Paint |
| 916 | 41022 | T-5 | Miniature Wedge | 13.5 | 0.54 | 2.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 10000 | |
| 916NA | 42150 | T-5 | Miniature Wedge | 13.5 | 0.54 | | C-2F | 1.49/37.9 | 0.62/15.8 | 10000 | Natural Amber |
| 904 | 41010 | T-5 | Miniature Wedge | 13.5 | 0.69 | 4.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 5000 | 5000+ hrs @ 14.0V |
| 1524X | 50050 | T-5 | Miniature Wedge | 24 | 0.3 | 5.4 | C-2F | 1.53/38.9 | 0.62/15.8 | 2500 | Xenon |
| 2410X-2 | 50054 | T-5 | Miniature Wedge | 24 | 0.417 | 8.0 | C-2F | 1.53/38.9 | 0.62/15.8 | 3000 | Xenon |
| 928 | 41032 | T-5 | Miniature Wedge | 28 | 0.3 | 6.0 | C-2F | 1.49/37.9 | 0.62/15.8 | 500 | |



T-6 Candelabra Screw Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---------------|----------|------|------------------|-------|-------|------|----------|-----------|-----------|----------|
| 15T6C-130V | 43000 | T-6 | Candelabra Screw | 130 | 15 | 90 | C-7A | 3.06/77.7 | 0.77/19.6 | 2000 |
| 15T6C-145V | 43002 | T-6 | Candelabra Screw | 145 | 15 | 90 | C-7A | 3.06/77.7 | 0.77/19.6 | 2000 |
| 25T6C-120V | 43018 | T-6 | Candelabra Screw | 120 | 25 | 190 | C-7A | 3.06/77.7 | 0.77/19.6 | 2000 |



T-6 Single Contact Bayonet Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---------------|----------|------|------------|-------|------|------|----------|-----------|-----------|----------|
| 3497 | 40645 | T-6 | SC Bayonet | 12.8 | 2.1 | 45 | C-6 | 2.00/50.8 | 0.79/20.1 | 600 |




T-6 Double Contact Index Bayonet Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---------------|----------|------|------------------|---------|----------|------|----------|-----------|-----------|------------|
| 3496 | 40641 | T-6 | DC Index Bayonet | 12.8/14 | 2.1/0.59 | 43/3 | C-6/C-6 | 2.00/50.8 | 0.79/20.1 | 600 / 5000 |



T-6 Wedge Double Filament Base

| Ordering Code | Bar Code | Bulb | Base | Volts | Amps | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---------------|----------|------|-------------|-----------|-----------|---------|----------|-----------|-----------|------------|
| 7440 | 40931 | T-6 | Wedge W3x16 | 13.5 | 1.85 | 37 | C-6 | 1.75/44.5 | 0.79/20.1 | 300 |
| 7443 | 40935 | T-6 | Wedge W3x16 | 13.5/13.5 | 1.85/0.44 | 35/2.78 | C-6/C-6 | 1.75/44.5 | 0.79/20.1 | 500 / 1000 |






23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-6½ Intermediate Screw Base (E17)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Lumens | Fila-ment | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|------------------|----------|---------|------------------------|-------|-------|--------|-----------|-----------|-----------|-----------|---------------|
| | 20T6-1/2N-130V | 43010 | T-6 1/2 | Intermediate Screw E17 | 130 | 20 | 180 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | |
| | 20T6-1/2F-130V | 43012 | T-6 1/2 | Intermediate Screw E17 | 130 | 20 | 170 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | Frosted |
| | 20T6-1/2N-145V | 44402 | T-6 1/2 | Intermediate Screw E17 | 145 | 20 | 170 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | |
| | 25T6-1/2N-130V | 43020 | T-6 1/2 | Intermediate Screw E17 | 130 | 25 | 210 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | |
| | 25T6.5N/F-130V | 43022 | T-6 1/2 | Intermediate Screw E17 | 130 | 25 | 200 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | Frosted |
| | 40T6-1/2N-130V | 43038 | T-6 1/2 | Intermediate Screw E17 | 130 | 40 | 330 | C-8 | 5.5/139.7 | 0.83/21.1 | 1500 | |
| | 40T6-1/2N/F-130V | 43040 | T-6 1/2 | Intermediate Screw E17 | 130 | 40 | 320 | C-8 | 5.5/139.7 | 0.83/21.1 | 1500 | Frosted |


T-6½ Double Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Lumens | Fila-ment | MOL in/mm | MOD in/mm | Avg. Life | Special Desc. |
|---|-----------------|----------|---------|------------|-------|-------|--------|-----------|------------|-----------|-----------|---------------|
| | 20T6-1/2DC-130V | 43014 | T-6 1/2 | DC Bayonet | 130 | 20 | 180 | C-8 | 5.56/141.2 | 0.83/21.1 | 3000 | |
| | 20T6.5DC/F-130V | 43016 | T-6 1/2 | DC Bayonet | 130 | 20 | 170 | C-8 | 5.56/141.2 | 0.83/21.1 | 3000 | Frosted |
| | 20T6-1/2DC-145V | 44400 | T-6 1/2 | DC Bayonet | 145 | 20 | 170 | C-8 | 5.56/141.2 | 0.83/21.1 | 3000 | |
| | 25T6-1/2DC-130V | 43024 | T-6 1/2 | DC Bayonet | 130 | 25 | 210 | C-8 | 5.5/139.7 | 0.83/21.1 | 3000 | |
| | 25T6.5DC/F-130V | 43026 | T-6 1/2 | DC Bayonet | 130 | 25 | 200 | C-8 | 5.56/141.2 | 0.83/21.1 | 3000 | Frosted |


T-7 Candelabra Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|--|---------------|----------|------|------------------|-------|-------|------|----------|-----------|-----------|----------|
| | 15T7C-130V | 43006 | T-7 | Candelabra Screw | 130 | 15 | 90 | C-7A | 2.25/57.2 | 0.89/22.6 | 1500 |


T-7 Intermediate Screw Base (E17)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---|---------------|----------|------|------------------------|-------|-------|------|----------|-----------|-----------|----------|
| | 15T7N-130V | 43004 | T-7 | Intermediate Screw E17 | 130 | 15 | 90 | C-7A | 2.25/57.2 | 0.89/22.6 | 1500 |


T-7 Double Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---|---------------|----------|------|------------|-------|-------|------|----------|-----------|-----------|----------|
| | 15T7DC-130V | 43008 | T-7 | DC Bayonet | 130 | 15 | 90 | C-7A | 2.25/57.2 | 0.89/22.6 | 1500 |

T-8 Candelabra Screw Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---|---------------|----------|------|------------------|-------|-------|------|----------|-----------|-----------|----------|
| | 25T8C-120V | 43028 | T-8 | Candelabra Screw | 120 | 25 | 180 | C-7A | 2.63/66.8 | 1.04/26.4 | 1500 |

T-8 Intermediate Screw Base (E17)

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---|---------------|----------|------|------------------------|-------|-------|------|----------|-----------|-----------|----------|
| | 25T8N-130V | 43030 | T-8 | Intermediate Screw E17 | 130 | 25 | 180 | C-7A | 2.63/66.8 | 1.04/26.4 | 1500 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MINIATURE


T-8 Double Contact Bayonet Base

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | MSCP | Filament | MOL in/mm | MOD in/mm | Avg Life |
|---|---------------|----------|------|------------|-------|-------|------|----------|-----------|-----------|----------|
| | 25T8DC-120V | 49563 | T-8 | DC Bayonet | 120 | 25 | 180 | C-7A | 2.63/66.8 | 1.04/26.4 | 1500 |
| | 25T8DC-130V | 43032 | T-8 | DC Bayonet | 130 | 25 | 180 | C-7A | 2.63/66.8 | 1.04/26.4 | 1500 |

T-10 Medium Screw Base


|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Lumens | Filament | MOL in/mm | MOD in/mm | Avg Life | Special Desc. |
|---|---------------|----------|------|--------------|-------|-------|--------|----------|------------|-----------|----------|----------------|
| | 25T10-130V | 43034 | T-10 | Medium Screw | 130 | 25 | 210 | C-8 | 5.19/131.8 | 1.25/31.8 | 1500 | |
| | 25T10/F-130V | 43036 | T-10 | Medium Screw | 130 | 25 | 200 | C-8 | 5.19/131.8 | 1.25/31.8 | 1500 | Frosted |
| | 25T10/IF-120 | 41522 | T-10 | Medium Screw | 120 | 25 | - | C-8 | 5.19/131.8 | 1.25/31.8 | 1500 | Inside Frosted |
| | 40T10-130V | 43042 | T-10 | Medium Screw | 130 | 40 | 320 | C-8 | 5.19/131.8 | 1.25/31.8 | 1500 | |
| | 40T10/F-130V | 43044 | T-10 | Medium Screw | 130 | 40 | 310 | C-8 | 5.19/131.8 | 1.25/31.8 | 1500 | Frosted |

TL-3 Miniature Screw Base


|  | Ordering Code | Bar Code | Bulb | Base | Volts | Amps | Lumens | Filament | MOL in/mm | MOD in/mm | Avg Life | Special Desc. |
|---|---------------|----------|------|-----------------|-------|------|--------|-----------|-----------|-----------|----------|---------------|
| | 112 | 40168 | TL-3 | Miniature Screw | 1.2 | 0.25 | S-2 | 0.93/23.6 | 0.38/9.6 | 5 | | 1 "AA" Cell |
| | 222 | 40492 | TL-3 | Miniature Screw | 2.25 | 0.25 | C-2R | 0.93/23.6 | 0.38/9.6 | 5 | | 2 "AA" Cells |
| | 243 | 40520 | TL-3 | Miniature Screw | 2.33 | 0.27 | C-6 | 0.93/23.6 | 0.38/9.6 | 10 | | |
| | K222 | 40063 | TL-3 | Miniature Screw | 2.33 | 0.6 | C-2R | 0.93/23.6 | 0.38/9.6 | 5 | Krypton | |

AUTOMOTIVE

HID Lamps - OE Replacement

|  | Ordering Code | Bar Code | Bulb | Base | Volts | Watts | Lumens | Filament | MOL in/mm | MOD in/mm | Avg Life | Special Desc. |
|---|---------------|----------|------|---------|-------|-------|--------|----------|-----------|-----------|----------|-------------------------------------|
| | D1R | | | PK32 d3 | | 35 | 2800 | | | | 3000 | For Reflector or Lens Optic Systems |
| | D1S | | | PK32 d2 | | 35 | 3200 | | | | 3000 | For Projector Optic Systems |
| | D2R | | | P32 d-3 | | 35 | 2800 | | | | 2000 | For Reflector or Lens Optic Systems |
| | D2S | | | P32 d-2 | | 35 | 3200 | | | | 2000 | For Projector Optic Systems |

Halogen Forward Lighting

|  | Ordering Code | Bar Code | Volts | Watts | Bulb | Type | Base | Filament | Avg. Life | Special Desc. |
|---|---------------|----------|-----------|--------|---------|---------------------------|---------|----------|-----------|--|
| | 9003 | 42268 | 12.8/12.8 | 60/55 | T-5 | HB2 | P43t-38 | C-8/C-8 | 150/800 | Halogen |
| | 9003HW-SWTX | 49111 | 12.8/12.8 | 90/82 | T-5 | HB2 | P43t-38 | C-8/C-8 | 150/800 | Xenon, Up to 30% brighter than std halogen. Super White Coated Capsule |
| | 9003SWTX | 44128 | 12.8/12.8 | 60/55 | T-5 | HB2 | P43t-38 | C-8/C-8 | 150/800 | Xenon, Up to 30% brighter than std halogen. Super White Coated Capsule |
| | 9004 | 41008 | 12.8/12.8 | 65/45 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 150/320 | Halogen |
| | 9004-Blue | 43500 | 12.8/12.8 | 65/45 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 150/320 | Halogen |
| | 9004HW | 43504 | 12.8/12.8 | 100/80 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 100/250 | Halogen, High Watt |
| | 9004HW-Blue | 43524 | 12.8/12.8 | 100/80 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 100/250 | Halogen, High Watt |
| | 9004HWSW | 44031 | 12.8/12.8 | 100/80 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 100/250 | Halogen, High Watt, Super White Coated Capsule |
| | 9004LL | 41063 | 12.8/12.8 | 65/45 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 250/850 | Halogen, Long Life |
| | 9004SW | 44024 | 12.8/12.8 | 65/45 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 150/320 | Halogen, Super White Coated Capsule |
| | 9004SWTX | 44134 | 12.8/12.8 | 65/45 | T-4 3/4 | HB1, Axial Prefocus | P29t | C-6/C-6 | 150/320 | Xenon, Up to 30% brighter than std halogen, Super White Coated Capsule |
| | 9005 | 41052 | 12.8 | 65 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 150 | Halogen |
| | 9005-Blue | 43508 | 12.8 | 65 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 150 | Halogen |
| | 9005HW | 43544 | 12.8 | 100 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 100 | Halogen, High Watt |
| | 9005HWSW | 44041 | 12.8 | 100 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 100 | Halogen, High Watt, Super White Coated Capsule |
| | 9005SW | 44036 | 12.8 | 65 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 150 | Halogen, Super White Coated Capsule |

Most Automotive Lamps are available boxed or in blister pack.






23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com



AUTOMOTIVE

Halogen Forward Lighting (Continued)

| | Ordering Code | Bar Code | Volts | Watts | Bulb | Type | Base | Filament | Avg. Life | Special Desc. |
|--|---------------|----------|-----------|--------|---------|------------------------------|--------|----------|-----------|--|
|  9005 | 9005SWTX | 44140 | 12.8 | 65 | T-3 1/4 | HB3, Right-Angle Prefocus | p20d | C-8 | 150 | Xenon, Up to 30% brighter than std halogen. Super White Coated Capsule |
| | 9005XS | 49413 | 12.8 | 65 | T-3 1/4 | HB3A, Straight Base Prefocus | p20d | C-8 | 150 | |
| | 9005XSLL | 00236 | 12.8 | 65 | T-3 1/4 | HB3A, Straight Base Prefocus | p20d | C-8 | 600 | |
| | 9006 | 41055 | 12.8 | 55 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 320 | Halogen |
| | 9006-Blue | 43512 | 12.8 | 55 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 320 | Halogen |
| | 9006HW | 43564 | 12.8 | 80 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 150 | Halogen, High Watt |
| | 9006HW-Blue | 43574 | 12.8 | 80 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 150 | Halogen, High Watt |
| | 9006HWSW | 44054 | 12.8 | 80 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 150 | Halogen, High Watt, Super White Coated Capsule |
| | 9006LL | 44170 | 12.8 | 55 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 800 | Halogen, Long Life |
| | 9006SW | 44048 | 12.8 | 55 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 320 | Halogen, Super White Coated Capsule |
|  9006 | 9006SWTX | 44146 | 12.8 | 55 | T-3 1/4 | HB4, Right-Angle Prefocus | P22d | C-8 | 320 | Xenon, Up to 30% brighter than std halogen. Super White Coated Capsule |
| | 9006XS | 49416 | 12.8 | 55 | T-3 1/4 | HB4A, Straight Base Prefocus | P22d | C-8 | 320 | |
| | 9006XSLL | 00237 | 12.8 | 55 | T-3 1/4 | HB4A, Straight Base Prefocus | P22d | C-8 | 600 | |
| | 9007 | 42426 | 12.8/12.8 | 65/55 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 150/320 | Halogen |
| | 9007-Blue | 43516 | 12.8/12.8 | 65/55 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 150/320 | Halogen |
| | 9007HW | 43517 | 12.8/12.8 | 100/80 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 100/150 | Halogen, High Watt |
| | 9007HW-Blue | 43590 | 12.8/12.8 | 100/80 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 100/150 | Halogen, High Watt |
| | 9007HWSW | 44068 | 12.8/12.8 | 100/80 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 100/150 | Halogen, High Watt, Super White Coated Capsule |
| | 9007LL | 44176 | 12.8/12.8 | 65/55 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 150/1450 | Halogen, Long Life |
| | 9007SW | 44060 | 12.8/12.8 | 65/55 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 150/320 | Halogen, Super White Coated Capsule |
|  9007 | 9007SWTX | 44152 | 12.8/12.8 | 65/55 | T-4 3/4 | HB5, Axial Prefocus | PX29t | C-8/C-8 | 150/320 | Xenon, Up to 30% brighter than std halogen. Super White Coated Capsule |
| | 9008 | 49865 | 12.8/12.8 | 65/55 | T-5 | H13 | P26.4t | C-8/C-8 | 150/500 | Halogen |
| | 9040 | 16070 | 12.8 | 40 | T-4 | Right Angle | P22d | C-6 | 1500 | Halogen |

Most Automotive Lamps are available boxed or in blister pack.

800 Series

| | Ordering Code | Watts | Volts | Description | Base | Life |
|--|---------------|-------|-------|-------------------------------------|----------------------|------|
|  880 | 880 | 27 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 300 |
| | 880SW* | 27 | 12.8 | Superwhite Halogen driving/fog lamp | Axial Prefocus | 300 |
|  881 | 881 | 27 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 300 |
| | 881SW* | 27 | 12.8 | Superwhite Halogen driving/fog lamp | Right Angle Prefocus | 300 |
|  882 | 882 | 4.5 | 12.8 | Halogen driving/fog lamp | PC Base | 2000 |
| | 884 | 27 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 300 |
|  885 | 885 | 50 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 200 |
| | 885SW* | 50 | 12.8 | Superwhite Halogen driving/fog lamp | Axial Prefocus | 200 |
|  886 | 886 | 50 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 200 |
| | 889 | 27 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 300 |
| 889SW | 889SW* | 27 | 12.8 | Superwhite Halogen driving/fog lamp | Right Angle Prefocus | 300 |
| | 890 | 27 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 300 |
| 890SW | 890SW* | 27 | 12.8 | Halogen driving/fog lamp | 98145.451 | 300 |
| | 891 | 8 | 12.8 | Halogen third brake lamp | G4 Bi-pin | 500 |
| 893 | 893 | 37.5 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 200 |
| | 893SW* | 37.5 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 200 |
| 894 | 894 | 37.5 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 200 |
| | 894SW* | 37.5 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 200 |
| 896 | 896 | 37.5 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 200 |
| | 896SW* | 37.5 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 200 |
| 898 | 898 | 37.5 | 12.8 | Halogen driving/fog lamp | Right Angle Prefocus | 1900 |
| | 899 | 37.5 | 12.8 | Halogen driving/fog lamp | Axial Prefocus | 2000 |

*Superwhite versions feature a whiter light for improved visibility.

Most Automotive Lamps are available boxed or in blister pack.

882

884



885SW



886



889



889SW



890



891





23220 West 84th Street
Shawnee, KS 66227


800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com


AUTOMOTIVE

| H1 | | | | | | | |
|---|--------|---------------|-------|-------|---------------------|--------|------|
|  | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
| | 01000 | H1 | 55 | 6 | Halogen driving/fog | P14.5S | 150 |
| | 01003 | H1 | 55 | 12 | Halogen driving/fog | P14.5S | 225 |
| | 01004 | H1 | 100 | 12 | Halogen driving/fog | P14.5S | 100 |
| | 01027 | H1 | 70 | 24 | Halogen driving/fog | P14.5S | 150 |
| <i>Most Automotive Lamps are available boxed or in blister pack.</i> | | | | | | | |

| H2 | | | | | | | |
|---|--------|---------------|-------|-------|---------------------|------|------|
|  | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
| | 01005 | H2 | 55 | 12 | Halogen driving/fog | X511 | 225 |
| | 01023 | H2 | 100 | 12 | Halogen driving/fog | X511 | 100 |
| <i>Most Automotive Lamps are available boxed or in blister pack.</i> | | | | | | | |

| H3 | | | | | | | |
|--|--------|---------------|-------|---------------------|------------------------|-------|------|
|  | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
| | 01006 | H3 | 55 | 6 | Halogen driving/fog | PK22S | 150 |
| | 01007 | H3 | 55 | 12 | Halogen driving/fog | PK22S | 150 |
| | 01008 | H3 | 70 | 24 | Halogen driving/fog | PK22S | 150 |
| | 01015 | H3 | 100 | 12 | Halogen driving/fog | PK22S | 100 |
| H3C | H3C | 55 | 12 | Halogen driving/fog | Prefocused Flanged H3C | 150 | |
| <i>Most Automotive Lamps are available boxed or in blister pack.</i> | | | | | | | |

| H4 | | | | | | | |
|---|------------|---------------|--------|-------|----------------------------------|------|---------|
|  | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
| | 01009 | H4 | 60/55 | 12 | Halogen headlamp | P43t | 150/300 |
| | 01009-BLUE | H4** | 60/55 | 12 | Blue Halogen headlamp | P43t | 150/300 |
| | 01010 | H4 | 75/70 | 24 | Halogen headlamp | P43t | 150/300 |
| | 01018 | H4 | 100/90 | 12 | Halogen headlamp | P43t | 100/200 |
| | 01021 | H4 | 100/80 | 12 | Halogen headlamp | P43t | 100/200 |
| | 6361 | H4 | 60/55 | 12.8 | Motorcycle/Snowmobile | P45t | 150/300 |
| | 6365 | H4 | 100/80 | 12.8 | Motorcycle/Snowmobile Heavy Duty | P45t | 100/200 |
| | 6255BAHP | H4 | 100/55 | 12.8 | Motorcycle/Snowmobile | P45t | 150/300 |
| | 6260H | H4 | 60/55 | 12.8 | Motorcycle/Snowmobile | P43t | 150/300 |
| | 6260HD | H4 | 60/55 | 12.8 | Motorcycle/Snowmobile Heavy Duty | P43t | 150/300 |
| | 6260HP | H4 | 100/55 | 12.8 | Motorcycle/Snowmobile | P43t | 100/200 |
| <i>Most Automotive Lamps are available boxed or in blister pack.</i> | | | | | | | |

| H7 | | | | | | | |
|---|----------|---------------|-------|-------|---|-------|------|
|  | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
| | H755 | H7 | 55 | 12 | Halogen headlamp | PX26d | 550 |
| | H755SW | H7* | 55 | 12 | Superwhite, DOT Approved | PX26d | 550 |
| | H755SWTX | H7* | 55 | 12 | Superwhite True Xenon, up to 30% brighter, DOT Approved | PX26d | 550 |
| | H7100 | H7 | 100 | 12 | High Wattage | PX26d | 150 |
| | H7100SW | H7* | 100 | 12 | Superwhite High Wattage | PX26d | 150 |
| <i>* Superwhite versions feature a whiter light for improved visibility.</i> | | | | | | | |
| <i>Most Automotive Lamps are available boxed or in blister pack.</i> | | | | | | | |









23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679















www.eiko.com
eiko@eiko.com

AUTOMOTIVE


H8-H13

| | EiKO # | Ordering Code | Watts | Volts | Description | Base | Life |
|---|---------|---------------|-------|-------|--------------------------|---------|---------|
|  H8 | H835 | H8 | 35 | 13.2 | Halogen | PGJ19-1 | 320 |
| | H965 | H9 | 65 | 13.2 | Halogen | PGJ19-5 | 120 |
| | H1042 | H10 | 42 | 13.2 | 9145 Halogen driving/fog | PY20d | 775 |
| | H1155 | H11 | 55 | 13.2 | Halogen | PGJ19-2 | 550 |
| | H1155LL | H1155LL | 55 | 13.2 | Halogen | PGJ19-2 | 1000 |
| | H1253 | H12 | 53 | 13.2 | 9055 Halogen driving/fog | PZ20d | 950 |
| | 9008 | H13 | 65/55 | 13.2 | Halogen Headlamp | P26.4t | 300/900 |
| | 9040 | 9040 | 40 | 13.2 | 9040 Halogen driving/fog | | 775 |
|  H9 | | | | | | | |
|  H10 | | | | | | | |
|  H11 | | | | | | | |
|  H12 | | | | | | | |
|  9040 | | | | | | | |

Rough Service Work Lamps

| | Ordering Code | Description |
|---|--|--|
|               | 50A/RS | 50 Watt Rough Service bulb |
| | 75A/RS | 75 Watt Rough Service bulb |
| | 100A/RS | 100 Watt Rough Service bulb |
| | 150A/RS | 150 Watt Rough Service bulb |
| | 50A/RS/TF | 50 Watt Silicone Coated bulb |
| | 75A/RS/TF | 75 Watt Silicone Coated bulb |
| | 100A/RS/TF | 100 Watt Silicone Coated bulb |
| | 50A/RS-12V | 50 Watt 12 Volt Rough Service bulb |
| | 75A/RS-12V | 75 Watt 12 Volt Rough Service bulb |
| | 100A/RS-12V | 100 Watt 12 Volt Rough Service bulb |
| | Q300T3/CL/120V | 300 Watt Quartz Halogen Work Light bulb |
| | Q500T3/CL/120V | 500 Watt Quartz Halogen Work Light bulb |
| | DT13/41 | 13 Watt Fluorescent Work Light bulb, 4100K |
| DT13/65 | 13 Watt Fluorescent Work Light bulb, 6500K | |
| SP23/41K | 23 Watt Spiral Fluorescent Rough Service lamp, 4100K | |
| SP23/65K | 23 Watt Spiral Fluorescent Rough Service lamp, 6500K | |

Commercial Metal Cabinets

| | Ordering Code | Description |
|---|---------------|--------------------|
|  | 44250 | Metal Lamp Cabinet |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

SEALED BEAM

PAR 36 Glass Sealed Beam



| Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | MOD in/mm |
|---------------|----------|-------------------|-------|-------|----------------------------|----------------------------|----------|-----------|-----------|--------------|
| 4546 | 46072 | Screw Terminals | 4.7 | 0.5A | 6300 | 3 x 3 | C-2R | 100 | 2.75/70 | 4 1/2 /114.3 |
| 4547 | 46074 | Screw Terminals | 4.75 | 1.25A | 20,000 | 3 x 3 | C-2R | 100 | 2.75/70 | 4 1/2 /114.3 |
| 7613 | 46108 | Screw Terminals | 6 | 8 | 400 | 30 x 20 | C-6 | 50 | 2.75/70 | 4 1/2 /114.3 |
| 4511 | 46060 | Screw Terminals | 6.2 | 30 | 2300 | Trapezoidal | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4510 | 46058 | Screw Terminals | 6.4 | 25 | 800 | 80 x 20 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4515 | 46062 | Screw Terminals | 6.4 | 30 | 55,000 | 5 x 5 | C-6 | 100 | 2.75/70 | 4 1/2 /114.3 |
| 4044 | 46008 | Screw Terminals | 12 | 12 | 1100 | 50 x 25 | C-6 | 150 | 2.75/70 | 4 1/2 /114.3 |
| 4414 | 46028 | Screw Terminals | 12.8 | 18 | 1500 | 50 x 25 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4414A | 46030 | Screw Terminals | 12.8 | 18 | 450 | 50 x 25 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4446 | 46048 | Screw Terminals | 12.8 | 25 | 400 | 80 x 80 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4416 | 46036 | Screw Terminals | 12.8 | 30 | 35,000 | 11 x 4 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4416R | 46038 | Screw Terminals | 12.8 | 30 | 6000 | 11 x 4 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4405 | 46016 | Screw Terminals | 12.8 | 30 | 50000 | 5.5 x 5.5 | C-6 | 100 | 2.75/70 | 4 1/2 /114.3 |
| 4406 | 46018 | Screw Terminals | 12.8 | 35 | 600 | 80 x 30 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4411 | 46020 | Screw Terminals | 12.8 | 35 | 2500 | Trapezoidal | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4415 | 46032 | Screw Terminals | 12.8 | 35 | 9000 | 40 x 5 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4415A | 46034 | Screw Terminals | 12.8 | 35 | 7000 | 40 x 5 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 7400 | 46106 | Slip-On Terminals | 12.8 | 35 | 33,000 | 12 x 5 | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4461 | 46050 | Screw Terminals | 12.8 | 60 | 6000 | Trapezoidal | C-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4509 | 46057 | Screw Terminals | 13 | 100 | 110,000 | 12 x 6 | C-6 | 25 | 2.75/70 | 4 1/2 /114.3 |
| Q4632 | 46088 | Screw Terminals | 13 | 250 | 75,000 | 14 x 12 | C-6 | 500 | 2.75/70 | 4 1/2 /114.3 |
| 4589 | 46084 | Screw Terminals | 28 | 50 | 5000 | Trapezoidal | CC-6 | 400 | 2.75/70 | 4 1/2 /114.3 |
| 4502 | 46054 | Screw Terminals | 28 | 50 | 10,000 | 40 x 7 | C-6 | 400 | 2.75/70 | 4 1/2 /114.3 |
| 4505 | 46056 | Screw Terminals | 28 | 50 | 45,000 | 11 x 5 | CC-6 | 400 | 2.75/70 | 4 1/2 /114.3 |
| 4626 | 46086 | Screw Terminals | 28 | 150 | 25,000 | 40 x 9 | CC-6 | 300 | 2.75/70 | 4 1/2 /114.3 |
| 4596 | 46085 | Screw Terminals | 28 | 250 | 150,000 | 11 x 12 | CC-8 | 25 | 2.75/70 | 4 1/2 /114.3 |
| 4350 | 46014 | Slip-On Terminals | 36 | 60 | 2100 | Trapezoidal | C-2V | 400 | 2.75/70 | 4 1/2 /114.3 |
| 4340 | 46012 | Slip-On Terminals | 48 | 80 | 2500 | Trapezoidal | C-2V | 400 | 2.75/70 | 4 1/2 /114.3 |

PAR 46 Glass Sealed Beam



| Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | MOD in/mm |
|---------------|----------|-----------------|-----------|---------|----------------------------|----------------------------|-----------|-----------|-----------|------------|
| 4531 | 46064 | Screw Terminals | 12.5 | 40 | 30,000 | 20 x 5 | C-6 | 400 | 3.75/95 | 5 3/4 /146 |
| 4435 | 46044 | Screw Terminals | 12.8 | 30 | 75,000 | 5 x 5 | C-6 | 100 | 3.75/95 | 5 3/4 /146 |
| 4413 | 46026 | Screw Terminals | 12.8 | 35 | 1100 | 80 x 20 | C-6 | 300 | 3.75/95 | 5 3/4 /146 |
| 4419 | 46040 | Screw Terminals | 12.8 | 35 | 1600 | Trapezoidal | C-6 | 300 | 3.75/95 | 5 3/4 /146 |
| 4412 | 46022 | Screw Terminals | 12.8 | 35 | 11,000 | 40 x 5 | C-6 | 300 | 3.75/95 | 5 3/4 /146 |
| 4412A | 46024 | Screw Terminals | 12.8 | 35 | 8800 | 40 x 5 | C-6 | 300 | 3.75/95 | 5 3/4 /146 |
| 4436 | 46046 | Screw Terminals | 12.8 | 35 | 60,000 | 10 x 4 | C-6 | 300 | 3.75/95 | 5 3/4 /146 |
| H5006 | 46116 | 3 Contact Lugs | 12.8/12.8 | 35/35 | 15,000/20,000 | 35 x 7/35 x 7 | C-6/C-6 | 200/320 | 4.0/102 | 5 3/4 /146 |
| 4000 | 46000 | 3 Contact Lugs | 12.8/12.8 | 37.5/60 | 11,000/25,000 | 34 x 7/34 x 7 | C-6/C-6 | 200/320 | 4.0/102 | 5 3/4 /146 |
| 4040 | 46006 | 3 Contact Lugs | 12.8/12.8 | 37.5/60 | 11,000/25,000 | 37 x 4/37 x 4 | C-6/C-6 | 300/500 | 4.0/102 | 5 3/4 /146 |
| 5001 | 46096 | 2 Contact Lugs | 12.8 | 50 | 35,000 | 26 x 5 | C-6 | 200 | 4.0/102 | 5 3/4 /146 |
| H5001 | 46114 | 2 Contact Lugs | 12.8 | 50 | 55,000 | 26 x 5 | C-6 | 200 | 4.0/102 | 5 3/4 /146 |
| H7635 | 46122 | Screw Terminals | 12.8 | 50 | 160,000 | 6.5 x 4 | C-6 | 100 | 3.75/95 | 5 3/4 /146 |
| 4478 | 46052 | 2 Contact Lugs | 13 | 60 | 1600 | 56 x 32 | 2C-6 | 800 | 4.0/102 | 5 3/4 /146 |
| 4537 | 46066 | Screw Terminals | 13 | 100 | 200,000 | 11 x 6 | C-6 | 25 | 3.13/80 | 5 3/4 /146 |
| 4007 | 46002 | MP | 13/13 | 100/100 | 50,000/20,000 | 5 x 6/7 x 13 | C-6/C-6 | 25/25 | 4.0/102 | 5 3/4 /146 |
| 4049 | 46010 | MP | 13 | 150 | 300,000 | 15 x 7 | C-6 | 15 | 3.13/80 | 5 3/4 /146 |
| 4578 | 46078 | 2 Contact Lugs | 28 | 60 | 1600 | 55 x 30 | 2C-6 | 800 | 4.0/102 | 5 3/4 /146 |
| 4579 | 46080 | 3 Contact Lugs | 28/28 | 80/60 | 24,000/11,000 | 25 x 25/7 x 7 | CC-6/CC-6 | 400/400 | 4.0/102 | 5 3/4 /146 |
| 4570 | 46076 | Screw Terminals | 28 | 150 | 32,000 | 50 x 9 | CC-6 | 300 | 3.75/95 | 5 3/4 /146 |
| 4581 | 46082 | Screw Terminals | 28 | 450 | 400,000 | 13 x 14 | CC-8 | 10 | 3.13/80 | 5 3/4 /146 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

SEALED BEAM


PAR 56 Glass Sealed Beam

|  | Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | MOD in/mm |
|---|---------------|----------|-----------------|-----------|-------|----------------------------|----------------------------|----------|-----------|-----------|-----------|
| | 4545 | 46070 | Screw Terminals | 12 | 100 | 225,000 | 9 x 5 | C-6 | 100 | 4.5/114 | 0.28/7.0 |
| | 4543 | 46068 | Screw Terminals | 12.5 | 100 | 250,000 | 9 x 5 | C-6 | 50 | 4.5/114 | 0.28/7.0 |
| | 6014 | 46098 | 3 Contact Lugs | 12.8/12.8 | 60/50 | 32,000/25,000 | 34 x 7/34 x 7 | C-6/C-6 | 200/320 | 5.0/127 | 0.28/7.0 |
| | 6015 | 46100 | 3 Contact Lugs | 12.8/12.8 | 60/50 | 32,000/25,000 | 34 x 7/34 x 7 | C-6/C-6 | 300/500 | 5.0/127 | 0.28/7.0 |
| | H6024 | 46118 | 3 Contact Lugs | 12.8/12.8 | 65/35 | 35,000/27,000 | 35 x 7/35 x 7 | C-6/C-6 | 150/320 | 5.0/127 | 0.28/7.0 |


Rectangular 72mm x 140mm Glass Sealed Beam

|  | Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | Description |
|---|---------------|----------|----------------------|-------|-------|----------------------------|----------------------------|----------|-----------|-----------|--|
| | H4351 | 46107 | Right Angle, Plastic | 12.8 | 55 | SAE | SAE | C-8 | 500 | 4.0/102 | Halogen Auto Headlamp, Lo Beam, Type K |
| | H4352 | 46109 | Right Angle, Plastic | 12.8 | 65 | SAE | SAE | C-8 | 150 | 4.0/102 | Halogen Auto Headlamp, Hi Beam, Type K |


Rectangular 92mm x 150mm Glass Sealed Beam

|  | Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | Description |
|--|---------------|----------|----------------|-------|-------|----------------------------|----------------------------|----------|-----------|-----------|---|
| | H4703 | 46121 | 2 Contact Lugs | 12.8 | 55 | SAE | SAE | C-8 | 320 | 3.35/85 | Halogen Auto Headlamp, Lo Beam, Type LF |
| | H4701 | 46119 | 2 Contact Lugs | 12.8 | 65 | SAE | SAE | C-8 | 150 | 3.35/85 | Halogen Auto Headlamp, Hi Beam, Type UF |

Rectangular 100mm x 165mm Glass Sealed Beam

|  | Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | Description |
|---|---------------|----------|----------------|-----------|-------|----------------------------|----------------------------|----------|-----------|-----------|--|
| | H4656 | 46112 | 3 Contact Lugs | 12.8/12.8 | 35/35 | 15,000/25,000 | 35 x 7/35 x 7 | C-6/C-6 | 200/320 | 4.8/121 | Halogen Auto Headlamp, Lo Beam, Type 2A1 |
| | H4656HO/H6556 | 46113 | 3 Contact Lugs | 12.8/12.8 | 40/55 | SAE | SAE | C-8/C-8 | 200/700 | 4.8/121 | Halogen Auto Headlamp, Hi Output, Hi/Lo Beam, Type 2A1 |
| | 4652 | 46092 | 3 Contact Lugs | 12.8/12.8 | 40/60 | 12,500/22,500 | 34 x 7/34 x 7 | C-6/C-6 | 200/320 | 4.8/121 | Auto Headlamp, Low Beam, Type 2A1 |
| | 4651 | 46090 | 2 Contact Lugs | 12.8 | 50 | 32,000 | 26 x 5 | C-6 | 200 | 4.8/121 | Auto Headlamp, Hi Beam, Type 1A1 |
| | H4651 | 46110 | 2 Contact Lugs | 12.8 | 50 | 55,000 | 26 x 5 | C-6 | 200 | 4.8/121 | Halogen Auto Headlamp, Hi Beam, Type 1A1 |
| | H4666 | 46117 | 3 Contact Lugs | 12.8/12.8 | 65/55 | SAE | SAE | C-8/C-8 | 150/320 | 4.8/121 | Halogen Auto Headlamp, Hi/Lo Beam, Type 2E1 |

Rectangular 142mm x 200mm Glass Sealed Beam

|  | Ordering Code | Bar Code | Base | Volts | Watts | Approx Initial Max Beam CP | ° Beam Spread Horiz x Vert | Filament | Avg. Life | MOL in/mm | Description |
|---|---------------|----------|----------------|-----------|-------|----------------------------|----------------------------|----------|-----------|------------|--|
| | 6052 | 46102 | 3 Contact Lugs | 12.8/12.8 | 65/55 | 32,000/25,000 | 34 x 7/34 x 7 | C-6/C-6 | 150/320 | 5.44/138 | Auto Headlamp, Type 2B1 |
| | H6054 | 46120 | 3 Contact Lugs | 12.8/12.8 | 65/35 | 40,000/35,000 | 35 x 7/35 x 7 | C-6/C-6 | 150/320 | 138 (5.44) | Auto Headlamp, Type 2B1 |
| | H6054HO/H6554 | 46123 | 3 Contact Lugs | 12.8/12.8 | 65/55 | SAE | SAE | C-8/C-8 | 150/700 | 138 (5.44) | Halogen Auto Headlamp, Hi Output, Hi/Lo Beam, Type 2B1 |



23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MOTORCYCLE / ATV / SNOWMOBILE

BA20d Base – B Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-----------|-------|------------------|------|----------|-----------|-----------|-----------|-------|
| | 6235B | 48056 | B Type | 12.8/12.8 | 35/35 | A7375 & 410-5019 | B-35 | C-8/C-2R | 100/100 | 2.60/66.0 | 1.42/36.0 | 53/53 |
| | 6245B | 48058 | B Type | 12.8/12.8 | 45/45 | A7379 & 410-5024 | B-35 | C-8/C-2R | 100/100 | 2.60/66.0 | 1.42/36.0 | 69/69 |

BA20s Base – B Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-------|-------|------------------|------|----------|-----------|-----------|-----------|------|
| | 635B | 48052 | B Type | 12.8 | 35 | A7275 & 410-5017 | B-35 | C-6 | 100 | 2.60/66.0 | 1.42/36.0 | 53 |
| | 660B | 48054 | B Type | 12.8 | 60 | A7278 & 410-5018 | B-35 | C-6 | 75 | 2.60/66.0 | 1.42/36.0 | 75 |

P45T41 Base – BA Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|---------|-----------|-------|----------|------|----------|-----------|-----------|-----------|-------|
| | 6245BA | 48062 | BA Type | 12.8/12.8 | 45/45 | 410-5035 | G-40 | C-8/C-2R | 100/100 | 3.00/76.2 | 1.61/41.0 | 69/69 |
| | 6260BA | 48064 | BA Type | 12.8/12.8 | 60/60 | 410-5036 | G-40 | C-8/C-2R | 75/75 | 3.00/76.2 | 1.61/41.0 | 75/75 |

P36T Base – S Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-----------|-------|----------|------|----------|-----------|-----------|-----------|-------|
| | 6260S | 48036 | S Type | 12.8/12.8 | 60/60 | A5989 | B-35 | C-6/C-6 | 75/75 | 3.00/76.2 | 1.42/36.0 | 75/75 |

P15d-3 Base – J Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-----------|-------|----------|-------|----------|-----------|-----------|-----------|-------|
| | 6235J | 48038 | J Type | 12.8/12.8 | 35/35 | A7027 | RP-10 | C-6/C-6 | 100/100 | 2.25/57.2 | 1.25/32.0 | 53/53 |
| | 6245J | 48040 | J Type | 12.8/12.8 | 45/45 | A7028 | RP-10 | C-6/C-2V | 100/100 | 2.25/57.2 | 1.25/32.0 | 69/69 |
| | 6260J | 48042 | J Type | 12.8/12.8 | 60/60 | A7030 | RP-10 | C-6/C-2V | 75/75 | 2.25/57.2 | 1.25/32.0 | 75/75 |

P15s-3 Base – J Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-------|-------|----------|-------|----------|-----------|-----------|-----------|------|
| | 635J | 48046 | J Type | 12.8 | 35 | A7043 | RP-10 | C-6 | 100 | 2.25/57.2 | 1.25/32.0 | 53 |

P15S Base – J Type

| | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|--|---------------|----------|--------|-------|-------|----------|-------|----------|-----------|-----------|-----------|------|
| | 625J | 48044 | J Type | 12.8 | 25 | A7041 | RP-11 | C-6 | 100 | 2.30/58.4 | 1.38/35.0 | 36 |




23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679


www.eiko.com
eiko@eiko.com

MOTORCYCLE / ATV / SNOWMOBILE


P43T38 Base – SA Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|---|---------------|----------|-------|---------|-----------|----------|-------|----------|-----------|-----------|-----------|-----------|
| | | 6260SA | 48034 | SA Type | 12.8/12.8 | 60/60 | A5988 | B-35 | C-8/C-2R | 75/75 | 3.00/76.2 | 1.42/36.0 |


P15D30 Base – Y Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP |
|---|---------------|----------|-------|--------|-----------|----------|-------|----------|-----------|-----------|-----------|-----------|
| | | 6235Y | 48028 | Y Type | 12.8/12.8 | 35/35 | A5677 | RP-11 | C-6/C-6 | 100/100 | 2.30/58.4 | 1.38/35.0 |


P43T Base – H4 Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP | Special Desc. |
|---|---------------|----------|---------|-----------|-----------|-------|----------|-----------|-----------|-----------|-----------|--------------------|
| | | 4745 | 57045 | H4 Type | 12.8/12.8 | 45/45 | T-5 | C-8/C-8 | 120/250 | 3.63/92.1 | 0.67/17.0 | 70/50 |
| | 6260SA | 48034 | H4 Type | 12.8/12.8 | 60/60 | B-35 | C-8/C-2R | 75/75 | 3.00/76.2 | 1.42/36.0 | 75/75 | |
| | 01009 | 40136 | H4 Type | 12/12 | 60/55 | T-5 | C-8/C-8 | 150/300 | 3.62/92.0 | 0.65/16.5 | 131/80 | Halogen |
| | 01021 | 40146 | H4 Type | 12/12 | 100/80 | T-5 | C-8/C-8 | 100/200 | 3.62/92.0 | 0.65/16.5 | 175/135 | Halogen |
| | 48220 | | H4 Type | 12.8/12.8 | 35/35 | T-5 | C-8/C-8 | 120/300 | 3.63/92.1 | 0.67/17.0 | 60/40 | Halogen |
| | 6260HD | 49668 | H4 Type | 12/12 | 60/55 | T-5 | C-8/C-8 | 150/300 | 3.62/92.0 | 0.65/16.5 | 131/80 | Halogen Heavy Duty |
| | 6260HP | 48072 | H4 Type | 12/12 | 100/55 | T-5 | C-8/C-8 | 100/200 | 3.62/92.0 | 0.65/16.5 | 191/80 | Halogen |


P45T41 Base – H4 Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Replaces | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP | Special Desc. |
|---|---------------|----------|---------|-----------|-----------|---------------|------|----------|-----------|-----------|-----------|-----------|--------------------|
| | | 6255BAHP | 48068 | H4 Type | 12.8/12.8 | 100/55 | | T-5 | C-8/C-8 | 100/200 | 3.62/92.0 | 0.65/16.5 | 191/80 |
| | 6361 | 48092 | H4 Type | 12.8/12.8 | 60/55 | 12596 & 64198 | T-5 | C-8/C-8 | 150/300 | 3.62/92.0 | 0.65/16.5 | 123/76 | Halogen |
| | 6365 | 48093 | H4 Type | 12.8/12.8 | 100/80 | | T-5 | C-8/C-8 | 100/200 | 3.63/92.1 | 0.67/17.0 | 200/120 | Halogen Heavy Duty |

Axial Prefocus Base – HB1 Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP | Special Desc. |
|---|---------------|----------|----------|-----------|-----------|---------|----------|-----------|-----------|-----------|-----------|---|
| | | 9004 | 41008 | HB1 Type | 12.8/12.8 | 65/45 | T-4 3/4 | C-6/C-6 | 150/320 | 2.43/61.7 | 1.33/33.8 | 95/55 |
| | 9004SW | 44024 | HB1 Type | 12.8/12.8 | 65/45 | T-4 3/4 | C-6/C-6 | 150/320 | 2.43/61.7 | 1.33/33.8 | - | Halogen, Shielded, Super White Coated Capsule |
| | 9004SWTX | 44134 | HB1 Type | 12.8/12.8 | 65/45 | T-4 3/4 | C-6/C-6 | 150/320 | 2.43/61.7 | 1.33/33.8 | - | Xenon, Shielded, Up to 30% brighter than std. halogen, Super White Coated Capsule |
| | 9004-Blue | 43500 | HB1 Type | 12.8/12.8 | 65/45 | T-4 3/4 | C-6/C-6 | 150/320 | 2.43/61.7 | 1.33/33.8 | - | Halogen, Shielded |

Axial Prefocus Base – HB5 Type

|  | Ordering Code | Bar Code | Type | Volts | Watts | Bulb | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP | Special Desc. |
|---|---------------|----------|----------|-----------|-----------|---------|----------|-----------|-----------|-----------|-----------|------------------------------|
| | | 9007 | 42426 | HB5 Type | 12.8/12.8 | 65/55 | T-4 3/4 | C-8/C-8 | 150/320 | 4.17/106 | 1.33/33.8 | 107/88 |
| | 9007-Blue | 43516 | HB5 Type | 12.8/12.8 | 65/55 | T-4 3/4 | C-8/C-8 | 150/320 | 4.17/106 | 1.33/33.8 | - | Halogen, Shielded |
| | 9007LL | 44176 | HB5 Type | 12.8/12.8 | 65/55 | T-4 3/4 | C-8/C-8 | 150/1450 | 4.17/106 | 1.33/33.8 | 107/88 | Halogen, Shielded, Long Life |
| | 9007HW | 43517 | HB5 Type | 12.8/12.8 | 100/80 | T-4 3/4 | C-8/C-8 | 100/150 | 4.17/106 | 1.33/33.8 | 135/115 | Halogen, Shielded, High Watt |
| | 9007HW-Blue | 43590 | HB5 Type | 12.8/12.8 | 100/80 | T-4 3/4 | C-8/C-8 | 100/150 | 4.17/106 | 1.33/33.8 | - | Halogen, Shielded, High Watt |











23220 West 84th Street
Shawnee, KS 66227

800.852.2217
FAX 913.441.6679

www.eiko.com
eiko@eiko.com

MOTORCYCLE / ATV / SNOWMOBILE

General



| Ordering Code | Bar Code | Bulb | Base | Volts | Watts (Amps) | Filament | Avg. Life | MOL in/mm | MOD in/mm | MSCP | Special Desc. |
|-------------------|----------|---------|-----------|-----------|--------------|-----------|-----------|-----------|-----------|--------|---|
| A-62 | 48000 | G-3 1/2 | BA9s | 6.75 | 1.5 | C-2R | | 0.94/23.9 | 0.43/11.0 | 1.0 | |
| A-72 | 48002 | G-3 1/2 | BA9s | 13.5 | 4 | C-2R | 4000 | 0.94/23.9 | 0.43/11.0 | 2.8 | |
| A-1262 | 48004 | T-2 | BA7s | 6 | 1.2 | C-2R | 200 | 0.91/23.0 | 0.27/6.9 | 0.6 | |
| A-1272 | 48006 | T-2 | BA7s | 12 | 2 | C-2R | 200 | 0.91/23.0 | 0.27/6.9 | 0.6 | |
| A-3598H | 48012 | T-6 | PX15d | 6.5/6.5 | 15/15 | C-2V/C-2V | - | 1.85/47.0 | 0.79/20.1 | 12/12 | |
| A-3603 | 48008 | T-6 | PX15d | 13/13 | 25/25 | C-2V/C-2V | 100/100 | 1.85/47.0 | 0.79/20.1 | 36/36 | |
| A-3625 | 48010 | T-6 | PX15d | 6.5/6.5 | 25/25 | C-2V/C-2V | 150/150 | 1.85/47.0 | 0.79/20.1 | 32/32 | |
| A-4513 | 48014 | S-8 | BA15s | 6.4 | 17 | C-6 | 200 | 2.00/50.8 | 1.04/26.4 | 21 | |
| A-4527 | 48016 | S-8 | BA15s | 12.8 | 23 | C-6 | 200 | 2.00/50.8 | 1.04/26.4 | 32 | |
| A-4813 | 48020 | S-8 | BAY15d | 6.4/7 | 17/5 | C-6/C-6 | 200/1000 | 2.00/50.8 | 1.04/26.4 | 21/3 | |
| A-4829 | 48022 | S-8 | BAY15d | 12.8/14 | 27/8 | C-6/C-6 | 1200/5000 | 2.00/50.8 | 1.04/26.4 | 32/3 | |
| A-5659 | 48024 | RP-10 | P15d30 | 6.5/6.5 | 35/35 | C-6/C-2V | 100/100 | 2.20/56.0 | 1.26/32.0 | 52/52 | |
| H1157 | 44040 | T-5 | BAY15d | 12.8/12.8 | 50/15 | C-6/C-6 | 250/400 | 2.00/50.8 | 0.64/16.3 | 108/24 | Halogen |
| 53 | 40761 | G-3 1/2 | BA9s | 14.4 | (0.12) | C-2V | 1000 | 0.94/23.9 | 0.43/11.0 | 1.00 | |
| 55 | 40766 | G-4 1/2 | BA9s | 7 | (0.41) | C-2R | 200 | 1.07/27.2 | 0.59/15.0 | 2.0 | |
| 57 | 40771 | G-4 1/2 | BA9s | 14 | (0.24) | C-2V | 500 | 1.07/27.2 | 0.59/15.0 | 2.0 | |
| 67 | 40845 | G-6 | BA15s | 13.5 | (0.59) | C-6 | 5000 | 1.44/36.6 | 0.75/19.1 | 4.0 | Rated 5000+ hrs at 14.0V |
| 68 | 40850 | G-6 | BA15d | 13.5 | (0.59) | C-6 | 5000 | 1.44/36.6 | 0.75/19.1 | 4.0 | Rated 5000+ hrs at 14.0V |
| 89 | 40995 | G-6 | BA15s | 13 | (0.58) | C-6 | 750 | 1.44/36.6 | 0.75/19.1 | 6.0 | |
| 93 | 41033 | S-8 | BA15s | 12.8 | (1.04) | C-6 | 700 | 2.00/50.8 | 1.04/26.4 | 15 | |
| 97 | 41043 | G-6 | BA15s | 13.5 | (0.69) | C-6 | 5000 | 1.44/36.6 | 0.75/19.1 | 4.0 | Rated 5000 hrs at 14V |
| 130 | 49671 | G-3 1/2 | BA9s | 6.3 | (0.15) | C-2R | 5000 | 0.94/23.9 | 0.43/11.0 | 0.32 | |
| 194 | 40427 | T-3 1/4 | W2.1x9.5d | 14 | (0.27) | C-2F | 2500 | 1.06/26.9 | 0.40/10.2 | 2.0 | |
| 257 | 49674 | G-4 1/2 | BA9s | 14 | (0.27) | C-2R | 500 | 1.07/27.2 | 0.59/15.0 | - | Flasher Lamp |
| 880 | 42450 | T-3 1/4 | P29t | 12.8 | 27 | C-6 | 300 | 1.75/44.5 | 0.42/10.7 | 45 | Halogen, Shielded, MSCP rating is for a filament in a non-shielded lamp |
| 880SW | 49640 | T-3 1/4 | P29t | 12.8 | 27 | C-6 | 300 | 1.75/44.5 | 0.42/10.7 | 45 | Halogen, Shielded, Super White Coated Capsule, MSCP rating is for a filament in a non-shielded lamp |
| 885 | 42456 | T-3 1/4 | P29t | 12.8 | 50 | C-6 | 200 | 1.75/44.5 | 0.42/10.7 | 105 | Halogen |
| 885SW | 49642 | T-3 1/4 | P29t | 12.8 | 50 | C-6 | 200 | 1.75/44.5 | 0.42/10.7 | 105 | Halogen, Super White Coated Capsule |
| 894 | 42466 | T-3 1/4 | P22d | 12.8 | 37.5 | C-6 | 200 | 1.51/38.4 | 0.42/10.7 | 78 | Halogen |
| 894SW | 49646 | T-3 1/4 | P22d | 12.8 | 37.5 | C-6 | 200 | 1.51/38.4 | 0.42/10.7 | 78 | Halogen, Super White Coated Capsule |
| 894TX-Blue | 49647 | T-3 1/4 | P22d | 12.8 | 37.5 | C-6 | 200 | 1.51/38.4 | 0.42/10.7 | - | Xenon, Up to 30% brighter than std halogen. |
| 1004 | 40158 | B-6 | BA15d | 12.8 | (0.94) | C-6 | 200 | 1.75/44.5 | 0.79/20.1 | 15 | |
| 1016 | 40166 | S-8 | BAY15d | 12.8/14 | (1.34/0.59) | C-6/C-6 | 300/1000 | 2.00/50.8 | 1.04/26.4 | 21/6 | |
| 1034 | 40161 | S-8 | BAY15d | 12.8/14 | (1.80/0.59) | C-6/C-6 | 200/5000 | 2.00/50.8 | 1.04/26.4 | 32/3 | |
| 1142 | 40178 | S-8 | BA15d | 12.8 | (1.60) | C-6 | 1000 | 2.00/50.8 | 1.04/26.4 | 21 | |
| 1157 | 40194 | S-8 | BAY15d | 12.8/14 | (2.10/0.59) | C-6/C-6 | 1200/5000 | 2.00/50.8 | 1.04/26.4 | 32/3 | |
| 1889 | 40408 | T-3 1/4 | BA9s | 14 | (0.27) | C-2F | 2000 | 1.19/30.2 | 0.43/11.0 | 2.0 | |
| 1895 | 40416 | G-4 1/2 | BA9s | 14 | (0.27) | C-2F | 2000 | 1.07/27.2 | 0.59/15.0 | 2 | |
| 7528 | 42245 | S-8 | BAY15d | 13.5/13.5 | (1.86/0.44) | C-6/C-6 | 300/2000 | 2.00/50.8 | 1.04/26.4 | 35/2.8 | ECE Type - P21/5W |
| 7537 | 00234 | S-8 | BAY15d | 28/28 | (1.86/0.44) | C-6/C-6 | 300/2000 | 2.00/50.8 | 1.04/26.4 | 35/3 | ECE Type - P21/5W/24V |

Index

| Ordering Code | Page Number |
|----------------|-------------|
| 00200 | 58 |
| 00600 | 58 |
| 00900 | 58 |
| 01000 | 82 |
| 01003 | 82 |
| 01004 | 82 |
| 01005 | 82 |
| 01006 | 82 |
| 01007 | 58, 82 |
| 01008 | 82 |
| 01009 | 82, 87 |
| 01009-BLUE | 82 |
| 01010 | 82 |
| 01015 | 82 |
| 01018 | 82 |
| 01021 | 82, 87 |
| 01023 | 82 |
| 01027 | 82 |
| 01200 | 58 |
| 01800 | 58 |
| 02000 | 58 |
| 02200 | 58 |
| 02300 | 58 |
| 02500 | 58 |
| 02600 | 58 |
| 02900 | 58 |
| 03000 | 58 |
| 03-000678-01P | 50 |
| 03-000708-01P | 50 |
| 03-000761-01P | 50 |
| 03-000866-01P | 50 |
| 03100 | 58 |
| 03300 | 58 |
| 03400 | 58 |
| 03600 | 58 |
| 03700 | 58 |
| 03900 | 58 |
| 03-900471-01P | 50 |
| 03-900520-01P | 50 |
| 04100 | 58 |
| 04200 | 58 |
| 04400 | 58 |
| 04500 | 58 |
| 04600 | 58 |
| 04700 | 58 |
| 04800 | 58 |
| 04900 | 58 |
| 06000 | 58 |
| 06100 | 58 |
| 06200 | 58 |
| 06300 | 58 |
| 07200 | 58 |
| 07600 | 58 |
| 07800 | 58 |
| 080-DH20-00020 | 50 |
| 08100 | 58 |
| 08200 | 58 |
| 08300 | 58 |
| 08500 | 58 |
| 10 | 62 |
| 1003 | 60 |
| 1004 | 60, 88 |
| 100A/CL-130V | 32 |
| 100A/RS | 32, 83 |
| 100A/RS/TF | 32, 83 |
| 100A/RS-12V | 32, 83 |
| 100A-130V | 32 |
| 100BT15/H/W | 33 |
| 1016 | 66, 88 |
| 1023661 | 51 |

| Ordering Code | Page Number |
|-----------------|-------------|
| 1028.09.527-501 | 76 |
| 1034 | 66, 88 |
| 105 | 60 |
| 1062 | 64 |
| 1073 | 65 |
| 1076 | 66 |
| 1093 | 65 |
| 1096 | 58, 67 |
| 1096X | 58, 67 |
| 10C7/120V | 61 |
| 10C7DC/120V | 61 |
| 10ESB5 | 71 |
| 10S11N | 58 |
| 10S11NF | 58 |
| 10S6/230V | 64 |
| 10S6DC/250V | 65 |
| 11143 | 58 |
| 112 | 80 |
| 1129 | 65 |
| 1130 | 66 |
| 1133 | 64 |
| 1141 | 65 |
| 1141IF | 65 |
| 1141LL | 65 |
| 1142 | 88 |
| 1143 | 64 |
| 1143IF | 64 |
| 1144 | 64 |
| 1152 | 66 |
| 1154 | 66 |
| 1155 | 63 |
| 1156 | 65 |
| 1156A | 65 |
| 1156B | 65 |
| 1156DC | 66 |
| 1156G | 65 |
| 1156LL | 65 |
| 1156NA | 65 |
| 1156P | 65 |
| 1156R | 65 |
| 1156Y | 65 |
| 1157 | 66, 88 |
| 1157A | 66 |
| 1157LL | 66 |
| 1157NA | 66 |
| 1158 | 66 |
| 1176 | 66 |
| 1178 | 63 |
| 11807 | 58 |
| 118F | 72 |
| 1195 | 64 |
| 1196 | 64 |
| 12 | 62 |
| 1203 | 65 |
| 1204 | 66 |
| 120BR40/FL-120V | 31 |
| 120BR40/FL-130V | 31 |
| 120BR40/SP-120V | 31 |
| 120BR40/SP-130V | 31 |
| 120MB | 72 |
| 120MB/6 | 72 |
| 120MB-Neon | 74 |
| 120PSB5 | 71 |
| 120PSB5-Neon | 71 |
| 120RB | 71 |
| 120RC | 70 |
| 120RC-Neon | 70 |
| 120VIP-LAMP | 50 |
| 1210X | 74 |
| 1211X | 74 |

| Ordering Code | Page Number |
|----------------|-------------|
| 1224 | 63 |
| 1224K | 63 |
| 1228 | 66 |
| 123 | 62 |
| 1230X | 72 |
| 1236X | 74 |
| 124 | 74 |
| 1250X | 74 |
| 1250X-2 | 74 |
| 1250X-5 | 74 |
| 1251 | 63 |
| 1252 | 63 |
| 125T10P | 58 |
| 1295 | 65 |
| 1295NA | 65 |
| 12ESB5 | 71 |
| 12MB | 72 |
| 12PSB5 | 71 |
| 12RB | 71 |
| 12RC | 70 |
| 13 | 62 |
| 130 | 62, 88 |
| 1309 | 60 |
| 130MB | 72 |
| 131 | 62 |
| 13298 | 58 |
| 1383 | 64 |
| 1383TF | 64 |
| 1385 | 64 |
| 14 | 62 |
| 1408 | 76 |
| 1414 | 77 |
| 1416 | 77 |
| 1440X | 74 |
| 1445 | 62 |
| 1447 | 62 |
| 1449 | 62 |
| 1450 | 62 |
| 1450X | 75 |
| 1460 | 58, 67 |
| 1460X | 58, 67 |
| 1464 | 63 |
| 1468X | 58, 67 |
| 147 | 74 |
| 1477 | 73 |
| 1487 | 75 |
| 1489 | 58, 77 |
| 1490 | 75 |
| 1493 | 58, 66 |
| 1495 | 77 |
| 15 | 62 |
| 1507 | 58 |
| 150A/RS | 32, 83 |
| 150A-130V | 32 |
| 150BT15/H/W | 33 |
| 150NSH-LAMP | 50 |
| 150P25/10 | 58 |
| 150T10/H/F | 49 |
| 1524X | 78 |
| 155MB | 72 |
| 155PSB5 | 71 |
| 158 | 74 |
| 159 | 74 |
| 1591 | 65 |
| 15B9.5/CL-130V | 32 |
| 15B9.5-130V | 32 |
| 15CA8/CL-130V | 33 |
| 15CA8-130V | 33 |
| 15S11/102CL | 58 |
| 15S11-13 | 58 |

Index

| Ordering Code | Page Number |
|---------------|-------------|
| 15S11-14 | 58 |
| 15S11-87 | 58 |
| 15S11-F | 58 |
| 15T6C-130V | 78 |
| 15T6C-145V | 78 |
| 15T7C-130V | 79 |
| 15T7DC-130V | 79 |
| 15T7N-130V | 79 |
| 16073 | 58 |
| 161 | 74 |
| 16120X | 78 |
| 1619 | 65 |
| 1630 | 58, 67 |
| 1631X | 58, 67 |
| 1634 | 58, 67 |
| 1638 | 66 |
| 1649 | 58, 67 |
| 1651 | 65 |
| 1662 | 66 |
| 168 | 74 |
| 1683 | 65 |
| 168LL | 74 |
| 168NA | 74 |
| 1691 | 65 |
| 1692 | 66 |
| 16ESB5 | 71 |
| 17 | 69 |
| 17002 | 41 |
| 17004 | 41 |
| 17006 | 41 |
| 17008 | 41 |
| 17010 | 41 |
| 17012 | 41 |
| 17014 | 41 |
| 17016 | 41 |
| 17018 | 41 |
| 17022 | 41 |
| 17024 | 41 |
| 17026 | 41 |
| 17028 | 41 |
| 17030 | 41 |
| 17032 | 42 |
| 17034 | 42 |
| 17040 | 42 |
| 17042 | 42 |
| 17044 | 42 |
| 17046 | 42 |
| 17048 | 42 |
| 17050 | 42 |
| 17052 | 42 |
| 1768 | 69 |
| 1769 | 69 |
| 1775 | 69 |
| 18 | 69 |
| 18001 | 38 |
| 18002 | 38 |
| 18003 | 38 |
| 18004 | 38 |
| 18006 | 38 |
| 18007 | 38 |
| 18008 | 38 |
| 18009 | 38 |
| 18011 | 38 |
| 18012 | 38 |
| 18013 | 38 |
| 18014 | 38 |
| 1804 | 75 |
| 1810 | 76 |
| 1813 | 76 |
| 1815 | 76 |

| Ordering Code | Page Number |
|---------------|-------------|
| 1816 | 76 |
| 1818 | 76 |
| 1819 | 76 |
| 1820 | 76 |
| 1820BTS | 76 |
| 1821 | 75 |
| 1822 | 76 |
| 1828 | 76 |
| 1829 | 76 |
| 1835 | 76 |
| 1843 | 76 |
| 1847 | 75 |
| 1850 | 75 |
| 1864 | 76 |
| 1866 | 75 |
| 1869 | 69 |
| 1873 | 76 |
| 1876 | 77 |
| 1888 | 76 |
| 1889 | 88 |
| 1891 | 76 |
| 1892 | 76 |
| 1893 | 76 |
| 1895 | 62, 88 |
| 1895A | 62 |
| 1895B | 62 |
| 1895R | 62 |
| 19 | 62 |
| 1906 | 75 |
| 19101 | 38 |
| 19103 | 38 |
| 19105 | 38 |
| 19107 | 38 |
| 19120 | 38 |
| 19123 | 38 |
| 19126 | 38 |
| 19129 | 38 |
| 19130 | 38 |
| 19131 | 38 |
| 19132 | 38 |
| 19133 | 39 |
| 19134 | 39 |
| 19150 | 38 |
| 19151 | 38 |
| 19152 | 38 |
| 19153 | 39 |
| 19154 | 39 |
| 19155 | 39 |
| 192 | 74 |
| 193 | 74 |
| 19362 | 38 |
| 19382 | 38 |
| 193E-1 | 75 |
| 194 | 74, 88 |
| 194A | 74 |
| 194B | 74 |
| 194LL | 74 |
| 194NA | 74 |
| 194R | 74 |
| 198 | 66 |
| 198LL | 66 |
| 199 | 65 |
| 2 | 68 |
| 2033 | 72 |
| 2040 | 72 |
| 2057 | 66 |
| 2057A | 66 |
| 2057LL | 66 |
| 2057NA | 66 |
| 2057NALL | 66 |

| Ordering Code | Page Number |
|-----------------|-------------|
| 2058U | 67 |
| 20T6.5DC/F-130V | 79 |
| 20T6-1/2DC-130V | 79 |
| 20T6-1/2DC-145V | 79 |
| 20T6-1/2F-130V | 79 |
| 20T6-1/2N-130V | 79 |
| 20T6-1/2N-145V | 79 |
| 210 | 60 |
| 2112 | 69 |
| 211-2 | 73 |
| 211-2/F | 61 |
| 211-2B | 73 |
| 211-2R | 73 |
| 2114 | 68 |
| 212-2 | 73 |
| 214-2 | 73 |
| 2162 | 69 |
| 2174 | 69 |
| 2176 | 69 |
| 2181 | 69 |
| 2182 | 69 |
| 2187 | 69 |
| 219 | 62 |
| 2200 | 69 |
| 222 | 80 |
| 2232 | 65 |
| 2233 | 65 |
| 23.80109.001 | 52 |
| 233 | 62 |
| 2357 | 66 |
| 2357A | 66 |
| 2357LL | 66 |
| 2357NA | 66 |
| 238 | 76 |
| 2396 | 65 |
| 2397 | 66 |
| 24 | 73 |
| 2410X-1 | 75 |
| 2410X-2 | 78 |
| 243 | 80 |
| 245 | 62 |
| 2450X | 75 |
| 2470X | 75 |
| 2475X-1 | 75 |
| 24A | 73 |
| 24CSB | 71 |
| 24E2 | 71 |
| 24E3 | 71 |
| 24ESB5 | 71 |
| 24EX | 71 |
| 24MB | 72 |
| 24NA | 73 |
| 24PSB5 | 71 |
| 24RC | 70 |
| 24X | 71 |
| 250T10/H/F | 49 |
| 250UHP-LAMP | 50 |
| 251 | 70 |
| 256 | 76 |
| 257 | 88 |
| 258 | 63 |
| 259 | 74 |
| 25B9.5/CL-130V | 32 |
| 25B9.5-130V | 32 |
| 25CA9.5/CL-130V | 33 |
| 25CA9.5-130V | 33 |
| 25G16.5/CL-130V | 32 |
| 25G16.5/W-130V | 32 |
| 25S11-2C | 58 |
| 25S11-5C | 58 |

Index

| Ordering Code | Page Number |
|-----------------|-------------|
| 25T10/F-130V | 80 |
| 25T10/IF-120 | 80 |
| 25T10/IF-120V | 58 |
| 25T10-130V | 80 |
| 25T6.5DC/F-130V | 79 |
| 25T6.5N/F-130V | 79 |
| 25T6-1/2DC-130V | 79 |
| 25T6-1/2N-130V | 79 |
| 25T6C-120V | 78 |
| 25T8/DC | 48, 49 |
| 25T8C-120V | 79 |
| 25T8DC-120V | 80 |
| 25T8DC-130V | 80 |
| 25T8N-130V | 79 |
| 265 | 62 |
| 27 | 63 |
| 2721 | 69 |
| 2721MF | 68 |
| 28-057 | 53 |
| 28-061 | 53 |
| 2821 | 74 |
| 2825 | 74 |
| 28-300 | 53 |
| 28-390 | 53 |
| 2841-BULK | 75 |
| 2860X | 75 |
| 28-631 | 53 |
| 28-640 | 53 |
| 28-650 | 53 |
| 28-685 | 53 |
| 28-861 | 53 |
| 28ESB5 | 71 |
| 28MB | 72 |
| 28PSB5 | 71 |
| 28RC | 70 |
| 293 | 62 |
| 303 | 63 |
| 304 | 63 |
| 3057 | 67 |
| 3057A | 67 |
| 3057K | 67 |
| 3057NA | 67 |
| 306 | 66 |
| 307 | 65 |
| 308 | 66 |
| 30R20/FL-120V | 31 |
| 30R20/FL-130V | 31 |
| 30R20/SP-130V | 31 |
| 31 | 63 |
| 310-2328 | 50 |
| 310-3472 | 50 |
| 310-3836 | 50 |
| 310-4523 | 50 |
| 310-4747 | 50 |
| 310-5027 | 50 |
| 310-5513 | 50 |
| 310-6747 | 50 |
| 310-7522 | 50 |
| 310-7578 | 50 |
| 311 | 67 |
| 313 | 76 |
| 315 | 65 |
| 3155 | 67 |
| 3155K | 67 |
| 3156 | 67 |
| 3156A | 67 |
| 3156K | 67 |
| 3157 | 67 |
| 3157A | 67 |
| 3157K | 67 |

| Ordering Code | Page Number |
|---------------|-------------|
| 3157NA | 67 |
| 327 | 70 |
| 328 | 70 |
| 330 | 70 |
| 334 | 70 |
| 335 | 69 |
| 3357 | 67 |
| 3357A | 67 |
| 3357NA | 67 |
| 337 | 70 |
| 344 | 70 |
| 345 | 70 |
| 3457/3357 | 67 |
| 3457/3357K | 67 |
| 3457/3357NA | 67 |
| 3457A | 67 |
| 3496 | 78 |
| 3497 | 78 |
| 35001 | 38 |
| 35002 | 38 |
| 35003 | 38 |
| 35004 | 38 |
| 35006 | 38 |
| 35007 | 38 |
| 35008 | 38 |
| 35009 | 38 |
| 35011 | 38 |
| 35012 | 38 |
| 35013 | 38 |
| 35014 | 38 |
| 356 | 62 |
| 359 | 62 |
| 363 | 62 |
| 365 | 62 |
| 3652 | 74 |
| 367 | 70 |
| 37 | 69 |
| 370 | 70 |
| 373 | 69 |
| 3757NAK | 67 |
| 376 | 70 |
| 377 | 70 |
| 378 | 69 |
| 379 | 70 |
| 380 | 70 |
| 381 | 70 |
| 382 | 70 |
| 385 | 70 |
| 386 | 70 |
| 387 | 70 |
| 388 | 70 |
| 3893 | 73 |
| 394 | 70 |
| 399 | 69 |
| 356/5-120V | 64 |
| 356/5-130V | 64 |
| 356/5DC-120V | 64 |
| 356/5DC-130V | 65 |
| 40 | 75 |
| 400 | 75 |
| 4000 | 84 |
| 4007 | 84 |
| 4040 | 84 |
| 4044 | 84 |
| 4049 | 84 |
| 4057K | 67 |
| 407 | 63 |
| 40A/CL-130V | 32 |
| 40A-130V | 32 |
| 40A15/F-130V | 31 |

| Ordering Code | Page Number |
|------------------|-------------|
| 40A15/F-230/250V | 31 |
| 40A15-130V | 31 |
| 40A15-230/250V | 31 |
| 40A15CL/RS-130V | 31 |
| 40A15W/RS-130V | 31 |
| 40B9.5/CL-130V | 32 |
| 40B9.5-130V | 32 |
| 40CA9.5/CL-130V | 33 |
| 40CA9.5-130V | 33 |
| 40G16.5/CL-130V | 32 |
| 40G16.5/W-130V | 32 |
| 40G25/CL-130V | 32 |
| 40G25/W-130V | 32 |
| 40S11N | 58 |
| 40T10/F-130V | 80 |
| 40T10-130V | 80 |
| 40T6-1/2N/F-130V | 79 |
| 40T6-1/2N-130V | 79 |
| 41 | 75 |
| 4114K | 67 |
| 41304 | 58 |
| 41306 | 58 |
| 41308 | 58 |
| 41310 | 58 |
| 41312 | 58 |
| 41314 | 58 |
| 41316 | 58 |
| 41318 | 58 |
| 41318HH | 58 |
| 41320 | 58 |
| 41324 | 58 |
| 41326 | 58 |
| 41328 | 58 |
| 41332 | 58 |
| 41334 | 58 |
| 41336 | 59 |
| 41338 | 59 |
| 41340 | 59 |
| 41344 | 59 |
| 41346 | 59 |
| 41348 | 59 |
| 41350 | 59 |
| 41352 | 59 |
| 41354 | 59 |
| 41358 | 59 |
| 41360 | 59 |
| 41362 | 59 |
| 41364 | 59 |
| 41366 | 59 |
| 41368 | 59 |
| 41370 | 59 |
| 41374 | 59 |
| 41376 | 59 |
| 41382 | 59 |
| 4157K | 67 |
| 4157NAK | 67 |
| 42005 | 68 |
| 42006 | 68 |
| 425 | 63 |
| 428 | 63 |
| 43 | 75 |
| 432 | 63 |
| 4340 | 84 |
| 4350 | 84 |
| 44 | 76 |
| 4405 | 84 |
| 4406 | 84 |
| 4411 | 84 |
| 4412 | 84 |
| 4412A | 84 |

Index

| Ordering Code | Page Number |
|--------------------|-------------|
| 4413 | 84 |
| 4414 | 84 |
| 4414A | 84 |
| 4415 | 84 |
| 4415A | 84 |
| 4416 | 84 |
| 4416R | 84 |
| 4419 | 84 |
| 44250 | 83 |
| 4435 | 84 |
| 4436 | 84 |
| 4446 | 84 |
| 4461 | 84 |
| 4478 | 84 |
| 4502 | 84 |
| 4505 | 84 |
| 4509 | 84 |
| 4510 | 84 |
| 4511 | 84 |
| 4515 | 84 |
| 4531 | 84 |
| 4537 | 84 |
| 4543 | 85 |
| 4545 | 85 |
| 4546 | 84 |
| 4547 | 84 |
| 455 | 62 |
| 456-204 | 50 |
| 456227 | 50 |
| 4570 | 84 |
| 4578 | 84 |
| 4579 | 84 |
| 4581 | 84 |
| 4589 | 84 |
| 4596 | 84 |
| 45BR30/FL-120V | 31 |
| 45PAR38/H/FL-120V | 34 |
| 45PAR38/H/FL-130V | 34 |
| 45PAR38/H/NSP-130V | 34 |
| 45PAR38/H/SP-120V | 34 |
| 45PAR38/H/SP-130V | 34 |
| 45PAR38/H/WFL-120V | 34 |
| 45PAR38/H/WFL-130V | 34 |
| 46 | 75 |
| 4626 | 84 |
| 4638AA001 | 50 |
| 464 | 75 |
| 4651 | 85 |
| 4652 | 85 |
| 47 | 75 |
| 4745 | 87 |
| 47-B | 75 |
| 47-G | 75 |
| 47-R | 75 |
| 47-Y | 75 |
| 48 | 75 |
| 48220 | 87 |
| 482213410123 | 53 |
| 482213410131 | 53 |
| 482213410134 | 53 |
| 482269110755 | 53 |
| 48C2 | 71 |
| 48ESB5 | 71 |
| 48MB | 72 |
| 48PSB5 | 71 |
| 48RC | 70 |
| 49 | 75 |
| 49406 | 34 |
| 49407 | 34 |
| 49408 | 34 |

| Ordering Code | Page Number |
|----------------------|-------------|
| 49409 | 34 |
| 49410 | 34 |
| 4C7/120V | 61 |
| 4C7/130V | 61 |
| 4C7/130V-B | 61 |
| 4C7/130V-P | 61 |
| 4C7/130V-W | 61 |
| 50 | 62 |
| 50 PAR20/H/NFL-120V | 33 |
| 5001 | 84 |
| 5007 | 77 |
| 5008 | 77 |
| 502 | 63 |
| 503 | 62 |
| 509K | 63 |
| 50A/RS | 32, 83 |
| 50A/RS/TF | 32, 83 |
| 50A/RS-12V | 32, 83 |
| 50PAR20/H/NFL-130V | 33 |
| 50PAR20/H/SP-120V | 33 |
| 50PAR20/H/SP-130V | 33 |
| 50PAR30/H/FL-120V | 33 |
| 50PAR30/H/FL-130V | 33 |
| 50PAR30/H/NFL-120V | 33 |
| 50PAR30/H/NFL-130V | 33 |
| 50PAR30/H/SP-120V | 33 |
| 50PAR30/H/SP-130V | 33 |
| 50PAR30LN/H/FL-120V | 34 |
| 50PAR30LN/H/FL-130V | 34 |
| 50PAR30LN/H/NFL-120V | 34 |
| 50PAR30LN/H/NFL-130V | 34 |
| 50PAR30LN/H/SP-120V | 34 |
| 50PAR30LN/H/SP-130V | 34 |
| 50R20/FL-120V | 31 |
| 50R20/FL-130V | 31 |
| 50R20/SP-120V | 31 |
| 50R20/SP-130V | 31 |
| 51 | 62 |
| 52 | 62 |
| 52A | 71 |
| 53 | 62, 88 |
| 55 | 88 |
| 555 | 74 |
| 555-B | 74 |
| 555-G | 74 |
| 555-R | 74 |
| 555-Y | 74 |
| 558 | 74 |
| 55A/58 | 66 |
| 55C2 | 71 |
| 55C3 | 71 |
| 56 | 69 |
| 56016164 | 59 |
| 56016678 | 59 |
| 56018366 | 59 |
| 56018550 | 59 |
| 56018566 | 59 |
| 56018769 | 59 |
| 561 | 73 |
| 562 | 73 |
| 563 | 73 |
| 564 | 73 |
| 57 | 88 |
| 585 | 75 |
| 59 J9901.CG1 | 50 |
| 59J8101CG1 | 50 |
| 5J.J2H01.001 | 50 |
| 60J00720.001 | 50 |
| 60J0804.CB2 | 50 |
| 60J3416.CG1 | 50 |

| Ordering Code | Page Number |
|-----------------|-------------|
| 60.J5016.CB1 | 50 |
| 60.J8618.CG1 | 50 |
| 6014 | 85 |
| 6015 | 85 |
| 6022 | 68 |
| 605 | 63 |
| 6052 | 85 |
| 60A/CL-130V | 32 |
| 60A/SW-130V | 32 |
| 60A-130V | 32 |
| 60A15CL/RS-130V | 31 |
| 60A15W/RS-130V | 31 |
| 60BT15/H/CL | 33 |
| 60BT15/H/W | 33 |
| 60G25/CL-130V | 32 |
| 60G25/W-130V | 32 |
| 60MB | 72 |
| 60PSB5 | 71 |
| 60RB | 71 |
| 610-254-5609 | 51, 53 |
| 610-257-6269 | 51, 53 |
| 610-259-0562 | 51 |
| 610-259-5291 | 51, 53 |
| 610-260-7208 | 51, 53 |
| 610-260-7215 | 51, 53 |
| 610-264-1196 | 51 |
| 610-264-1943 | 50, 51 |
| 610-265-8828 | 50, 51, 53 |
| 610-276-3010 | 51, 53 |
| 610-278-3896 | 53 |
| 610-279-5417 | 51, 53 |
| 610-280-6939 | 51, 53 |
| 610-282-2755 | 50, 51, 53 |
| 610-284-4627 | 51 |
| 610-285-4824 | 53 |
| 610-287-5379 | 51, 53 |
| 610-289-6939 | 50 |
| 610-289-8422 | 50, 51, 53 |
| 610-290-7698 | 51, 53 |
| 610-292-4831 | 51, 53 |
| 610-292-4848 | 53 |
| 610-293-2751 | 51, 53 |
| 610-293-5868 | 53 |
| 610-293-8210 | 50, 51, 54 |
| 610-297-3891 | 50, 54 |
| 610-298-3135 | 51, 54 |
| 610-300-0862 | 50, 54 |
| 610-301-6047 | 51, 54 |
| 610-301-7167 | 51, 54 |
| 610-302-5933 | 54 |
| 610-303-5826 | 54 |
| 610-305-1130 | 54 |
| 610-305-5602 | 50, 53, 54 |
| 610-306-5977 | 50, 54 |
| 610-307-7925 | 51, 54 |
| 610-308-1786 | 54 |
| 610-308-3117 | 51, 54 |
| 610-309-2706 | 50, 51, 54 |
| 610-309-3802 | 54 |
| 610-314-9127 | 51, 54 |
| 610-315-5647 | 54 |
| 610-315-7689 | 50, 51, 54 |
| 610-317-7167 | 51 |
| 610-323-0726 | 51, 54 |
| 610-325-2957 | 54 |
| 610-328-7362 | 51, 54 |
| 610-330-7329 | 51, 54 |
| 623 | 63 |
| 6235B | 86 |
| 6235J | 86 |

Index

| Ordering Code | Page Number |
|-------------------|-------------|
| 6235Y | 87 |
| 624 | 63 |
| 6245B | 86 |
| 6245BA | 86 |
| 6245J | 86 |
| 6253 | 62 |
| 6255BAHP | 82, 87 |
| 625J | 86 |
| 6260BA | 86 |
| 6260H | 82 |
| 6260HD | 82, 87 |
| 6260HP | 82, 87 |
| 6260J | 86 |
| 6260S | 86 |
| 6260SA | 87 |
| 63 | 63 |
| 631 | 63 |
| 635B | 86 |
| 635J | 86 |
| 6361 | 82, 87 |
| 6365 | 82, 87 |
| 64 | 63 |
| 6411 | 61 |
| 64111 | 42, 73 |
| 6418 | 61 |
| 64260 | 59 |
| 64514 | 56, 59 |
| 655 | 75 |
| 656 | 75 |
| 657 | 75 |
| 658 | 74 |
| 65BR30/FL-120V | 31 |
| 65BR30/FL-130V | 31 |
| 65BR30/SP-120V | 31 |
| 65BR30/SP-130V | 31 |
| 65BR40/FL-120V | 31 |
| 65BR40/FL-130V | 31 |
| 65PAR38/H/FL-130V | 34 |
| 6609F | 71 |
| 660B | 86 |
| 6610F | 71 |
| 6612F | 71 |
| 6614F | 71 |
| 6615F | 71 |
| 67 | 88 |
| 67K | 63 |
| 68 | 88 |
| 680 | 68 |
| 683 | 68 |
| 6833 | 68 |
| 6838 | 68 |
| 6839 | 68 |
| 685 | 68 |
| 6MB | 72 |
| 6PSB5 | 71 |
| 6S6/120V | 64 |
| 6S6/12V | 64 |
| 6S6/130V | 64 |
| 6S6/145V | 64 |
| 6S6/155V | 64 |
| 6S6/18V | 64 |
| 6S6/230V | 64 |
| 6S6/24V | 64 |
| 6S6/30V | 64 |
| 6S6/48V | 64 |
| 6S6/60V | 64 |
| 6S6/6V | 64 |
| 6S6DC/12V | 64 |
| 6S6DC/130V | 65 |
| 6S6DC/145V | 65 |

| Ordering Code | Page Number |
|----------------------|-------------|
| 6S6DC/24V | 64 |
| 6S6DC/30V | 64 |
| 6S6DC/32V | 64 |
| 6S6DC/48V | 64 |
| 6S6DC/60V | 64 |
| 6S6DC/6V | 64 |
| 70 | 69 |
| 715 | 68 |
| 71818 | 59 |
| 7219 | 68 |
| 7225 | 65 |
| 73 | 69 |
| 7327 | 70 |
| 7328 | 70 |
| 7330 | 70 |
| 7349 | 70 |
| 7362 | 70 |
| 7371 | 70 |
| 7373 | 70 |
| 7374 | 70 |
| 7377 | 70 |
| 7381 | 70 |
| 7382 | 70 |
| 7387 | 70 |
| 73P2775 | 51 |
| 74 | 69 |
| 7400 | 84 |
| 7440 | 78 |
| 7443 | 78 |
| 7463A001AA | 50 |
| 7506 | 65 |
| 7511 | 65 |
| 7528 | 66, 88 |
| 7537 | 66, 88 |
| 755 | 75 |
| 756 | 76 |
| 757 | 76 |
| 75A/CL-130V | 32 |
| 75A/RS | 32, 83 |
| 75A/RS/TF | 32, 83 |
| 75A/RS-12V | 32, 83 |
| 75A/SW-130V | 32 |
| 75A-130V | 32 |
| 75BR30/FL-120V | 31 |
| 75BR40/FL-120V | 31 |
| 75BT15/H/W | 33 |
| 75PAR30/H/FL-120V | 33 |
| 75PAR30/H/FL-130V | 33 |
| 75PAR30/H/NFL-120V | 33 |
| 75PAR30/H/NFL-130V | 33 |
| 75PAR30/H/SP-120V | 33 |
| 75PAR30/H/SP-130V | 33 |
| 75PAR30LN/H/FL-120V | 34 |
| 75PAR30LN/H/FL-130V | 34 |
| 75PAR30LN/H/NFL-120V | 34 |
| 75PAR30LN/H/NFL-130V | 34 |
| 75PAR30LN/H/SP-120V | 34 |
| 75PAR30LN/H/SP-130V | 34 |
| 75PAR38/H/FL-120V | 34 |
| 75PAR38/H/FL-130V | 34 |
| 75PAR38/H/NSP-120V | 34 |
| 75PAR38/H/NSP-130V | 34 |
| 75PAR38/H/SP-120V | 34 |
| 75PAR38/H/SP-130V | 34 |
| 75PAR38/H/WFL-120V | 34 |
| 75PAR38/H/WFL-130V | 34 |
| 7613 | 84 |
| 7632 | 68 |
| 7646 | 68 |
| 7683 | 68 |

| Ordering Code | Page Number |
|---------------|-------------|
| 76907 | 59 |
| 7714 | 68 |
| 7715 | 68 |
| 778 | 42, 59, 73 |
| 77903 | 59 |
| 77904 | 59 |
| 77910 | 59 |
| 77A/58 | 66 |
| 7839 | 68 |
| 787 | 42, 59, 72 |
| 7876 | 70 |
| 788 | 42, 59, 72 |
| 789 | 42, 59, 73 |
| 79 | 69 |
| 795 | 42, 76 |
| 795X | 42, 76 |
| 796 | 42, 76 |
| 7C7/120V | 61 |
| 7C7/130V | 61 |
| 7C7/130V-W | 61 |
| 8001 | 59 |
| 8013 | 59 |
| 8014 | 59 |
| 8017 | 59 |
| 8018 | 59 |
| 8022 | 59 |
| 80-A | 59 |
| 80-B | 59 |
| 81 | 63 |
| 8100 | 59 |
| 8111 | 68 |
| 82 | 63 |
| 8276A001 | 50 |
| 8362 | 69 |
| 8-3995 | 76 |
| 84 | 69 |
| 8441A001 | 50 |
| 85 | 69 |
| 86 | 69 |
| 8610 | 68 |
| 8627 | 68 |
| 8640 | 68 |
| 867093108090 | 53 |
| 867093109009 | 53 |
| 867093111009 | 53 |
| 867093112009 | 53 |
| 867093115009 | 53 |
| 867093116009 | 53 |
| 867093118009 | 53 |
| 867093121009 | 53 |
| 867093122009 | 53 |
| 867093124009 | 53 |
| 86G | 69 |
| 87 | 65 |
| 88 | 66 |
| 880 | 81, 88 |
| 880SW | 81, 88 |
| 881 | 81 |
| 881A001 | 50 |
| 881SW | 81 |
| 882 | 72, 81 |
| 884 | 81 |
| 885 | 81, 88 |
| 885SW | 81, 88 |
| 886 | 81 |
| 889 | 81 |
| 889SW | 81 |
| 89 | 88 |
| 890 | 81 |
| 890SW | 81 |

Index

| Ordering Code | Page Number |
|--------------------|-------------|
| 891 | 42, 73, 81 |
| 8918 | 70 |
| 893 | 81 |
| 893SW | 81 |
| 894 | 81, 88 |
| 894SW | 81, 88 |
| 894TX-Blue | 88 |
| 895 | 66 |
| 896 | 81 |
| 896SW | 81 |
| 898 | 81 |
| 899 | 81 |
| 90 | 63 |
| 9003 | 80 |
| 9003HW-SWTX | 80 |
| 9003SWTX | 80 |
| 9004 | 80, 87 |
| 9004-Blue | 80, 87 |
| 9004HW | 80 |
| 9004HW-Blue | 80 |
| 9004HWSW | 80 |
| 9004LL | 80 |
| 9004SW | 80, 87 |
| 9004SWTX | 80, 87 |
| 9005 | 80 |
| 9005-Blue | 80 |
| 9005HW | 80 |
| 9005HWSW | 80 |
| 9005SW | 80 |
| 9005SWTX | 81 |
| 9005XS | 81 |
| 9005XSLL | 81 |
| 9006 | 81 |
| 9006-Blue | 81 |
| 9006HW | 81 |
| 9006HW-Blue | 81 |
| 9006HWSW | 81 |
| 9006LL | 81 |
| 9006SW | 81 |
| 9006SWTX | 81 |
| 9006XS | 81 |
| 9006XSLL | 81 |
| 9007 | 81, 87 |
| 9007-Blue | 81, 87 |
| 9007HW | 81, 87 |
| 9007HW-Blue | 81, 87 |
| 9007HWSW | 81 |
| 9007LL | 81, 87 |
| 9007SW | 81 |
| 9007SWTX | 81 |
| 9008 | 81, 83 |
| 901 | 77 |
| 901A | 77 |
| 901B | 77 |
| 901G | 77 |
| 901R | 77 |
| 904 | 78 |
| 9040 | 81, 83 |
| 906 | 78 |
| 906B | 78 |
| 906G | 78 |
| 906R | 78 |
| 906Y | 78 |
| 908 | 77 |
| 909 | 77 |
| 90MB | 72 |
| 90PAR38/H/FL-120V | 34 |
| 90PAR38/H/FL-130V | 34 |
| 90PAR38/H/NSP-120V | 34 |
| 90PAR38/H/NSP-130V | 34 |

| Ordering Code | Page Number |
|--------------------|-------------|
| 90PAR38/H/SP-120V | 34 |
| 90PAR38/H/SP-130V | 34 |
| 90PAR38/H/WFL-120V | 34 |
| 90PAR38/H/WFL-130V | 34 |
| 912 | 77 |
| 912LL | 77 |
| 914 | 77 |
| 915 | 77 |
| 915P020010 | 52 |
| 916 | 78 |
| 916NA | 78 |
| 917 | 78 |
| 918 | 77 |
| 918A | 77 |
| 918B | 77 |
| 918G | 77 |
| 918R | 77 |
| 920 | 78 |
| 921 | 78 |
| 921-FR | 78 |
| 921LL | 78 |
| 921X | 78 |
| 922 | 77 |
| 923 | 77 |
| 923G | 77 |
| 923R | 77 |
| 9268A001 | 50 |
| 927 | 77 |
| 928 | 78 |
| 93 | 65, 88 |
| 939 | 77 |
| 94 | 66 |
| 9431A001 | 50 |
| 949 | 76 |
| 957 | 77 |
| 96 | 63 |
| 967 | 76 |
| 97 | 88 |
| 97A | 63 |
| 98 | 63 |
| 9HJ7083119001 | 54 |
| A1-010-28 | 59 |
| A11/30K | 21 |
| A-1262 | 88 |
| A-1272 | 88 |
| A13 | 21 |
| A1-420-10 | 59 |
| A15/27K | 21 |
| A15/30K | 21 |
| A1-510-01 | 59 |
| A-1606-034-B | 54 |
| A1A | 72 |
| A1B | 72 |
| A1C | 72 |
| A1H | 70 |
| A2A | 72 |
| A2B | 72 |
| A-3598H | 88 |
| A-3603 | 88 |
| A-3625 | 88 |
| A3C | 72 |
| A-4513 | 88 |
| A-4527 | 88 |
| A-4813 | 88 |
| A-4829 | 88 |
| A-5659 | 88 |
| A-62 | 62, 88 |
| A-72 | 62, 88 |
| A9A | 72 |
| AH-35001 | 51 |

| Ordering Code | Page Number |
|------------------|-------------|
| ANA20LP | 54 |
| ANK2LP | 54 |
| ANM20LP | 54 |
| AN-MB60LP | 54 |
| ANMB70LP | 54 |
| ANP25LP/1 | 54 |
| AN-PH50L1 | 54 |
| ANXR10L2 | 54 |
| AN-XR10LP/1 | 54 |
| ANXR1LP | 54 |
| ANXR20LP/1 | 54 |
| B1-010-28 | 59 |
| B1A | 74 |
| B2A | 74 |
| B5-011-32 | 59 |
| BAB | 36, 44, 56 |
| BAB/SU | 36 |
| BAB-BLACK | 37, 44, 56 |
| BAB-FG | 36, 44, 56 |
| BAB-FG-GU10-120V | 37 |
| BAB-SILVER | 37, 44, 56 |
| BAK | 44 |
| BBA | 44, 49 |
| BBF/SU | 36 |
| BCA | 44, 49 |
| BCK | 44 |
| BCM | 56 |
| BFE | 44, 56 |
| BFK/BFL | 44, 56 |
| BFM | 44, 59 |
| BGB/BGK | 44 |
| BHB | 44 |
| BHL5001SU | 52 |
| BHL5002SU | 52 |
| BHL5006S | 52 |
| BKV | 44 |
| BLC | 44, 56, 59 |
| BL-FU180B | 52 |
| BLK | 44 |
| BLR | 45 |
| BLX | 45, 56 |
| BMG/BMH | 45, 56 |
| BMY | 45 |
| BNF | 45, 56 |
| BQC-PGA10X//1 | 54 |
| BQC-PGB10S//1 | 54 |
| BQC-PGC20X/1 | 54 |
| BQC-PGC30XU/1 | 54 |
| BQC-PGM10X1 | 54 |
| BQC-XGC40XU/1 | 54 |
| BQC-XGC50X/1 | 54 |
| BQC-XGC55X//1 | 54 |
| BQC-XGE1000U1 | 54 |
| BQC-XGE1100U2 | 54 |
| BQC-XGE1200U1 | 54 |
| BQC-XGE3000U1 | 54 |
| BQC-XGE3500U1 | 54 |
| BQC-XGE630U/1 | 54 |
| BQC-XGE650U/1 | 54 |
| BQC-XGE690U/1 | 54 |
| BQC-XGE690UB1 | 54 |
| BQC-XGE850U/1 | 54 |
| BQC-XGH400U | 54 |
| BQC-XGNV1U/1 | 54 |
| BQC-XGNV2U//1 | 54 |
| BQC-XGNV45U/1 | 54 |
| BQC-XGNV5XB/1 | 54 |
| BQC-XGNV5XU/1 | 54 |
| BQC-XGNV6XU/1 | 54 |
| BQC-XGNV7XU/1 | 54 |

Index

| Ordering Code | Page Number |
|---------------|-------------|
| BQC-XGP10XU/1 | 54 |
| BQC-XGP20X/1 | 54 |
| BQC-XGP25X//1 | 54 |
| BQC-XGV10WU/1 | 54 |
| BQC-XVH35U/1 | 54 |
| BQC-XVH37U/1 | 54 |
| BQC-XVP15U//1 | 54 |
| BQC-XVZ100005 | 54 |
| BQC-XVZ1U/1 | 54 |
| BQC-XVZ9000/1 | 54 |
| BRH | 45, 56 |
| BRK | 45 |
| BRL | 45, 56, 59 |
| BRN | 45 |
| BTG | 45 |
| BTL | 45, 56 |
| BTN | 45, 56 |
| BTP | 45, 56 |
| BTR | 45, 56 |
| BVE | 45 |
| BVR | 45, 56 |
| BVT | 45, 56 |
| BVV | 45, 56 |
| BVW | 45, 56 |
| BWA | 45, 56 |
| BWF | 45, 56 |
| BWM | 45, 56 |
| BWN | 45, 56 |
| BXB | 45 |
| BXE | 45 |
| BZW | 45, 59 |
| C2A | 72 |
| C7A | 70 |
| C9A | 70 |
| CAL/CXP | 45 |
| CAR | 45 |
| CAS/CAV | 45 |
| CAX | 45, 59 |
| CAX-130V | 45, 59 |
| CBA | 45 |
| CBJ/CBC | 45, 56 |
| CBX/CBS | 45, 56 |
| CD450M-930 | 50 |
| CDD | 59 |
| CDD | 45 |
| CDJ | 45, 56 |
| CDS/CDX | 45, 56 |
| CEA/CEB/CDK | 45, 56 |
| CEM | 45, 56 |
| CEW/CFC | 56 |
| CGW/CGT | 45, 56 |
| CHK | 45, 56 |
| CLS/CLG | 45, 56 |
| CLX/CMB | 45, 56 |
| CMV/CMT | 45, 56 |
| CP13T-930 | 50 |
| CP310T-930 | 50 |
| CP335/345LAMP | 50, 51 |
| CP455M-930 | 50 |
| CP670K-930 | 50 |
| CP720E-930 | 50 |
| CP731I-930 | 50 |
| CP840940LAMP | 51 |
| CP860/960LAMP | 50, 51 |
| CP870LAMP | 51 |
| CP885/880LAMP | 51 |
| CP980985LAMP | 51 |
| CPL100LAMP | 51 |
| CPL750LAMP | 50 |
| CPL850LAMP | 50, 51, 55 |

| Ordering Code | Page Number |
|-----------------|-------------|
| CPRS55LAMP | 51 |
| CPS210LAMP | 51 |
| CPS220LAMP | 51 |
| CPS225LAMP | 51 |
| CPS235LAMP | 51 |
| CPS240/X250LAMP | 51 |
| CPS317LAMP | 51 |
| CPSX5500LAMP | 51 |
| CPX1200LAMP | 51 |
| CPX1250LAMP | 51 |
| CPX251LAMP | 51 |
| CPX260LAMP | 51 |
| CPX275LAMP | 51 |
| CPX325320LAMP | 51 |
| CPX327LAMP | 51 |
| CPX380LAMP | 51 |
| CPX430LAMP | 51 |
| CPX445LAMP | 51 |
| CPX605LAMP | 51 |
| CPX935LAMP | 51 |
| CPX940LAMP | 51 |
| CPX950LAMP | 51 |
| CPX955LAMP | 51 |
| CPX990LAMP | 51 |
| CS.59J0Y.1B1 | 50 |
| CS.5JJ1B.1B1 | 50 |
| CTT/DAX | 45 |
| CVX/CVS | 45 |
| CWA | 45 |
| CWZ | 45, 56 |
| CXK | 45 |
| CXL/CXR | 45 |
| CXZ | 45, 56 |
| CYC | 45 |
| CYV | 45, 56 |
| CYX | 45, 56 |
| CZA/CZB | 45 |
| CZX/DAB | 45 |
| D1R | 80 |
| D1S | 80 |
| D2R | 80 |
| D2S | 80 |
| DAT/DAK | 45 |
| DAY/DAK | 45 |
| DCA | 45 |
| DCH/DJA/DFP | 45 |
| DCX | 45 |
| DEB | 45 |
| DDJ/DZZ | 45 |
| DDK | 45 |
| DDL | 45, 59 |
| DDM | 45 |
| DDN | 45 |
| DDS | 45 |
| DE3021 | 61 |
| DE3022 | 61 |
| DE3175 | 61 |
| DE3423 | 61 |
| DE3425 | 61 |
| DEB | 45, 56 |
| DED | 45 |
| DEK | 45 |
| DEP | 45 |
| DFD | 45 |
| DFE | 45 |
| DFN/DFC | 45 |
| DFT | 45 |
| DGH | 45, 56 |
| DJL | 45 |
| DJT | 45 |

| Ordering Code | Page Number |
|---------------|-------------|
| DLD/DFZ | 45 |
| DLG/DLS/DHX | 45 |
| DMX | 45, 56 |
| DNE | 45, 59 |
| DNF | 45, 59 |
| DNS/FMC | 45, 56 |
| DNT/FMD | 45, 56 |
| DNW | 45, 56 |
| DPT | 45, 56 |
| DPW | 45, 56 |
| DPY | 45, 56 |
| DRA | 45, 56 |
| DRA/5 | 45 |
| DRB/DRC | 45, 56 |
| DRB/DRC/5 | 45 |
| DRS | 45, 56 |
| DRS/5 | 45 |
| DRW | 45, 56 |
| DSB | 45 |
| DT00661 | 51 |
| DT13/27 | 22 |
| DT13/30 | 22 |
| DT13/35 | 22 |
| DT13/41 | 22, 83 |
| DT13/50 | 22 |
| DT13/65 | 22, 83 |
| DT18/30/RS | 22 |
| DT18/35/RS | 22 |
| DT18/41/RS | 22 |
| DT18/50/RS | 22 |
| DT24/30/RS | 22 |
| DT24/35/RS | 22 |
| DT24/41/RS | 22 |
| DT24/50/RS | 22 |
| DT24/65/RS | 22 |
| DT36/30/RS | 22 |
| DT36/35/RS | 22 |
| DT36/41/RS | 22 |
| DT36/50/RS | 22 |
| DT36/65/RS | 22 |
| DT40/30/RS | 22 |
| DT40/35/RS | 22 |
| DT40/41/RS | 22 |
| DT40/50/RS | 22 |
| DT40/65/RS | 22 |
| DT5/27 | 22 |
| DT5/35 | 22 |
| DT5/41 | 22 |
| DT5/50 | 22 |
| DT5/65 | 22 |
| DT50/30/RS | 22 |
| DT50/35/RS | 22 |
| DT50/41/RS | 22 |
| DT50/50/RS | 22 |
| DT50/65/RS | 22 |
| DT55/30/RS | 22 |
| DT55/35/RS | 22 |
| DT55/41/RS | 22 |
| DT55/50/RS | 22 |
| DT55/65/RS | 22 |
| DT55/932K | 49 |
| DT55/955K | 49 |
| DT7/27 | 22 |
| DT7/35 | 22 |
| DT7/41 | 22 |
| DT7/50 | 22 |
| DT7/65 | 22 |
| DT9/27 | 22 |
| DT9/35 | 22 |
| DT9/41 | 22 |

Index

| Ordering Code | Page Number |
|---------------|----------------|
| DT9/50 | 22 |
| DT9/65 | 22 |
| DTA | 45, 56 |
| DTJ | 45, 56 |
| DVS | 45, 56 |
| DVY | 45, 56 |
| DWT | 45, 56 |
| DWY/FAB | 45, 56 |
| DWZ | 45, 56 |
| DXN | 45, 56 |
| DXW | 45, 56 |
| DXX | 45, 56 |
| DYG | 45, 56 |
| DYH | 45, 56 |
| DYH/5 | 45 |
| DYP | 45, 56 |
| DYP/5 | 45 |
| DYR | 45, 56 |
| DYS/DYV/BHC | 45, 56 |
| DYS/DYV/BHC/5 | 45 |
| DYY/EGH | 45 |
| DZA | 45, 56 |
| DZB | 45, 56 |
| DZE/FDS | 45, 59 |
| E17 | 69 |
| E37 | 69 |
| E73 | 69 |
| E74 | 69 |
| E79 | 69 |
| E84 | 69 |
| E85 | 69 |
| E86 | 69 |
| EAD | 45, 48, 56 |
| EAJ | 45, 48, 56 |
| EAK | 48 |
| EBV | 45, 49 |
| EBW | 45, 49 |
| EC.J1001.001 | 50 |
| ECA | 45, 49 |
| ECT | 45, 49 |
| EFM | 45, 59 |
| EFN | 45, 59 |
| EPF | 45, 59 |
| EFR | 45, 59 |
| EGC | 45, 56 |
| EGE | 45, 56 |
| EGF | 46, 56 |
| EGG | 46, 56 |
| EGJ | 46, 57 |
| EGK | 46, 57 |
| EGN | 46, 57 |
| EGR | 46, 57 |
| EGT | 46, 57 |
| EHA | 46 |
| EHC/EHB | 46, 57 |
| EHD | 46, 57 |
| EHF | 46, 57 |
| EHG | 46, 57 |
| EHJ | 46, 57, 59 |
| EHM | 46, 57 |
| EHP | 46, 57 |
| EHR | 46, 57 |
| EHT | 46, 48, 57, 59 |
| EHV | 46, 57 |
| EHZ | 46, 57 |
| EI-2201 | 59 |
| EI-722 | 59 |
| EI-737 | 59 |
| EI-738 | 59 |
| EI-74000 | 59 |

| Ordering Code | Page Number |
|---------------|----------------|
| EI-77Z | 59 |
| EI-886 | 59 |
| EI-B153 | 59 |
| EI-M102 | 59 |
| EI-M103 | 59 |
| EJA | 46, 59 |
| EJG | 46, 57 |
| EJL | 46, 49, 59 |
| EJM | 46, 59 |
| EJV | 46, 49, 59 |
| EJY | 46, 59 |
| EKB | 46, 57 |
| EKD | 46, 57 |
| EKE | 46, 59 |
| EKG | 46 |
| EKL | 46 |
| EKP/ENA | 46 |
| EKX | 46 |
| EKZ | 46 |
| EL-12B | 59 |
| EL-1B | 59 |
| EL-2B | 59 |
| EL-38 | 59 |
| EL-3B | 59 |
| ELA | 46 |
| ELB | 46 |
| ELC | 46, 49 |
| ELC/5 | 46 |
| ELC/5H | 57 |
| ELC/E | 46, 49 |
| ELD/EJN | 46 |
| ELE | 46 |
| ELH | 46, 49 |
| ELH/5 | 46 |
| ELPLP02 | 51 |
| ELPLP03 | 51 |
| ELPLP04 | 51 |
| ELPLP05 | 51 |
| ELPLP06 | 51 |
| ELPLP07 | 51 |
| ELPLP08 | 51 |
| ELPLP09 | 51 |
| ELPLP10B | 51 |
| ELPLP10S | 51 |
| ELPLP11 | 51 |
| ELPLP12 | 51 |
| ELPLP13 | 51 |
| ELPLP14 | 51 |
| ELPLP15 | 51 |
| ELPLP18 | 51 |
| ELPLP19 | 51 |
| ELPLP21 | 51 |
| ELPLP25 | 51 |
| ELZ | 46, 59 |
| EMC | 46 |
| EMD | 46, 57 |
| EML | 46 |
| EMM/EKS | 46 |
| ENG | 46 |
| ENH | 46, 49, 57 |
| ENH/5 | 46 |
| ENL | 36, 46, 57, 59 |
| ENW/ENC | 46 |
| ENX | 46 |
| ENX/5 | 46 |
| ENZ | 46, 59 |
| EP-1625 | 50 |
| EP1750 | 50 |
| EP1830 | 50 |
| EP1890 | 50 |

| Ordering Code | Page Number |
|------------------|-------------|
| EP1920 | 50 |
| EP2010 | 50 |
| EP5000 | 50 |
| EP7630BLK | 50 |
| EP7630LK | 50 |
| EP-7640ILK | 50 |
| EP7720LK | 50 |
| EP7740ILK | 50 |
| EP7750LK | 50 |
| EP8746LK | 50 |
| EP8749LK | 50 |
| EP8765LK | 50 |
| EP8775ILK | 50 |
| EPF | 46 |
| EPN | 46, 57 |
| EPR | 46 |
| EPT | 46 |
| EPV | 46, 59 |
| EPW | 46 |
| EPX | 46 |
| EPZ | 46 |
| ERV | 46 |
| ESA/FHD | 46, 57, 59 |
| ESB/FHE | 46, 57, 59 |
| ESD | 46, 49, 59 |
| ESD150-SE-D | 55 |
| ESD200-SE-D | 55 |
| ESD250/2-SE-D8.5 | 55 |
| ESD250-SE-D | 55 |
| ESD575/2-SE-D7.2 | 55 |
| ESD575/2-SE-D8.5 | 55 |
| ESD575-SE-D | 55 |
| ESH | 46 |
| ESI12000-DE | 56 |
| ESI1200-DE | 56 |
| ESI1200-DE-S | 56 |
| ESI2500-DE | 56 |
| ESI4000-DE | 56 |
| ESI575-DE | 56 |
| ESI6000-DE | 56 |
| ESJ | 46, 49 |
| ESL | 46, 48, 57 |
| ESM | 46, 48, 57 |
| ESN | 46, 48, 57 |
| ESP | 46, 48, 57 |
| ESR | 46, 48, 57 |
| ESR1200-SE-HR | 55 |
| ESR1200-SE-NHR | 55 |
| ESR200-SE-HR | 55 |
| ESR2500-SE-HR | 55 |
| ESR400-SE-HR | 55 |
| ESR400-SE-NHR | 55 |
| ESR575-SE-HR | 55 |
| ESR575-SE-NHR | 55 |
| ESR600-DE-SA | 56 |
| ESR600-SE-SA | 56 |
| ESR700-SE-NHR | 55 |
| ESR700-SE-SA | 56 |
| ESR800-SE-HR | 55 |
| ESS | 46, 48, 57 |
| ESX | 36, 46, 57 |
| ESX/SU | 36 |
| ESX-FG | 36, 46, 57 |
| ESY | 46, 57 |
| ETB | 46, 48, 57 |
| ETC | 46, 48, 57 |
| ETD | 46, 49, 57 |
| ETE | 46, 49, 57 |
| ETF | 46, 49, 57 |
| ETG | 46, 49, 57 |

Index

| Ordering Code | Page Number |
|------------------|-------------|
| ETH | 46, 49, 57 |
| ETJ | 46, 59 |
| ET-LA057 | 52 |
| ET-LA059 | 52 |
| ET-LA059X | 52 |
| ET-LA095 | 52 |
| ET-LA097 | 53 |
| ET-LA097N | 53 |
| ET-LA097NW | 53 |
| ET-LA097W | 53 |
| ET-LA097XW | 53 |
| ET-LA201 | 53 |
| ET-LA390 | 53 |
| ET-LA555 | 53 |
| ET-LA556 | 53 |
| ET-LA592 | 53 |
| ET-LA701 | 53 |
| ET-LA702 | 53 |
| ET-LA730 | 53 |
| ET-LA735 | 53 |
| ET-LA780 | 53 |
| ET-LA785 | 53 |
| ET-LAB10 | 53 |
| ET-LAB30 | 53 |
| ET-LAB50 | 53 |
| ET-LAC50 | 53 |
| ET-LAC75 | 53 |
| ET-LAC80 | 53 |
| ET-LAD35 | 53 |
| ET-LAD55 | 53 |
| ET-LAD55L | 53 |
| ET-LAD55LW | 53 |
| ET-LAD55W | 53 |
| ET-LAD7500 | 53 |
| ET-LAD7500W | 53 |
| ET-LAD7700LW | 53 |
| ET-LAE100 | 53 |
| ET-LAE700 | 53 |
| ET-LAE900 | 53 |
| ET-LAL6510 | 53 |
| ET-LAL6510W | 53 |
| ET-LAM1-C | 53 |
| ET-LAX100 | 53 |
| EVA | 46, 59 |
| EVB/BRJ | 46, 59 |
| EVC/FGX | 46 |
| EVD | 46, 57 |
| EVR | 46, 49, 57 |
| EVW | 46, 49 |
| EWG | 46 |
| EXN | 36, 46, 57 |
| EXN/SU | 36 |
| EXN/SU/10LL | 35 |
| EXN-BLACK | 37, 46, 57 |
| EXN-FG | 36, 46, 57 |
| EXN-FG-24V | 36, 46 |
| EXN-FG-GU10-130V | 37 |
| EXN-SILVER | 37, 46, 57 |
| EXR | 46 |
| EXR/5 | 46 |
| EXT | 36, 46, 57 |
| EXT/SU | 36 |
| EXT/SU/10LL | 35 |
| EXT-FG | 36, 46, 57 |
| EXT-FG-24V | 36, 46 |
| EXV | 46, 57 |
| EXW | 46 |
| EXX | 46, 57 |
| EXY | 46 |
| EXZ | 36, 46, 57 |

| Ordering Code | Page Number |
|---------------|-------------|
| EXZ/SU | 36 |
| EXZ/SU/10LL | 35 |
| EXZ-BLACK | 37, 46, 57 |
| EXZ-FG | 36, 46, 57 |
| EXZ-SILVER | 37, 46, 57 |
| EYA | 46, 49 |
| EYB | 46 |
| EYB/5 | 46 |
| EYC | 36, 46, 57 |
| EYC/SU | 36 |
| EYC-FG | 36, 46, 57 |
| EYF | 36, 46, 57 |
| EYF/SU | 36 |
| EYF-FG | 36, 46, 57 |
| EYH/FKT | 46, 57 |
| EYJ | 36, 46 |
| EYJ/SU | 36 |
| EYJ-FG | 36, 46 |
| EYK | 46 |
| EYL | 46 |
| EYP | 36, 46 |
| EYP-FG | 36, 46 |
| EYR | 36, 46 |
| EYR-FG | 36, 46 |
| EYS | 36, 46, 57 |
| EYS-FG | 36, 46, 57 |
| EYT | 46, 57 |
| EYV | 47, 57 |
| EYW | 47, 57 |
| EYX | 47, 57 |
| EZE | 47 |
| EZF/EZJ | 47 |
| F10T8/CW | 25 |
| F13T5/CW | 25, 59 |
| F13T5/D | 25, 59 |
| F13T5/WW | 25 |
| F13T8/CW | 25 |
| F14T5/835 | 24 |
| F14T5/841 | 24 |
| F14T8/CW | 25, 59 |
| F14T8/D | 25, 59 |
| F15T8/AQ | 27 |
| F15T8/BL | 27 |
| F15T8/BLB | 27 |
| F15T8/CW | 25, 59 |
| F15T8/D | 25, 59 |
| F15T8/W | 25 |
| F15T8/WW | 25 |
| F17T8/730K | 26 |
| F17T8/735K | 26 |
| F17T8/741K | 26 |
| F17T8/830K | 26 |
| F17T8/835K | 26 |
| F17T8/841K | 26 |
| F17T8/850K | 26 |
| F21T5/835 | 24 |
| F21T5/841 | 24 |
| F24T5/HO/835 | 25 |
| F24T5/HO/841 | 25 |
| F25T8/730K | 26 |
| F25T8/735K | 26 |
| F25T8/741K | 26 |
| F25T8/830K | 26 |
| F25T8/835K | 26 |
| F25T8/841K | 26 |
| F28T5/835 | 24 |
| F28T5/841 | 24 |
| F28T8/830K | 26 |
| F28T8/835K | 26 |
| F28T8/841K | 26 |

| Ordering Code | Page Number |
|---------------|-------------|
| F28T8/850K | 26 |
| F31T8/830/U | 26 |
| F31T8/835/U | 26 |
| F31T8/841/U | 26 |
| F31T8/850/U | 26 |
| F32T8/730K | 25 |
| F32T8/735K | 25 |
| F32T8/735K/U6 | 27 |
| F32T8/741K | 25 |
| F32T8/741K/U6 | 27 |
| F32T8/750K/U6 | 27 |
| F32T8/830K | 25 |
| F32T8/835K | 25 |
| F32T8/835K/U6 | 27 |
| F32T8/841K | 25 |
| F32T8/841K/U6 | 27 |
| F32T8/850K | 25 |
| F32T8/850K/U6 | 27 |
| F34T12/CW/RW | 26 |
| F39T5/HO/835 | 25 |
| F39T5/HO/841 | 25 |
| F4T5/BL | 27 |
| F4T5/BLB | 27 |
| F4T5/CW | 25 |
| F4T5/D | 25 |
| F4T5/W | 25 |
| F54T5/HO/835 | 25 |
| F54T5/HO/841 | 25 |
| F54T5/HO/850 | 25 |
| F6T5/BL | 27 |
| F6T5/BLB | 27 |
| F6T5/CW | 25, 59 |
| F6T5/D | 25, 59 |
| F6T5/W | 25 |
| F6T5/WW | 25 |
| F8T5/AQ | 27 |
| F8T5/BL | 27 |
| F8T5/BLB | 27 |
| F8T5/CW | 25, 59 |
| F8T5/D | 25, 59 |
| F8T5/W | 25 |
| F8T5/WW | 25 |
| FAD | 47, 57 |
| FAL | 47, 49 |
| FAL/5 | 47 |
| FBG/FBD | 47, 57 |
| FBX | 47, 57 |
| FBY | 47, 57 |
| FC12T9/CW | 26 |
| FC12T9/D | 26 |
| FC16T9/CW | 26 |
| FC16T9/D | 26 |
| FC8T9/CW | 26 |
| FC8T9/D | 26 |
| FCB | 47, 57 |
| FCB/5 | 47 |
| FCL | 47, 57 |
| FCM | 47, 57 |
| FCR | 47, 57, 59 |
| FCS | 47, 57, 59 |
| FCZ | 47, 57 |
| FDA | 47, 57 |
| FDB | 47, 57 |
| PDF | 47, 57 |
| FDN | 47, 57 |
| FDT | 47, 57, 59 |
| FDV | 47 |
| FDX | 47, 59, 60 |
| FEL | 47, 57 |
| FEP | 47, 57 |

Index

| Ordering Code | Page Number |
|-----------------------|-------------|
| FER | 47, 57 |
| FEV | 47, 57 |
| FEY | 47, 57 |
| FFJ | 47, 49 |
| FFJ/5 | 47 |
| FFM | 47, 57 |
| FFN | 47, 57 |
| FFP | 47, 57 |
| FFR | 47, 57 |
| FFS | 47, 57 |
| FFT | 47, 57 |
| FGT | 47, 57 |
| FHM | 47, 57 |
| FHS | 47 |
| FHS/5 | 47 |
| FHX | 47 |
| FJX | 47 |
| FKW | 47, 57 |
| FLK | 47, 57 |
| FLT | 47 |
| FLW | 47 |
| FML | 47 |
| FML18/65 | 23 |
| FML27/27 | 23 |
| FML27/41 | 23 |
| FML27/65 | 23 |
| FML36/27 | 23 |
| FML36/41 | 23 |
| FML36/65 | 23 |
| FMT | 36, 47 |
| FMT-FG | 36, 47 |
| FMV | 36, 47 |
| FMV-FG | 37, 47 |
| FMW | 36, 47 |
| FMW/SU/10LL | 35 |
| FMW-BLACK | 37, 47 |
| FMW-FG | 37, 47 |
| FMW-FG-GU10-130V | 37 |
| FMW-SILVER | 37, 47 |
| FNC-FG (Yellow) | 37, 47 |
| FND-FG (Red) | 37, 47 |
| FNE-FG (Green) | 37, 47 |
| FNF-FG (Blue) | 37, 47 |
| FNT | 47 |
| FNV | 36, 47 |
| FNV/SU | 36 |
| FNV-FG | 37, 47 |
| FPA | 36, 47, 57 |
| FPA-FG | 37, 47 |
| FPB | 36, 47, 57 |
| FPB-FG | 37, 47 |
| FPC | 36, 47 |
| FPC-FG | 37, 47 |
| FRA/SU | 36 |
| FRA-FG | 37 |
| FRB/SU | 36 |
| FRB/SU/10LL | 35 |
| FRK | 47, 57 |
| FS12 - Aluminum | 24 |
| FS2 - Aluminum | 24 |
| FS4 - Aluminum | 24 |
| FS5 - Aluminum | 24 |
| FSA | 37, 47 |
| FSB | 37, 47 |
| FSC | 37, 47 |
| FSD | 37, 47 |
| FSE | 37, 47 |
| FSF | 37, 47 |
| FSU - 120V - Aluminum | 24 |
| FSU - 220V - Aluminum | 24 |

| Ordering Code | Page Number |
|---------------|-------------|
| FTA | 35, 47 |
| FTA/SU | 35, 47 |
| FTB | 35, 47, 57 |
| FTB/SU | 35, 47 |
| FTB-FG | 35, 47 |
| FTC | 35, 47, 57 |
| FTC/SU | 35 |
| FTC-FG | 35, 47 |
| FTD | 35, 47, 57 |
| FTD/SU | 35, 47 |
| FTD-FG | 35, 47 |
| FTE | 35, 47, 57 |
| FTE/SU | 35, 47 |
| FTE-FG | 35, 47 |
| FTF | 35, 47, 57 |
| FTF/SU | 35, 47 |
| FTF-FG | 35, 47 |
| FTH | 35, 47, 57 |
| FTH/SU | 35, 47 |
| FTH-FG | 35, 47 |
| FTK | 47, 57 |
| FXL | 47 |
| FXL/5 | 47 |
| G10LAMP-SU | 52 |
| G10T5/4P | 28 |
| G10T5L | 28 |
| G10T8 | 27, 60 |
| G11T5 | 28 |
| G14T5/4P | 28 |
| G15T8 | 27, 60 |
| G16T5 | 28 |
| G20T10 | 27 |
| G20T5 | 28 |
| G25T8 | 27, 28 |
| G30T8 | 27 |
| G36T5/4P | 28 |
| G36T5L | 28 |
| G40T10 | 27 |
| G4T5 | 27, 60 |
| G55T8 | 28 |
| G64T5/4P | 28 |
| G64T5L | 28 |
| G6T5 | 27, 60 |
| G8T5 | 27, 60 |
| GBD | 47 |
| GBE | 47 |
| GBF | 35, 47 |
| GBF-FR | 35, 47 |
| GBJ | 47 |
| GBK | 47 |
| GCA | 47, 57 |
| GCC | 47, 57 |
| GDA | 47, 57 |
| GT50LP | 52 |
| GT60LP | 52 |
| GT95LP | 52 |
| GTL-2 | 27 |
| GTL3 | 27 |
| H1042 | 83 |
| H1155 | 83 |
| H1155LL | 83 |
| H1156 | 42, 77 |
| H1157 | 42, 77, 88 |
| H1253 | 83 |
| H33CD-400 | 30 |
| H33GL-400/DX | 30 |
| H37KB-250 | 30 |
| H37KC-250/DX | 30 |
| H38AV-100/DX | 30 |
| H38JA-100/DX | 30 |

| Ordering Code | Page Number |
|------------------|-------------|
| H38MP-100/DX | 30 |
| H39KB-175 | 30 |
| H39KC-175/DX | 30 |
| H3C | 82 |
| H4351 | 85 |
| H4352 | 85 |
| H43AV-75/DX | 30 |
| H4651 | 85 |
| H4656 | 85 |
| H4656HO/H6556 | 85 |
| H4666 | 85 |
| H46DL-40/50/DX | 30 |
| H4701 | 85 |
| H4703 | 85 |
| H5001 | 84 |
| H5006 | 84 |
| H6024 | 85 |
| H6054 | 85 |
| H6054HO/H6554 | 85 |
| H7100 | 82 |
| H7100SW | 82 |
| H755 | 82 |
| H755SW | 82 |
| H755SWTX | 82 |
| H7635 | 84 |
| H835 | 83 |
| H965 | 83 |
| HPL575/115V | 57 |
| HPL575/120V | 57 |
| HPL575LL/115V | 57 |
| HPL750/115V | 57 |
| HPR36 | 42, 74 |
| HPR40 | 42, 74 |
| HPR44 | 42, 74 |
| HPR50 | 42, 74 |
| HPR51 | 42, 74 |
| HPR52 | 42, 74 |
| HPR53 | 42, 74 |
| HPR55 | 42, 74 |
| JC12V100WH20 | 39 |
| JC12V20W | 39, 57 |
| JC12V20WH20 | 39 |
| JC12V30W | 39, 57 |
| JC12V30WH20 | 39 |
| JC12V35WH20 | 39 |
| JC12V50WH20 | 39, 60 |
| JC12V5W | 57 |
| JC12V5W-FR | 39 |
| JC12V75WH20 | 39 |
| JC24V300W | 39, 47 |
| JCD100V650WL | 47, 49 |
| JCD120V100W/A | 39, 47, 57 |
| JCD120V650WL | 49 |
| JCD12V10WH20 | 39 |
| JCD12V20WH20 | 39 |
| JCD12V35WH20 | 39 |
| JCD12V5WH20 | 39 |
| JCD130V100WG6.35 | 39 |
| JCD130V100WG8 | 39 |
| JCD130V20WG6.35 | 39 |
| JCD130V20WG8 | 39 |
| JCD130V25WG6.35 | 39 |
| JCD130V25WG8 | 39 |
| JCD130V25WG9 | 39 |
| JCD130V25WG9/F | 40 |
| JCD130V35WG6.35 | 39 |
| JCD130V35WG8 | 39 |
| JCD130V40WG9 | 39 |
| JCD130V40WG9/F | 40 |
| JCD130V50WG6.35 | 39 |

Index

| Ordering Code | Page Number |
|-----------------|-------------|
| JCD130V50WG8 | 39 |
| JCD130V50WG9 | 40 |
| JCD130V50WG9/F | 40 |
| JCD130V60WG9 | 40 |
| JCD130V60WG9/F | 40 |
| JCD130V75WG6.35 | 39 |
| JCD130V75WG8 | 39 |
| JCD130V75WG9 | 40 |
| JCD130V75WG9/F | 40 |
| JCD24V20WH20 | 39 |
| JCD6V10WH20 | 39 |
| JCD6V20WH20 | 39 |
| JCP100V650W | 47, 49 |
| JCR/120V150WB | 47 |
| JCR/M12-28 | 47 |
| JCR/M12V100W | 47, 60 |
| JCR/M12V20W | 47, 57 |
| JCR/M12V75W | 47, 60 |
| JCR/M14V35W | 47, 60 |
| JCR100V300W | 47, 49 |
| JDR100/FL | 37 |
| JDR100/MF | 37 |
| JDR75/FL | 37 |
| JDR75/MF | 37 |
| JDR75/SP | 37 |
| JF02XE | 76 |
| JF03XE | 76 |
| JF07XE | 76 |
| JF08XE | 76 |
| JF135050XE | 76 |
| JF135100XE | 76 |
| JF13XE | 76 |
| JF14XE | 76 |
| JF14XE/F | 76 |
| JF16XE | 76 |
| JF17XE | 76 |
| JF260050XE | 76 |
| JF260100XE | 76 |
| K12 | 60 |
| K15 | 60 |
| K222 | 80 |
| KE10XE/F | 61 |
| KE16XE/F | 61 |
| KE20XE/F | 61 |
| KE23XE/F | 61 |
| KK10XE | 61 |
| KK14XE | 61 |
| KK20XE | 61 |
| KL20XE | 61 |
| KL23XE | 61 |
| KN10XE | 61 |
| KN20XE | 61 |
| KO10XE | 61 |
| KO16XE | 61 |
| KO20XE | 61 |
| KO23XE | 61 |
| KPR102 | 60 |
| KPR103 | 60 |
| KPR118 | 60 |
| KPR13 | 60 |
| KPR130 | 60 |
| KPR2 | 60 |
| KPR3 | 60 |
| KPR4 | 60 |
| L114 | 53 |
| L1515A | 50 |
| L1516A | 50 |
| L1550A | 50 |
| L1551A | 50 |
| L1552A | 50 |

| Ordering Code | Page Number |
|---------------------|-------------|
| L1553A | 50 |
| L1554A | 50 |
| L1561A | 50 |
| L1582A | 50 |
| L1621A | 50 |
| L1624A | 50 |
| L1695A | 50 |
| L1709A | 50 |
| L1720A | 50 |
| L26 | 53 |
| L84 | 53 |
| L92 | 53 |
| LAMP-010 | 53 |
| LAMP-011 | 53 |
| LAMP-013 | 50, 53 |
| LAMP-014 | 53 |
| LAMP-016 | 53 |
| LAMP-017 | 50, 53 |
| LAMP-018 | 53 |
| LAMP-019 | 53 |
| LAMP-021 | 53 |
| LAMP-022 | 53 |
| LAMP-025 | 53 |
| LAMP-026 | 53 |
| LAMP-027 | 53 |
| LAMP-029 | 50, 53 |
| LAMP-030 | 53 |
| LAMP-031 | 51, 53 |
| LAMP-032 | 53 |
| LAMP6180 | 50 |
| LCA3112 | 53 |
| LCA3125 | 53 |
| LED-120-MB-G | 43 |
| LED-120-MB-R | 43 |
| LED-120-MB-W | 43 |
| LED-120-MB-Y | 43 |
| LED-120-PSB-G | 44 |
| LED-120-PSB-R | 44 |
| LED-120-PSB-W | 44 |
| LED-120-PSB-Y | 44 |
| LED-12-DCBAY-R | 42 |
| LED-12-DCBAY-W | 42 |
| LED-12-FESTOON-W | 43 |
| LED-12-SCBAY-R | 42 |
| LED-12-SCBAY-W | 42 |
| LED-14-BA9S-G | 43 |
| LED-14-BA9S-R | 43 |
| LED-14-BA9S-W | 43 |
| LED-14-T1.75WEDGE-W | 43 |
| LED-194-R | 44 |
| LED-194-W | 44 |
| LED-24-BA9S-G | 43 |
| LED-24-BA9S-R | 43 |
| LED-24-BA9S-W | 43 |
| LED-24-FESTOON-W | 43 |
| LED-24-MF-R | 43 |
| LED-24-MF-W | 43 |
| LED-24-MF-Y | 43 |
| LED-24-MG-R | 43 |
| LED-24-MG-W | 43 |
| LED-24-MG-Y | 43 |
| LED-24-PSB-G | 44 |
| LED-24-PSB-R | 44 |
| LED-24-PSB-W | 44 |
| LED-24-PSB-Y | 44 |
| LED-24-T1.75WEDGE-G | 43 |
| LED-24-T1.75WEDGE-R | 43 |
| LED-24-T1.75WEDGE-W | 43 |
| LED-24-T1.75WEDGE-Y | 43 |
| LED-6-T1.75WEDGE-R | 43 |

| Ordering Code | Page Number |
|--------------------|-------------|
| LED-6-T1.75WEDGE-W | 43 |
| LED-6-T1.75WEDGE-Y | 43 |
| LEDC18/MR16-W | 44 |
| LEDC30/PAR20-W | 44 |
| LEDC6-70B | 44 |
| LEDC6-70G | 44 |
| LEDC6-70M | 44 |
| LEDC6-70R | 44 |
| LEDC6-70W | 44 |
| LEDC70/PAR30-W | 44 |
| LEDC80/PAR38-W | 44 |
| LH01LP | 52 |
| LH02LP | 52 |
| LKS10 | 50 |
| LKS15 | 50 |
| LKX55 | 50 |
| LKX75 | 50 |
| LMP-600 | 54 |
| LMP-C120 | 54 |
| LMP-C121 | 54 |
| LMP-C132 | 54 |
| LMP-C133 | 54 |
| LMP-C150 | 54 |
| LMP-C160 | 54 |
| LMP-C161 | 54 |
| LMP-C162 | 54 |
| LMP-C163 | 54 |
| LMP-C190 | 54 |
| LMP-E150 | 54 |
| LMP-E180 | 54 |
| LMP-F250 | 54 |
| LMP-F300 | 54 |
| LMP-H130 | 54 |
| LMP-H150 | 54 |
| LMP-H180 | 54 |
| LMP-M130 | 54 |
| LMP-P120 | 54 |
| LMP-P200 | 54 |
| LMP-P201 | 54 |
| LMP-P202 | 54 |
| LMP-P260 | 54 |
| LMP-P260 | 54 |
| LMP-Q120 | 54 |
| LMP-S120 | 54 |
| LT20LPE | 52 |
| LT30LP | 52 |
| LT35LP | 52 |
| LT40LP | 52 |
| LT50LP | 52 |
| LT51LP | 52 |
| LT57LP | 52 |
| LT60LPK | 52 |
| LT70LP | 52 |
| LT80LAMP | 52 |
| LT81/100LAMP | 52 |
| LU100 | 30 |
| LU100/D/MED | 30 |
| LU100/MED | 30 |
| LU1000 | 30 |
| LU150/100 | 30 |
| LU150/55 | 30 |
| LU150/55/D/MED | 30 |
| LU150/55/MED | 30 |
| LU200 | 30 |
| LU250 | 30 |
| LU250/D | 30 |
| LU35/D/MED | 30 |
| LU35/MED | 30 |
| LU400 | 30 |
| LU400/D | 30 |
| LU50 | 30 |

Index

| Ordering Code | Page Number |
|---------------------|-------------|
| LU50/D | 30 |
| LU50/MED | 30 |
| LU600 | 30 |
| LU70 | 30 |
| LU70/D | 30 |
| LU70/D/MED | 30 |
| LU70/MED | 30 |
| LV-LP17 | 50 |
| LV-LP19 | 50 |
| LV-LP22 | 50 |
| MH100/C/U/MED | 28 |
| MH100/U/MED | 28 |
| MH1000/C/U | 29 |
| MH1000/U | 29 |
| MH1000/U/BT37 | 29 |
| MH150/C/U/MED | 29 |
| MH150/U/MED | 29 |
| MH1500/U | 29 |
| MH175/C/U | 29 |
| MH175/C/U/MED | 29 |
| MH175/U | 29 |
| MH175/U/MED | 29 |
| MH200/C/U | 29 |
| MH200/U | 29 |
| MH250/C/U | 29 |
| MH250/U | 29 |
| MH250/U/T15 | 29 |
| MH320/U | 29 |
| MH350/C/HOR | 29 |
| MH350/HOR | 29 |
| MH400/C/U | 29 |
| MH400/C/U/ED28 | 29 |
| MH400/U | 29 |
| MH400/U/ED28 | 29 |
| MH400/U/T15 | 29 |
| MH50/C/U/MED | 28 |
| MH50/U/MED | 28 |
| MH70/C/U/MED | 28 |
| MH70/U/MED | 28 |
| MH-DE150/TD/UVS/10K | 28 |
| MH-DE150/TD/UVS/3K | 28 |
| MH-DE150/TD/UVS/4K | 28 |
| MH-DE150/TD/UVS/6K | 28 |
| MH-DE150/TD/UVS/GDX | 28 |
| MH-DE150/TD/UVS/PDX | 28 |
| MH-DE250/TD/3K | 28 |
| MH-DE250/TD/4K | 28 |
| MH-DE70/TD/UVS/3K | 28 |
| MH-DE70/TD/UVS/4K | 28 |
| MH-SE150/UVS/3K | 28 |
| MH-SE150/UVS/4K | 28 |
| MH-SE70/UVS/3K | 28 |
| MH-SE70/UVS/4K | 28 |
| MP100/C/U/MED/3K | 29 |
| MP100/C/U/MED/4K | 29 |
| MP100/C/V/MED/27K | 29 |
| MP100/U/MED/3K | 29 |
| MP100/U/MED/4K | 29 |
| MP150/C/U/MED/3K | 29 |
| MP150/C/U/MED/4K | 29 |
| MP150/U/MED/3K | 29 |
| MP150/U/MED/4K | 29 |
| MP200/C/V/4K | 30 |
| MP25T-930 | 50 |
| MP30T-930 | 50 |
| MP320/BU | 30 |
| MP350/BU | 30 |
| MP350/C/BU/3K | 30 |
| MP350/C/BU/4K | 30 |
| MP35T-930 | 50 |

| Ordering Code | Page Number |
|-------------------|-------------|
| MP37T-930 | 50 |
| MP50/U/MED/3K | 29 |
| MP70/C/U/MED/3K | 29 |
| MP70/C/U/MED/4K | 29 |
| MP70/C/V/MED/27K | 29 |
| MP70/U/MED/3K | 29 |
| MP70/U/MED/4K | 29 |
| MT1035LAMP | 52 |
| MT40LP | 52 |
| MT50LP | 52 |
| MT60LP | 52 |
| MT60LPS | 52 |
| MT70LP | 52 |
| MT830/1030LAMP | 52 |
| MTLAMP600/800 | 52 |
| MTLAMP820/1020 | 52 |
| MTP150/C/U/MED/4K | 29 |
| MTP150/U/MED/3K | 29 |
| NE51H-R | 74 |
| NE51-R | 74 |
| NP01LP | 52 |
| P129362-228 | 60 |
| P21/5W | 66 |
| P21-W | 65 |
| P25-1 | 65 |
| P25-2 | 66 |
| PAR38/20/27K | 21 |
| PC168 | 74 |
| PC194 | 74, 75 |
| PH/111A | 47, 49 |
| PH/113 | 47, 49 |
| PH/140 | 47, 49 |
| PH/211 | 47, 49 |
| PH/212 | 47, 49 |
| PH/213 | 47, 49 |
| PKPJ500 | 54 |
| PKPJ-800 | 54 |
| PR12 | 60 |
| PR13 | 60 |
| PR15 | 60 |
| PR16 | 60 |
| PR18 | 60 |
| PR2 | 60 |
| PR20 | 60 |
| PR3 | 60 |
| PR30 | 60 |
| PR4 | 60 |
| PR6 | 60 |
| PR7 | 60 |
| PR9 | 60 |
| PRJ-RLC-001 | 55 |
| PRJ-RLC-002 | 55 |
| PRJ-RLC-004 | 55 |
| PRJ-RLC-008 | 55 |
| PRJ-RLC-010 | 55 |
| PRJ-RLC-011 | 55 |
| PRJ-RLC-015 | 55 |
| Q100/DC-120V | 40 |
| Q100/MC-120V | 40 |
| Q1000T3/CL/120V | 41 |
| Q1000T3/CL/220V | 41 |
| Q1000T3/CL/240V | 41 |
| Q1000T3/CL/277V | 41 |
| Q100CL/DC/2V-120V | 40, 47, 57 |
| Q100CL/DC/2V-130V | 40 |
| Q100CL/DC-120V | 40 |
| Q100CL/MC/2V-120V | 40, 48, 58 |
| Q100CL/MC/2V-130V | 40 |
| Q100CL/MC-120V | 40 |
| Q100DC/2V-120V | 40, 48, 58 |

| Ordering Code | Page Number |
|-------------------|----------------|
| Q100MC/2V-120V | 40, 48, 58 |
| Q100T3/CL/120V | 41 |
| Q100W/S120V | 41 |
| Q100W/S130V | 41 |
| Q1500T3/CL/120V | 41 |
| Q1500T3/CL/208V | 41 |
| Q1500T3/CL/220V | 41 |
| Q1500T3/CL/240V | 41 |
| Q1500T3/CL/277V | 41 |
| Q150CL/DC-120V | 40, 48, 58 |
| Q150CL/DC-130V | 40 |
| Q150CL/MC/2V-130V | 40 |
| Q150CL/MC-120V | 40, 48, 58 |
| Q150DC-120V | 40, 48, 58 |
| Q150MC-120V | 40, 48, 58 |
| Q150T3/CL/120V | 41 |
| Q150T4/CL/25 | 60 |
| Q150W/S120V | 41 |
| Q150W/S130V | 41 |
| Q200T3/CL/120V | 41 |
| Q200W/S120V | 41 |
| Q200W/S130V | 41 |
| Q200W/S220V | 41 |
| Q235T4/3-33V | 60 |
| Q250CL/DC-120V | 40, 48, 58 |
| Q250CL/DC-130V | 40 |
| Q250CL/MC-120V | 40, 48, 58, 60 |
| Q250CL/MC-130V | 40 |
| Q250DC-120V | 40, 48, 58 |
| Q250DC-130V | 40 |
| Q250MC-120V | 40, 48, 58 |
| Q250MC-130V | 40, 58 |
| Q250T3/CL/120V | 41 |
| Q250W/S120V | 41 |
| Q300T3/CL/120V | 41, 83 |
| Q300T3/CL/130V | 41 |
| Q300T3/CL/220V | 41 |
| Q300W/S120V | 41 |
| Q300W/S130V | 41 |
| Q325CL/MC-120V | 40, 48 |
| Q400W/S120V | 41 |
| Q400W/S130V | 41 |
| Q4632 | 84 |
| Q500/MC-120V | 40, 48, 58 |
| Q500/MC-130V | 40, 58 |
| Q500CL/DC-120V | 40 |
| Q500CL/MC-120V | 40, 48, 58 |
| Q500CL/MC-130V | 40, 58 |
| Q500DC-120V | 40 |
| Q500T3/CL/120V | 41, 83 |
| Q500T3/CL/130V | 41 |
| Q500T3/CL/220V | 41 |
| Q500T3/CL/240V | 41 |
| Q750T3/CL/120V | 41 |
| Q750T3/CL/240V | 41 |
| Q75CL/DC-120V | 40 |
| Q75CL/DC-28V | 60 |
| Q75CL-120V | 40 |
| Q75CL-130V | 40 |
| Q75CL-28V | 60 |
| Q75MC-120V | 40 |
| QT13/27 | 23 |
| QT13/27-4P | 24 |
| QT13/30 | 23 |
| QT13/30-4P | 24 |
| QT13/35 | 23 |
| QT13/35-4P | 24 |
| QT13/41 | 23 |
| QT13/41-4P | 24 |
| QT13/50 | 23 |

Index

| Ordering Code | Page Number |
|---------------|-------------|
| QT13/50-4P | 24 |
| QT13/65 | 23 |
| QT13/65-4P | 24 |
| QT13/G24D1/27 | 23 |
| QT13/G24D1/30 | 23 |
| QT13/G24D1/35 | 23 |
| QT13/G24D1/41 | 23 |
| QT13/G24D1/50 | 23 |
| QT13/G24D1/65 | 23 |
| QT18/27 | 23 |
| QT18/27-4P | 24 |
| QT18/30 | 23 |
| QT18/30-4P | 24 |
| QT18/35 | 23 |
| QT18/35-4P | 24 |
| QT18/41 | 24 |
| QT18/41-4P | 24 |
| QT18/50 | 24 |
| QT18/50-4P | 24 |
| QT18/65 | 24 |
| QT18/65-4P | 24 |
| QT26/27 | 24 |
| QT26/27-4P | 24 |
| QT26/30 | 24 |
| QT26/30-4P | 24 |
| QT26/35 | 24 |
| QT26/35-4P | 24 |
| QT26/41 | 24 |
| QT26/41-4P | 24 |
| QT26/50 | 24 |
| QT26/50-4P | 24 |
| QT26/65 | 24 |
| QT26/65-4P | 24 |
| QT9/27 | 23 |
| QT9/30 | 23 |
| QT9/35 | 23 |
| R30/15/27K | 21 |
| R30/15/41K | 21 |
| R30/15/65K | 21 |
| R30/20/27K | 21 |
| R30/20/41K | 21 |
| R30/20/65K | 21 |
| R40/23/27K | 21 |
| R40/23/41K | 21 |
| R40/23/65K | 21 |
| R98-41111 | 50 |
| R98-41761 | 50 |
| RLC-004 | 55 |
| RLC-013 | 55 |
| RLC-014 | 55 |
| RLC-120-07A | 55 |
| RLC-130-07A | 55 |
| RLC-150-002 | 55 |
| RLC-150-003 | 55 |
| RLC-150-07A | 55 |
| RLC-160-03A | 55 |
| RLC-250-03A | 55 |
| RLC-260-001 | 55 |
| RLM-200-01A | 55 |
| RLMPF0057CEZZ | 54 |
| RLU-150-001 | 55 |
| RLU-150-03A | 55 |
| RLU-190-03A | 55 |
| RLU820 | 55 |
| RS-LP01 | 50 |
| RS-LP02 | 50 |
| RS-LP03 | 50 |
| SE1274 | 69 |
| SP105/41/MED | 20 |
| SP105/41/MOG | 20 |

| Ordering Code | Page Number |
|-------------------|-------------|
| SP105/41/MOG-277V | 20 |
| SP105/50/MED | 20 |
| SP13/27-4P | 21 |
| SP13/27-GU24 | 21 |
| SP13/27K | 20 |
| SP13/35K | 20 |
| SP13/41K | 20 |
| SP15/65K | 20 |
| SP18/27-4P | 21 |
| SP18/27-GU24 | 21 |
| SP19/27K | 20 |
| SP19/35K | 20 |
| SP19/41K | 20 |
| SP23/27K | 20 |
| SP23/35K | 20 |
| SP23/41K | 20, 83 |
| SP23/65K | 83 |
| SP26/27-4P | 21 |
| SP26/27-GU24 | 21 |
| SP27/27K | 20 |
| SP27/35K | 20 |
| SP27/41K | 20 |
| SP27/50K | 20 |
| SP30/955K | 49 |
| SP32/27K | 20 |
| SP32/35K | 20 |
| SP32/41K | 20 |
| SP32/50K | 20 |
| SP42/27K | 20 |
| SP42/35K | 20 |
| SP42/41K | 20 |
| SP42/50K | 20 |
| SP50/955K | 49 |
| SP80507001 | 52 |
| SP80701001 | 52 |
| SP80N01001 | 52 |
| SP80V01001 | 52 |
| SP80Y01001 | 52 |
| SP81003001 | 52 |
| SP81101001 | 52 |
| SP81218001 | 52 |
| SP81416001 | 52 |
| SP81C01001 | 52 |
| SP82902001 | 52 |
| SP82F01001 | 52 |
| SP82G01001 | 52 |
| SP83401001 | 52 |
| SP83601001 | 52 |
| SP85/41/MED | 20 |
| SP85/50/MED | 20 |
| SP86302001 | 52 |
| SP86501001 | 52 |
| SP86701001 | 52 |
| SP89601001 | 52 |
| SPL1501001 | 52 |
| SPL3701001 | 52 |
| SP-LAMP-001 | 53 |
| SP-LAMP-002A | 51 |
| SP-LAMP-003 | 51, 53 |
| SP-LAMP-004 | 53 |
| SP-LAMP-005 | 51 |
| SP-LAMP-006 | 51, 53 |
| SP-LAMP-007 | 51, 53 |
| SP-LAMP-008 | 53 |
| SP-LAMP-009 | 51 |
| SP-LAMP-010 | 53 |
| SP-LAMP-011 | 53 |
| SP-LAMP-012 | 51, 53 |
| SP-LAMP-013 | 51 |
| SP-LAMP-015 | 51, 53 |

| Ordering Code | Page Number |
|---------------|-------------|
| SP-LAMP-016 | 51, 53 |
| SP-LAMP-017 | 51, 53 |
| SP-LAMP-018 | 50, 51 |
| SP-LAMP-019 | 51 |
| SP-LAMP-021 | 51 |
| SP-LAMP-024 | 52 |
| SP-LAMP-027 | 52 |
| SP-LAMP-LP1 | 52 |
| SP-LAMP-LP10 | 52 |
| SP-LAMP-LP12 | 52 |
| SP-LAMP-LP2E | 50, 52 |
| SP-LAMP-LP3 | 52 |
| SP-LAMP-LP3F | 52 |
| SP-LAMP-LP4 | 52 |
| SP-LAMP-LP4Z | 52 |
| SP-LAMP-LP5F | 52 |
| SP-LAMP-LP620 | 52 |
| SP-LAMP-LP630 | 52 |
| SP-LAMP-LP7 | 52 |
| SP-LAMP-LP755 | 52 |
| SP-LAMP-LP770 | 52 |
| SP-LAMP-LP7E | 52 |
| SP-LAMP-LP7P | 52 |
| SP-LAMP-LP9 | 52 |
| TDP-LD1 | 54 |
| TLP-L1 | 54 |
| TLP-L2 | 54 |
| TLP-L3 | 54 |
| TLP-L55 | 54 |
| TLP-L6 | 54 |
| TLP-L78 | 54 |
| TLP-L79 | 54 |
| TLP-LB2 | 54 |
| TLP-LD2 | 54 |
| TLP-LF6 | 54 |
| TLP-LP4 | 54 |
| TLP-LP5 | 54 |
| TLP-LT1 | 54 |
| TLP-LU6 | 54 |
| TLP-LV1 | 54 |
| TLP-LV2 | 54 |
| TLP-LV3 | 54 |
| TLP-LV4 | 54 |
| TLP-LV5 | 54 |
| TLP-LV6 | 54 |
| TLP-LV8 | 54 |
| TLP-LW10 | 55 |
| TLP-LW11 | 55 |
| TLP-LW13 | 55 |
| TLP-LW2 | 55 |
| TLP-LW3 | 55 |
| TLP-LW5 | 55 |
| TLP-LW6 | 55 |
| TLP-LX10 | 55 |
| TLP-LX40 | 55 |
| TLP-LX45 | 55 |
| TT18/27 | 23 |
| TT18/30 | 23 |
| TT18/35 | 23 |
| TT18/41 | 23 |
| TT18/50 | 23 |
| TT18/65 | 23 |
| TT26/27 | 23 |
| TT26/30 | 23 |
| TT26/35 | 23 |
| TT26/41 | 23 |
| TT26/50 | 23 |
| TT26/65 | 23 |
| TT32/27 | 23 |
| TT32/30 | 23 |

Index

| Ordering Code | Page Number |
|---------------|-------------|
| TT32/35 | 23 |
| TT32/41 | 23 |
| TT32/50 | 23 |
| TT32/65 | 23 |
| TT42/27 | 23 |
| TT42/30 | 23 |
| TT42/35 | 23 |
| TT42/41 | 23 |
| TT42/50 | 23 |
| TT42/65 | 23 |
| TY-LA1000 | 53 |
| TY-LA1500 | 53 |
| UX21511 | 51 |
| V13H010L15 | 51 |
| V13H010L16 | 51 |
| V13H010L17 | 51 |
| V13H010I1D | 51 |
| V13H010L21 | 51 |
| V13H010L22 | 51 |
| V13H010L23 | 51 |
| V13H010L25 | 51 |
| V13H010L27 | 51 |
| V13H010L29 | 51 |
| V13H010L30 | 51 |
| V13H010L31 | 51 |
| V13H010L32 | 51 |
| V13H010L33 | 51 |
| V13H010L34 | 51 |
| V13H010L36 | 51 |
| V13H010L37 | 51 |
| V13H010L38 | 51 |
| VLT-EX100LP | 52 |
| VLT-HC2LP | 52 |
| VLT-HC3LP | 52 |
| VLT-HC5000LP | 52 |
| VLT-HC900LP | 52 |
| VLT-HC910LP | 52 |
| VLT-PX1LP | 52 |
| VLT-SE1LP | 52 |
| VLT-SE2LP | 52 |
| VLT-SL6LP | 52 |
| VLT-X10LP | 52 |
| VLT-X120L9 | 52 |
| VLT-X200LP | 52 |
| VLT-X300LP | 52 |
| VLT-X30LP | 52 |
| VLT-X400LP | 52 |
| VLT-X500LP | 52 |
| VLT-X70LP | 52 |
| VLT-XD110LP | 52 |
| VLT-XD2000LP | 52 |
| VLT-XD200LP | 52 |
| VLT-XD205LP | 52 |
| VLT-XD20LP | 52 |
| VLT-XD300LP | 52 |
| VLT-XD350LP | 52 |
| VLT-XD400LP | 52 |
| VLT-XD50LP | 52 |
| VLT-XD70LP | 52 |
| VLT-XL1LP | 52 |
| VLT-XL2LP | 52 |
| VLT-XL30LP | 52 |
| VLT-XL550LP | 52 |
| VLT-XL5950LP | 52 |
| VLT-XL5LP | 52 |
| VLT-XL8LP | 52 |
| VT40LP | 52 |
| VT45LPK | 52 |
| VT50LP | 52 |
| VT60LP | 52 |

| Ordering Code | Page Number |
|---------------|-------------|
| VT70LP | 52 |
| VT75LPE | 52 |
| VT77LP | 52 |
| VT80LP | 52 |
| VT85LP | 52 |
| WK101 | 48 |
| WK120HD | 48 |
| WK120HD-UV | 48 |
| WK140HD | 48 |
| WK140HD-UV | 48 |
| WK152 | 48 |
| WK76 | 48 |
| WK76-UV | 48 |
| WK92 | 48 |
| WK92-UV | 48 |
| WK93 | 48 |
| WK94 | 48 |
| WK94-UV | 48 |
| WK95 | 48 |
| WK96 | 48 |
| WK96-UV | 48 |
| WK97 | 48 |
| WK98 | 48 |
| WK98-UV | 48 |
| WT61LP | 52 |
| XD15C-930 | 50 |
| XL2400 | 54 |
| XT50LP | 52 |
| XT51LH | 52 |

EiKO Large Lamp Warranty

EiKO brand large lamps are warranted to be free of defective materials and workmanship for the period listed below. EiKO will replace or credit the distributor only for the cost of any lamp that fails under normal operating conditions and the use and operation conditions below due to defective materials or workmanship.

This warranty is limited to the replacement or credit of the lamp itself. This is buyer's exclusive remedy. Any other warranty, express or implied, including any warranty of merchantability or fitness for a particular purpose, is excluded and disclaimed. EiKO shall not be liable for any special, incidental or consequential damage including labor, loss of use, lost profits or injury to persons or property.

EiKO reserves the right to examine all lamps prior to the determination of warranty status. All lamps must be retained for warranty claims. The warranty period starts on the date of installation. If the date of installation is unknown or undetermined the warranty period will start at the wholesale purchase date.

Lamp Category:

Warranty:

| | |
|---|-----------|
| Metal Halide, High-Pressure Sodium, Mercury Vapor | 15 months |
| Compact Fluorescent | 12 months |
| Self Ballasted Compact Fluorescent | 12 months |
| Linear Fluorescent (below 14 watt) | 12 months |
| Linear Fluorescent (14 watt and above) | 24 months |

Use and Operating Conditions:

Lamps must be used in UL approved fixtures with UL approved ballasts and installed according to local and national codes and standards. Use of occupancy sensors, dimmers or programmable systems with the lamp may void the warranty.

HID Lamps

Warranty is based on 5,000 hours per year maximum operation with a minimum of 8 hours operation per cycle. More frequent cycles will shorten lamp life and may not be covered under this warranty.

Fluorescent Lamps

Warranty is based on 4,000 hours per year maximum operation with a minimum of 3 hours operation per cycle. More frequent cycles will shorten lamp life and may not be covered under this warranty.

Warranty is in effect for sales and installations on and after January 1, 2006.

Our lamps are packaged in professional, attractive 4 color boxes or blister cards for retail or commercial sale.

Contact **EiKO** for specific packaging details.





WORLD HEADQUARTERS

23220 W. 84th Street • Shawnee, KS • 66227
Phone: 913-441-8500 • Toll-Free: 1-800-852-2217
Fax: 913-441-6679 • Toll-Free: 1-800-492-8975

EiKO Canada

31 King Street Unit 7 • Barrie, Ontario L4N 6B5 • Canada
Phone: [1] 705-721-5189
Fax: [1] 705-721-7855
sales@eiko-can.com

EiKO Ireland

Unit 4C Base Enterprise Centre • Ladyswell Road • Dublin 15 • Ireland
Phone: 353 1 826 3214
Fax: 353 1 640 2901
brian.mccrory@eiko.ie

EiKO Europe

Mittelwegring 23 • 76751 Jockgrim • Germany
Phone: [49] 0 7271-7607-0
Fax: [49] 0 7271-7607-29
info@eiko-europe.de

EiKO China

Room 606, BLK202, Tairan Industrial Park, Futian District, Shenzhen, China
Phone: [86] 755-8835-0908
Fax: [86] 755-8250-4066
sales.cn@eiko-china.com

EiKO Taiwan

25F, No. 29-1, Sec. 2 • Jungjeng E. Rd. • Danshuei Jen
Taipei, Taiwan ROC
Phone: [886] 2-8809-9966
Fax: [886] 2-8809-8372
eiko@eiko-ltd.com.tw

EiKO Korea

708-2 Gojan-dong • Danwon-gu • Sam Young Town #606
Ansan City • Gyeonggi Province • Republic of Korea
Phone: [82] 31-486-6001
Fax: [82] 31-486-4002
eiko-korea.co.kr