


pronto Universal *intelligent remote control*

SBC RU940



- **NEW** - extended 2 MB memory
- Award-winning intelligent remote control with large touch-screen LCD
- Dynamic, intuitive user interface for complete control of all audio/video products
- Unique and fully customisable learning remote control
- Software upgradeable
- Unlimited macro functionality

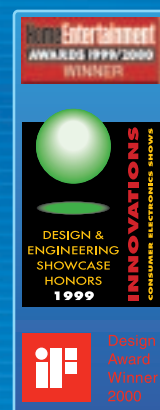

Let's make things better.



PHILIPS

SBC RU940

Standard product information

• Power supply	4 x LR6 (included)
• Battery lifetime	6 months
• Processor	Motorola DragonBall MC68328
• SRAM	512 Kb (0.5Mb)
• Flash memory	2048 Kb (2Mb)
• PC port	RS232 Serial port (3 wire connector)
• Transmission type	IR universal
• Transmission system	Modulated
• Effective IR range	> 15 meters
• Transmission angle	130 deg.
• Transmission LEDs	5
• No. direct access buttons	8
• Audio	Piëzo speaker with adjustable volume
• Weight	250g, with batteries
• Dimensions (mm)	138 x 92 x 38 (L x W x H)
• Warranty	1 year European warranty

LCD information

• Dimension (mm)	77 x 58
• Resolution	320 x 240, 0.24mm pitch
• Refresh rate	70 Hz
• Color scales	4 gray levels
• Dynamic LCD input	Finger or blunt object
• EL backlighting	Yes

Installation

• Pre-installed	RC5, RC6 (Philips & Marantz ready)
• Learnable	yes
• No. of devices	Unlimited (within memory)
• No. of learnable codes	Unlimited (within memory)

Features

• Direct-access buttons	Mute Channel Up/Down Volume Up/Down Right/Left Configuration buttons Backlight button
• Customisable User Interface manual or via PC	Yes
• Software upgradeable	Yes
• Macro functionality	Yes, Unlimited (within memory)
• Timer functionality	Yes, Unlimited (within memory)
• Automatic backlighting	Yes
• LCD Contrast adjustment	Yes
• Auto power on/off	Yes

Packaging

	Pronto (SBC RU940/00)	Docking station (SBC RU941/00)
• Type	Carton box	Carton box
• Dimensions (mm)	196 x 241 x 54	196 x 241 x 79
• Languages	GB, D, F, NL	GB, D, F, NL
• Languages	IFU GB, D, F, NL	GB, D, F, NL, S, FIN, I
• 12NC	9082 100 00517	9082 100 00518
• EAN code	87 10101 67892 4	87 10101 67893 1
Inner carton	NONE	

Outer carton

• Contents	5	
• Dimensions (mm)	305 x 260 x 210	350 x 255 x 210
• Weight (Kg)	3,5	3,5
• EAN code	87 10101 87280 3	87 10101 87281 0

Pronto is a universal learning remote control that combines elegance, flexibility and ease of use. It combines a large touchscreen display with an intuitive user interface and direct-access buttons to conveniently provide home entertainment control.

Dynamic, Interactive, user interface

The intuitive graphical user interface is easy to understand. The dynamic display uses familiar icons and sliding menus, which allow for quick and easy executions of commands. Pronto allows maximum flexibility for even the most sophisticated audio/video products

Pronto is as unique as you are!

Pronto's unparalleled design combines the benefits of a dynamic, digital user interface with direct access buttons. It's easy to add, delete, and label new buttons or menus. This allows maximum customisation according to individual needs and tastes.

Universal, learnable and expandable

Pronto can control almost all infrared (IR) receiving devices. It comes pre-programmed with RC5 and RC6 commands for Philips and Marantz components. Pronto can be 'taught' to control any other IR controlled product, regardless of brand.

Unlimited macro functionality and timer facility

Allows combinations of commands to be created and controlled under one macro button. The Pronto's timer can programme your VCR to record and play at any time. Perfect for putting you in total control of your home entertainment products.

Software upgradeable

Thanks to ProntoEdit software, which is freely available on the Internet, and which enables configurations to be duplicated, new IR codes to be stored, and graphics and templates to be added.

Pronto recharge docking station

Optional recharging system that's ideal for table-top operation while charging Pronto, and for storing Pronto when not being used.



SBC RU941 Pronto recharge docking station (optional)

- Keeps Pronto charged when not in use
- Allows Pronto to be used even while docked
- Includes NiMH rechargeable battery, power adaptor and docking station

<http://www.pronto.philips.com>

Let's make things better.



PHILIPS