

Bluetooth Mini Phone BT-Phone01

User Manual

Thank you for purchasing this Bluetooth Mini Phone. This device allows you to make and answer calls without touching your larger Bluetooth mobile phone. It has the same basic functions as mobile phone, such as Phone book, Call records, Password setting and so on.

To obtain best performance of this Mini Phone, please read this user manual carefully before using it. Also read the user guide of your mobile phone, which provides important safety and maintenance information.

Bluetooth wireless technology makes it possible to connect compatible communication devices without using cables. A Bluetooth connection does not require the devices to be in line of sight, but both devices should be within 10 meters (30feet) of each other. Connections can be subject to interference from obstructions.

There may be restrictions on using Bluetooth technology in some locations .Check with your local authorities or service provider.

Product Specifications

Bluetooth Specification: V3.0 with V2.1 EDR features, Class 2

Bluetooth Profiles Supported: Bluetooth Mini Phone & Handsfree

Range of Frequency: 2.4GHz spectrum

Nominal Charging Time: Within 30minutes

Talk Time*: Up to 6 hours

Standby Time*: Up to 270 hours

Dimensions: 95 (L) x 35 (W) x 10 (H) mm

Weight: 20 grams

Operating temperature range: -20°C to 55°C

Storage temperature range: -30°C to 70°C

* may vary due to the user's habit, different modes of operation, and mobile phone settings.

Factory Reset

You may reset BT-PHONE01 to its default settings. Resetting will also remove the pairing history of your Bluetooth Mini Phone with the mobile phone.

1. Keep BT-PHONE01 in “power on” mode
2. Remove the Bluetooth® connection to BT-PHONE01 on your phone or other devices
3. Hold the button of “Volume up”, “Volume down” and “MFB” simultaneously
4. Bluetooth Mini Phone will restart by flashing blue 3 times then goes into pairing mode automatically.

Bluetooth Bluetooth Mini Phone is designed to work with Alcatel Bluetooth devices. Due to large variability between different Bluetooth devices from different manufacturers, interoperability between the Bluetooth Mini Phone and non-Alcatel Bluetooth-enabled products is not guaranteed.

Troubleshooting

I can hear crackling noise.

To receive the best audio quality, it is recommended to wear your Bluetooth Mini Phone on the same side of the body as your mobile phone.

I can't hear anything in my Bluetooth Mini Phone.

- Ensure the Bluetooth Mini Phone is turned on and is properly charged.
- Ensure the Bluetooth Mini Phone is properly paired with the mobile phone.
- Ensure that the mobile phone is connected with the Bluetooth Mini Phone – if it does not connect, either refer to the mobile phone's Bluetooth menu or by pressing the MFB once (see “Using Your Bluetooth Mini Phone” and “Pairing Your Bluetooth Mini Phone with a Bluetooth Mobile Phone”).

I can't connect my Bluetooth Mini Phone with my mobile phone.

- Ensure your Bluetooth Mini Phone is turned off and is properly charged.
- Ensure the Bluetooth Mini Phone is properly paired with your mobile phone.
- Ensure your mobile phone's Bluetooth feature is activated. Please refer to your mobile phone user guide for specific instruction.
- Ensure the Bluetooth Mini Phone is within ten meters range of your mobile phone and there are no obstructions, such as walls or other electronic devices in between.

If the above steps do not solve your problem, please recharge the Bluetooth Mini Phone and remove your mobile phone's battery for a while.

Safety Information

- Check and observe local laws regarding the use of a mobile phone and a Bluetooth Mini Phone while driving. If you use the Bluetooth Mini Phone while driving, ensure your full attention and focus. It is your responsibility to drive safely. Consider to pull off the road before making or answering a call.
- Never leave your Bluetooth Mini Phone above any air bag deployment area inside your car as serious injury may result when an air bag deploys.

- Never allow children to play with the Bluetooth Mini Phone – small parts may be of choking hazard.
- Observe all signs and displays that require an electrical device or RF radio product to be switched off in designated areas. These could include hospitals, blasting areas, and potentially explosive atmospheres.
- Turn off your Bluetooth Mini Phone prior to boarding an aircraft. Do not use your Bluetooth Mini Phone inside an aircraft.
- •To prevent damage to your hearing, please do not set the listening volume too high.
- Do not attempt to modify the Bluetooth Mini Phone.
- Do not keep the Bluetooth Mini Phone near a wash basin or other wet places.
- Do not use the Bluetooth Mini Phone outdoors in the rain.
- Do not use the Bluetooth Mini Phone in stormy weather.
- Do not clean the Bluetooth Mini Phone while it is being charged. Always disconnect the charger from the Bluetooth Mini Phone before cleaning.
- Do not attempt to force open the built-in battery.
- Only charge the Bluetooth Mini Phone’s built-in battery in accordance with the instructions described in this user guide.
- Excessive sound pressure may harm your hearing.

Declaration of Conformity

Hereby, TCT Mobile Limited, declares that this product is in conformity with the following essential requirements of Council Directive 1999/5/EC (referred to as R&TTE Directive): Article 3.1a, 3.1.

Federal Communications Commission (FCC) Statement

BT-PHONE01 complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

Guarantee

Your accessory is guaranteed against all manufacturing defects for six (6) months from the date of purchase shown on your invoice. Nevertheless, if the legal warranty period in force in your country exceeds six (6) months, the legal warranty alone shall be applicable.

Hot Line Number: see “PLANEX COMMUNICATIONS INC.” leaflet or go to our Internet site.


On our Internet site (www.alcatel-mobilephones.com), you will find our FAQ (Frequently Asked Questions) section. You can also contact us by e-mail to ask any questions you may have.



 **Bluetooth[®]**
CE0700



Overview

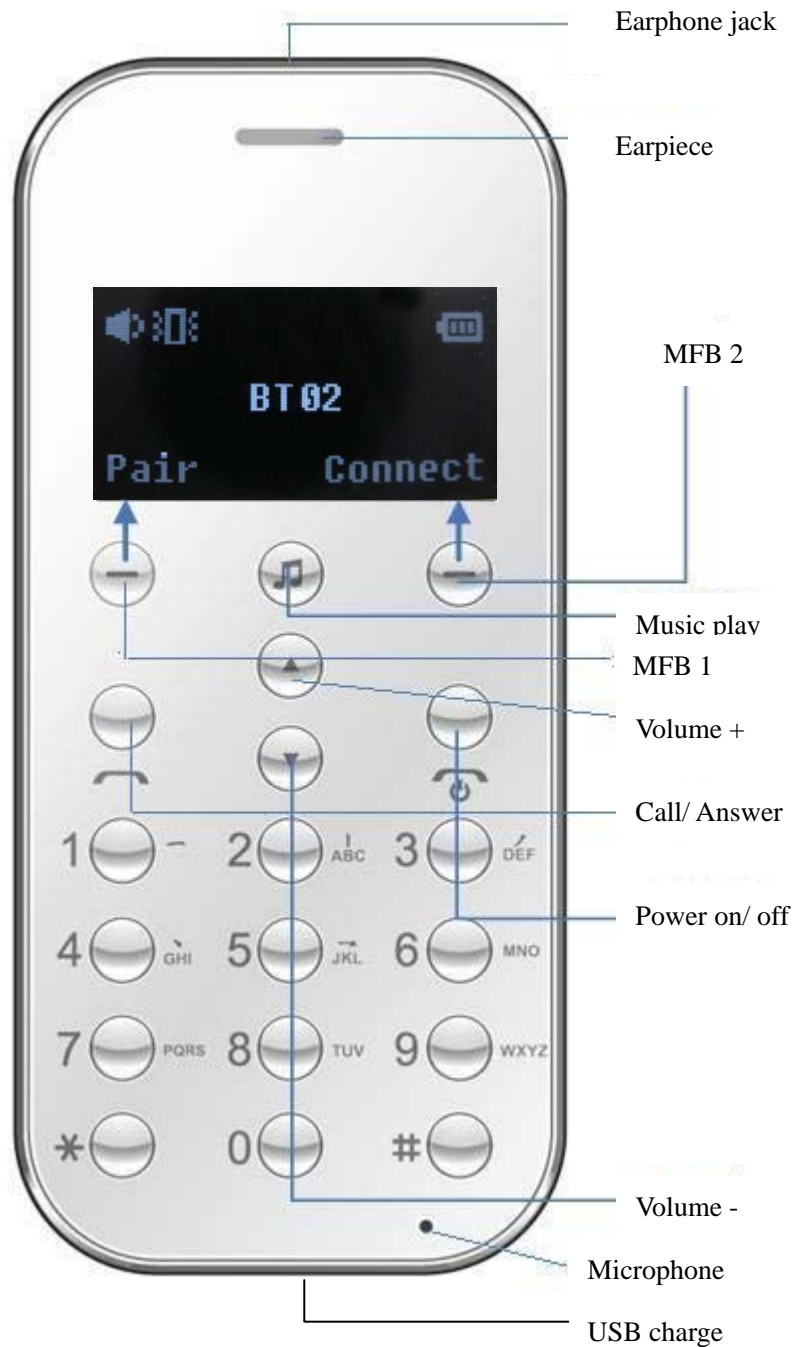


Operation Instruction

1. Power-on: Press the Power on/ off Button for a while until the screen gets light and you will see the display as the following. Then release it.



2. Power-off: Press and hold the Power on/ off Button until the screen become dark.


3. Pairing: After switch on BT-Phone01, select “Pair” to get into the paring status.

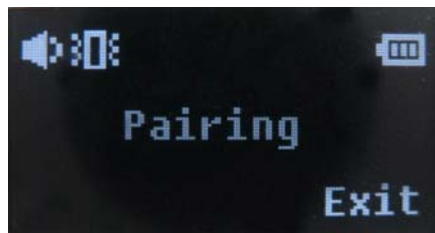

4. Connection: Use the Bluetooth function of your mobile phone to search and complete connection with BT-Phone01 (Refer to your mobile phone instruction). When they are successful in connection, the name of your mobile phone will display on the middle of BT-Phone01 as below.



Reconnection: Reconnect the last paring mobile phone with BT-Phone01 by selecting “Connect”, you will find “connecting” displaying on the screen. After that, the name of mobile phone connected appears.

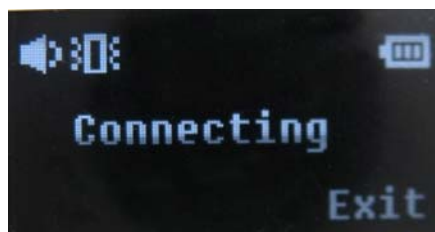

5. Menu introduction:

After connection, select “Menu”, then the nether list will come out. Now press Volume + or Volume – to choose the item you want.



6. Phone book:

Select “Contacts” from main menu and press ok, then the contacts which have been down loaded from mobile phone will be listed.



Look up the name you want by using Volume + or Volume -. You also can input the first letter of a name to find it. Now, select a contact here and make a call as well.




7. Synchronize Phone book:

Select "Sync" from main menu and press ok, it will display "Synchronize Phonebook". Then confirm to do or not by choosing "Sync" or "Exit". If you confirm ok, the phone book in the mobile phone will be down loaded to BT-Phone01, which will take several minutes.

8. Call records:

Select Call log from main menu and press ok, the following will appear.

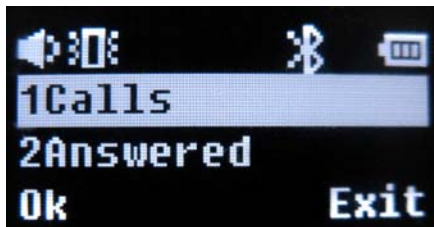

Then you can look up all the call records of Answered, Missed, Dialed and so on. Calls also can be made from this list.

9. Delete phone book:

Select "delete" from main menu and press ok to delete all the contacts saved in BT-Phone01. It will indicate "deleting" and "complete" during the process.

10. Rename:

Select "New name" from main menu and press ok, then you can input a new name to replace BT-Phone01 for the device.



11. Password setting:

Select “New password” from main menu and press ok, then input your new password and confirm it by pressing ok.




12. Ring setting:

Select “Rings” from main menu and press ok, it will display as the following. Then choose “Ring on” or “Ring off” for incoming calls.



13. Vibration setting:

Select “Vibration” from main menu and press ok to choose Vibration on or Vibration off when a call come in, then select ok to confirm.

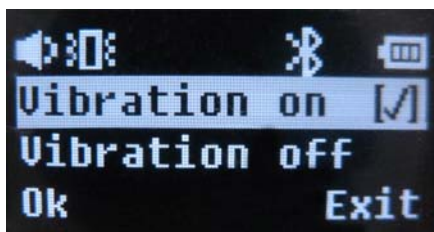

14. Black light setting:

Select “Backlight” to set the time when the light will turn off.



15. Lock setting:

Select “Key lock” from main menu and press ok to choose the time when it will be locked.



16. Make calls:

While BT-Phone01 is in connection with mobile phone, dial the phone number via its keyboard, and then press “call”, just like using your mobile phone.



17. Answer:

In case there is incoming call, the caller ID will appear on screen. Just press “Answer” to answer it under the connection state.

18. End calls/ Reject:

When you need to end a call or reject it, select “hang up” or press “power on/ off” button.

19. Music play:

When you turn on music in mobile phone, BT-Phone01 will display VOL+ and VOL- as below. Then press Button 1 to select previous song or Button 3 for next song, and Button 2 to play or pause.



20. Unlock:

Select “unlock” and then press “*” to unlock the keyboard if it is locked.

20. Low power alert:

When the battery is short of power, there will be a ring prompt and the battery icon will flicker continuously.

Maintenance:

- * Put the phone in a place out of children's reach.
- * The phone shall be kept from moisture and shaking. Do not put it in any place directly exposed to sunshine. Any liquid flowing into the phone will cause corrosion of the metal made electric circuit; and heat will shorten the service lives of the electronic component parts and damage the battery.

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Features:

- * 128x64 OLED Display
- * Caller's telephone number and Caller ID display
- * Phonebook Synchronization
- * Support English, Chinese Simplified, Chinese Traditional
- * Echo Cancellation and Noise Reduction by Build in DSP Technology
- * Can directly make a call from the keypad
- * Can make a call from the phonebook contacts
- * Support the first letter searching contacts
- * Support phone call history
- * Support Call vibration
- * Support Call ring tone
- * Support pairing name and pair code amendment
- * Support keypad lock

Specifications:

- * Bluetooth Specification v2.1+EDR class 2,
- * Supports Bluetooth Headset and Hands-free Profile (HFP 1.5)
- * Supports A2DP1.2 and AVRCP1.0 profiles,
- * RF Frequency Range: 2.402-2.480GHZ, 2.4G ISM band
- * Radio Performance: Receive Sensitivity of -90dBm, TX Power Max 4dBm
- * 19 Button design: 0-9 Keypad, MFB, Answer Key, Volume Button
- * LED Indicator Status: LED indicator light for keypad
- * Rechargeable 200mAh Li-Polymer Battery
- * Mini 5 Pin USB Plug charging Port
- * USB charging
- * Nominal charging time: MAX 2 hours
- * Talk time: Up to 6 hours
- * Standby time: Up to 100 hours

* Dimensions: 32*71*10 mm

* Weight: 26.0 g

* Operating Temperature: -10 °C ~ 75 °C

* Storage Temperature: -10 °C ~ 85 °C