
**User Manual
(Model:RZ05-0157)**

CONFIDENTIAL

PACKAGE CONTENTS

- GAMING & MUSIC SPEAKER (Model: RZ05-0157)
- Micro-USB to USB cable (for charging)
- 3.5 mm analog audio cable
- Carrying case
- Power adapter with interchangeable plugs
- Quick Start Guide
- Important Product Information Guide

HARDWARE & SYSTEM REQUIREMENTS

Hardware Requirements

- Devices with Bluetooth connectivity or a 3.5 mm analog audio port

System Requirements

For use with the Razer Leviathan Mini mobile app

- iOS 8 or newer / Android 4.3 or newer

REGISTRATION / TECHNICAL SUPPORT

REGISTRATION

Visit www.razerzone.com/razer-id to sign up for a Razer ID now to get a wide range of Razer benefits. For example, get real-time information on your product's warranty status via Razer Synapse. To learn more about Razer Synapse and all its features, visit www.razerzone.com/synapse.

If you already have a Razer ID, register your product by clicking on your email address within the Razer Synapse application and select Warranty Status from the dropdown list.


To register your product online, visit www.razerzone.com/registration. Please note that you will not be able to view your warranty status if you register via the website.

TECHNICAL SUPPORT

What you'll get:

- 1 year limited manufacturer's warranty.
- Free online technical support at www.razersupport.com.

DEVICE LAYOUT

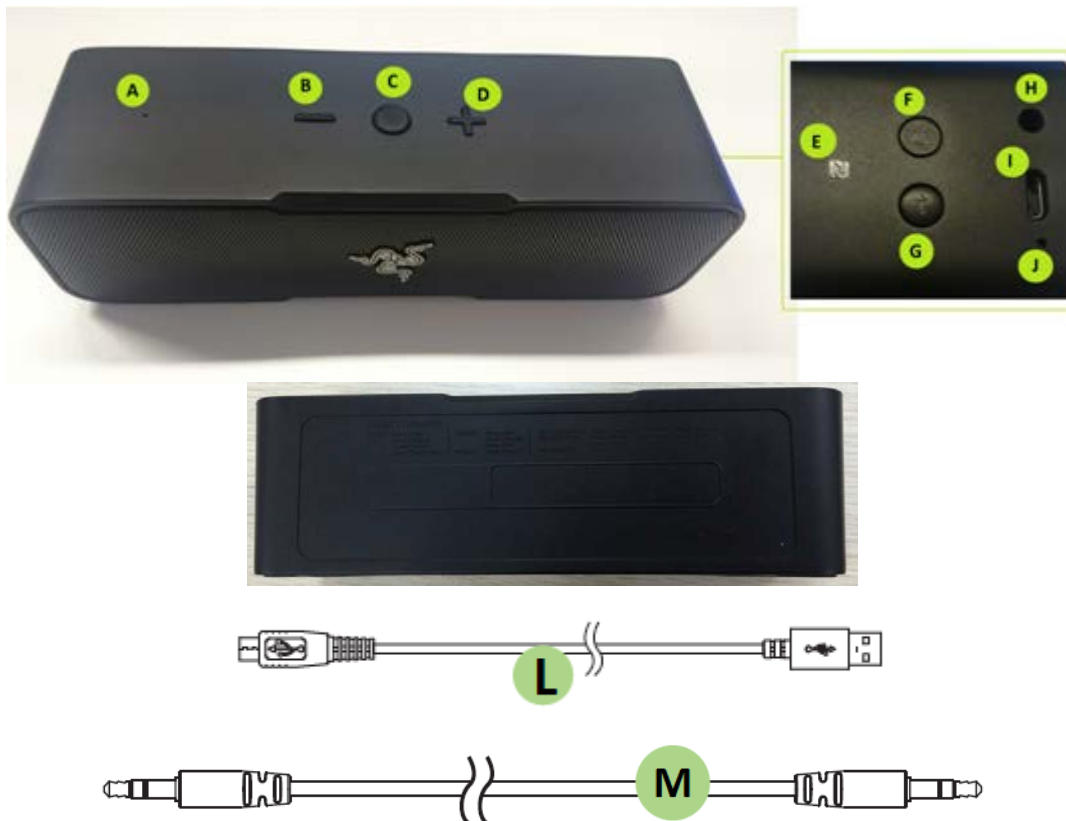

- A. Microphone
- B. Volume down
- C. Play/Talk button
- D. Volume up
- E. NFC connectivity zone
- F. Power button / Battery indicator LED
- G. Bluetooth mode button
- H. 3.5 mm analog audio port
- I. Micro-USB port
- J. Factory reset button
- L. Micro-USB to USB charging cable
- M. 3.5 mm to 3.5 mm cable
- N. Carrying case
- O. Power adapter with interchangeable plugs*

*Use the appropriate adapter plug for your region

USING YOUR RAZER LEVIATHAN MINI

POWERING ON / OFF

[PLACEHOLDER: Diagram showing short press and green LED on power button.]

To power on/off your speaker, press and hold the power button until the audio feedback is heard.

CHARGING YOUR SPEAKERS

[PLACEHOLDER: Diagram showing 1, attaching the appropriate power plug, 2, speakers connected to a power source (Power plug)]

1. Select the appropriate power plug for your region and attach it to the power adapter.
2. Connect your speaker to an appropriate power source.

For best results, please charge the battery fully before using your Razer Leviathan Mini for the first time. A depleted battery will fully charge in about 5 hours.

Battery Indicator (Power button)

LED	Audio feedback	Status
Green	N.A.	Battery is fully charged and speaker is on.
Off	N.A.	Battery is charged and speaker is off.
Orange	N.A.	Battery low
Blinking in red	Single beep	Battery is critically low.
Breathing in red	N.A.	Battery is charging.

CONNECTING TO AN AUDIO SOURCE

Note: When connected to devices with inbuilt speaker systems, audio may continue to be played via the inbuilt speaker. In such cases, please switch your device's audio output to the Razer Leviathan Mini manually.

Connecting via NFC

Simply activate NFC on your device and tap it on the speaker's NFC connectivity region to pair. The input source will automatically switch to the paired device.

[DIAGRAM]

Connecting via Bluetooth®

If you are using the speaker's Bluetooth input for the first time, or if you are attempting to connect a new device to the speaker via Bluetooth, you will need to activate pairing mode.

1. Press and hold the Bluetooth button for 3 seconds or more to enter pairing mode. The Bluetooth LED will start to blink slowly.

[DIAGRAM]

2. Enable Bluetooth on your device and search for new Bluetooth devices.
3. Select "Razer Leviathan Mini" from the list of devices found.
4. Wait for pairing to complete. The Bluetooth indicator will change to a solid light once successfully connected.

Understanding the Bluetooth modes

The speaker's Bluetooth module operates in the following modes:

	Pairing Mode	Connecting Mode	Connected Mode
	Pairing with new devices	Connecting to the last paired device	When a device is connected to the speaker via Bluetooth
Discoverable?	Any Bluetooth enabled device	Only the last paired device	No
How to activate?	Press and hold the Bluetooth button for >3 sec	Press the Bluetooth button once	Automatically activated when a device is successfully paired
Timeout	15 min	10 sec	Never
Automatically changes to?	Speaker turns off after timeout	Pairing mode after timeout	Connecting mode when the paired device is disconnected (out of range)
LED indication	Blinks slowly	Blinks fast	Solid
Audio feedback	Yes	No	Yes

Connecting via the analog cable

Connect your device to the Razer Leviathan Mini's 3.5 mm audio port using a 3.5 mm analog cable. When connected, AUX input takes priority over devices paired via Bluetooth.

[PLACEHOLDER DIAGRAM]




CONTROLLING YOUR RAZER LEVIATHAN MINI

You can use the buttons on the speaker to manually control various functions including audio playback and call features. You can also link 2 Razer Leviathan Mini speakers together using the Play/Talk button.

Note: You can also use the Razer Leviathan Mini Mobile App to control your speaker remotely. Please refer to *USING THE RAZER LEVIATHAN MINI MOBILE APPLICATION* for more information.

Playing Music

You can use the following button presses to control music playback from the connected audio source.


Button	Action	Effect
	Single press / Press and hold	Decrease the speaker's playback volume. While audio is being played through the speaker, each press comes with an audio beep feedback, indicating the current volume level.
	Single press / Press and hold	Increase the speaker's playback volume. While audio is being played through the speaker, each press comes with an audio beep feedback, indicating the current volume level. Two beeps will be played when the volume is increased to the maximum level.
	Single press	Play / pause music playback from the currently connected audio source.
	Double press	Play next track.
	Triple press	Play previous track.

Answering Calls

You can receive calls with the Razer Leviathan Mini by connecting it to a call-enabled mobile device.

If music is playing through the speaker when a call is received, the currently playing audio track will fade off into the speaker's ring tone. When the call ends, the speaker will resume playing the audio track.




The Play/Talk button () can be used to control the speaker during a call. The following table explains the button presses and LED indicator. A single beep will be played upon each of the actions below.


Action	Light indicator	Effect
N.A.	Blinking in green	There is an incoming call on the connected mobile device. The speaker will play its incoming call ringtone
Press once	Green	Answer the call.
Press once while the call is ongoing	Red	Mute the call. Press the button again to unmute. The LED indicator will return to green.
Press and hold > 3 sec	Off	Reject / end the call.

Using Combo Play

Linking 2 Razer Leviathan Mini Speakers

Wirelessly link 2 Razer Leviathan Mini speakers together with our Combo Play feature, playing audio from a single source onto both speakers simultaneously. To link your speakers:

1. Turn on the primary speaker and connect it to an audio source via Bluetooth. Start playing music on this speaker.
2. Press and hold the  button for > 5 sec until it starts to blink slowly in white. The speaker will start to search for other Razer Leviathan Mini devices in range.
3. Turn on your 2nd speaker. Check to ensure that it is not paired to any device via Bluetooth.

4. On the 2nd speaker, press and hold the  button for > 5 sec until it starts to blink slowly in white.
5. Wait for the LED of the button on both speakers to turn a solid white, indicating that the speakers are now linked.

Changing the playback mode


Combo Play gives you the flexibility of using your linked speakers in two modes: Mono and Stereo mode.

In Mono mode, both speakers receive the same audio signal from the single audio source connected to the primary speaker. This allows you to amplify the audio playback.

In Stereo mode, the primary speaker acts as the left speaker while the secondary speaker acts as the right speaker out of the box. Position your speakers accordingly to enjoy a stereo effect from the Razer Leviathan Mini.

Note: You can switch modes and change the default left/right speaker setting via the Razer Leviathan Mini App for iOS and Android.

Disabling Combo Play

To unlink your speakers, simply press and hold the  button for > 5 sec on either speaker till the button starts to blink quickly in white. The speakers are unlinked when the LED indicator on the button turns off.

RESETTING THE SPEAKER TO FACTORY DEFAULT

[PLACEHOLDER: Diagram showing a thin pin inserted into and pressed onto the factory reset button for 3s]

USING THE RAZER LEVIATHAN MINI MOBILE APPLICATION

Your Razer Leviathan Mini can be remotely controlled via the Razer Leviathan Mini Mobile App when connected to your mobile device via Bluetooth. You can download the App from Google Play Store / Apple App Store by searching for “Razer Leviathan Mini”, or scan the following QR code with your mobile device.


[PLACEHOLDER: QR CODE]

When starting the App for the first time, a brief introduction on the features available will be shown. You can access this introduction at any time from the General menu (☰).


LINKING THE APP TO YOUR RAZER LEVIATHAN MINI

The App automatically starts to search for a Razer Leviathan Mini within range to connect to. Please ensure that your Razer Leviathan Mini is turned on and that it is not connected to any analog input via the 3.5mm analog cable.


Note: Your mobile device may prompt you to enable Bluetooth if it is not already turned on.


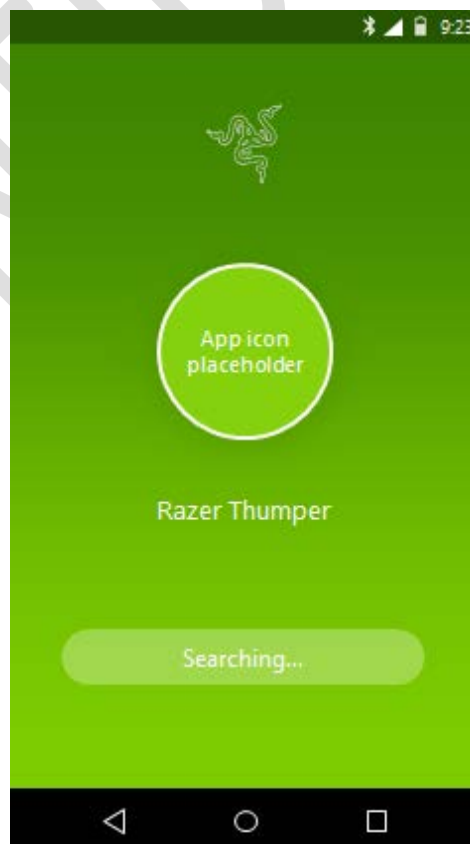


Select “Razer Leviathan Mini” from the list of devices found and wait for the App to complete the connection. The main dashboard will be displayed once connected.

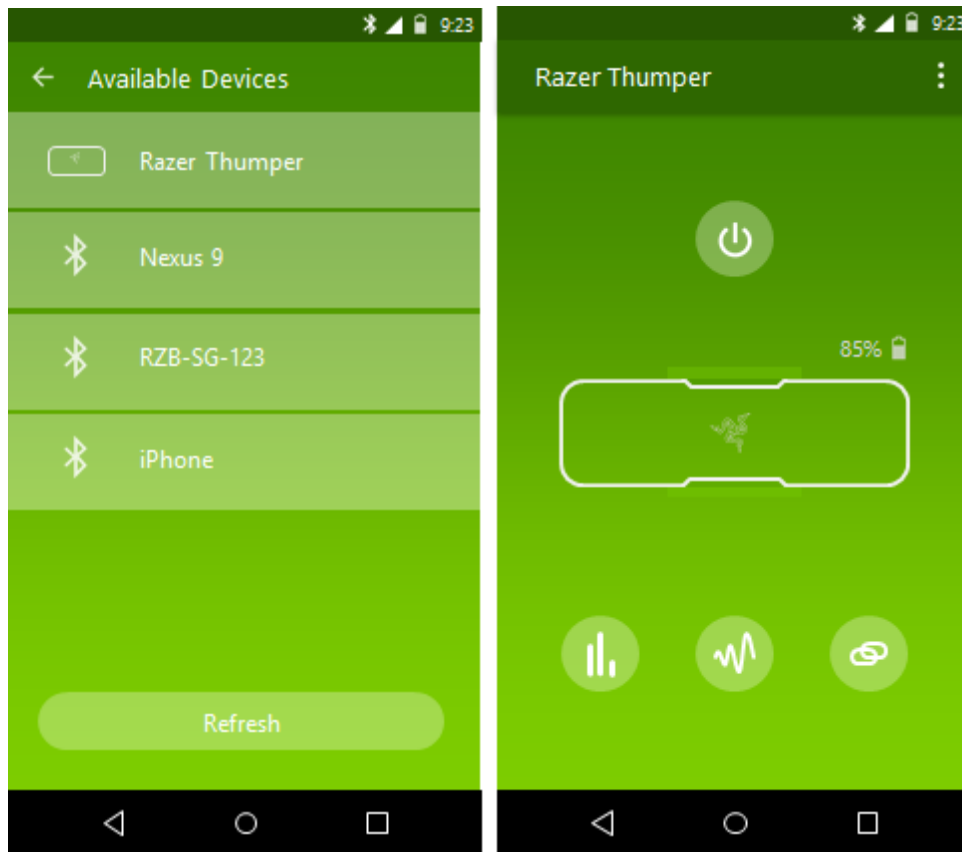


CUSTOMIZING THE EQUALIZER SETTINGS

Click the equalizer button . From the equalizer menu, choose from the set of pre-set equalizer settings or tap **Custom** to customize your settings.

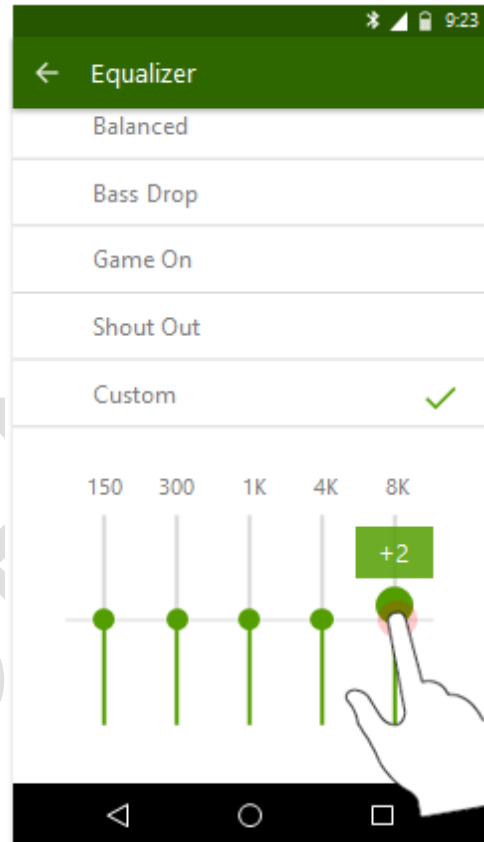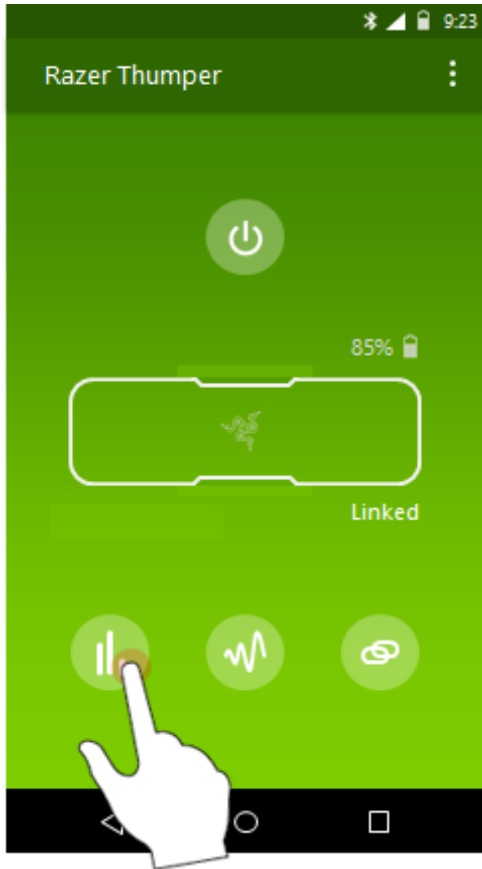

Your current equalizer setting is displayed on the bottom left corner of the speaker diagram displayed on the App's main dashboard.

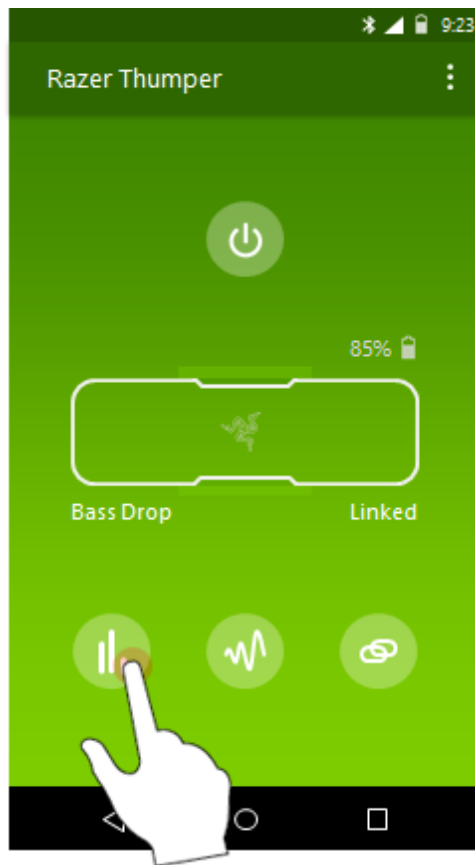


AMPLIFYING YOUR MUSIC VIA PARTY BOOST

Party Boost lets you amplify the playback capabilities of your speaker. Simply tap the




icon to enable/disable the feature.

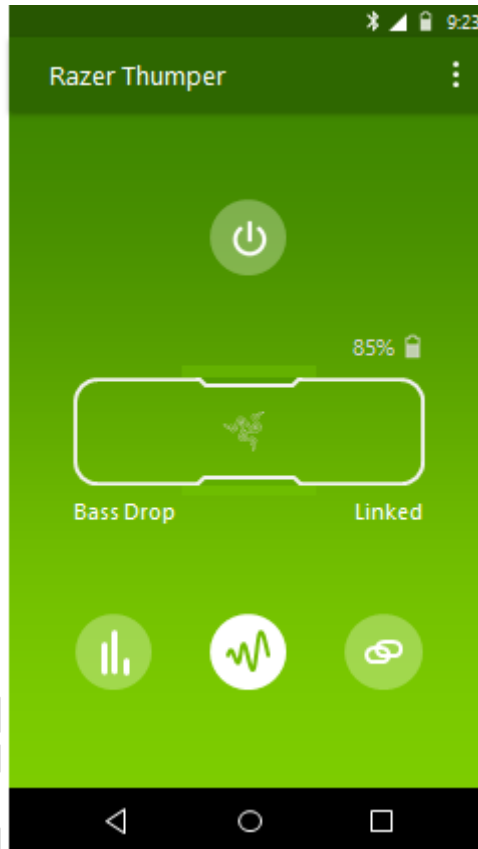


USING COMBO PLAY

Linking 2 Razer Leviathan Mini Speakers

Wirelessly link 2 Razer Leviathan Mini speakers together with our Combo Play feature,

playing audio from a single source onto both speakers simultaneously. Tap the  icon to begin. A connection wizard will guide you through the linking progress. Follow each step to link your speakers.

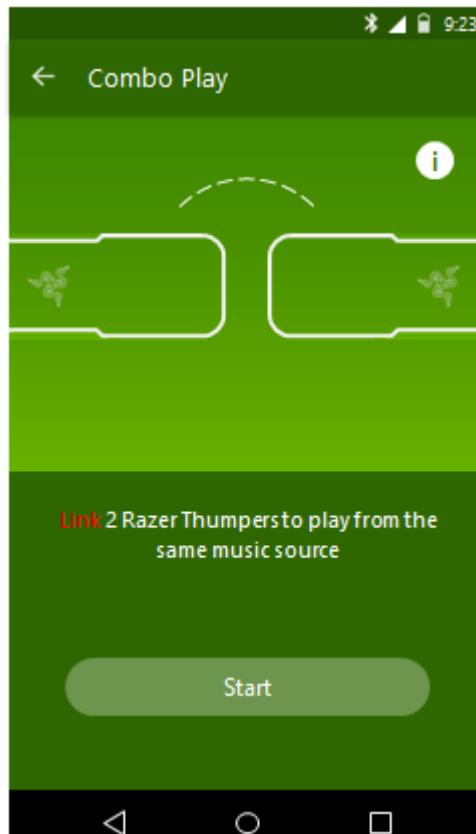


Changing the playback mode

Combo Play gives you the flexibility of using your linked speakers in two modes: Mono and Stereo mode.

In Mono mode, both speakers receive the same audio signal from the single audio source connected to the primary speaker. This allows you to amplify the audio playback.

In Stereo mode, the primary speaker acts as the left speaker while the secondary speaker acts as the right speaker by default. Position your speakers accordingly to enjoy a stereo effect from the Razer Leviathan Mini.


By default, the speakers are linked in Mono mode. Switch to Stereo mode and adjust the left/right speakers accordingly using the App.

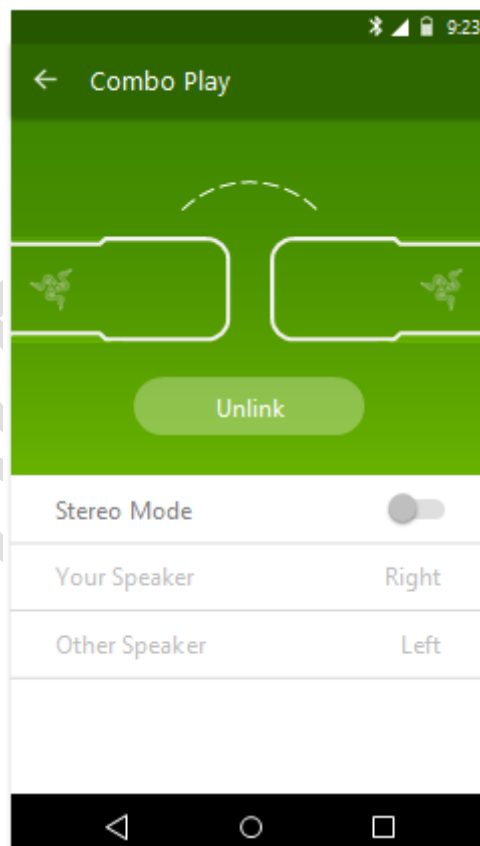


Disabling Combo Play

To unlink your speakers, simply tap the **Unlink** button. The speakers are unlinked when the LED indicator on the button turns off.

GENERAL MENU

Tap  on the top right corner of the app to access the general menu.

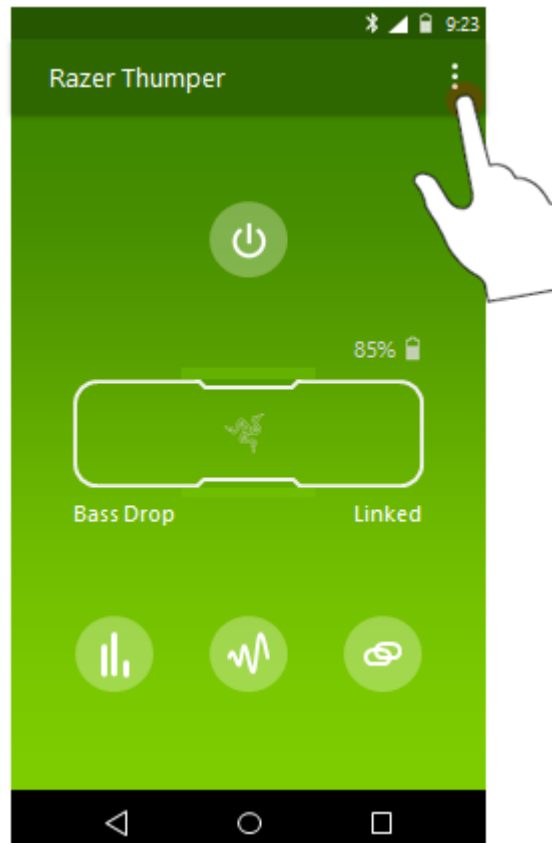

Here, you can:

- Name your speaker for easier identification when connected to the App.
- View a brief tutorial to understand what you can do with the speaker
- View the App's introduction
- Launch the FAQ webpage for the Razer Leviathan Mini
- View general information about the App. You can also send feedback to Razer if you have any suggestions or encountered any bugs while using the App.

Note: An internet connection is required to send feedback via the App.

SAFETY AND MAINTENANCE

IMPORTANT SAFETY & MAINTENANCE INFORMATION

WARNING : Failure to follow these safety instructions could result in fire, electric shock, or other injury or damage.

Please follow these safety rules for handling your Razer Leviathan Mini and for working more comfortably. Keep this guide handy for future reference by you and others.

To operate your Razer Leviathan Mini safely and reduce the possibility of heat-related injuries, follow these guidelines:

1. Set up your Razer Leviathan Mini and power adapter on a stable work surface that allows for adequate air circulation.
2. Do not use or install near water, moisture, or other wet surfaces.
3. Do not use or install near any heat or naked flame sources. Do not use around radiators, stoves, fire places, candles or other hot surfaces.
4. Do not block ventilation grills or openings. Install the apparatus in a cool, dry place.
5. Clean only with a dry or damp cloth. Unplug the apparatus before cleaning and do not use aerosol or liquid cleaning agents.
6. Do not insert or push any objects into openings on the product.
7. Refer all servicing to qualified service personnel. Do not attempt to service this apparatus yourself. Removing the covers will expose you to dangerous electric currents.

POWER ADAPTER FOR THE RAZER LEVIATHAN MINI

NOTICE : Incorrect storage or use of your power adapter may void the manufacturer's warranty.

This power adapter complies with the user-accessible surface temperature limits defined by the International Standard for Safety of Information Technology Equipment (IEC 60950-1).

This apparatus should only be operated from the type of power source indicated on the label. If you are unsure of the power source in the location you intend to operate the apparatus please consult the local power company or a qualified technician. The use of AC Plug Adapters is cautioned because it can allow the product to be plugged into voltages in which the product was not designed to operate. If you are unsure of the correct operational voltage, please contact your local distributor and/or retailer.

1. Use only the power adapter that came with your Razer Leviathan Mini, or the Razer-authorized power adapter that is compatible with this product.
2. The power adapter is equipped with exchangeable adapter plug, use only the appropriate adapter plug for your region.
3. Make sure the exchangeable adapter plug is fully inserted into the power adapter before plugging the adapter into a power outlet.
4. The power adapter may become very warm during normal use. Never place anything over the power adapter when operating your apparatus.
5. Unplug this apparatus during lightning storms or when unused for extended periods of time to further protect the apparatus.
6. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, or the point where they exit from the apparatus.
7. Do not overload wall electricity outlets, extension cords and plugs. This may result in fire or electrical shock.
8. Disconnect the power adapter and disconnect any other cables if any of the following conditions exists:
 - You want to clean the case
 - The power cord or plug becomes frayed or otherwise damaged.
 - Your Razer Leviathan Mini or power adapter is exposed to rain, excessive moisture, or liquid spilled into the case.
 - Your Razer Leviathan Mini or power adapter has been dropped, the case has been damaged, or you suspect that service or repair is required.

SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer Leviathan Mini, we suggest that you adopt the following guidelines:

1. Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to www.razersupport.com for support. Do not attempt to service or fix the device yourself at any time.
2. Do not take the device apart (doing so will void your warranty) and do not attempt to service it yourself or operate it under abnormal current loads.
3. Keep your device away from liquid, humidity or moisture. Operate your device only within the specified temperature range of 0°C (32°F) to 40°C (104°F). Should you operate it in a temperature that is beyond this range, unplug and switch off the device in order to let the temperature stabilize within the optimal temperature range.
4. Listening to excessively loud volumes over extended periods of time can damage your hearing. Furthermore, legislation of certain countries permits a maximum sound level of 86dB to affect your hearing for 8 hours a day. We therefore recommend that you reduce the volume to a comfortable level when listening for prolonged periods of time. Please, take good care of your hearing.

MAINTENANCE AND USE

The Razer Leviathan Mini requires minimum maintenance to keep it in optimum condition. Once a month we recommend you unplug the device and clean it using a soft cloth or cotton swab with a bit of warm water to prevent dirt buildup. Do not use soap or harsh cleaning agents.

LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2015 Razer Inc. All Rights Reserved. Razer™, the Razer Triple-Headed Snake logo, the Razer “distressed word” logo and other trademarks set out herein are owned or controlled by Razer Inc. and/or its affiliated companies, pending or registered in the United States and other countries.

Razer Inc. and its affiliate companies (“Razer”) may own or control copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Leviathan Mini (the “Product”) may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

Copyright © 2015 Apple Inc. All rights reserved. Apple, the Apple logo, iPod, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Android is a trademark of Google Inc.

The N Mark is a trademark or registered trademark of NFC Forum, Inc. in the United States and in other countries.

The aptX® mark and the aptX logo are trade marks of CSR plc or one of its group companies and may be registered in one or more jurisdictions.



LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit www.razerzone.com/warranty.

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

COSTS OF PROCUREMENT

For the avoidance of doubt, in no event will Razer be liable for any costs of procurement unless it has been advised of the possibility of such damages, and in no case shall Razer be liable for any costs of procurement liability exceeding the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

CONFIDENTIAL