




Wireless Security Solutions




RE202 Honeywell-Compatible Pencil Door / Window

Features

- Senses opening or separation. Narrow mounting locations.
- 1/2 width of competitive products. Great for casements!
- Magnet and Internal reed switch operation.
- Magnet can mount beside or over sensor housing.
- Strong, reliable RF signal.
- 8-10 year battery life on 2-AAA batteries.

Key Instructions

- Battery "+" faces towards white "+" on circuit board.
- Install batteries: rear batt - tail in first, front battery - nose in first.
- Board goes in and out of housing without batteries (not with).
- Reed switch is at the top of the housing, near the push button hole.
- Reed switch = Loop 2
- (Inserting battery will send a Loop 4 Tamper, but Sensor does not actually have a tamper)
- Enrolling:
 - Place Panel in RF Learning mode.
 - Input Type = RF
 - Lynx *56 "E I" mode:
To enroll any particular loop: cause the loop to fault... restore... (panel should beep to indicate ID capture)... fault... restore... [panel will confirm enrollment].
 - Vista *56 "10 INPUT S/N: L" mode:
Transmit two open/close sequences (using magnet). Press * (to check for duplicate serial/loop number). Press * (to continue to confirmation screen). Press * if you wish to skip confirmation; or "Yes" and activate the loop to confirm.



Operation


- Magnetic reed switch:
 - Alarm, when...
 - ... magnet is pulled away from reed switch.
- Supervisories, every hour.

Specifications

Magnet trip distance:	0.75 inch nominal
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	2 AAA Alkaline
Temperature Range:	0F to 120F
Housing dimensions:	4 x 0.6 x 0.9 inches.

Specifications subject to change without notice.

Internal Picture

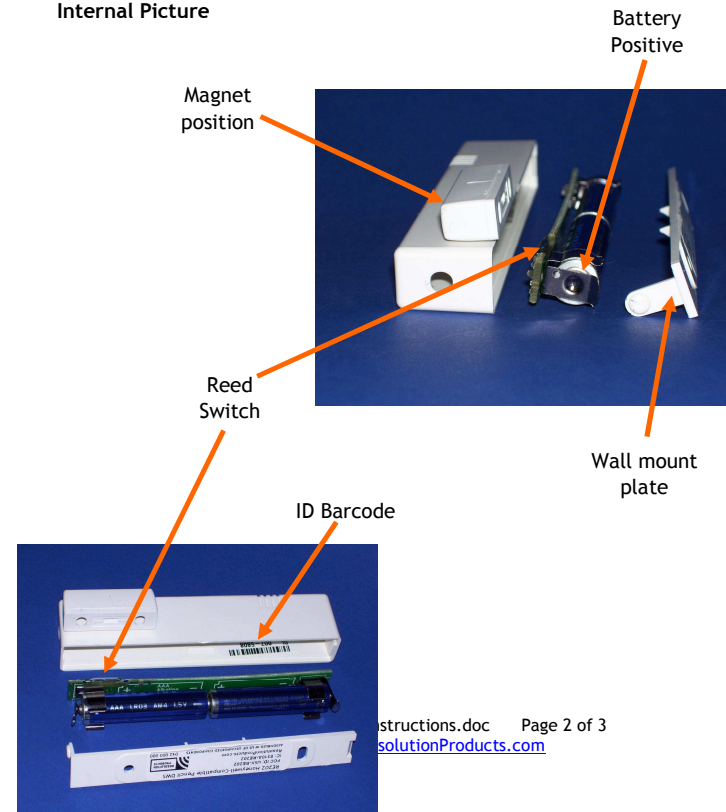

Notices

“GE”, “Honeywell”, and “DSC” are trademarks owned by General Electric Company, Honeywell International Inc., and Tyco Safety Products Canada LTD, respectively.

Resolution Products, Inc. products will function with one of either GE, DSC or Honeywell systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell or DSC. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first year.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE202

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec d'Industrie Canada RSS standard exempts de licence. Son fonctionnement est soumis aux deux conditions suivantes:

1. Ce dispositif ne peut causer des interférences, et
2. Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

IC: 8310A-RE202