




LED BLUETOOTH HEADPHONES CT-7

USER MANUAL

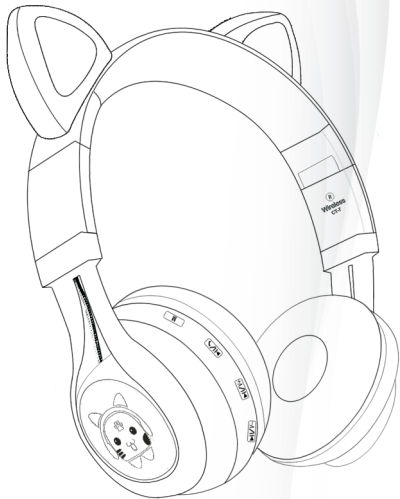

Designed & Produced by RiWbox
www.riwbox.com

INTRODUCTION

RiWBOX bluetooth stereo bass headphones are designed base on the advanced bluetooth V4.2, providing maximum 10 meter operating range. An auxiliary input cable also included for use as a wired headphones with non-Bluetooth audio sources, or in case of internal rechargeable battery is exhausted.


BOX CONTENTS

- One foldable Multifunction Bluetooth headset "CT-7"
- One charging cable
- One Aux-in cable
- One User's Manual

SPECIFICATIONS

Bluetooth Version: V4.2
Support Profile: AVRCP, TS.1.6.0/A2DP, TS.1.3.1/HFP, TS.1.7.0/RF, TS.4.2.0/BB, TS.4.2.0
Working Distance Range: 10m
Frequency Range: 2.402GHz-2.480GHz
Battery Specifications: 3.7V, 300mAh, Built-in rechargeable lithium battery
Charging Voltage: DC4.2-5.5V
Charging Time: about 2 hours
Talking/Music time: about 5 hours
Standby Time: about 10 hours

KEYS AND FUNCTION

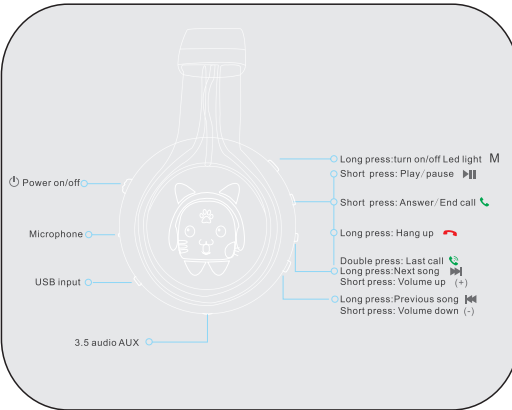

Button	Function
ON/OFF	ON/OFF Switch
M	three kinds of playback modes switch (TF Mode, Radio Mode, Bluetooth Mode)
	Play or Pause Music/ Answer or Reject Calls
/V+	long press for Next song or radio station short press increase volume
/V-	long press for Next song or radio station short press increase volume

BLUETOOTH FUNCTION DESCRIPTION

Very happy you own this Bluetooth headphone, We are here show you how to use it, you will easy to use this headphone after reading this instructions.

Note: Some of the functions described below may not be supported on your specific smartphone. Check with your smartphone owner's manual to confirm the features supported by your phone.

1. Pairing Operation

- For the first time pairing: start up the Bluetooth headset. It will boot into Bluetooth Mode automatically, voice prompts "Bluetooth Mode", LED indicator light rapidly alternating flashes with blue and red colors. Please open the smart device's Bluetooth searching function, and select the device "CT-7", no password required, after successful pairing, voice prompts "Connected", LED indicator light stays blue.
- Re-pairing: turn off the attached smart device's Bluetooth function, voice prompts "Disconnected", if can't search and pair with the last connected smart device within 3 seconds, the headset will automatically re-enter pairing mode, voice prompts "Bluetooth Mode", LED indicator light rapidly alternating flashes with blue and red colors. Open another smart device's Bluetooth searching function, and select the device "CT-7", no password required, after successful pairing, voice prompts "Connected", LED indicator light stays blue.
- Follow-up pairing: automatically pair the last connected device in 3 seconds after boot.

2. Answer Calls:

Short press when calls' coming.

3. Hang up phone calls:

Short press after calling.

4. Reject Calls:

Long press .

5. Redial the last outgoing number:

Double-click .

6. Music Play:

Short press after connected with the smart device.

Micro SD Card playback Mode:

- When the slot is empty, inserted the Micro SD Card, voice prompts "TF Mode". Then it plays media automatically.
- When the Micro SD Card is inside, switch to TF Mode through M.

FM Radio Mode:

- When the headset is turn on, switch to FM mode through "M", voice prompts "Radio Mode".
- Usage Tips: short press to search and save stations automatically (it can be abort with another short press while searching). Once enter FM mode again, it will play the first saved radio station automatically. If you want to re-scan, short press again in the Radio mode.


Line-in Mode:

When the headset is turn on, insert the Line-in cable, voice prompts "Line-in Mode". Then it plays smart device's media automatically.

- Maximum volume warning voice prompts "du du".
- Supports MP3, WAV, WMA format playback.
- Battery indication on IOS.
- Micro USB as common use charging port.



Auxiliary input cable with in-line mic wired Use

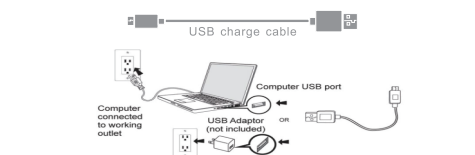

7. Charge

Before charge, turn off the headphone, the headset charging cable connect to the computer USB pilot lamp turn in green, it means connect with USB successfully, headphone is charging. Built-in battery capacity overload protection detection system, no need worrying about the battery long, pilot lamp turns off means charge finished

8. LED indicator light Status

Charge Status	Steady red LED. When fully charged, the LED indicator light turns off.
Power on Status	Blue LED indicator light turns on.
Power off Status	LED indicator light turns off.
Pairing Status	Blue and Red LED indicator lights rapidly alternating flash.
Standby Status	Blue LED indicator light turns on.
Connected Status	Blue LED indicator light turns on.
Using Status	Bluetooth Mode, Blue LED indicator light flashes every two seconds.
	Radio Mode, Green LED indicator light turns on.
	TF Mode, Green LED indicator light flashes every three seconds.
	AUX-in Mode, the headset automatically turns off, LED light goes out.

Note:

★ Please make sure to turn off the power when charging. ⚡ ⚠

★ When you receive the headphone, please send your order number to the after-sale e-mail address: Support@riwbox.com. Your order will be guaranteed and your warranty will be extended.

FAQ

★ If there is any problem please do not hesitate to contact
E-mail: support@riwbox.com

More About Us

f RiWbox

🐦 @RiWbox001

🌐 RiWbox001

RiWbox Technology Co. Limited
4061 Filhurst Ave, Baldwin Park, CA 91706, USA
Email : support@riwbox.com
Website : https://www.riwbox.com

⚠ Continuous use at high volume might damage hearing



LED蓝牙无线耳机 CT-7

使用说明书



Designed & Produced by RiWbox
www.riwbox.com

简介

适科品牌蓝牙耳机是根据国际标准设计制作，可以在10米的有效范围内连接您的智能手机或者音乐播放器。并且拥有一条可插拔的耳机音频线，可以用于连接我们的蓝牙耳机，以便在电池用完的时候可以当做普通耳机使用。


包装内容

- 折叠头戴式多媒体蓝牙耳机 "CT-7"
- USB充电线
- AUX-in音频线
- 使用说明书

产品参数

蓝牙标准 : Bluetooth V4.2
支持协议 : AVRCP, TS.1.6.0/A2DP, TS.1.3.1/HFP, TS.1.7.0/RF, TS.4.2.0/BB, TS.4.2.0
有效范围 : 10m
工作频率 : 2.402—2.480GHz
电池规格 : 3.7V/300mAh.
充电电压 : DC4.2—5.5V
充电时间 : 约2小时
续航时间 : 约5个小时

按键功能

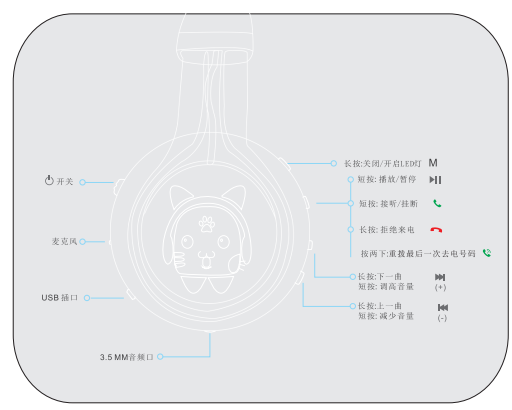

Button	Function
开关 / 配对	打开电源/关闭电源转换
播放/暂停	当播放音乐时，短按可暂停/播放
接听/挂断	当正在通话时，短按可接听/结束电话
拒绝来电	长按可拒绝来电
重拨电话	长按下可重拨最近一次去电号码
Volume up (+) / Next	当播放音乐时，短按可以调高音量 当播放音乐时，长按按可以调到下一曲
Volume down (-) / Previous	当播放音乐时，短按可以调低音量 当播放音乐时，长按按可以调到上一曲
M	长按可开启/关闭LED灯显示

耳机使用说明

1) 配对状态：

a首次配对：开机提示"Welcome to riwbox headset"，自动进入蓝牙模式，语音提示"Bluetooth Mode"，LED指示灯蓝、绿两色快速交替闪烁，打开智能设备蓝牙功能，开启搜索并选择设备"CT-7"，无需密码，配对成功后语音提示"Bluetooth Connected"，LED指示灯变为蓝色长亮。

b重新配对：关闭已连接手机蓝牙，耳机语音提示"Bluetooth Disconnected"，3秒内搜索不到最后一次连接的蓝牙设备，耳机重新自动进入配对模式。打开新智能设备蓝牙功能，开启搜索并选择设备"CT-7"，无需密码，配对成功后语音提示"Bluetooth Connected"，LED指示灯变为蓝色长亮。

c后续配对：开机后3秒内会自动搜索并连接最后一次已配对的设备。

2) 接通电话：

来电时，短按 .

3) 挂断电话：

通话中，短按 .

4) 拒绝来电：

长按 两秒。

5) 重拨最后一次去电号码：

双击 .

Line-in播放模式：

在其他模式下，插入Line-in线，自动进入Line-in播放，语音提示"Line-in Mode"。

一、最大音量警示语音："du du"，最小音量提示音："du"

二、低电量语音提示"battery Low"

三、IOS系统电量显。

四、国际通用Micro USB充电口。




3.5mm 音频线

7. Charge

如果电量过低指示灯会显示绿色。

> 充电前请确保蓝牙耳机处于关机状态，通过充电线连接到电脑，指示灯显示为绿色。代表耳机已经正确连接并且正在充电。内置电池有充电过保护机制。不需要担心充电会导致电池或耳机损坏，当指示灯变为蓝色时，表示充电完成



8. LED indicator light Status

充电状态	红色LED指示灯长亮，满电时，指示灯熄灭。
开机提示	蓝色LED指示灯常亮
关机提示	LED指示灯熄灭
配对状态	蓝绿LED指示灯交替闪烁
待机状态	蓝色LED指示灯长亮
连接状态	蓝色LED指示灯长亮
使用状态	Bluetooth Mode，蓝色LED指示灯两秒闪一次 AUX-in Mode，耳机自动关机，LED指示灯熄灭

注意事项：

蓝牙耳机进入配对模式后若无配对连接操作，请关闭设备避免电量损耗。

搜索蓝牙时不要进行其他操作，防止程序出错。

在使用中请选择适当的音量，以防对耳朵造成伤害。

请注意蓝牙耳机的好使用环境，避免对耳机造成损伤。

长时间未使用的耳机，请先将耳机进行一次充电过程后再使用

FAQ

★ 在RiWbox官方网站注册：www.riwbox.com 了解更多产品

More About Us

f RiWbox

🐦 @RiWbox001

🌐 RiWbox001

RiWbox Technology Co. Limited
4061 Filhurst Ave, Baldwin Park, CA 91706, USA
Email : support@riwbox.com
Website : http://www.riwbox.com

⚠ Continuous use at high volume might damage hearing

FCC ID: 2ARGL-RIWBOX

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter