

C9GMXA

freestanding cooker, 90cm wide

90cm giant electric oven and six-burner gas hob with flame failure device



dimensions: 900mmW x 600mmD x 900mmH
 NB: height excludes fitted 63mmH rear splashguard.
 NB: actual overall height can be adjusted — from 812mm without supplied telescopic legs to a maximum 912mm height with telescopic legs fitted. The cooker can be positioned on a kitchen cabinet plinth.



fan forced



defrost



grill (without rotisserie)



fan grill



classic convection



super cook



base heat only



rotisserie



Canali knobs



EAN 8017709121419

OVEN

- 126 litre
- seven cooking functions plus defrost
- twin fan forced — 2 x 2000 watt rear wall elements
- full programmable — digital
 - time of day*
 - fully automatic cooking*
 - semi automatic cooking*
 - minute minder*
 - manual override*
- double glazed, thermo-reflective door
- forced air door cooling
- easy cleaning oven enamelling — AA anti acid
- safety-notch trays and shelves
- 41 litre full-width storage compartment
- insulated control panel dials and door handle

NB 63mm high rear splashguard supplied for optional fitment

Option: stainless steel kickplate, code KITZOC9


COOKTOP

- spacious six-burner hob, 50.6mj/hr maximum
- three heavy-duty cast-iron trivets
- flame failure device (FFD) fitted to each burner
- automatic electronic flame ignition
- ultra-rapid triple-crown all-purpose burner (wok)
- rapid burner
- two semi-rapid burners
- two low-simmer auxiliary burners
- single-pressed stainless steel hob with rolled edging
- no metal joins eliminates difficult grime accumulation
- satin stainless steel finish
- set for natural gas, regulator supplied
- ULPG adaptable, test point supplied
- 60mm high splashguard supplied (optional fitment to rear of cooktop zone)
- burner skirts, burner caps removable for easy maintenance

C9GMXA

freestanding cooker, 90cm wide



* includes legs at minimum 60mm height

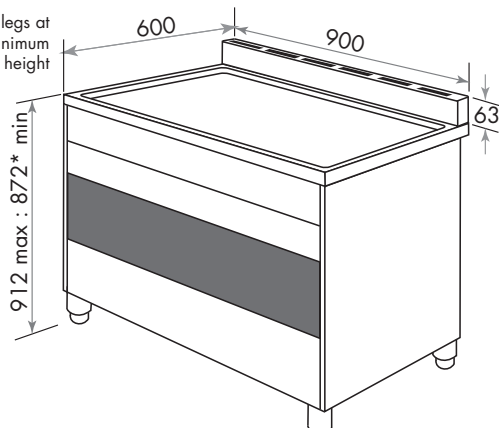

REAR UTILITIES

gas

electric

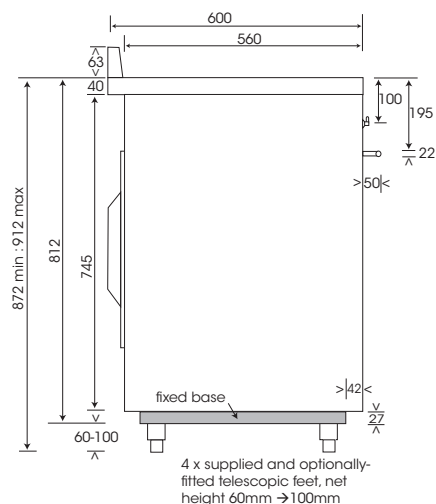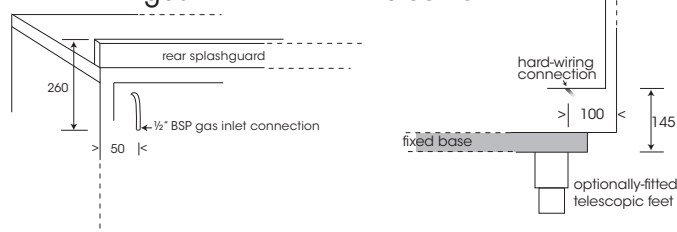

4 x supplied and optionally-fitted telescopic feet, net height 60mm → 100mm

height

minimum 812mm without legs, maximum 912mm with legs fully extended and excluding 63mmH rear splashguard

width

898mm

depth

600mm

net weight

74kg

gross weight

80kg

OVEN

internal oven dimensions 350mmH x 770mmW x 450mmD = 121.3 litres

net cooking dimensions 340mmH x 750mmW x 420mmD = 107.8 litres

storage compartment 760mmW x 450mmD x 120mmH = 41 litres

electricity supply 240 volt, 50 Hz

electrical connection hard-wired single phase

maximum current 18.67 amp

HOB

50.6 mj/hour maximum over six burners

supplied


- three heavy-duty cast-iron trivets for full gas hob cover
- 60mmH x 898mmW splashguard for rear of hob, optional fitment
- baking/grill tray
- two chromed-wire shelves
- one teflon biscuit tray
- 4 x telescopic legs

options

stainless steel kickplate, code KITZOC9

gas connection

1/2" BSP gas inlet connection
1/2" BSP 1.0 kPa natural gas, regulator supplied
adapt for ULPG — test point supplied

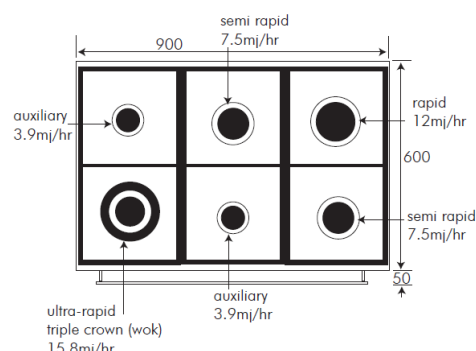

element		roof		floor	rear wall	rear wall fan (2)	cooling fan	light (2)	roisserie	maximum wattage	current amp
		inner	outer								
wattage		1600	1200	1800	1500x2	25x2	20	15x2	10		
static grill	•••••	•	•				•	•		2850	11.88
fan grill	•••••	•	•			•	•	•		2900	12.09
convection	()		•	•			•	•		3050	12.71
fan forced	•••••				•	•	•	•		3080	12.84
super cook	•••••		700	700	•	•	•	•		4480	18.67
base heat only	•••••			•			•	•		2154	8.98
roisserie	•••••	•	•				•	•	•	2914	12.14
defrost	•••••					•	•	•		104	0.43

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice.
Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

ID160512
Code C9GMXA