

FM Transmitter Module for TV

■ FM Transmitter is for LCD & PDP TV to listen to TV sound through home audio

■ The model name of FM Transmitter is KSR-MX028 and it consists of 3 parts;

Circuit Board, Plastic Case and Wire antenna

Product Specifications

Power Requirements	DC 3.3V
Current Consumption	30mA
Dimension(W*H*D)	53.0*5.0*21.5 mm
Operating Temperature	-10℃ ~ 50℃
Operating Humidity	10% ~ 75%
Frequency Range	88.1MHz ~ 107.9MHz
FM Deviation	75KHz (100% MOD)
Input Audio Level	500mV (RMS)
Transmitting Distance	5m ~ 10m
Antenna Length	900mm

PRODUCT

FM-Transmitter (KSR-MX028)




Top View



Bottom View

Application Case

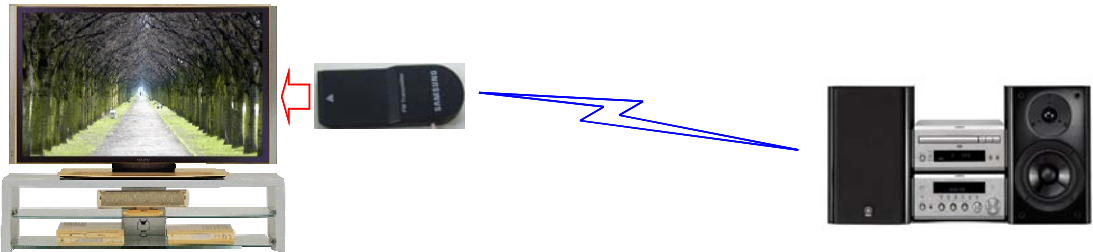

Set up Guide

1. Insert FM Transmitter Module into the Socket which is located at the back side of TV



2. Push the menu button on Remote controller for TV and select FM Transmitter on Sound Menu



3. Make FM Transmitter Active



4. Tune the Frequency to what you want(Frequency Range: 8.1MHz~107.9MHz)



5. Listen to TV sound through FM Radio after tuning FM Radio with the same Frequency as FM Transmitter's

WARNING: This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

This device complies with Part 15 of the FCC's Rules. Operation is subject to the following two Conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesirable operation.