



SCH-I201

Samsung Internet Phone

User's Manual

Please read this manual before operating the phone,
and keep it for future reference.

FCC RF EXPOSURE INFORMATION

In August 1996 the Federal Communications Commission (FCC) of the United States with its action in Report and Order FCC 96-326 adopted an updated safety standard for human exposure to radio frequency electromagnetic energy emitted by FCC regulated transmitters. Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies. The design of this phone complies with the FCC guidelines and these international standards.

Use only the supplied or an approved antenna. Unauthorized antennas, modifications, or attachments could impair call quality, damage the phone, or result in violation of FCC regulations.

Do not use the phone with a damaged antenna. If a damaged antenna comes into contact with the skin, a minor burn may result. Please contact your local dealer for replacement antenna.

Body-worn Operation

This device was tested for typical body-worn operations using the optional belt-clip/holster placed 0.8 inches (2cm) from the body. To comply with FCC RF exposure requirements, a minimum separation distance of 0.8 inches (2cm) must be maintained between the user's body and the belt-clip/holster, including the antenna, whether extended or retracted. The use of other belt-clips/holsters with no metallic components that provide the minimum separation distance of 0.8 inches (2cm) can be used to satisfy FCC RF exposure requirements. The use of non-tested accessories or other body-worn operations may not comply with FCC RF exposure requirements and should be avoided.

For more information about RF exposure, please visit the FCC website at www.fcc.gov

Safty Precautions

Compliance with Safety Standards

The samsung CDMA Cellular phone meets all standards and recommendations for the protection of the public from exposure to radio frequency(RF) electromagnetic energy established by governmental bodies and other qualified organizations. To reduce the risk of fire, electric shock, serious personal injury, or property damage, please follow these guidelines:

Driving

Using a wireless phone while driving is illegal in some states and countries. Know the laws and regulations for your area, and pull off the road and park if you need to make a call. If you must use the phone while driving, purchase and install the optional Hands-Free Car Kit.

Electronic Devices

Your wireless telephone is a radio transmitter and receiver. When the power is on, the phone receives and sends out RF energy. Most modern electronic equipment, such as equipment and cars, contains an RF signal shield. RF energy may affect some inadequately shielded electronic equipment.

Turn off your phone in health care facilities, and always request pacemakers and hearing aids, to determine if they are shielded adequately from external RF signals.

Note if there are any regulations posted in area regarding the operation of wireless phones, and learn where you can use them safely within facility.

Aircraft

Turn off your phone before boarding any aircraft. The Federal Aviation Administration (FAA) requires that you have prior permission from the crew to use your phone while the plane is on the ground. FCC regulations prohibit using your phone in the air. Do not use your phone at any time while traveling on board a plane.

Blasting Areas

Construction crews often use remote-control RF devices to set off explosives. To avoid interfering with blasting operation, turn off your phone when you are in a blasting area or in any area with signs posted that read "Turn off two-way radio."

Other Dangerous Areas

Turn off your phone in any area with a potentially explosive atmosphere. It is rare, but your phone or its accessories could generate sparks, which could explosion or fire.

- * Fueling areas, such as gas stations
- * Below deck on boats
- * Furl or chemical transfer or storage facilities
- * Areas where the air contain chemicals or particles such as grain, dust, or metal powders
- * Any other area where you would normally be advised to turn off your vehicle engine

Do not transport or store flammable gas, liquid, or explosives in the compartment of a vehicle containing your or accessories.

FCC/IC Notice

This device compiles with part 15 of the FCC rules. Operation is subject to the following two condition: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Introduction to SCH-I201

Congratulations on the purchase of your new CDMA cellular phone. Your cellular phone features the latest CDMA digital technology.

The following features provide a range of user options that make the phone both fun and easy to use.

Combines a mobile phone and PDA

Handwriting recognition


Touch Screen interface

DataSync with PC for easy information management

Accessing World Wide Web, and e-mail

Scheduler, Calculator, Address Book, Voice memo, etc.

Phone Layout

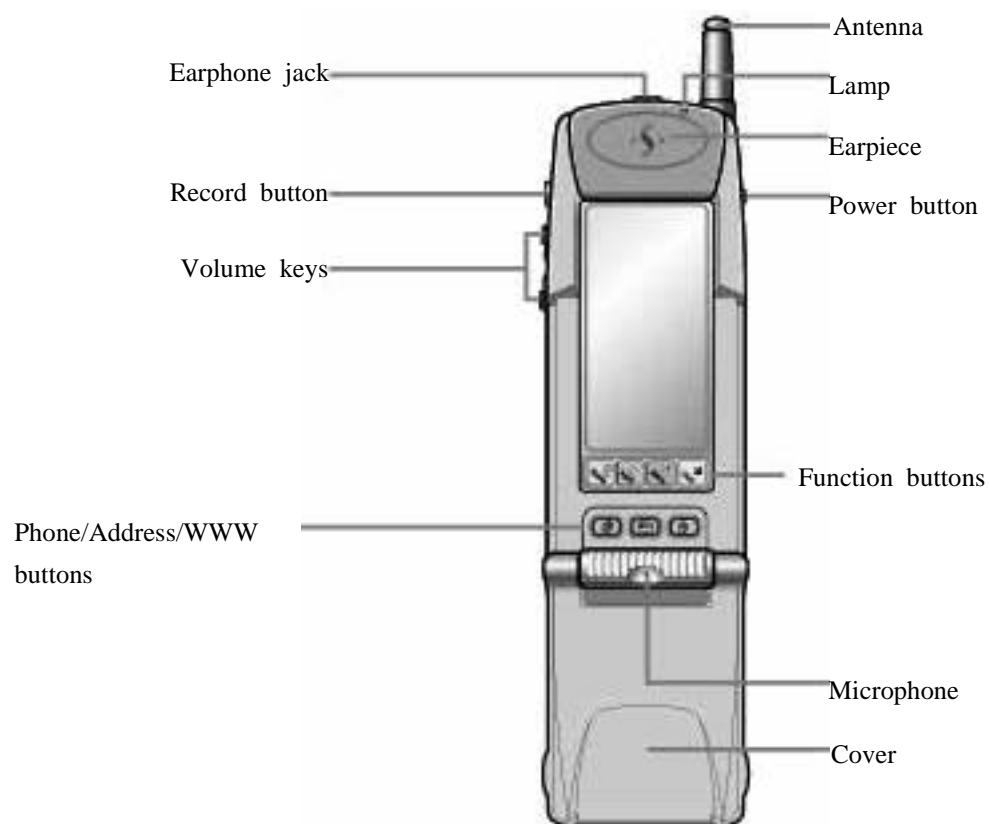

Key Description



Press to turn the phone on and off.



Press to record the voice of the other party during conversation, and press and hold to record the voice memo.



Press to adjust voice volume during conversation, and adjust key beep volume in standby mode.



Press to use phone features.



Press to access the address features.



Press to use phone features.



Press to access the home menu items.



Press to input characters and digits.



Press to access the menu options of each home menu.



Press to adjust the screen contrast.

Status/ Alert Indicators



Signal Strength

Indicates current signal strength



Service

Indicates that the phone is in call process



No Service

Indicates that the phone is outside a service area and cannot send or receive calls.



Alarm/Schedule

Indicates alarm or schedule



Message

Indicates messages



Vibrate/Manner Mode

Indicates vibrate mode or manner mode



Roaming

Displays when the phone is outside the home service area but within the network



Battery Change

Indicates battery change level

SEND

Press to make a call

VD

Press to make a call with a voice dialing

CLR

Press to make a correction or erase the digits you entered

END

Press to end a call.



Press to set a manner mode



Displays when you set your phone to unlock mode

Basic Operations

Power On/Off : Press and hold the **POWER** button.

Backlight On/Off : Press the **POWER** button when you using the phone.

Make Calls: Enter number, and the press **SEND**.

End Calls: Press **END**, or close the cover.

Answer Calls: Press any button, when the cover is open, or
press and hold the **RECORD** button or press the volume button, without opening
the cover.

Connect Mistakes: Press **CLR**.

Access Menu: Press **MENU** button.

Home Menu Structure

Home Menu Menu Level 1

1. Phone

1. Call

2. Message

3. Setup

2. Any Web

3. Email

4. Address

1. List

2. Edit

3. Setup

Menu Level 2

1. Outgoing

2. Incoming

3. Air Time

4. Phone

5. Speed Dial

6. Voice Dial

7. Send DTMF

8. Voice Memo

9. International Call

1. In Box

2. Out Box

1. Ring/Vibrate

2. Sounds

3. Display

4. Security

5. System

6. Auto Voice Dial

7. About

1. Delete List...

1. Cut

2. Copy

3. Paste

1. Edit Categories...

2. Edit Custom Field...

3. Program Information

Home Menu Menu Level 1**Menu Level 2**

5. Schedule	1. Records	1. Menu 2. Delete 3. Purge
	2. Edit	1. Cut 2. Copy 3. Paste 4. Select All 5. Delete
6. Voice	1. Setting	1. About Voice Memo
7. To do	1. Event	1. Delete Event 2. Delete Attached 3. Attached 4. New 5. Delete done event
	2. Sort	1. Done 2. Priority 3. Due Date
	3. Edit	1. Cut 2. Copy 3. Paste
	4. Set up	1. Go to top 2. Go to bottom 3. Edit Categories 4. Hide Priority 5. Hide Due Date 6. Program Information
8. Voice Memo	1. Option	1. Edit Category 2. About Memo

Home Menu Menu Level 1**Menu Level 2**

9. Message

1. View

1. Date(Up)

2. Date(Down)

2. SMS

1. Delete All

3. Setup

1. About SMS

10. Palette

1. Edit Delete All

2. Setup About Palette

11. Calculator

1. Edit

2. Setup

12. Clock

1. Set

1. Info

2. Base Station Time

3. About Clock

13. Control

1. Bell(Ring Type)

1. Bell

2. Vibrator

3. Lamp

4. Vib+Bell

2. Sound

1. Sounds

2. Voice Volume

3. Key Beep

4. Mic Gain

3. Disp

1. My Phone#

2. Greeting

3. World Time

4. Big Clock

4. Security

1. Change password

2. Enter Emergenay#

3. Reset Phone

5. Battery

1. Screen Saver Time

1. Battery Dower

2. Handsfree kit

Home Menu Menu Level 1

Menu Level 2

13. Control (Continued)

- 6. System
- 7. Network
- 8. Storage
- 9. Owner
- 10. Calibration
- 11. Contrast

14. Sync

- 1. Data Sync
- 2. Data Capability

15. Find

- 1. Address Book
- 2. Scheduler
- 3. To-do List
- 4. Memo Pool
- 5. Message
- 6. All

Overview of the Menu Options

Anyweb

Accessing the Internet is simple and browsing the internet is similar the way you surf the Internet on a normal computer.

You can obtain up to date news, stock information and other information.

Email

You can send and receive e-mails. It's also similar the way you do on a normal computer.

Address

You can store phone numbers and their corresponding informatin. You can choose the view by All, Business, Personal, Unfiled, Speed Dial, and Voice Dial.

Scheduler

You can organize your schedule in your phone. It also comes with a reminder function so you won't forget that important appointment. You can choose the view by day, week or month.

Voice Memo

You can record the voice of the other party during conversation, and memos, up to 12.

The maximum recording time is around 60 seconds a memo.

To do

This function allows you to manage your to do list with the priority and deadline.

Memo

You can make simple memos with text or graphic format, and also send and receive that kind of memos.

Message

You can manage the voice, text, or call messages you sent and received.

Palette

You can make your hand writing emssage in the touch screen, and send and receive the handwriting messages. (It's only available between SCH-I201 users.)

Calculator

Using the calculator on this phone is similar the way you do on a normal calculator.

Clock

You can set the alarm, and current time. You can also view the world time.

Control

You can customize various phone settings as follows :

- Ring type
- Sound
- Display
- Security
- Battery
- System
- Network
- Storage
- Owner
- Calibration
- Contrast

PCsync

The function enables you to build your phone database on the pC to transfer into your phone. You can also load the data in your phone to the PC.

Find

You can find what you want in Address Book, Scheduler, To-do List, Memo Pad, Message or All information.

Tetris

You can enjoy the tetris game.