

**SAMSUNG ELECTRONICS**



World Wide Web  
<http://www.samsungmobile.com>

Printed in Korea  
Code No.:GH68-xxxxxA  
05/2006. Rev. 1.0



# **Bluetooth Headset**

WEP180





# Contents

## BEFORE USING YOUR HEADSET

Checking phone compatibility .....	3
Your headset overview .....	3
Checking the accessories .....	4
Charging the headset .....	4
Storage of the headset .....	5

## BASIC OPERATIONS

Turning the headset on/off .....	6
Pairing with your Bluetooth phone .....	7
Wearing the headset .....	9
Making a call .....	10
Ending a call .....	11
Answering a call .....	11
Rejecting a call .....	12
Adjusting the volume .....	12
Using enhanced features .....	12

## APPENDIX

Frequently asked questions .....	14
Certification .....	16
Warranty and parts replacement .....	17
Correct disposal of this product .....	19

Thank you for purchasing the Samsung Bluetooth Mono Headset WEP180, we hope you will be delighted with its operation.

Please read this user's guide to get started, and to make the best use of the headset's many features.

### **Driving safety**

- When you are driving a car, driving is your first responsibility.
- When using your headset while driving, follow local regulations in the country or region you are in.

# BEFORE USING YOUR HEADSET




## Checking phone compatibility

Your headset is compatible with most Bluetooth phones that are compliant with Bluetooth version 2.0 and support the headset and/or hands-free profile(s). Ensure that your phone has Bluetooth capability by visiting your phone manufacturer's web site.



## Your headset overview

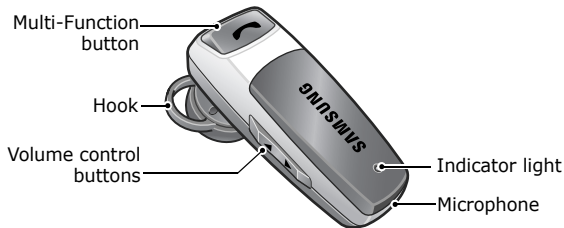



## Checking the accessories


Make sure you have the following items with your headset:  
travel adapter, User's Guide, 2 headset hooks



## Charging the headset

Your headset uses a rechargeable battery. You must charge the battery fully before using the headset for the first time.

- 1 Plug the travel adapter into the jack on the headset.
- 2 Plug the travel adapter into the electrical outlet.



- Charge the headset until the red light on the headset turns to blue.
- The headset will be fully charged in approximately 2 hours.

### 3 Remove the travel adapter from the headset.



#### **WARNING**

Do not attempt to charge the headset with anything other than the travel adapter provided. Using unauthorised travel adapter may damage the headset.



#### **IMPORTANT**

Removing the travel adapter from the headset during charging will turn the headset off and stop the charging progress. The headset cannot be used while charging.



### **Storage of the headset**

- Always store the headset with the power off and make sure it is safely protected.
- Avoid storage at high temperatures (above 40°C / 104°F). such as in a hot vehicle or in direct sunlight. Storage at high temperatures can damaged performance and reduce battery life.
- Do not expose the headset or any of its supplied parts to rain or other liquids.



# BASIC OPERATIONS



## Turning the headset on/off

To	Press and hold	You will see
turn the headset on	the Multi-Function button for 3 seconds until you see <b>4 blue flashes</b> on the indicator light.	the indicator light flashes while the power is on (see <b>Meaning of the indicator light</b> ).
turn the headset off	the Multi-Function button for 3 seconds until you see <b>3 blue flashes</b> on the indicator light.	the indicator light stops flashing.

## Meaning of the indicator light

Light	Status
Flashes in blue every 8 seconds.	The headset is in Active mode. <ul style="list-style-type: none"><li>• The headset has an active call in progress.</li><li>• <b>You can talk up to 4 hours.*</b></li></ul>

Light	Status
Flashes in blue every 3 seconds.	The headset is in Standby mode. <ul style="list-style-type: none"><li>• The headset is waiting for a call.</li><li>• The headset can be in Standby mode up to 70 hours.*</li></ul>
Flashes in red.	The battery of the headset is low. <ul style="list-style-type: none"><li>• There is less than 10% of battery power left. Recharge the battery.</li></ul>

\* Depending on the phone type and usage, the actual time may vary.




## Pairing with your Bluetooth phone

Pairing will create a unique and encrypted wireless link between two Bluetooth enabled devices, such as your Bluetooth phone and Bluetooth headset.

- 1 Ensure that the headset is off (see **Turning the headset on/off**).

- 2 Press and hold the Multi-Function button until the indicator light turns on in blue (approximately 8 seconds).

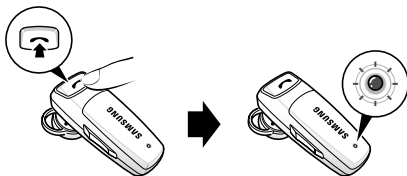

- 3 Set your Bluetooth phone to discover the headset by following your phone's guide. Typically, the steps involve going to a 'Setting', 'Connection', or 'Bluetooth' menu on your phone and then selecting the option to discover Bluetooth devices.
- 4 Your phone will find the Samsung WEP180 headset and ask if you want to pair with it. Confirm this by pressing the **Yes** or **OK** key.

- 5 Enter a passkey or PIN, 0000 (4 zeros), then press the **Yes** or **OK** key.

**IMPORTANT**

If pairing was successful, the indicator light will flash in blue 10 times rapidly before going to flashing every 3 seconds. If unsuccessful, the light remains on, and you will need to re-attempt pairing.

**Wearing the headset**

Wear the headset on your ear. In general, you will get better performance when there are no obstructions (including parts of your body) between the headset and the phone.

Depending on what ear you are going to wear the headset, simply adjust the hook accordingly.



▲ Left



▲ Right



## **Making a call**

### **Making a voice activated call**

If the voice recognition feature is on, you can make a voice activated call.

- 1** Press the Multi-Function button once. You will hear the voice-activation tone.
- 2** Say the name of the person you wish to call.

Depending on your phone, this feature is not supported.

### **Redialling the last number**

**When the headset is connected with the phone via the Handsfree profile:**

- 1** Press the Multi-Function button to access the recent call list.
- 2** If necessary, press ▲ or ▼ to scroll to the number you want.
- 3** Press the Multi-Function button to dial the selected number.

## **When the headset is connected with the phone via the Handsfree profile:**

Press and hold the Multi-Function button for 2 seconds. When you release the button, the phone dials the last dialed or received number.



### **IMPORTANT**

Depending on your phone, how to redial the last number may vary.



### **Ending a call**

Press the Multi-Function button once.



### **Answering a call**

After you hear the ring tone, press the Multi-Function button once.



### **IMPORTANT**

Do not hold the Multi-Function button down too long when making a call with your voice, ending, or answering a call. This should only be a quick tap.



## **Rejecting a call**

When you receive a call, press and hold the Multi-Function button for 2 seconds to reject the call. Depending on your phone's setting or type, you may only be able to mute the ringer or this feature may not be supported.



## **Adjusting the volume**

Press ▲ on the side of the headset to increase the volume level and ▼ to decrease the volume level.



## **Using enhanced features**

Enhanced features are available for phones that support the hands-free Bluetooth profile and enhanced features.

- **Placing a call on hold**

While you are on a call, press and hold the Multi-Function button for 2 seconds.

To retrieve the call, press and hold the Multi-Function button for 2 seconds again.

Depending on your phone, this feature is not supported.

- **Answering a second call**

When your phone notifies you of another incoming call while you are on a call, press and hold the Multi-Function button for 2 seconds to place the call on hold. Then press the Multi-Function button to answer the second call.

You can switch between calls by pressing and holding it for 2 seconds.

Depending on your phone, this feature is not supported.

- **Switching off the microphone**

Press and hold ▲ or ▼ to switch off the headset's microphone.

To switch it back on, press and hold either one again.

- **Transferring a call from the phone to the headset**

If you answer the call with your phone, you can transfer the call to the headset by pressing the Multi-Function button



# APPENDIX



## Frequently asked questions

<b>How far away from my phone will the headset work?</b>	The operating range is typically up to 30 feet (10 metres).
<b>Will the headset work with my cordless phone at home?</b>	The headset is not designed for use with cordless phones.
<b>Will the headset work with laptops, PCs, and PDAs?</b>	The headset will work with devices that are compliant with Bluetooth version 2.0 and support the headset and/or hands-free profile(s).
<b>Will anything cause interference with my conversation when I'm using the headset?</b>	Appliances such as cordless phones and wireless networking equipment may cause interference with your conversation. To reduce any interference, keep the headset away from other devices that use or produce radio waves.

<b>Will the headset interfere with my car's electronics, radio, or computer?</b>	The headset produces significantly less power than a typical mobile phone. It also only emits signals that are in compliance with the international Bluetooth standard. Therefore, you should not expect any interference with standard consumer-grade electronics equipment.
<b>Can other Bluetooth phone users hear my conversation?</b>	When you pair the headset to your Bluetooth phone, you are creating a private link between only these two Bluetooth devices. The wireless Bluetooth technology used in the headset is not easily monitored by third parties, because Bluetooth wireless signals are significantly lower in radio frequency power than those produced by a typical mobile phone.
<b>How do I take care of the headset?</b>	To clean the headset, use a clean, soft cloth that is slightly damp.



# Certification

## Declaration of Conformity (R&TTE)

**For the following product:**

Bluetooth Ear-phone

(Product description)

WEP180

(Model name)

**Manufactured at:**

- Samsung Electronics Co., Ltd, 94-1, Imsoo-Dong, Gumi City, Kyung-Buk, Korea, 730-350\*

(factory name, address)

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

Safety :

EMC :

Radio :

We hereby declare the [all essential radio test suites have been carried out and that] the above named product is in conformity to all the essential requirements of Directive 1999/5/EC.

The conformity assessment procedure referred to in Article 10 and detailed in Annex[IV] of Directive 1999/5/EC has been followed with the involvement of the following Notified Body(ies):

BABT, Balfour House, Churchfield Road,  
Walton-on-Thames, Surrey, KT12 2TD, UK\*  
Identification mark: 0168

CE 0168

**The technical documentation kept at:**

Samsung Electronics QA Lab.

which will be made available upon request.

*(Representative in the EU)*

Samsung Electronics Euro QA Lab.  
Blackbushe Business Park, Saxony Way,  
Yateley, Hampshire, GU46 6GG, UK\*

Yong-Sang Park / S. Manager

(place and date of issue)

(name and signature of authorised person)

\* It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your phone.

## Bluetooth

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Samsung is under license. Other trademarks and trade names are those of their respective owners.



### Warranty and parts replacement

Samsung warrants this product as free of defects in material, design and workmanship for the period of one year from the original date of purchase.

If during the period of warranty this product proves defective under normal use and service you should return the product to the retailer from whom it was originally purchased or qualified service center. The liability of Samsung and its appointed maintenance company is limited to the cost of repair and/or replacement of the unit under warranty.

- The warranty is limited to the original purchaser
- A copy of your receipt or other proof of purchase is required for a proper warranty service

- The warranty is void if the serial number, date code label or product label is removed, or if the product has been subject to physical abuse, improper installation modification, or repair by unauthorised third parties
- The responsibility of Samsung products shall be limited to the repair or replacement of the product at its sole discretion
- Specifically exempt from any warranty are limited-life consumable components such as batteries and other accessories
- Samsung is not liable to for any incidental or consequential damages arising from the use or misuse of any Samsung product
- This warranty gives you specific rights and you may have other rights which vary from area to area
- Unless otherwise instructed in the User Guide, the user may not, under any circumstances, attempt to perform service, adjustments or repairs on the unit, whether in or out of warranty. It must be returned to the purchase point, factory or authorised service agency for all such work
- Samsung will not assume any responsibility for any loss or damage incurred in shipping. All repair work on Samsung products by unauthorised third parties voids any warranty



## Correct disposal of this product



### (Waste Electrical & Electronic Equipment)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

## **FCC**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

The device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

Users are not permitted to make changes or modify the device in any way.

Changes or modifications not expressly approved by Samsung will void the user's authority to operate the equipment.