

English / Français / Deutsch / Nederlands

# Bluetooth® HEADSET WED250

MOBILE ENHANCEMENT

World Wide Web www.samsungmobile.com Printed in Korea Code No.:GH68-19955A EU A. 07/2008. Rev. 1.0

#### Turning the headset on or off

To turn the headset on, press and hold the Multi-function button until the blue indicator light flashes 4 times.

To turn the headset off, press and hold the Multi-function button until both blue and red indicator lights flash.

#### Understanding various modes

- Standby mode: The headset is waiting for a call. The blue indicator light flashes every 6 seconds.
- Active mode: The headset has a call in progress. The blue indicator light flashes every 8 seconds.
- Pairing mode: The blue indicator light stays lit. You can discover and connect to your headset on your phone.
- Low battery mode: There is less than 10% of battery power left. The red indicator light flashes. You must recharge the battery.

#### Pairing with your Bluetooth phone

- Enter Pairing mode.
  - Turn off your headset and press and hold the Multi-function button until the blue indicator light remains lit after blinking.
  - If you turn it on for the first time, it proceeds into Pairing mode immediately.

# **English**

Bluetooth® is a registered trademark of the Bluetooth SIG, Inc. worldwide. Bluetooth QD ID: B013814

#### Safety and usage information

- Never disassemble or modify your headset for any reason. Doing this may cause the headset to malfunction or become combustible. Bring the headset to an authorised service centre to repair it or replace the battery.
- When using your headset while driving, follow local regulations in the country or region you are in.
- Avoid storage at high temperatures (above 50° C/122° F), such as in a hot vehicle or in direct sunlight, as this can damage performance and reduce battery life.
- Do not expose the headset or any of its supplied parts to rain or other liquids.



At very high volumes, prolonged listening to the headset can damage your hearing.

#### Warranty and parts replacement

Samsung warrants this product as free of defects in material, design and workmanship for the period of one year from the original date of purchase. (Depending on your country, the length of warranty may vary.)

If during the period of warranty this product proves defective under normal use and service you should return the product to the retailer from whom it was originally purchased or qualified service center. The liability of Samsung and its appointed maintenance company is limited to the cost of repair and/or replacement of the unit under warranty.

- 2. Search for and pair with your phone according to your phone's user guide. (Bluetooth PIN: 0000, 4 zeros)
  - If the pairing is successful, the blue indicator light will flash 10 times rapidly before entering Standby mode.
  - If the blue indicator light remains lit, retry pairing.



When the headset and the phone are paired, the headset attempts to reconnect automatically each time it turns on. Otherwise, press the Multi-function button to reconnect.

#### Using call functions

Some functions may not be supported by your phone.

#### In Standby mode

Press the Multi-function button to:

- Answer an incoming call
- Redial the last number called

Press and hold Multi-function button to:

- Make a voice-activated call
- Reject an incoming call

- 2. Search for and pair with your phone according to your phone's user guide. (Bluetooth PIN: 0000, 4 zeros)
  - If the pairing is successful, the blue indicator light will flash 10 times rapidly before entering Standby mode.
  - If the blue indicator light remains lit, retry pairing.



When the headset and the phone are paired, the headset attempts to reconnect automatically each time it turns on. Otherwise, press the Multi-function button to reconnect.

#### Using call functions

Some functions may not be supported by your phone.

#### In Standby mode

Press the Multi-function button to:

- Answer an incoming call
- Redial the last number called

Press and hold Multi-function button to:

- Make a voice-activated call
- Reject an incoming call

#### In Active mode

Press the Multi-function button to:

- End a call
- Transfer a call from the phone to the headset

Press and hold Multi-function button to:

- Place a call on hold
- Answer a second call
- Retrieve a call on hold

Press [+] or [-] to adjust the volume.


Press and hold [+] or [-] to turn the microphone off or on.

#### **Specifications**

| Item              | Specifications and description      |
|-------------------|-------------------------------------|
| Bluetooth version | 2.0 + EDR                           |
| Support profile   | Headset Profile, Hands-Free Profile |
| Operating range   | Up to 30 feet (10 metres)           |
| Standby time      | Up to 180 hours*                    |
| Active time       | Up to 8 hours*                      |
| Charging time     | Approximately 2 hours*              |

<sup>\*</sup> Depending on the phone type and usage, the actual time may vary.

#### Your headset overview

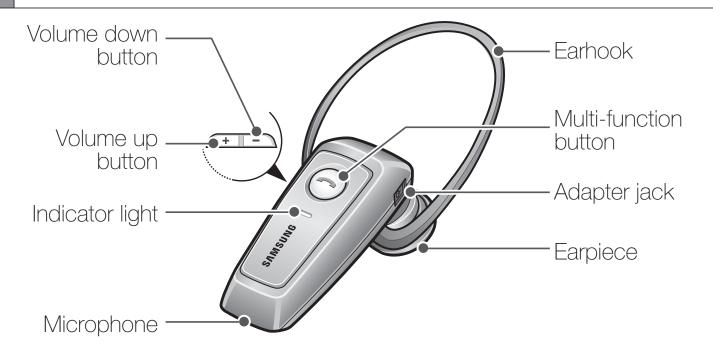

#### Charging the headset

Put the adapter into the jack on the headset and into the electrical outlet. Charge the headset until the red indicator light turns blue.



Do not attempt to charge the headset with anything other than the adapter provided.





#### **Declaration of Conformity (R&TTE)**

We,

#### Samsung Electronics

declare under our sole responsibility that the product

#### Bluetooth Headset: WEP250

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

SAFETY EN 60950-1:2001

EMC EN 301 489-1 V1.6.1:2005

EN 301 489-17 V1.2.1:2002

RADIO EN 300 328 V1.6.1 (11-2004)

We hereby declare that [all essential radio test suites have been carried out and that] the above named product is in conformity to all the essential requirements of Directive 1999/5/EC.

which will be made available upon request.

(Representative in the EU)

Samsung Electronics Euro QA Lab. Blackbushe Business Park, Saxony Way, Yateley, Hampshire, GU46 6GG, UK\*

2008.02.25

Yong-Sang Park / S. Manager

P. S. POMZ

(place and date of issue)

(name and signature of authorised person)

<sup>\*</sup> It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your product.

# \*

## Safety approvals

#### **FCC**

FCC ID: A3LWEP250

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

Users are not permitted to make changes or modify the device in any way.

Changes or modifications not expressly approved by Samsung will void the user's authority to operate the equipment.

### **Industry Canada**

IC ID: 649E-WEP250

Operation is subject to the following two conditions: (1) This device may not cause interference and (2) This device must

accept any interference, including interference that may cause undesired operation of the device.

The term "IC:" before the certification/registration number only signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.



# **UL** certified travel adapter

The travel adapter for this headset has met UL 1310 safety requirements. Please adhere to the following safety instructions per UL guidelines.

FAILURE TO FOLLOW THE INSTRUCTIONS OUTLINED MAY LEAD TO SERIOUS PERSONAL INJURY AND POSSIBLE PROPERTY DAMAGE.

IMPORTANT SAFETY INSTRUCTIONS - SAVE THESE INSTRUCTIONS.

DANGER - TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, CAREFULLY FOLLOW THESE INSTRUCTIONS.

FOR CONNECTION TO A SUPPLY NOT IN THE U.S.A., USE AN ATTACHMENT PLUG ADAPTOR OF THE PROPER CONFIGURATION FOR THE POWER OUTLET.
THIS POWER UNIT IS INTENDED TO BE CORRECTLY ORIENTATED IN A VERTICAL, HORIZONTAL, OR FLOOR MOUNT POSITION.



#### **Cautions**

Changes or modifications made in the radio phone, not expressly approved by Samsung, will void the user's authority to operate the equipment. Only use approved batteries, antennas and chargers. The use of any unauthorized accessories may be dangerous and void the phone warranty if said accessories cause damage or a defect to the phone. Although your phone is quite sturdy, it is a complex piece of equipment and can be broken. Avoid dropping, hitting, bending or sitting on it.