

BV160
Bluetooth Speaker

USER MANUAL ▶

English


- Matters need attention before using
- Packing content
- Features
- Product Parameters
- Function Key
- Power on/off
- Connect to other Bluetooth device
- CTF card music playback mode
- Hands-free call
- Entering card reader/charging mode
- FAQ

1 Matters need attention before using English


- Please use and store this product at room temperature
- Do not expose this product to rain or wet conditions
- Do not throw and drop this product to avoid product damage
- Do not self-dismantling, repair and transform the product
- Do not use chemical solvent cleaning the product
- Please don't arbitrarily discarded or placed the lithium battery in the fire in order to avoid the risk of explosion
- Long time high volume may cause hearing impairment, please adjust the volume appropriately when listening, especially for long time listening.

- Note: Improper battery replacement may cause explosion, only replace with same or equivalent battery
- Don't expose the battery to sunlight, fire or excessive heat

2 Packing content English



1 Speaker unit 1pc



2 USB charging cable 1pc



3 Rope 1Pc



4 User manual 1pc


3 Features English

- Support Bluetooth playback
- Support TF card music playback
- Support TF card reader
- Support hands-free
- Support TF card MP3\WMA\WMA audio format playback

4 Product Parameters English

| Appearance | |
|-------------------------|--|
| External interface | TF card slot, Micro USB interface |
| Product specifications | W87XD33XH62(mm) |
| Wet weight | 155g(including li-ion battery) |
| Basic Parameters | |
| Product type | Bluetooth Speaker |
| Speaker system | Output 3W, 1.5 inch inside magnetic trumpet with single voice coil |
| Volume Control | Long press left/right button VOL-/VOL+ |
| Bluetooth Version | 4.2 |
| Storage type | MAX 32GB TF card |
| Power supply | Built-in 3.7V 600mAh li-ion battery |
| Technical Parameters | |
| Output power | 3W THD=10% |
| Frequency Response | 100Hz-20KHz |
| USB Specs | USB2.0, compatible USB 1.1 |
| Charging Time | DC5V=1A around 1.5-2 hours |
| Play Time | Medium volume more than 4 hours |
| Functions | |
| File format | MP3, WMA, WAV |
| Voice Call | Support hands free call |
| TF Card | Support TF card music play |
| Bluetooth | Support Bluetooth play |
| Card Reader | Support TF card data copy |
| Bluetooth Re-connection | Support Bluetooth one key re-connection |


5 Function Key English



Previous Song/VOL-: Short press previous song, long press VOL-.

Next Song/VOL+: Short press next song, long press VOL+.

Power Key: long press for 2 seconds power on/off
Short press: play/pause, when Bluetooth disconnected, short press to reconnect, when incoming calls, short press to answer the phone.
Long press: Reject call, short press to end the call

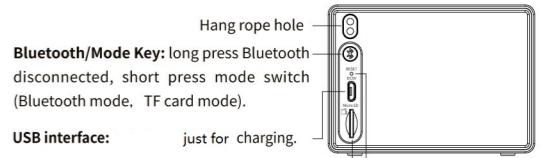

Bluetooth/Mode Key: long press Bluetooth disconnected, short press mode switch (Bluetooth mode, TF card mode).

USB interface: just for charging.


TF card slot: Insert a TF card with music files, can play the audio files, connect to PC, can read or copy TF card data.

Reset Hole: When system halted, press the button via thin metal stick, force to reset and turn it off/on.

6 Power ON/OFF English

1 Long press for 2 seconds power on/off


Long press 2 seconds power on voice prompts, the blue light starts to flash, long press 2 seconds power off the voice prompts one time and blue light off.



7 Connect to other Bluetooth device English

1 Bluetooth connection

Open the phone, tablet or other devices Bluetooth connectivity, enter the Bluetooth device search, when search Bluetooth device "bv160", then confirm the connection.



2 Bluetooth connection success and play

When success matched, blue LED light is on, then you can play music in your phone, tablet PC or other Bluetooth devices connected with speaker, blue LED lights is on during playing, pause play LED light blink.

1. If necessary, input "0000" and press confirmation to connect.

2. The Bluetooth speaker will automatically reconnect the last connected device (Bluetooth is turned on) without the need to re-search for paired Bluetooth.

3 Disconnect Bluetooth

When speaker and device connected, long press to disconnect Bluetooth, then the speaker can be found, LED blue light begin to quick blink, with disconnect warning tone.



4 Bluetooth Devices re-connection

After Bluetooth device disconnected, if you need to reconnect, only need to short press to reconnect the last playback device, short press to end the call, long press to reject the call.

8 CTF card music playback mode English

1 Insert a TF card and turn on the device

Insert a TF card with music files into the card slot, long press the Power switch to turn speaker on.

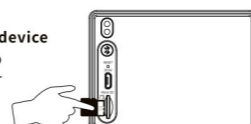

2 Switch to TF card music playback mode


Short press, auto play the audio files, blue LED indicator turns blue during playing, short press pause and blue LED indicator slow flash.

Tip: Bluetooth speakers set the Bluetooth mode to the first mode, so you need to switch to TF card mode before play TF card audio file. when speaker is on, insert the TF card automatically play TF card audio files.


9 Hands-free call English

1 connecting speaker and mobile phone

During Bluetooth music playback, music will pause when phone calls, short press to answer the call and press it again to end the call, long press to reject the call.



10 Entering card reader/charging mode English

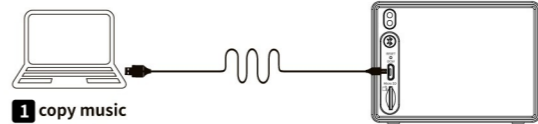

1 copy music

Turn off the speaker, insert the TF card, connect the speaker to PC with the USB cable via Micro USB interface, press the Power button to enter card reader mode, and then you can copy music files to the TF card, short press to exit card read mode then enter Bluetooth mode.

2 charging the speaker

You can connect the speaker to PC with the provided USB cable and charge the speaker no matter it's power on/off. It is recommended to buy a separate DC5V=1A USB charger or other 5V=1A charger for mobile phone and charge the speaker through indoor outlet.

Tip: Please charge the speaker first if it hasn't been used for a long time. Speaker will automatically turn off after disconnect Bluetooth without TF card or Pause playback for ten minutes.

11 FAQ English

| Problems | Settlement |
|---------------------------------------|--|
| Failed to connect many times | 1.Restart the speaker 2.If needed, please input passcode "0000" |
| discontinuities appears when playback | 1.check if the Bluetooth device is out of the valid distance, or there is block between speaker and Bluetooth devices. |
| Micro SD card error Format error | 1.Check if the Micro SD card format right (the speaker supported micro SD format is FAT 32) 2.Check the files stored in Micro SD card are Mp3, WMA, WAV |
| No sound when play | 1.Check the speaker's volume 2.Check if the speaker is on mute or pause |
| Can not power on | 1.Please reset the speaker by pressing the reset hole |

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance

could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

FCC ID: 2ABNJ-BV160

Manufactory:
Shenzhen See Me Here Electronic Co.,Ltd.
Address: D Block, TongFuYu Industrial Park, Xi'Xiang Town, Bao'an District, Shenzhen.
Tel: 0755-61181399 Fax:0755-29101982
Website: www.see-me-here.com