

MEE audio®

USER MANUAL



BLUETOOTH SUPPORT PAGE

Please visit the **Bluetooth Support Guide** at www.MEEaudio.com/Bluetooth for easy-to-follow video setup guides and the latest troubleshooting information.



POWERED BY Qualcomm aptX® AND Bluetooth®

PACKAGE CONTENTS

ENGLISH



Matrix3 AF68
Stereo Bluetooth Headphones



Premium protective
carrying case



Micro-USB
charging cable




Stereo
audio cable



User manual

CHARGING

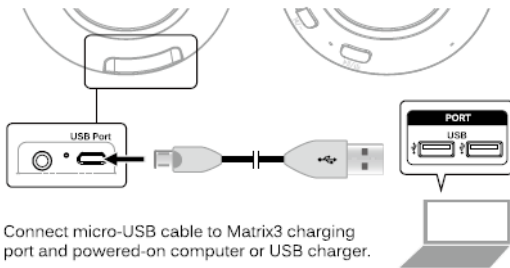

Connect micro-USB cable to Matrix3 charging port and powered-on computer or USB charger.

Charge time is ~2 hours. The red charging indicator light will turn off once fully charged.

Low battery is indicated by a flashing red status indicator light and "Battery Low" voice notification every 60 seconds.

Apple® devices such as the iPhone®, iPad®, and iPod touch® will also display an on-screen headset battery indicator near the top right corner of the screen when the Matrix3 is connected.



BLUETOOTH PAIRING

Make sure the Matrix3 is turned off and within 3 feet (1 meter) of your device. Put the headset in pairing mode by holding the *Multifunction* button for about 6 seconds until the status indicator light begins to flash red and blue in an alternating pattern and the headphone says "Ready to Pair".

Phones and tablets

Open the Settings menu and select "Bluetooth". If Bluetooth is not on, turn it on. Select "Search for Devices" or "Refresh" if your phone or tablet does not automatically search for new devices.



Other devices


Visit www.MEEaudio.com/Bluetooth for pairing & setup information.

Wait until you see "MEE audio Matrix3" on the screen of your device. Select it and follow any further prompts to pair. Use "0000" if a pin is required. Once connected, the status indicator light will turn blue.

Note: It is only necessary to pair your headset once with each device.

If pairing fails, please refer to your device's user manual for further information. Visit the Bluetooth Support Page at www.MEEaudio.com/Bluetooth for instructional pairing videos and troubleshooting information.

PRODUCT OVERVIEW

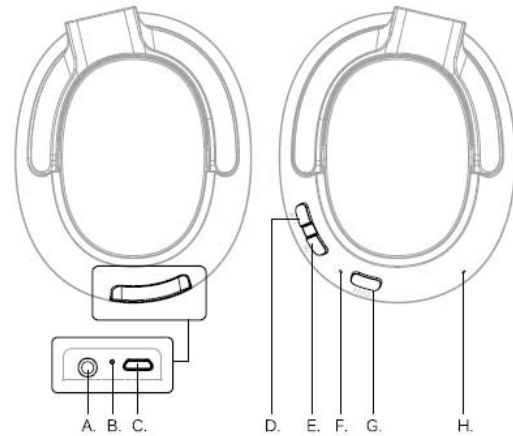

Left Earcup


- A. 3.5mm audio jack
- B. Charging Indicator light
- C. Micro-USB charging port

Right Earcup

- D. Volume Up / Skip Track button (M/+)
- E. Volume Down / Previous Track button (M/-)
- F. Status Indicator light
- G. Multifunction button (M/⏸)
- H. Microphone

CONTROLS

The headphone controls on the Matrix3 are located on the right earcup.

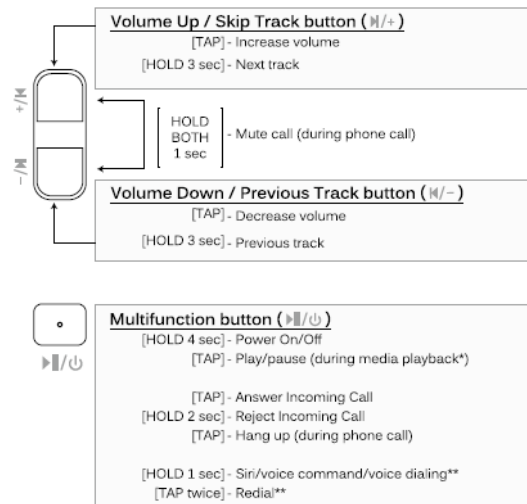

* To start playing music, open a music app on your device and start playback.
** Not all devices support this functionality. For more information, refer to the user manual for your device.

RECONNECTING TO PAIRED DEVICES

The Matrix3 can remember previously paired devices. Any time it is turned on, it will automatically connect with the last paired Bluetooth device that is on and within range. If the headset does not connect automatically once turned on, open the Bluetooth menu on your device and select "MEE audio Matrix3" from the Bluetooth device list.

MULTIPOINT

Multipoint is an optional feature which allows two Bluetooth devices to be connected to the Matrix3 simultaneously.

Enabling Multipoint

To turn on Multipoint, first put the Matrix3 headphones in standby mode (standby mode is when the headphones are powered on but not connected to any device). To enter standby mode, turn off the Bluetooth functions on all nearby devices that have been previously paired with the Matrix3 and then power on the headphones. In standby mode, the blue status indicator light will blink slowly.

Once in standby mode, press and hold the **Volume Up** and **Volume Down** buttons for approximately two seconds or until you hear an ascending tone indicating that Multipoint has been turned on.

To turn Multipoint off again, enter standby mode and hold the **Volume Up** and **Volume Down** buttons for approximately 5 seconds or until you hear a descending tone indicating that Multipoint has been turned off.




DISABLING AUDIO PROMPTS

Voice prompts and other audible notifications of the Matrix3 can be disabled. To turn off all audio prompts, put the Matrix3 in standby mode (see the **Enabling Multipoint** section) and then press and hold the **Volume Down** button for 4 seconds, until you hear two descending tones.

To turn audio prompts back on, repeat the above procedure using the **Volume Up** button and listen for two ascending tones.

Note: this will turn off all sound alerts and other audio notifications.

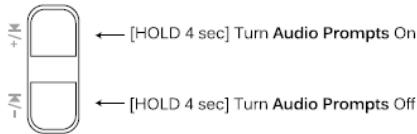

SAFETY AND CARE

- Clean with a soft cloth, damp with diluted soap water solution if necessary. Do not use chemical cleaners.
- When not in use, power the headphones off and store in the included protective carrying case.
- Battery performance will be severely decreased when stored in extreme temperatures: below -10°C/14°F or above 45°C/113°F including direct sunlight.
- The lifetime of the battery will be significantly reduced if your headset is not charged for a long time. It is recommended to charge your headset at least once a month.
- There are no user replaceable/repairable parts in the headset. Disassembling it will void your warranty.
- If the device comes in contact with liquids, quickly wipe away. If submerged in water, do not turn the device on until completely dried. Note: liquid submersion voids the warranty.
- Do not use around flammable gasses as fire or explosion may occur.

MULTIPOINT CONT.

Multipoint Pairing

To use two Bluetooth devices with the Matrix3, first pair each one by following the pairing procedure described in the **Bluetooth Pairing** section and then power the headset off. When powered on again, the headset will connect to the 2 most recently-paired devices, as long as they have Bluetooth enabled and are within range. If a device that has already been paired does not connect automatically, select "MEE audio Matrix3" from the Bluetooth menu of the device.

Multipoint Functionality

To switch between the two connected devices, pause audio playback on the active device and start audio playback on the other connected device. It may take up to 30 seconds for the audio to switch.

Incoming calls will always take precedence over media. The Matrix3 will automatically activate the connected device that has an incoming call.

Disabling Multipoint


If you no longer wish to connect to multiple devices, disable Multipoint by following the instructions in the **Enabling Multipoint** section above, disable Bluetooth on the device you do not want connected to the Matrix3, or remove the "MEE audio Matrix3" entry from the Bluetooth menu of the device.

USE AS WIRED HEADPHONE

The Matrix3 can be used as a wired headphone with the included 3.5mm stereo audio cable. This allows use when the battery is depleted and with devices that do not have Bluetooth (such in-flight entertainment systems) or aren't paired.

The wired connection can also be used while the Matrix3 is connected to another device wirelessly via Bluetooth. Bluetooth audio takes precedence over wired audio. Wired audio will be partially muted whenever a signal is transmitted via Bluetooth and will resume approximately 5 seconds after the Bluetooth transmission ends.

Note: the built-in microphone of the Matrix3 will not work when the headphones are used only in wired mode.

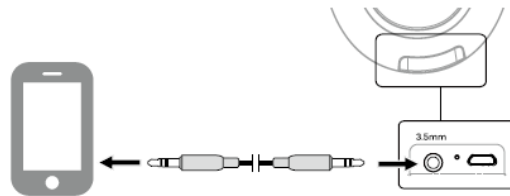

WARNING

Using headphones at high volumes for extended periods of time will result in permanent hearing damage. It is advised you keep volume levels moderate to low at all times for your safety. Turn the volume all the way down after connecting your earphones, then gradually increase the volume until you reach a comfortable listening level. Do not use while driving a car, cycling, operating machinery, or performing other activities that require hearing surrounding sounds.

TROUBLESHOOTING

Visit the Bluetooth Support Page at www.MEEaudio.com/Bluetooth for troubleshooting procedures.

SPECIFICATIONS

Visit www.MEEaudio.com/Matrix3 for product specifications.

WARRANTY

The Matrix3 is covered by a 1-year manufacturer warranty. For more information, contact your local MEE audio dealer or visit www.MEEaudio.com/Support

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.