



7. Recent Calls Menu Operation

Deleting Stored Numbers (MENU 2-4)

You can delete the current numbers dialled, received, and missed in the Recent Calls list at any time.

Press \wedge/\vee to select **Yes**, and press \blacktriangleleft .
"Please wait" will be displayed and your phone will return to standby mode.
To cancel deleting, select **No**, and press \blacktriangleleft .

Call Timer Review (MENU 2-5)

You can show the time for the last call or all calls in standby mode. The time for last call/all calls will be displayed in minutes.

Select one of the following items, and press \blacktriangleleft .

Last Call (MENU 2-5-1), All Calls (MENU 2-5-2)

Call Cost Review (MENU 2-6)

You can show the cost of the current call during a call, if your network service provider supports the feature.

Select one of the following items, and press \blacktriangleleft .

Last Call (MENU 2-6-1), All Calls (MENU 2-6-2)

- To clear the log for Last call/All Calls:
 - 1) Select **Clear logs (MENU 2-6-3)**, and press \blacktriangleleft .
"Enter PIN2" will be displayed.
 - 2) Enter your PIN2 code, and press \blacktriangleleft . Then, all the data of the cost will be cleared.





7. Recent Calls Menu Operation

Cost Unit Reading/Setting (MENU 2-6-4)

- To review the current cost per call unit setting:
 - 1) Select **Read units**, and press .
Price/unit will be displayed with the three-letter description that shows the currency.
- To set the cost per call unit:
 - 1) Select **Set units**, and press . "Enter PIN2" will be displayed.
 - 2) Enter your PIN2 code, and press .
 - 3) Enter the cost per call unit, and press .
Use the * key to enter a decimal point.
 - 4) Enter the three-letter identification for the currency chosen, and press .
Example: "UKP" for UK pounds.
Please contact your service provider for the identification letters.
(You can register the letters as you like or your service provider will provide them.)

Max Cost Reading/Setting (MENU 2-6-5)

- To review the current cost limit setting:
 - 1) Select **Read limit**, and press .
The maximum cost being set will be displayed with the three-letter description that shows the currency.
- To set the maximum cost limit:
 - 1) Select **Set limit**, and press . "Enter PIN2" will be displayed.
 - 2) Enter your PIN2 code, and press .
 - 3) Enter the maximum cost limit, and press .

NOTES:

- *The key entry for the code will be displayed by the letter "x".*
- *Your PIN2 code will be provided by your service provider.*
- *When you enter the wrong PIN2 code, "Invalid PIN Please try again" will be displayed.*
- *When the wrong PIN2 is entered three consecutive times, your phone will not accept any further PIN2 entry. In this case, enter your PUK2 (Personal Unblocking Key) code. Please contact your service provider for further information on your PUK2 code.*





8. Messages (MENU 3)

This feature operation may be offered by your mobile service provider. Before using this feature, you must subscribe to them through your home mobile service provider. Please contact your mobile service provider for more information.

Press **MENU** and **Message**, and press .
See page 21 for general information on the menu functions.

NOTE:

- These optional network services may not be available in all areas.

Short Message Service

You can receive and send short text messages via the network, where such services are available.

Reading Messages (MENU 3-1)

When you receive a new message, the message indicator () will be displayed on the standby screen.

Select the message you wish to read from the message list with / and press .

Where no messages have been received, "No more message" will be displayed.

NOTE:

- If the SIM is full, the message indicator () will flash and the network will hold it until you delete another message from the SIM. How to delete it is described in Reviewing/Editing Short Messages on page 32.

Editing Incoming Messages (MENU3-1 /)

Messages that have been received can be edited, saved, and sent.

- 1 Select the message you wish to edit from the message list with / and press .
- 2 Press then select **Edit**.
- 3 The body of the incoming mail (message to send) will be shown. Edit the text then press .
- 4 The telephone number can also be edited if necessary. (**MENU** can also be pressed to bring up the telephone book to edit the settings for the receiver of the message.)





8. Messages

- 5 Select **Save** or **Send** (save then send edited message or send message without saving).

Deleting Incoming Messages (MENU3-1 ^/∩)

Deletes messages that have been received.

- 1 Select the message to delete with ^/∩ and press ↵.
- 2 Press ↵ and selected **Delete** then press ↵ again.
- 3 Select either **Yes** or **No** and press ↵.

NOTE:

- To delete all received messages, select Delete all from the bottom of the message list.

Forwarding Incoming Messages (MENU3-1 ^/∩)

Messages that have been received can be forwarded elsewhere.

- 1 Select the message to forward from the message list with ^/∩ and press ↵.
- 2 Press ↵ and select **forward** then press ↵ again.
- 3 Enter the number to the recipient of the message being forwarded and press ↵.
- 4 Select **Save** or **Send** (save then send edited message or send message without saving).

Text Reply (MENU3-1 ^/∩)

Reply to received messages with text.

- 1 Press ↵ while the message that has been received is being displayed.
- 2 Select **Text reply** and press ↵.
- 3 Enter your reply in the text input screen and press ↵.
- 4 Re-enter the telephone number if necessary and press ↵.
- 5 Select **Save** or **Send** (save then send edited message or send message without saving).

Voice Call (MENU3-1 ^/∩)

Make a phone call to the sender of a message that has been received.





- 1 Press while the message is being displayed.
- 2 Select Voice call and press to dial the number to the sender of the message.

Extracting Numbers from Incoming Messages (MENU3-1 ^/∩)

Phone numbers can be extracted from incoming messages and a call can be made to the number.

- 1 Press while a messaging containing a phone number is being displayed.
- 2 Select **Extract nos.** and press to extract the phone number.
Pressing twice will dial the number that has been extracted.

Reviewing Outgoing Messages (MENU3-2 ^/∩)

Messages that have been sent can be reviewed.
Select the message that you wish to review with ^/∩ and press . The message list containing messages that have been sent and saved will be displayed. When there is no message list, "**No messages**" will be displayed.



Editing Outgoing Messages (MENU3-2 ^/∩)

Please refer to Editing Incoming Messages (MENU3-1, ^/∩).

Deleting Outgoing Messages (MENU3-2 ^/∩)

Please refer to Deleting Incoming Messages (MENU3-1, ^/∩).

Forwarding Outgoing Messages (MENU3-2 ^/∩)

Please refer to Forwarding Incoming Messages (MENU3-1, ^/∩).

Extracting Numbers from Outgoing Messages (MENU3-2 ^/∩)

Please refer to Extracting Numbers From Incoming Messages (MENU3-1, ^/∩).






8. Messages

Using T9 Predictive Text Input

T9 predictive text entry is available in some areas of your phone that require text entry, as opposed to numbers only. It comprises several main modes:

In the Message create screen (e.g, **MENU, 3, 3**), press **MENU**, then select the desired mode as follows;

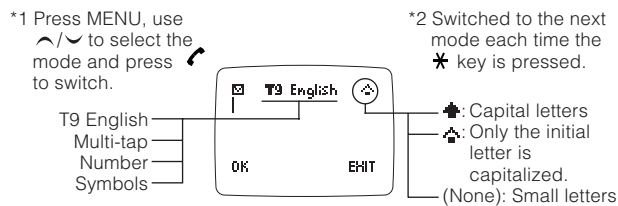

- **T9 English** - *English text input mode.*
To enter text, press each key once for each letter you want and the phone predicts the word you are typing. For example, to type "Hello" at a T9 text entry screen, press the keys **4, 3, 5, 5, 6** once each. As you type the letters displayed will change to reflect the most likely word for the letters you have entered. You must type the whole word before trying to correct individual letters.

If the word you have typed is not the one you want, press the **1** key to scroll through the other options. The * key can be used to change the case and to input numbers. To change the case, press the * key once quickly. To input numbers, press and hold down the * key to switch to numeric input mode. Punctuation and other symbols are available via the # key. Press the # key once quickly to insert smart punctuation, or press and hold the # key to choose from the whole range of symbols. Press the number key associated with the symbol displayed to enter that symbol and return to T9 text entry. If you cannot immediately see the symbol you want, press the ^ and ∨ keys to scroll through other options.

You can correct a mistyped letter or number by using the **CLEAR** key to remove it.

- **Multi-tap** - *This mode can be used to add words to the English database.*
In multi-tap text entry mode different letters are reached by cycling through the options: one press gives the first character, two quick presses the second, and so on. To type the word "Hello", you need to press the **4** key twice quickly to give an "H", then change case using the * key. Next press the **3** key twice to give "e", then the **5** key three times to give "l", and

