


1 Your cellphone.....

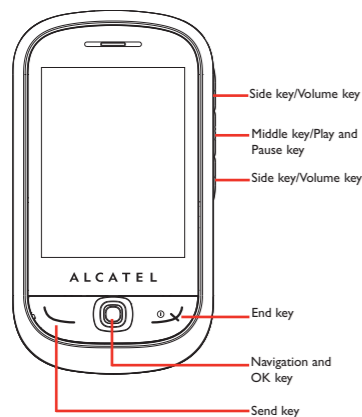

1.1 Keys

- Send Key ()
- Access call log from idle
 - Accept an incoming call
 - To dial the number focused on the screen
- End Key ()
- Power on (long press)
 - Return back to idle from any other state
 - Turn off the backlight and lock the screen (short press in idle screen)
 - Long press in idle to access 'quick profile + power off'
- Navigation keys (in idle screen):
- Up to message
 - Down to Camera
 - Left to alarm
 - Right to Bluetooth menu
- Central key ()
- Open Main Menu in idle
 - Confirm/ok/select in other state
- Play/pause key (side middle key)
- Play/pause music
- Volume keys (side keys)
- Adjust general volume (short press)
 - Go or return to previous/next song (long press)

1.2 Main screen icons ⁽¹⁾

- Battery charge level.**
- Vibrate alert:** your cellphone vibrates, but does not ring or beep with the exception of the alarm.
- Bluetooth status** (Blue - Activated).
- Bluetooth status** (Connected to an audio device).
- Headset connected.**

⁽¹⁾ The icons and illustrations in this guide are provided for informational purposes only.

- Keypad locked.**
- Call forwarding activated:** your calls are forwarded.
- Alarm clock or appointment(s).**
- Level of network reception.**
- Voicemail message arrived.**
- Unanswered calls.**
- Radio is on.**
- Web alerts ⁽¹⁾.**
- Roaming.**
- Memory card scanning in progress.**
- Memory card scanning completed.**
- Line switching ⁽²⁾:** indicates the selected line.
- GPRS attached.**
- GPRS connecting.**
- Music player active.**
- Message receipt in progress.**
- Sending a message.**
- Silence mode:** your cellphone does not ring, beep or vibrate.
- Message unread.**
- Message list is full:** your cellphone cannot accept any new messages. You must access the message list and delete at least one message on your SIM card.
- Flight mode.**
- Bluetooth headset connected.**

⁽¹⁾ Depending on your network operator.
⁽²⁾ Contact your network operator to check service availability.

2 Getting started

2.1 Let's go

Removing and installing the back cover



Inserting and installing the battery, SIM card



Place the SIM card with the chip facing downwards and slide it into its housing. Make sure that it is correctly inserted. To remove the card, press it and slide it out.

2.2 Power on your cellphone

Hold down the key until the cellphone powers on.

2.3 Power off your cellphone

Hold down the key until the pop-up "Profile tab" appears, then select "Power off" and confirm.

3 Calling.....

3.1 Making a Call

Dial the desired number then press the key to place the call. If you make a mistake, you can delete the incorrect digits by pressing the right softkey.

To hang up the call, press the key.

Making an emergency call

If your cellphone is covered by the network, dial emergency number and press the key to make an emergency call. This works even without a SIM card and without typing the PIN code ⁽¹⁾.

3.2 Calling your voicemail ⁽²⁾

Your voicemail is provided by your network to avoid missing calls. It works like an answering machine that you can consult at any time. To access your voicemail, hold down key.

3.3 Receiving a call

When you receive an incoming call, press the key to talk and then hang up using the key.

3.4 Available functions during the call

During a call, you can use your directory, short messages, etc. without losing your correspondent.

⁽¹⁾ Depends on local regulations.

⁽²⁾ Contact your network operator to check service availability.

4 Calls

4.1 Call log

You can access your call memory by pressing from the idle screen. Choose the option of the desired list: **Outgoing call(s)**, **Missed call(s)**, **Answered call(s)**.

4.2 My numbers

Type in or modify your cellphone number or the number to access your voicemail and confirm by clicking. Your cellphone number is usually written on your SIM card.

4.3 Billings

You can access different items with this option: Amount, Duration, GPRS counter, Beep duration.

4.4 Call settings ⁽¹⁾

You can access a number of items with this option: Call waiting, Call forwarding, Call barring, Caller ID, Auto redial.

⁽¹⁾ Contact your network operator to check service availability.

5 Directory.....

5.1 Consulting your directory list

In Idle interface, click icon to access the **contacts**.

5.2 Create contact

Select the contacts list in which you wish to add a contact to, press the "Options" softkey, select "Create contact" then .

6 Messages

You can create, edit and receive SMS and MMS⁽¹⁾ with this cellphone.

MMS enables you to send images, photos, animations and sounds to other compatible cellphones.

6.1 Create text/multimedia message ⁽¹⁾

You can click in idle interface to create a message. Or select "Messages" from the Main Menu to create text/multimedia messages. You can type a message, but you can also modify a predefined message in "Templates" or customize your message by adding pictures, photos, sounds, titles, etc. (only available while editing an MMS). While writing a message, select "Options" to access all the messaging options.

You can save standard messages to **Drafts** or **Templates** (MMS only).

⁽¹⁾ Depending on your network operator.
English - CJB2221ALAAA

7 Camera

Your cellphone is fitted with a camera for taking photos that you can use in different ways:

- store them in your "File manager";
- send them in a multimedia message (MMS) to a cellphone or an email address;
- customize your main screen;
- select them as incoming call image to a contact in your directory;
- transfer them by data cable or microSD card to your computer;
- modify your photos by adding frames.

7.1 Camera

Select to access the function from main menu.

7.2 My creations

This feature stores all the photos captured by your cellphone.

8 Applications.....

8.1 Music player

Access to main menu "Applications" and select "Music". You will have full flexibility of managing music both on your cellphone and memory card.

8.2 Radio

Your cellphone is equipped with FM radio ⁽¹⁾ with RDS functionality. You can use the application as a traditional radio with saved channels or with parallel visual information related to the radio program on the display if you tune to stations that offer Visual Radio service. You can listen to it while running other applications.

8.3 Image viewer

A library links to the pictures in "My creations" and "My images" in cellphone to be shown in list, slide, or thumbnail, set as **Wallpaper**, **Screen saver**, **Power on/off display**, and **Contact ID**, or sent by **MMS**, **Bluetooth**.

9 Web

Internet is a mobile internet portal service which allows you to obtain information such as weather conditions, news, sport and download new ringtones, wallpapers, music.

Homepage

- Launch the Web browser with the homepage of the default profile.

- Bookmarks**
 - Access your favorite sites.
- Recent pages**
 - Pages which you recently viewed.
- Offline pages**
 - Pages available for offline viewing.
- Go to URL**
 - Enter the URL of Web site.
- Profiles**
 - Customize your Web access.

⁽¹⁾ The quality of the radio depends on the coverage of the radio station in that particular area.

10 Tools.....

10.1 Services

Contact your network operator to check service availability.

10.2 Alarm

Your cellphone has a built-in alarm clock with a snooze feature.

10.3 Bluetooth

To use your cellphone with a Bluetooth device, you need to proceed in two steps:

- Pair and register the device to your cellphone,
- Select it to use hands-free communication.

10.4 Calendar

Once you enter this menu from "Tools", there is a monthly-view calendar for you to keep track of important meetings, appointments, etc. Days with events entered will be marked in color.

10.5 Calculator

Enter a number, select the type of operation to be performed, and enter the second number; then press key to display the result. To return to the main screen, click area.

10.6 Memo

You can create a **Text note** or **Voice memo** by accessing "Memo".

10.7 World clock

The World clock shows current local time and the time in different cities. You may view up to 3 cities at one time (Options) **Set as my city**). Also, you can add a maximum of 10 new cities to the list (Options) **Add**.

11 File manager

11.1 Memory card

You can access all files stored in memory card here.

11.2 My audios

Choose an audio for the Power on/off screen, for an incoming call, a message alert, power on/off ringtone or an alarm and scheduler.

11.3 My images

You can select an image or a photo as wallpaper, ON/OFF screen, or assign it to a contact in the directory.

11.4 My videos

The "My videos" album contains all video clips recorded by the user, originally embedded in the cellphone and downloaded to the cellphone or memory card.

11.5 My creations

This feature stores all the photos captured by your cellphone.

11.6 Others

Store files of unsupported format.

11.7 Memory status

Indicates how much space is used and how much is currently free on your cellphone and memory card (if any).

12 Settings

From the main menu, select the menu icon and select the function of your choice in order to customize your cellphone: Profiles, Touch settings, Display, Clock, Languages, Headset mode, Screen lock, Numeric keys, Input mode, Vocabulary, Security, Network, Connectivity, Call settings.

13 Latin input mode/character table⁽¹⁾

To write messages, there are two writing methods:

- Normal:
This mode allows you to type text by choosing a letter or a sequence of characters.

- Predictive with the Zi mode:
This mode speeds up the writing of your text. Press the key once and the word will be modified each time you press a key. As you go on, the word will keep changing.

ALCATEL is a trademark of Alcatel-Lucent and used under license by TCT Mobile Limited.

All rights reserved © Copyright 2010 TCT Mobile Limited.

TCT Mobile Limited reserves the right to alter material or technical specification without prior notice.

⁽¹⁾ For specific languages as Chinese, please see specific input leaflets.

Safety and use

We recommend that you read this chapter carefully before using your cellphone. The manufacturer disclaims any liability for damage, which may result as a consequence of improper use or use contrary to the instructions contained herein.

•TRAFFIC SAFETY:

• **Chapters that studies show that using a cellphone while driving a vehicle constitutes a real risk, even when the hands-free kit is used (car kit, headset...), drivers are requested to refrain from using their cellphone when the vehicle is not parked. Check the laws and regulations on the use of wireless cellphones and their accessories in the areas where you drive. Always obey them. The use of these devices may be prohibited or restricted in certain areas.**

When driving, do not use your cellphone and headphone to listen to music or to the radio. Using a headphone can be dangerous and forbidden in some areas.

When switched on, your cellphone emits electromagnetic waves that can interfere with the vehicle's electronic systems such as ABS anti-lock brakes or airbags. To ensure that there is no problem:

- do not place your cellphone on top of the dashboard or within an airbag deployment area,
- check with your car dealer or the car manufacturer to make sure that the car's electronic devices are shielded from cellphone RF energy.

• CONDITIONS OF USE:

You are advised to switch off the cellphone from time to time to optimize its performance.

Switch the cellphone off before boarding an aircraft to avoid prosecution.

Switch the cellphone off when you are in health care facilities, except in designated areas. As with many other types of equipment now in regular use, cellphones can interfere with other electrical or electronic devices, or equipment using radio frequency.

Switch the cellphone off when you are near gas or flammable liquids. Strictly obey all signs and instructions posted in a fuel depot, gas station, or chemical plant, or in any potentially explosive atmosphere.

When the cellphone is switched on, it should be kept at least 15 cm from any medical device such as a pacemaker, a hearing aid or insulin pump. In particular when using the cellphone you should hold it against the ear on the opposite side to the device, if any.

To avoid hearing impairment, answer the call before holding your cellphone to your ear. Also move the handset away from your ear while using the "hands-free" option because the amplified volume might cause hearing damage.

Do not let children use the cellphone and/or play with the cellphone and accessories without supervision.

When replacing the cover please note that your cellphone may contain substances that could create an allergic reaction.

Always handle your cellphone with care and keep it in a clean and dust-free place.

13

Cellphone warranty.....

Your cellphone is warranted against any defect which may occur in conditions of normal use during the warranty period of twelve (12) months⁽¹⁾ from the date of purchase as shown on your original invoice. Batteries⁽²⁾ and accessories sold with your cellphone are also warranted against any defect which may occur during the first six (6) months⁽¹⁾ from the date of purchase as shown on your original invoice. In case of any defect of your cellphone which prevents you from normal use thereof, you must immediately inform your vendor and present your cellphone with a proof of purchase.

If the defect is confirmed, your cellphone or part thereof will be either replaced or repaired, as appropriate. Repaired cellphone and accessories are entitled to a one (1) month warranty for the same defect. Repair or replacement may be carried out using reconditioned components offering equivalent functionality.

This warranty covers the cost of parts and labor but excludes any other costs.


This warranty shall not apply to defects to your cellphone and/or accessory due to (without any limitation):

- 1) Non-compliance with the instructions for use or installation, or with technical and safety standards applicable in the geographical area where your cellphone is used,
 - 2) Connection to any equipment not supplied or not recommended by TCT Mobile Limited,
 - 3) Modification or repair performed by individuals not authorized by TCT Mobile Limited or its affiliates or your vendor,
 - 4) Inclement weather, lightning, fire, humidity, infiltration of liquids or foods, chemical products, download of files, crash, high voltage, corrosion, oxidation...
- Your cellphone will not be repaired if case labels or serial numbers (IMEI) have been removed or altered.
- There are no express warranties, whether written, oral or implied, other than this printed limited warranty or the mandatory warranty provided by your jurisdiction.
- In no event shall TCT Mobile Limited or any of its affiliates be liable for incidental or consequential damages of any nature whatsoever, including but not limited commercial loss, to the full extent those damages can be disclaimed by law. Some countries/states do not allow the exclusion or limitation of incidental or consequential damages, or limitation of the duration of implied warranties, so the preceding limitations or exclusions may not apply to you.

14


Troubleshooting.....

Before contacting the aftersales department, you are advised to follow the instructions below:


- You are advised to switch off the cellphone from time to time to optimize its performance.
- You are advised to fully charge () the battery for optimal operation.
- Avoid storing large amounts of data in your cellphone as this may affect the performance of your cellphone.

and carry out the following checks:

My cellphone will not switch on

- Press  until the screen comes on
- Check the battery charge level
- Check the battery contacts, remove and reinstall your battery, then turn your cellphone back on

My cellphone has not responded for several minutes

- Press the  key
- Remove the battery and re-insert it, then switch the cellphone back on

My screen is difficult to read

- Clean your screen
- Use your cellphone in accordance with the recommended conditions of use

My cellphone turns off by itself

- Check that your keypad is locked when you are not using your cellphone
- Check the battery charge level

15

• PRIVACY:

Please note that you must respect the laws and regulations in force in your jurisdiction or other jurisdiction(s) where you will use your cellphone regarding taking photographs and recording sounds with your cellphone. Pursuant to such laws and regulations, it may be strictly forbidden to take photographs and/or to record the voices of other people or any of their personal attributes, and reproduce or distribute them, as this may be considered to be an invasion of privacy. It is the user's sole responsibility to ensure that prior authorization be obtained, if necessary, in order to record private or confidential conversations or take a photograph of another person; the manufacturer, the seller or vendor of your cellphone (including the operator) disclaim any liability which may result from the improper use of the cellphone.

• BATTERY AND ACCESSORIES:

Before removing the battery from your cellphone, please make sure that the cellphone is switched off.

Observe the following precautions for battery use:

- Do not attempt to open the battery (due to the risk of toxic fumes and burns).
- Do not puncture, disassemble or cause a short-circuit in a battery,
- Do not burn or dispose of a used battery in the garbage or store it at temperatures above 60°C.

Batteries must be disposed of in accordance with locally applicable environmental regulations. Only use the battery for the purpose for which it was designed. Never use damaged batteries or those not recommended by TCT Mobile Limited and/or its affiliates

This symbol on your cellphone, the battery and the accessories means that these products must be taken to collection points at the end of their life:

- Municipal waste disposal centers with specific bins for these items of equipment
- Collection bins at points of sale.

They will then be recycled, preventing substances being disposed of in the environment, so that their components can be reused.

In European Union countries: These collection points are accessible free of charge. All products with this sign must be brought to these collection points.

In non European Union jurisdictions: Items of equipment with this symbol are not to be thrown into ordinary bins if your jurisdiction or your region has suitable recycling and collection facilities; instead they are to be taken to collection points for them to be recycled.

In the United States you may learn more about CTIA's Recycling Program at www.recyclewirelessphones.com

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

• CHARGERS

Home A.C. chargers will operate within the temperature range of: 0°C to 40°C. The chargers designed for your cellphone meet with the standard for safety of information technology equipment and office equipment use. Due to different applicable electrical specifications, a charger you purchased in one jurisdiction may not work in another jurisdiction. They should be used for this purpose only.

Characteristics of power supply (depending on the country):

Travel charger: Input : 100-240 V, 50/60 Hz, 0.15 A
Output : 5 V, 350 mA

Battery: Lithium 650 mAh

• RADIO WAVES:

THIS CELLPHONE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES.

Your cellphone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio-frequency (RF) energy. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. These guidelines include a substantial safety margin designed to ensure the safety of all persons, regardless of age and health.

The exposure standard for cellphones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by public authorities such as the Federal Communications Commission of the US Government (FCC), or by Industry Canada, is 1.6 W/kg averaged over 1 gram of body tissue. Tests for SAR are conducted using standard operating positions with the cellphone transmitting at its highest certified power level in all tested frequency bands.

Although the SAR is determined at the highest certified power level, the actual SAR level of the cellphone while operating can be well below the maximum value. This is because the cellphone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output of the cellphone. Before a cellphone model is available for sale to the public, compliance with national regulations and standards must be shown.

The highest SAR value for this model cellphone when tested is:

OT-706A: 1.19 W/Kg for use at the ear and 0.966 W/Kg for use close to the body.

While there may be differences between the SAR levels of various cellphones and at various positions, they all meet the government requirement for RF exposure. For body-worn operation, the cellphone meets FCC RF exposure guidelines provided that it is used with a non-metallic accessory with the handset at least 1.5 cm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. The World Health Organization (WHO) considers that present scientific information does not indicate the need for any special precautions for use of cellphones. If individuals are concerned, they might choose to limit their own or their children's RF exposure by limiting the length of calls, or using "hands-free" devices to keep cellphones away from the head and body. (fact sheet n°193). Additional WHO information about electromagnetic fields and public health are available on the following website: <http://www.who.int/peh-emf>.

16

My cellphone has a low level of autonomy

- Make sure you respected the complete charge timing (minimum 3 hours)
- Check a partial charge, the battery level indicator may not be exact. Wait for at least 20 minutes after removing the charger to obtain an exact indication

My cellphone will not charge properly

- Make sure that your battery is not completely discharged; the battery charge indicator can take several minutes and may be accompanied by a quiet whistling sound
- Make sure charging is carried out under normal conditions (0°C +40°C)
- Make sure your battery is inserted. It must be inserted **before** plugging in the charger
- Make sure you are using an Alcatel battery and charger in the box
- When abroad, check that the electrical current is compatible


My cellphone will not connect to a network

- Try connecting in another location
- Verify the network coverage with your operator
- Check with your operator that your SIM card is valid
- Try selecting the available network(s) manually
- Try connecting at a later time if the network is overloaded

SIM card error

- Make sure the SIM card has been correctly inserted
- Verify with your operator that your SIM card is 3V or 1.8V compatible; the old 5V SIM cards cannot be used
- Make sure the chip on your SIM card is not damaged or scratched

Unable to make outgoing calls

- Make sure you have dialled a valid number and press the  key
- For international calls, check the country and area codes
- Make sure your cellphone is connected to a network, and that the network is not overloaded or unavailable
- Check your subscription status with your operator (credit, SIM card valid, etc.)
- Make sure you have not barred outgoing calls

17



Unable to receive incoming calls

- Make sure your cellphone is switched on and connected to a network (check for overloaded or unavailable network)
- Check your subscription status with your operator (credit, SIM card valid, etc.)
- Make sure you have not forwarded incoming calls
- Make sure that you have not barred certain calls

The caller's name does not appear when a call is received

- Check that you have subscribed to this service with your operator
- Your caller has concealed his/her number

The sound quality of the calls is not optimal

- You can adjust the volume during a call by means of the  key
- Check the network strength 

I am unable to use the features described in the manual

- Check with your operator to make sure that your subscription includes this service
- Make sure this feature does not require an Alcatel accessory

When I select a number from my directory, the number is not dialled

- Make sure that you have correctly recorded the number in your file
- Make sure that you have selected the country prefix when calling a foreign country

I am unable to create a file in my directory

- Make sure that your SIM card directory is not full; delete some files or save the files in the product directory (i.e. your professional or personal directories)
- Check the "Call barring" option for "Incoming calls" to be sure that the "All calls except SIM directory" feature is not activated

My callers are unable to leave messages on my voicemail

- Contact your network operator to check service availability

Note: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For the receiver devices associated with the operation of a licensed radio service (e.g. FM broadcast), they bear the following statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

For other devices, they bear the following statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Your cellphone is equipped with a built-in antenna. For optimal operation, you should avoid touching it or degrading it.

As mobile devices offer a range of functions, they can be used in positions other than against your ear. In such circumstances the device will be compliant with the guidelines when used with headset or USB data cable. If you are using another accessory ensure that whatever product is used is free of any metal and that it positions the cellphone at least 2cm away from the body.

• LICENCES

Obigo® is a registered trademark of Obigo AB.

microSD Logo is a trademark.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by TCT Mobile Limited and its affiliates is under license. Other trademarks and trade names are those of their respective owners.

OT-706A Bluetooth QD ID B015709

eZiText™ and Zi™ are trademarks of Zi Corporation and/or its Affiliates.

18

General information

- **Website:** www.alcatel-mobilephones.com

On our Internet site, you will find our FAQ (Frequently Asked Questions) section. You can also contact us by e-mail to ask any questions you may have.

An electronic version of this user guide is available in English and other languages according to availability on our server: www.alcatel-mobilephones.com

Your cellphone is a transceiver that operates on GSM networks with 850 and 1900 MHz bands.

Protection against theft ⁽¹⁾

Your cellphone is identified by an IMEI (cellphone serial number) shown on the packaging label and in the product's memory. We recommend that you note the number the first time you use your cellphone by entering *#06# and keep it in a safe place. It may be requested by the police or your operator if your cellphone is stolen. This number allows your cellphone to be blocked preventing a third person from using it, even with a different SIM card.

Disclaimer

There may be certain differences between the user manual description and the cellphone's operation, depending on the software release of your cellphone or specific operator services.

19

I cannot access my voicemail

- Make sure your operator's voicemail number is correctly entered in "My numbers"
- Try later if the network is busy

The icon is displayed on my standby screen

- You have saved too many short messages on your SIM card; delete some of them or archive them in the product memory




"No service" is displayed

- You are outside of the network coverage area

I have already entered 3 incorrect PIN codes

- Contact your network operator to obtain the PUK code (Personal Unblocking Key)

My cellphone is frozen, can't power on

- Make sure your battery is not completely used up or damaged
- Remove your battery, remove your SIM card then reinstall them to power on again, if still does not work
- Hold down  key +  key at same time, then press up  key to reset it ⁽¹⁾

ALL User cellphone data: contacts, photos, messages, files and downloaded applications will be lost permanently. Please do not remove battery during resetting.

20

⁽¹⁾ The warranty period may vary depending on your country.

⁽²⁾ The life of a rechargeable cellphone battery in terms of conversation time standby time, and total service life, will depend on the conditions of use and network configuration. Batteries being considered expendable supplies, the specifications state that you should obtain optimal performance for your cellphone during the first six months after purchase and for approximately 200 more recharges.

19

20

21

22

23

24