

BLUETOOTH® SPEAKER WITH NFC

URBAN



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks by The Source (Bell) Electronics Inc. is under license. Other trademarks and trade names are those of their respective owners.



WHAT'S INCLUDED:


- Bluetooth® speaker
- USB to micro USB charging cable
- 3.5mm to 3.5mm audio cable
- User Manual

FEATURES:

1. Bluetooth® BK 2.1
2. NFC connectivity
3. Handsfree telephone calling
4. Stereo music
5. Operating distance up to 10m (33-ft.)
6. Operation time up to 8 hours (medium volume level)
7. 3.5mm line-in
8. IPX 7 water-resistant feature
9. Convenient handle for carry at side
10. Internal Power Bank for charging mobile phones or other electronic devices

COMPONENT IDENTIFICATION

1. Power ON/OFF
2. Play/Pause/Handsfree
3. Volume –
4. Volume +
5. Microphone
6. Micro USB charging jack
7. Battery indicator LEDs
8. Aux-in jack
9. USB charging jack
10. NFC connection location

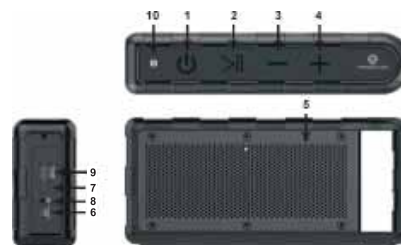

PRODUCT OVERVIEW

You can use this item with iPad®, iPhone®, iPod® and many types of smartphones to stream music and enjoy handsfree calling. In order to get the best results when using this device, please read this manual first before using. This unit has IPX 7 rating: Protected against water immersion for 30 minutes at a depth of one meter.

PAIRING

1. Make sure your Bluetooth® audio source is held within 10 metres of your speaker.
2. Press and hold the "Power ON/OFF" button for about one second to turn the speaker ON. The Bluetooth® blue LED indicator will blink slowly and the voice prompt will say, "Power ON" and "Pairing", then the Bluetooth® blue LED indicator will blink quickly.
3. Enable your Bluetooth® device and make sure it is in searching mode.
4. Select "HR Urban-L" from the list of discovered Bluetooth® devices on your mobile phone. The voice prompt will say, "Your device is connected". Once paired the blue LED will turn solid.
5. You can now listen to your music or make/receive telephone calls on the speaker.
6. To increase or decrease the volume while playing music, press the "Volume-" or "Volume+" buttons.
7. To turn the speaker OFF hold the "Power ON/OFF" button for about one second. The voice prompt will say, "Power off".

Tip: The next time you switch the speaker ON it will connect automatically; as long as your Bluetooth® function is switched ON on your audio device. The voice prompt will say, "Power on", while the blue LED indicator will blink slowly, then the voice prompt will say "Your device is connected" and the blue LED indicator will turn solid blue.

When you disconnect the speaker while paired, the blue LED light will start to blink quickly and the voice prompt will say, "Your device is disconnected." The speaker has entered into pairing mode. If there is no device paired within 5 minutes, the speaker will turn OFF.

PAIRING BY ONE-TOUCH CONNECTION WITH NFC

1. Enable the NFC function on your device.
2. Use your NFC enabled device and touch the NFC logo on the speaker.
3. Confirm the NFC connection on your device. This will vary depending on your device, check your device manual for compatibility.
4. After paired, the speaker voice prompt will say, "Your device is connected".

CHARGING

This speaker has a built-in rechargeable Li-Ion battery. **Fully charge the speaker before first use.** Charge the battery as follows:

1. Connect one end of the included USB charging cable to the charging port on your speaker. Then plug the other end of the USB charging cable into a suitable port on your computer or 5V/2A power adapter (sold separately).
2. The three side white LED lights will turn ON to indicate that the unit is charging. When the charge is complete the white LED lights will be solid.
3. It will take about 8 hours to fully charge the speaker by PC USB port.

Tip: When the battery is low the voice prompt will say "Battery Low" every 5 minutes to warn that the speaker needs to be recharged. After approximately 15 minutes, if the speaker does not get recharged, the speaker will turn off and the voice prompt will say, "Power off."

CHARGING OUT/INTERNAL POWER BANK

1. The unit has a charging out feature to support your portable devices with a back-up power supply.
 2. Connect your portable device by its charging cable to the USB jack.
 3. Power bank function works only when the speaker is powered ON.
- *This product is designed for charging portable devices with a charging current of 1A or lower. Charging tablets or other high power portable devices is not recommended and may damage the speaker.

HANDSFREE SPEAKERPHONE

When a smartphone is connected to your speaker follow the steps below to take calls handsfree.

1. If there is an incoming call while streaming music, the speaker will beep to notify the call.
2. Short press the "Play/Pause" button to pick up the call; short press the "Play/Pause" button again to hang up the call.
3. Press and hold the "Play/Pause" button for one second to reject the call.

LINE-IN

1. Use the supplied 3.5mm cable to connect the speaker directly to your device.

Tip: Once LINE-IN is connected, note that Bluetooth® function takes priority. In order to play music from LINE-IN, ensure Bluetooth® function is disabled. Both modes will play until one has been disabled.

TO PLAY MUSIC FROM YOUR PC OR LAPTOP

To pair your PC or laptop to the speaker, right-click on the speaker icon on the lower right hand corner of the task bar, select "Playback devices". Under the "Playback" tab, the paired device will show within the list. To connect to it, click on the speaker to set it as default.

UNDERSTANDING THE LED STATUS LIGHTS

- **When charging your speaker**
 - o 3 white LEDs moving from solid to blinking=charging
 - o Bottom white LED blinking=battery power < 40%
 - o Bottom white LED solid, second white LED blinking=battery power 40% > 70%
 - o Bottom 2 white LEDs solid, third white LED blinking=battery power 70% > 100%
 - o 3 solid white LEDs=charging complete
- **When not charging your speaker**
 - o With power turned on, press any button, the 3 white LEDs will show the battery power
 - o Bottom white LED solid=battery power < 40%
 - o Bottom 2 white LED solid=battery power 40% > 70%
 - o 3 white LEDs solid=battery power 70% > 100%
- **When pairing your speaker to a Bluetooth® device**
 - o Slow blinking white LED=Bluetooth® searching device, ready to pair
 - o Quick blinking white LED=Bluetooth® is waiting to pair
 - o Solid white LED=Bluetooth® connected

TECHNICAL SPECIFICATIONS

Carrier Frequency:	Bluetooth® 2.1
Battery Capacity :	7.4V, 2600mAh
Frequency Response:	65Hz-20KHz
Operation Distance:	Up to 10m (33-ft.)
Output Power:	7W x 2 (RMS)
Impedance:	8 Ohms
Driver unit:	2" x 2

NOTE: This speaker is in compliance with the specified Bluetooth® version. It does not guarantee compatibility with all the functions on every Bluetooth®-enabled device. Please check your mobile phone's user manual for compatibility and functionality.

TROUBLESHOOTING

No Sound:

- Ensure the speaker is charged and has enough battery power for operation
- Ensure the speaker is switched ON
- Ensure Bluetooth® device is ON
- The volume of the speaker is too low, adjust the volume to an appropriate level

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

THE FCC WANTS YOU TO KNOW

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Industry Canada Notice

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

IC: 255A-8044149 FCC ID: ZHW-8044149

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

THE SOURCE - WARRANTY



The Source warrants that this product will be free from defects in materials and workmanship for a period of 12 months from the date of purchase. Within this period, simply take the product and your proof of purchase to any The Source store or participating dealer and the product will be replaced (where available) without charge. Any product which has been subject to misuse or accidental damage is excluded from this warranty.

This warranty is only applicable to a product purchased through The Source company-owned stores or participating dealers in Canada where the warranty is included with the product. While this warranty does not confer any legal rights other than those set out above, you may have additional statutory rights which will vary under the laws of the various countries, states, provinces and other governmental entities in which The Source operates. This warranty is subject to all statutory rights you may have in Canada.

Imported by:
The Source,
Barrie, Ontario, Canada, L4M 4W5

Manufactured in China

www.headrushaudio.com



© 2016 The Source
All rights reserved.