# Instructions For Optional/Additional Handset(s)

This phone is EXPANDABLE up to a total of 4 handsets (by additional purchase of the optional Model 28001 handset with charge cradle).


IMPORTANT: If you have purchased an extra handset apart from your original purchased unit you may find a detailed description of its functions in the User's Guide provided with your original purchased unit.

If you have purchased an extra handset that is not of the same type as your original handset you may still use the original User's Guide to help explain the new handsets basic functions and options.

£

#### **Parts Checklist**

Make sure your package includes the items shown here.

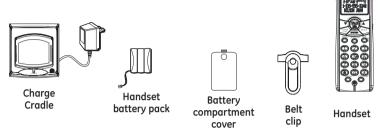

### **Installing the Handset Battery**

NOTE: You must connect the handset battery before use.



CAUTION: To reduce the risk of fire or personal injury, use only the ATLINKS USA, Inc. Nickel-metal Hydride battery model 5-2660, which is compatible with this unit.


- Locate battery and battery door which are packaged together inside a plastic bag and are separate from the handset.
- 2. Locate the battery compartment on the back of the handset.
- 3. Plug the battery pack cord into the jack inside the compartment.

NOTE: To ensure proper battery installation, the connector is keyed and can be inserted only one way.

- Insert the battery pack.
- 5. Close the battery compartment by pushing the door up until it snaps into place.

## **Extra Charging Cradle**

1. Plug the AC power converter of the extra charging cradle into the electrical outlet.



- Place the handset in the extra charging cradle. The charge indicator turns on, verifying the battery is charging.
- 3. Allow the phone to charge for 16 hours.

## Registration

YOU MUST REGISTER THE HANDSET TO THE MAIN BASE BEFORE USE!

After the optional handset has charged for 16 hours on the extra charger, **HANDSET NEEDS REGISTRATION** shows in the display.

- Press the MUTE/PROG button. HOLD BASE PAGE WAIT FOR BEEP shows in the display. (Your handset should be held near the base during registration process.)
- Press and hold the page button on the base unit until you hear a tone at the handset. HANDSET
  X REGISTERED shows in the handset display, where X is the handset number. You may now
  rename your handset. (Refer to Step 3 & 4 of Handset Name Section)