


# SMART PROJECTOR

## QUICK START GUIDE



Thank you for purchasing our DLP mini projector. Please read this manual carefully and keep it in a safe place for future reference.


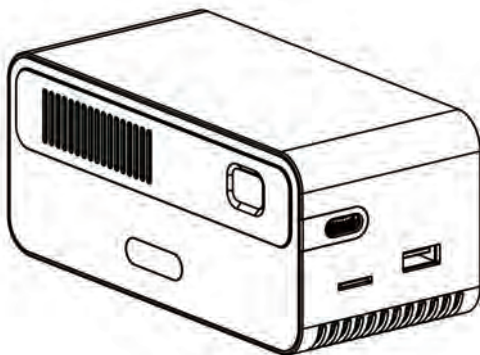



## BRIEF INTRODUCTION

### 1.1 Package Contents


Including mini projector, Power adapter, HDMI cable and User manual.

### 1.2 Appearance

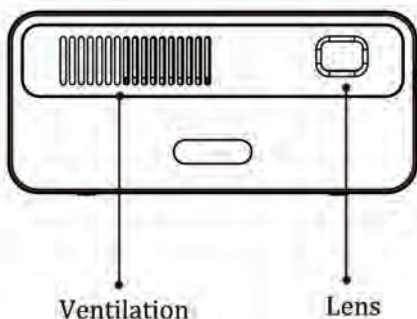




Speaker

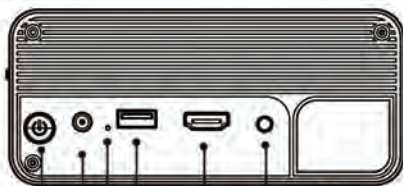


Power  
DC IN  
Reset  
USB  
HDMI IN  
Audio out

## 1.3 Remote Control

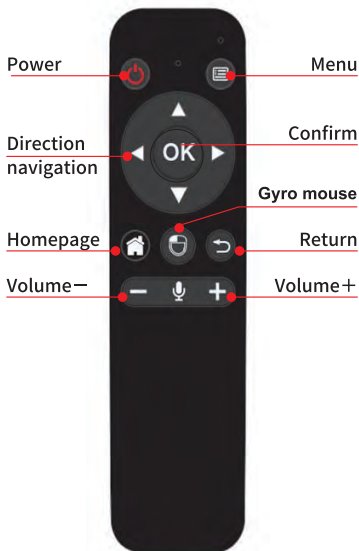

## Bluetooth Remote Pairing

1. Enter "Bluetooth".
2. Hold the "OK" and "VOLUME-" key 5 seconds to turn on the Bluetooth function of remote. The red indicator of remote will flash quickly when bluetooth function is opened.
3. Turn on the Bluetooth, and scan, select "**SONG-1**" and connect.



## Turn On and Turn Off

1. After "SONG-1" connected successfully, click"  "in the remote to start Air Mouse function.
2. Click"  " in the remote again, the Air Mouse function will be closed, and the Arrow mark will disappear after 15 seconds or press "Return" key in the remote.

# BASIC OPERATION OF THE PROJECTOR

## 2.1 Power on / Power off

### 1. Power on


In battery mode, holding power button 5 seconds

In charging mode, holding power button 5 seconds(P1), or holding power key of remote 5s seconds(P2).


### 2. Power off

In battery mode, holding power button 5 seconds

In charging mode, holding power button 5 seconds(P1), or holding power key of remote 5s seconds(P2).

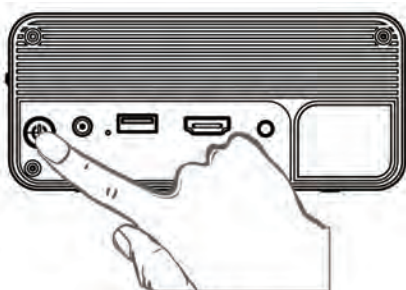

P1



P2


## 2.2 Focus/Brightness/Keystone/Projection mode

### 1. Adjust focus

Slide the focus wheel to adjust the screen's definition.

### 2. Adjust Brightness, Keystone Correction and Projection mode


Enter "Setting" on the home screen, and select.

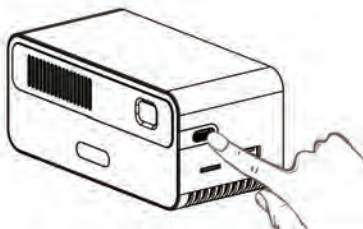

(P3)



## 2.3 Interface Display

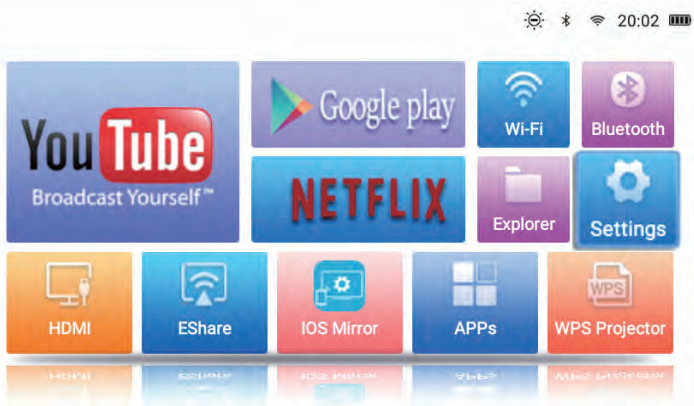

## 2.4 Wi-Fi

Enter “WiFi”, and turn on , searching and connecting.

## 2.5 Google Play

User can download apps from Google Play.

## 2.6 Explorer

Allows you to view files of both internal/external storages.

## 2.7 Settings

Where various adjustments can be done to fully enjoy the features of the projector.

## 2.8 HDMI

Projecting the display screen from computers, DVs, DSC or other HDMI source devices like PS4, Xbox 360 game consoles via HDMI cable connection.

## 2.9 WPS Office

WPS app is used for playing office files like PPT,PDF...stored in USB disk, Micro SD card and phone.



## Airplay


Enter “iMirror”app. on the homescreen.



## iPhone(iPad)

1. In Wi-Fi environment: Go to iPhone's “**Setting**” ---- “Wi-Fi”, then connect your phone and projector to ***the same network***.
2. Back to the phone homepage, slide upward of iOS equipment to display the hidden menu and click “Airplay”.
3. Choose ID “EShare-XXXX”, then open “Mirroring” and done.






Enter phone settings



Connect same Wifi as projector



Slide upward from the bottom of iOS equipment to display the hidden menu




Choose Airplay



Choose Projector, and switch mirroring to green, mirroring start.

## Mac

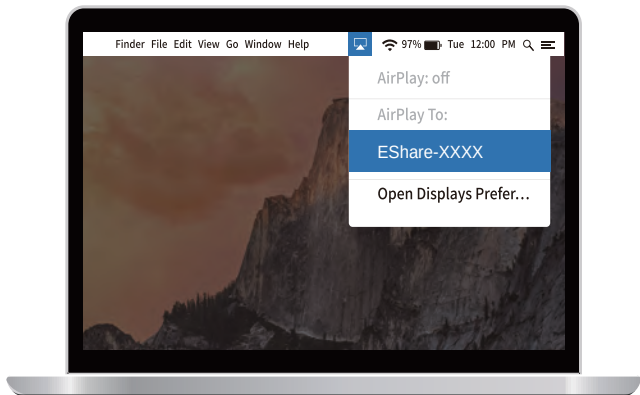

1. Projector Networked: Click “”, connect it to projector through the same network.

2. Click “”, choose ID “EShare-XXXX” and be done.




# EShare

Compatible iOS,Android and Windows device.

- 1.Allows user to share/mirror smartphone/Computer to the projector with the use of the app.
- 2.Allows user to control the projector with the use of EShare app.

Enter “APPs” on the homescreen and open EShare Server app.

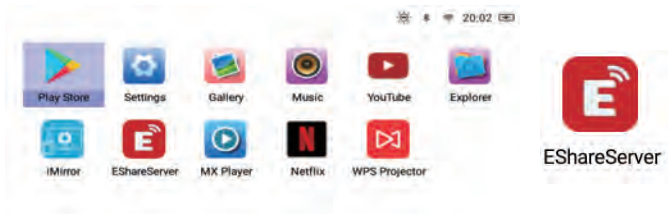

EShare Download link and QR code:

Link: <http://d.eshare.tech/#once>



# CHARGING

The projector can be powered by AC adapter or internal rechargeable battery. To have maximum battery life, it is highly suggested to charge the battery for at least 2 hours the first time.

- 1.Ensure the projector is turned off and connect it to the power charger.
- 2.Insert the plug of the power charger into the wall outlet to charge the battery.

## ✕ Indicator Lights Status

|            | Turn off | Turn on  |
|------------|----------|----------|
| Red Light  | Charging | Charging |
| Blue Light | ✕        | Working  |

# FAQ

- Q) The projector is not powering up.
- A) Check if the charger is properly connected to the projector and the mains and make sure that the projector have enough charge to operate.

- Q) No Display from HDMI.
- A) Re-check the connections of the projector from the source. Loose connection or faulty cable(s) can cause this issue. Adjusting the source's resolution may also sort it out.

# SPECIFICATIONS

|                        |                                                |
|------------------------|------------------------------------------------|
| Product Name           | Mini Projector                                 |
| Display Technology     | 0.2" DMD DLP                                   |
| Native Resolution      | FWVGA(854*480)                                 |
| Compatible Resolution  | Up to 1080P                                    |
| Light source           | RGB 3LED OSRAM                                 |
| LED working life       | Above 30000 hrs                                |
| Focus                  | Manual Zoom                                    |
| Offset                 | Support                                        |
| Operation System       | Android                                        |
| CPU                    | Cortex A7 Quad-Core, 1.2GHz                    |
| Memory                 | RAM:DDR3 1G + ROM Flash memory 16 GB(EMMC 5.1) |
| Wi-Fi                  | 802.11 a/b/g/n 2.4GHz dual band                |
| Wireless mirror        | IOS, Android, Windows                          |
| Bluetooth              | 5.0                                            |
| Keystone Correction    | Support                                        |
| Projection Methods     | Front/Rear/Ceiling                             |
| Operation Methods      | Remote, Mouse, Physical Buttons                |
| Application            | Compatible with thousands of Apps.             |
| Projection Screen Size | 7"~200"                                        |
| Interface              | HDMI X1 HDMI input (1.4 line)                  |
|                        | USB X 2 Multimedia Play                        |
|                        | Micro SD X1 Multimedia Play                    |
|                        | DC X1                                          |
|                        | 3.5mm stereo audio output *1                   |
| Physical Buttons       | Power                                          |
| Built-in Speaker       | 8 ohm 5W( X1)                                  |
| Built-in Battery       | Li-Polymer,7000mAH                             |
| Working time           | 2hrs(Approx.)                                  |
| Projector Size (mm)    | 136(D) x65(W) x 60(H)                          |
| Net Weight             | 510g                                           |
| Power supply           | DC 12V/2A                                      |

Note : The specifications are subject to change without notice.

#### FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.