


DHS100 Cordless Headset User's Guide

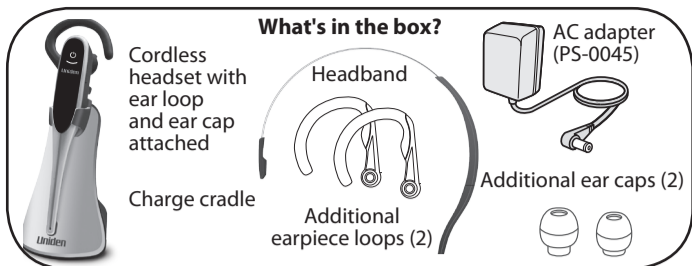

- If any items are missing or damaged, contact our Customer Care Line immediately. Never use damaged products!
- Need Help? Get answers 24/7 at our website: www.uniden.com.

If You...	Contact Uniden's...	Phone Number
have a question or problem	Customer Care Line*	817-858-2929 or 800-297-1023
need a part or accessory	Parts Department*	800-554-3988
need special assistance due to a disability	Accessibility Help Line	800-874-9314 (voice or TTY)

* During regular business hours, Central Standard Time. Visit our website for detailed business hours.

Important Safety Instructions!

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:


- This unit is **NOT waterproof**. DO NOT expose this unit to rain or moisture.
- Do not use this product near water, for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- Do not use the telephone to report a gas leak in the vicinity of the leak.

SAVE THESE INSTRUCTIONS!

PREPARING YOUR HEADSET


Attach Earpiece Loop or Headband

- Choose the appropriate size Earpiece Loop.
- Push the selected Earpiece Loop or Headband eyelet onto headset mounting peg.



Charge the Battery

1. Connect the AC adapter to the charge cradle jack and to a wall outlet.
2. Place the headset in the charging cradle with the status LED facing forward. If the LED doesn't light up, reseal the headset or connect the charger to a different outlet.



3. When the headset is fully charged, the status LED will show blue.
 - ⚡ **Charge the headset completely (about 3 hours) before using it.**
 - ⚡ **Do not charge the headset when the ambient temperature is below 0° C (32°F) or above 40° C (104°F).**

REGISTERING TO A BASE

- ⚡ **The accessory headset won't work until you register it to a compatible Uniden cordless phone!**

Compatible Uniden Cordless Phones

Find compatible models at our website: www.uniden.com.

Register the Headset

1. On the phone base, press and hold **FIND HANDSET** for 5 seconds.
 - ⚡ **On some models (such as the D3588) press MENU, select Register handset from the display menu selection, and then press SELECT.**
2. On the headset, press and hold both **VOLUME -** and **+** for 5 seconds. The status LED alternately blinks slow to fast blue and red while registering. When registered, a confirmation tone sounds at the phone base and the headset LED flashes blue once every 10 seconds.

Test the connection

Pick up the headset and press **ON/OFF/TALK**. Listen for a dial tone. (Press **ON/OFF/TALK** to hang up.)

If...	Try...
<ul style="list-style-type: none"> • there is no dial tone • the error tone sounds 	charging the headset until fully charged and then retry connection.

OPERATION

To power on...	To power off...
<ul style="list-style-type: none"> • press and hold ON/OFF/TALK for 3 seconds. 	<ul style="list-style-type: none"> • press and hold ON/OFF/TALK for 3 seconds.
To answer a call...	To adjust call or ringer volume...
<ul style="list-style-type: none"> • press ON/OFF/TALK and speak clearly • press ON/OFF/TALK again to end call 	call (in use) or ringer (standby): <ul style="list-style-type: none"> • press + to increase or - to decrease
To mute the microphone...	To answer call waiting call...
<ul style="list-style-type: none"> • press MUTE/FLASH to mute • press MUTE/FLASH again to unmute 	<ul style="list-style-type: none"> • press and hold MUTE/FLASH • press and hold MUTE/FLASH to return

IMPORTANT INFORMATION

AC Adapter and Battery Specifications

AC adapter		
Part number	Input voltage	Output voltage
PS-0045	120VAC, 60 Hz	5.4VDC @ 400mA

- Use only the supplied AC adapter.
- Do not place the unit in direct sunlight or subject it to high temperatures.

Battery information (battery is not user-replaceable)			
Type	Capacity	Talk time	Standby time
Lithium-ion	230mAh, 3.7VDC	about 6 hours	about 3 days

- Please contact Uniden Customer Service if the battery fails.
- When the battery gets low, the headset sounds an alert tone and the status indicator shows red once every 10 seconds to indicate the unit needs charging.

GENERAL INFORMATION

- You cannot use the headset while it is charging.
- Actual range varies depending environmental conditions and battery power level.

CLEANING THE HEADSET

If necessary, remove the Ear Cap and Earpiece loop. Dampen a lint-free cloth with water or a cleaner specially designed for electronics, and gently wipe the headset clean.

Do not expose this product to liquid (water, alcohol, etc.) or submerge in liquid for any reason.

Compliance Information

Any changes or modifications to this product not expressly approved by the manufacturer or other party responsible for compliance could void your authority to operate this product.

FCC Part 15 Information

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this phone.

FCC PART 15.105(b): Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Information

This product complies with FCC radiation exposure limits under the following conditions:

- The base must be placed to allow a minimum of 20 cm (8 inches) between the antenna and all persons during normal operation.
- The base must not be collocated or operated in conjunction with any other antenna or transmitter.
- The headset is designed for body-worn operation and meets FCC RF exposure guidelines when used with any belt clip, carrying case, or other accessory supplied with this product. (All necessary accessories are included in the package; any additional or optional accessories are not required for compliance with the guidelines.) Third party accessories (unless approved by the manufacturer) should be avoided as these might not comply with FCC RF exposure guidelines.

Industry Canada (I.C.) Notice

Terminal equipment

NOTICE: This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation *IC* before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

NOTICE: The Ringer Equivalence Number (REN) for this terminal equipment is marked on the equipment itself. The REN assigned to each terminal equipment provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed 5.

Radio equipment

The term *IC* before the radio certification number only signifies that Industry Canada technical specifications were met. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. "Privacy of communications may not be ensured when using this telephone".

One-year Limited Warranty

Evidence of original purchase is required for warranty service.

WARRANTOR: UNIDEN AMERICA CORPORATION ("Uniden")

ELEMENTS OF WARRANTY: Uniden warrants, for one year, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 12 months after the date of original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the owner's manual for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will either, at its option, repair or replace the defective unit and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. Warrantor, at its option, may replace the unit with a new or refurbished unit. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America and Canada.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the owner's manual you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). Disconnect the battery from the Product and separately secure the battery in its own separate packaging within the shipping carton. The Product should include all parts and accessories originally packaged with the Product. Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, to warrantor at:

Uniden America Service
4700 Amon Carter Blvd.
Fort Worth, TX 76155

- Uniden® is a registered trademark of Uniden America Corporation.
- Call waiting, CID, CIDCW, and Voice Mail are telephone line services. Your phone supports these services, but you have to arrange for them through your telephone provider. Contact your provider for details.
- The pictures in this manual are for example only. Your phone may not look exactly like the pictures.

As an Energy Star® Partner, Uniden has determined that this product meets the Energy Star® guidelines for energy efficiency. Energy Star® is a U.S. registered mark.

