RM5766-2HD

5" Smart Wi-Fi 2K Pan & Tilt Monitor



For more support information

Quick start guide



Congratulations

on purchasing your new VTech product. Before using this baby monitor, please read the Important safety instructions For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com. In Canada, visit www.vtechcanada.com.

hat does HD Video Monitor do?

VTech 5" Smart Wi-Fi 2K Pan & Tilt Monitor allows you to stay close to your baby when you are on the move or away. This monitor is Wi-Fi enabled, using your home wireless network to stream live video and audio through the 2K baby unit and 5-inch color screen parent unit. It allows you to maintain a constant connection to your baby.

You can also monitor from your smartphone and mobile tablet. VTech 5" Smart Wi-Fi 2K Pan & Tilt Monitor uses **MyVTech Baby Pro** app to let you instantly see and hear what's happening with your baby from anywhere in the world. The app can

be downloaded from the App Store or the Google Play™ Store.

IMPORTANT SAFETY INSTRUCTIONS RM5766HD

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- Follow all warnings and instructions marked on the product. 3. CAUTION: Do not install the baby unit at a height above 6.5
- 4. This product is intended as an aid. It is not a substitute for responsible and proper adult supervision and should not be used as such.
- This product is not intended for use as a medical monitor Do not use this product near water. For example, do not use

it next to a bath tub. wash bowl, kitchen sink, laundry tub or

- **CAUTION**: Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use storage or transportation. Disposal of battery into fire or a ho oven, or mechanically crushing or cutting or the battery can esult in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid of gas. Battery
- subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in **The RBRC seal**. Use only the adapters included with this product. Incorrect pter polarity or voltage can seriously damage the produc

Power adapters information: Baby Unit Output: 5V DC 1000mA Parent Unit Output: 5V DC 2A VTech Telecommunications Ltd Model: VT07EUS05200

Rechargeable battery information: V 5000mAh, 18.5Wh Lithium-ion battery

The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under 10. For pluggable equipment, the socket-outlet (power adapter) shall be installed near the equipment and shall be easily

1. Unplug this product from the wall outlet before cleaning Do not use liquid or aerosol cleaners. Use a damp cloth fo

12. Do not cut off the power adapters to replace them with other 13. Do not allow anything to rest on the power cords. Do not

14. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer local power company.

install this product where the cords may be walked on or

15. The equipment is to be supplied from an identified USB port complying with the requirements of Limited Power Source. 16. Do not overload wall outlets or use an extension cord. 7. Do not place this product on an unstable table, shelf, stand or

other unstable surfaces. 18. This product should not be placed in any area where prope ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protec them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa product should never be placed near or over a radiator or heat register.

The applied nameplate is located at the bottom of the baby unit's base. 19. Never push objects of any kind into this product through

product is subsequently used.

or create a short circuit. Never spill liquid of any kind on the 20. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risk Incorrect reassembling can cause electric shock when the

ou should test the sound reception every time you turn on he units or move one of the components 2. Periodically examine all components

3. There is a very low risk of privacy loss when using certain electronic dévices, such as baby monitors, cordless telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use it for some time.

Children should be supervised to ensure that they do not play with the product. . The small parts of this monitor can be swallowed by babies or

small children. Keep these parts out of reach of children he product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

nishandling of the battery.

o not remove this tag.

Use and store the product at a temperature between 32°F and Burn hazard, fire hazard, explosion hazard associated with

Do not expose the product to extreme cold, heat or direct nlight. Do not put the product close to a heating source. Warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away). he reach of children (more than 3 ft (0.9m) away).

Never place the camera unit(s) inside the baby's crib or playpen. Never cover the camera unit(s) or parent unit with invithing such as a towel or a blanket. Other electronic products may cause interference with you camera unit. Try installing your camera unit as far away from these electronic devices as possible: wireless routers, radios cellular telephones, intercoms, room monitors, televisions,

personal computers, kitchen appliances and cordless

Precautions for users of implanted cardiac pacemakers Cardiac pacemakers (applies only to digital cordless devices

Wireless Technology Research, LLC (WTR), an independent cardiac pacemakers. Supported by the U.S. Food and Drug stration, WTR recommends to physicians that:

Should keep wireless devices at least six inches from the

Should NOT place wireless devices directly over the WTR's evaluation did not identify any risk to bystanders with Electromagnetic fields (EMF)

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.


Mobile access

Connecting Wi-Fi to

enhance local access



Your baby monitor package contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary.



1 set for RM5766HD 2 sets for RM5766-2HD

For mobile access:

MyVTech Baby Pro mobile app

	Network	Wi-Fi
	Wi-Fi router	2.4GHz 802.11 b/g/n
_	Internet connection	1.5 Mbps @ 720p or 2.5 Mbps @1080p upload bandwidth per baby unit

DOWNLOAD APP FOR MOBILE ACCESS

Download the free **MyVTech Baby Pro** mobile app and install it to a mobile device, then use your mobile device and the mobile app to monitor your areas remotely.

1. Press **MENU** when the parent unit is idle.

2. Go to Connect Mobile Phone

3. Scan the QR code in the parent unit to download the app into your mobile device. 4. Follow the instructions in the mobile app to set up and pair your baby

unit to the mobile app. Alternatively, you can download the mobile app from the App Store or

Google Play store. Install MyVTech Baby Pro mobile app

1. Browse the App Store 🙆 or the Google Play store 🕟.

2. Search for the mobile app with the keyword "myvtech baby pro".

3. Download and install the MyVTech Baby Pro mobile app to your mobile device.

Scan the QR codes on the right to get the app.

 Make sure your mobile device meets the minimum requirement for the mobile app.

Minimum requirement

The mobile app is compatible with: Android[™] 6.0 or later; and

unit to set up and pair your baby unit.

iOS 11.0 or later.

After installing the mobile app, follow the instructions in the mobile app and parent

In your mobile device:


1. Tap to run the mobile app in your mobile device, and then create a user account. 2. We recommend that you use common webmail services, such as Google Gmail for

registration of your user account. Check your email (and Spam folder), and activate your new camera account via the email link, then sign in to your account.

3. Follow the instructions in the mobile app to pair the camera. Tap =, then Add Camera in the mobile app to get started.

OVERVIEW

Baby unit overview



Camera lens -Ò- Night Light Control Key • Go to Night Light section to learn more. LED indicator Red is steadily on when the baby unit is

> Red flashing slowly during video streaming in direct mode.

 Green flashes slowly during video streaming in Wi-Fi router mode.

connecting to the parent unit in direct mode.

Green is steadily on when the baby unit and

parent unit are connecting in Wi-Fi router

Allow you to see clearly in a dark environment.

• Power on/off switch.

Speake Temperature sensor

ON

Wall mount slots

Infrared LEDs


PAIR · Press and hold for three seconds to enter

· Reset the baby unit to factory default. 1. Press and hold PAIR key until you hear a

2. Release the **PAIR** key, and then press the PAIR key again five times until you hear

another beep sound. 3. The baby unit will sound another beep when the reset completes. Then, the baby unit will reboot.

Parent unit overview



LINK LED light

• On when the parent unit is linked to the Flashes when the link to the baby unit

III LED light

 On when the parent unit is connected to AC power, and the battery is charging. • Flashes when the parent unit battery is

low and needs to be charged. 3 3- level sound indicator light

Green: low sound level is detected by ⊕ z_{oom}

the baby unit. Green and amber: moderate sound

level is detected by the baby unit. Green, amber and red: high sound level is detected by the baby unit.

Press to enter the main menu.

item, or save a setting.

· While in a menu, press to choose an

TALK / 🗢

MENU | SELECT

• Press and hold to talk to the baby unit. • While in a sub-menu, press to exit.

13 Power jack

14 **RESET**

Force reboot the parent unit.

Options

6 < | \(\) | \(\) Arrow keys

Microphone

VOL - | VOL +

volume.

Press to zoom in/out.

Press to navigate leftward, upward,

main menu and sub-menus.

Increase or decrease parent unit

While in a sub-menu, press to view the

rightward or downward.

rightward or downward, within the

While viewing a zoomed image, press

to move the image leftward, upward,

15 Stand

All rights reserved. 09/21. RM5766-XHD_QSG_V1 2021 VTech Communications, Inc. cations are subject to change without notice.



IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. App Store is a trademark of Apple Inc., registered in the U.S. and other countries. Android TM and Google Play TM are trademarks of Google Inc.



Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 267-7377 in Canada Address: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States Company: VTech Communications, Inc. responsibility for any loss or claims by third parties that may arise through the use of this product. resulting from the use of this user's manual. Viech Communications, inc. and its suppliers assume no VTech Communications, Inc. and its suppliers assume no responsibility for any damage or loss

DISCLAIMER AND LIMITATION OF LIABILITY

Saby unit: 2412 - 2462 MHz


Power requirement	Baby unit power adapter: Output: 5V DC, 1000mA.	
egner evitoeffe lenimoM	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.	
	(IPS 1280x720 pixels)	
TCD	5" Color LCD	
Channels	π	

Parent unit battery: 3.7V 5000mAh, 18.5Wh Lithium-ion battery

TECHNICAL SPECIFICATIONS

How the system works

The parent unit and the baby unit of your video monitor connect to each others in Direct mode by default, which allows you to stream live video right out of the box. Direct mode connection lets you stream live video from parent unit only.



You may experience reduced signal strength if your parent unit and baby unit are far apart, or there are obstructing factors, such as internal walls, between them. Move the parent unit closer to the baby unit to improve the signal strength.

Wi-Fi Router mode

To stream live video with better connection, you can also set up your monitor in Router mode connection.

Router mode uses your home Wi-Fi

network to connect the video monitor. It supports streaming live video through the parent unit and MyVTech Baby Pro

Download and install the MyVTech Baby **Pro** mobile app to stream remotely. With the mobile app, your Wi-Fi router (not included) serves as a communicating channel between your baby unit and mobile device, allowing you to monitor and control your baby unit wherever you

optimised to deliver the best possible viewing result.

are. For details, see **Download app for mobile access** section in this quick start guide.

With Auto mode connection, the parent unit will automatically select the most reliable

connection mode (Direct or Wi-Fi) when connecting to the baby unit(s). Mobile app access will not be interrupted in Auto mode. ■ Notes

When both parent unit and app are viewing the camera simultaneously, the video quality will be

PROTECT YOUR PRIVACY AND ONLINE SECURITY

VTech cares about your privacy and peace of mind. That's why we've put together a list of industry-recommended best practices to help keep your wireless connection private and your devices protected when online. We recommend you carefully review and consider complying with the following tips.

Ensure your wireless connection is secure.

• Before installing a device, ensure your router's wireless signal is encrypted by selecting the "WPA2-PSK with AES" setting in your router's wireless security menu. Change default settings.

• Change your wireless router's default wireless network name (SSID) to something unique. · Change default passwords to unique, strong passwords. A strong password:

- Is at least 10 characters long. Is complex.

Does not contain dictionary words or personal information.

- Contains a mix of uppercase letters, lowercase letters, special characters and numbers. Keep your devices up to date.

• Download security patches from manufacturers as soon as they become available. This will ensure you always have the latest security updates.

• If the feature is available, enable automatic updates for future releases. Disable Universal Plug and Play (UPnP) on your router. UPnP enabled on a router can limit the effectiveness of your firewall by allowing other

For more information on wireless connections and protecting your data, please review the following resources from industry experts

network devices to open inbound ports without any intervention or approval from you.

A virus or other malware program could use this function to compromise security for the

1. Federal Communications Commission: Wireless Connections and Bluetooth Security Tips

2. U.S. Department of Homeland Security: Before You Connect a New Computer to the www.us-cert.gov/ncas/tips/ST15-003.

4. Wi-Fi Alliance: Discover Wi-Fi Security -

http://www.wi-fi.org/discover-wi-fi/security.

3. Federal Trade Commission: Using IP Cameras Safely – https://www.consumer.ftc.gov/articles/0382-using-ip-cameras-safely.

www.fcc.gov/consumers/guides/how-protect-yourself-online.

CONNECT, CHARGE AND POWER ON THE BABY MONITOR

Download on the App Store Google Play


Connect the baby monitor

■ Notes

Use only the power adapters supplied with this product.


Make sure the parent unit and the baby unit are not connected to the switch controlled electric outlets.

under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets. Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

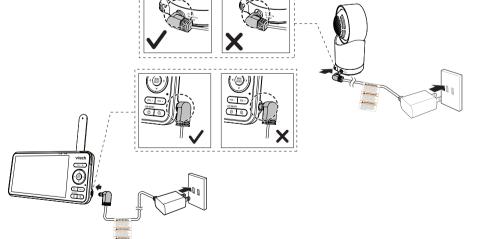


Slide the switch to **ON** to power on your baby unit.


• When powering up, the baby unit's status LED turns on. It will turn off after a while and keeps off.



Camera lens and surface may get









The status LED is set to off by default. If you want to keep the LED on, press **MENU**, then go to



warm during normal operation.





Charge the parent unit battery before use

The parent unit runs on rechargeable battery or AC power. To continuously monitor your baby, keep the parent unit connected to AC power.

· Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. When

the parent unit battery is fully charged, the battery icon becomes solid [1110]. The standby time varies depending on your actual use.

After the parent unit is fully charged, press $oldsymbol{ ext{O}}$ Power until the welcoming screen appears



The battery has very little Charge without

charge and may be used interruption (about 30

To keep the battery

charged, connect if to AC

power when not in use.

The battery icon indicates the battery status (see the following table).

The <u>screen</u> displays 🛄 and 🔲. The LED light flashes.

Raise the parent unit

The battery icon becomes solid [IIII] The battery is fully

PARENT UNIT ICONS


Options Monitoring mode (* For RM5766-2HD only)

General settings Configure Wi-Fi. View baby units in Single mode. · View baby units in Patrol mode.

· View baby units in Split screen.

• Turn on or turn off night light. Select a night light color.

Adjust night light brightness. Set a night light timer.



You can also set the timer to stop playing after 15, 30 or 60 minutes, or playing non-stop. Adjust baby unit speaker volume.

Alerts - Sound, motion and temperature Select the sound and motion

sensitivity level.

Turn on/off sound and motion detection alerts. Select maximum and minimum

> temperature for alert range. • Turn on/off temperature alert. • Turn on/off Auto Wake Up

Parent unit settings

Adjust parent unit screen

Turn on/off Low Battery Alert Tone. Turn on/off No Link Alert Tone.

• Turn on/off Dim mode. Change Language

Baby unit settings

· Turn on/off Night Vision. Turn on/off baby unit Status LED.

70°F °F Temperature is lower than 68°F. Temperature is within 68°F and 75°F.

Temperature is higher than 75°F.

10 U Power | LCD ON/OFF 11 Antenna 12 Speaker

• Change Wi-Fi Network

(*For **RM5766-2HD only**) are connected to

Baby unit 1 and 2 are being viewed in

Motion detection alert is turned on.

Selection Connection Mode Connection Status · Connect mobile phone. · Reset Settings to factory default.

Status icons Direct mode Parent unit, baby unit 1 and baby unit 2

· Software Update.

(*For RM5766-2HD only) are connected to each others directly. Wi-Fi Router mode Parent unit, baby unit 1 and baby unit 2

Baby unit 1 and 2 are being viewed in Patrol mode (*For RM5766-2HD only).

home Wi-Fi network.

Split mode (*For RM5766-2HD only). Night vision is turned on.

Sound detection alert is turned on. Melodies and soothing sounds are

Night light is turned on. Auto night light brightness is activated.

> Temperature alert is turned on. Parent unit is muted.

Battery indicator.

· Adjust baby unit speaker volume. Update baby unit security key.