

VXi Reveal™/Xplorer™ Quick-Start Guide


IMPORTANT: CHARGE HEADSET FULLY PRIOR TO FIRST USE

Package Contents

1. Headset
2. 2 Ear Hooks (1 small, 1 large)
3. 4 Contoured Ear Buds (multiple sizes)
4. USB Charging Cable
5. Auto Adapter
6. Quick-Start Guide
7. Warranty and Compliance Insert

Features and Functions

- A. Volume Up/Mute
- B. Volume Down
- C. Extendable Microphone Boom
- D. On/Off Switch
- E. Indicator Lights
- F. Multifunction Button (MFB)
- G. NFC Zone (pictured below)

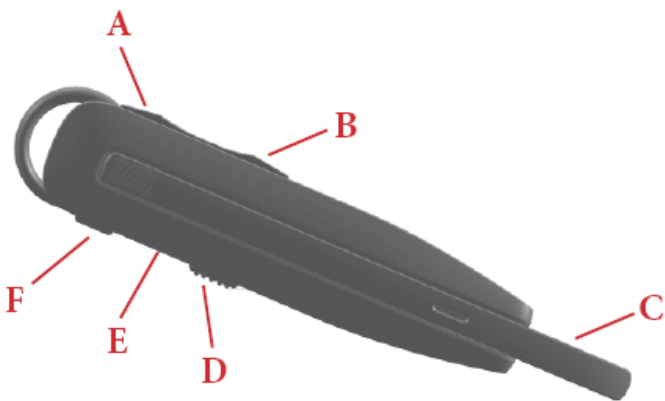

IMPORTANT SAFETY NOTE: Prolonged exposure to high volume levels can damage your hearing. To avoid injury, set the volume to the lowest comfortable level. If you experience ringing in your ears, or voices sound muffled, stop using the headset. Avoid turning up the volume to block noisy surroundings. It's possible for your ears to adapt to volume that is too high, and this could result in permanent hearing damage without any noticeable discomfort.

VXi Reveal™/Xplorer™ Quick-Start Guide

Wearing and Adjusting the Reveal

To get the best performance from our noise-canceling technology, angle the microphone boom towards the corner of your mouth. Positioning is important; small adjustments in microphone placement can improve performance.

The headset can be worn on either ear, with or without the ear hook.

Choose the ear bud that best fits your ear. To adjust the fit, rotate the ear bud so that the stabilizer loop (if applicable) presses against the back curve of your ear.

Using the Headset in High-Noise Situations

The microphone boom is extendable for greater levels of noise cancelation in noisy environments. Simply slide the boom in or out as needed.

Charging

Connect charger cord to the headset's USB charging port. The headset indicator lights will illuminate red when charging and blue when fully charged.


Turning Headset On/Off

Slide the switch to turn the headset on or off.

One-Touch Pairing (NFC)

- 1) Confirm that your cell phone is NFC-capable.
- 2) Make sure that NFC is enabled on your cell phone.
- 3) Turn the headset on.
- 4) Place the NFC zone of your cell phone against the NFC zone of the headset and hold together while your cell phone registers the headset.
- 5) Follow the prompts on your cell phone until it confirms pairing is successful.

NFC Zone on headset (back of unit, just below earpiece receiver)

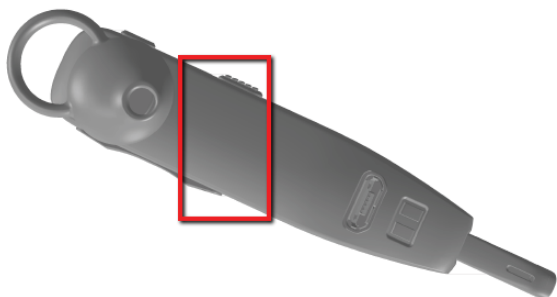

VXi Reveal™/Xplorer™ Quick-Start Guide

Note: NFC and One-Touch Pairing are dependent on your cell phone. The size and sensitivity of your phone's NFC zone and how to connect the headset may vary between devices.

Manual Pairing

Placing Headset into Pairing Mode

When you turn the headset on for the first time, it will go into pairing mode automatically.

If you want to pair the headset with another device, you will need to manually put it into pairing mode:

- 1) Turn the headset on and make sure it does not connect to another device.
- 2) Press and hold the MFB for 5 seconds, until the lights alternate flashing between red and blue. You will hear the voice prompt "Discovering" (in English).
- 3) Headset will be visible for pairing to devices for 120 seconds.

Pairing to a Cell Phone

- 1) Make sure that other Bluetooth devices are turned off or out of range.
- 2) Place headset into pairing mode.
- 3) Put your cell phone in Bluetooth Search/Scan Mode per the manufacturer's instructions.
- 4) Select "VXi Reveal" or "VXi Explorer" to pair. (Passcode is "0000" if needed.)
- 5) When connected, the headset will give you the voice prompt, "Your headset is connected" (in English).

Multi-Point Mode

Multi-point mode is the default mode for this headset. It enables the headset to be simultaneously paired and connected to two devices. In multi-point mode, the headset will monitor both devices and allow you to switch between them when there is an incoming call.

To use Multi-Point:

- 1) Pair each device you wish to use with the headset. Power off the headset.
- 2) Enable Bluetooth, or power on both paired devices, then power on the headset.
- 3) You should hear the voice prompt "Your headset is connected" (in English) twice, as the headset connects to each device.

VXi Reveal™/Xplorer™ Quick-Start Guide

Quick-Reference Table

Function	Button/Duration of Press	LED Indicator	Audio Indicator	Voice Indicator (in English)
Power On/Off	Slide Switch (Green = On)	On = Three quick blue flashes Off = Four quick red flashes	Short tone	"Power on" or "Power off"
Manual Pairing Mode	Press and Hold MFB (5 seconds)	Red and blue, alternating flash	NONE	"Discovering"
Volume Up	Volume Up (quick press)	NONE	Single tone	NONE
Volume Down	Volume Down (quick press)	NONE	Single tone	NONE
Mute (On/Off)	Volume Up (1-2 seconds)	NONE	Single tone, reminder tone every 10 seconds	NONE
Answer a Call/Active Call	MFB (quick press)	Blue flash, once per second	Two rising tones	NONE
End a Call	MFB (quick press)	Blue flash, every 4 seconds	Two falling tones	NONE
Transfer Audio	Volume Down (1-2 seconds)	NONE	NONE	NONE
Low Battery	n/a	Red, fast flash	Long, high tone @ 20 seconds	"Battery low"

Multiple Device Pairing and Advanced Features

The headset can pair with up to eight (8) devices. However, only two (2) devices may be connected to the headset at any time (Multi-Point). For more information on advanced features, please refer to the complete user guide, available online.

For the complete user guide, technical notes and available accessories, go to vxicorp.com.

271 Locust Street | Dover, NH 03820 | Toll-free: 800-742-8588 | Phone: 603-742-2888 | vxicorp.com

© 2014 VXi Corporation. All rights reserved.

PN 203401/APN 203404X

06/14

VXI WARRANTY STATEMENT

(1) VXI warrants that your product will be free from defects in material and workmanship for one year from the date of purchase. If, during the first year from the date of purchase, your product fails to work due to a defect in material or workmanship, VXI will repair or replace the product, at its election, free of charge. Without proof of purchase, the warranty period begins on the date of manufacture. Consumable components (for example, cushions, battery and fuse) are not included in this one-year warranty. (2) The foregoing limited warranty does not cover equipment failure attributable to accident, improper operation, misuse, abuse, or any cause other than defects in the materials or workmanship of VXI's products. (3) VXI's obligations under this warranty are limited to repair or replacement (at our option) of any defective part returned to VXI at the customer's expense. Returned products require a Return Authorization that may be obtained by calling **603-742-2888** or visiting **vxicorp.com**. Products returned to VXI for repair under this warranty will be return shipped to the customer at VXI's expense. (4) THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you. (5) In no event shall VXI be responsible for any other damages whatsoever, including direct, indirect, special, incidental, consequential, or other damages for breach of this or any other warranty, expressed or implied.

FCC NOTICE TO USERS

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Users are not permitted to make changes or modify the device in any way. Changes or modifications not approved by VXI Corporation will void the user's authority to operate the equipment.

IC NOTICE TO CANADIAN USERS

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

CE NOTICE TO USERS

Hereby, VXI Corporation declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

271 Locust Street | Dover, NH 03820 | Toll Free: (800) 742-8588 | Phone: (603) 742-2888 | vxicorp.com

© 2014 VXI Corporation. All rights reserved.

APN 203601A 06/14



The Sound Choice™

DECLARACIÓN DE GARANTÍA DE VXI

(1) VXI garantiza que su producto no presentará defectos de materiales ni de mano de obra por un año a partir de la fecha de compra. Si, durante el primer año a partir de la fecha de compra, su producto no funcionara por un defecto de materiales o de mano de obra, VXI reparará o sustituirá, a su elección, el producto de forma gratuita. Sin el comprobante de compra, el período de garantía se inicia en la fecha de fabricación. Los componentes fungibles (por ejemplo, almohadillas, baterías y fusibles) no están incluidos en esta garantía de un año. (2) La garantía limitada anterior no cubre fallas del equipo atribuibles a accidentes, operación inadecuada, uso indebido, abuso o a cualquier otro motivo distinto de los defectos de materiales o mano de obra. (3) La obligación de VXI de conformidad con esta garantía se limita a la reparación o sustitución (a elección de la empresa) de cualquier pieza defectuosa devuelta a VXI a cuenta del comprador. Los productos devueltos deben contar con un número de Autorización de devolución que se puede obtener llamando al **603-742-2888** o visitando el sitio **vxicorp.com**. Los productos devueltos a VXI para su reparación de conformidad con la presente garantía serán enviados al cliente a cargo de VXI. LA PRESENTE GARANTÍA LIMITADA SUSTITUYE A CUALQUIER OTRA GARANTÍA EXPRESA O IMPLÍCITA, INCLUSO A LAS GARANTÍAS IMPLÍCITAS DE COMERCIABILIDAD E IDONEIDAD PARA UN FIN ESPECÍFICO. Algunas jurisdicciones no permiten la exclusión de las garantías implícitas, por lo tanto, es posible que las exclusiones anteriormente mencionadas no se apliquen en su caso. (5) En ningún caso VXI asumirá responsabilidad por cualquier otro tipo de daños, ya sean indirectos, especiales, incidentales, consecuentes u otros daños derivados por incumplimiento de ésta u otra garantía expresa o implícita.

AVISO DE LA FCC A LOS USUARIOS

Este dispositivo cumple con la parte 15 de las reglas de la FCC. El funcionamiento está sujeto a las dos condiciones siguientes: (1) Este dispositivo no debe causar interferencias dañinas y (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluso aquellas que pudieran causar un funcionamiento no deseado. Los usuarios no están autorizados a realizar cambios ni modificar el dispositivo de manera alguna. Todo cambio o modificación que no cuente con la aprobación de VXI Corporation anulará la autorización para operar el equipo otorgada al usuario.

AVISO DE IC A LOS USUARIOS DEL CANADÁ

Este dispositivo cumple con la(s) norma(s) RSS de exención de licencia de Industry Canada. El funcionamiento está sujeto a las dos condiciones siguientes: (1) Este dispositivo no debe causar interferencias dañinas y (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluso aquellas que pudieran causar un funcionamiento no deseado del equipo.

AVISO CE PARA LOS USUARIOS

Por el presente, VXI Corporation declara que este producto cumple con los requisitos esenciales y otras disposiciones pertinentes de la Directiva 1999/5/CE.

271 Locust Street | Dover, NH 03820 | Teléfono: +1 603 742-2888 | vxicorp.com

© 2014 VXI Corporation. All rights reserved.

APN 203601A-ES 06/14



The Sound Choice™