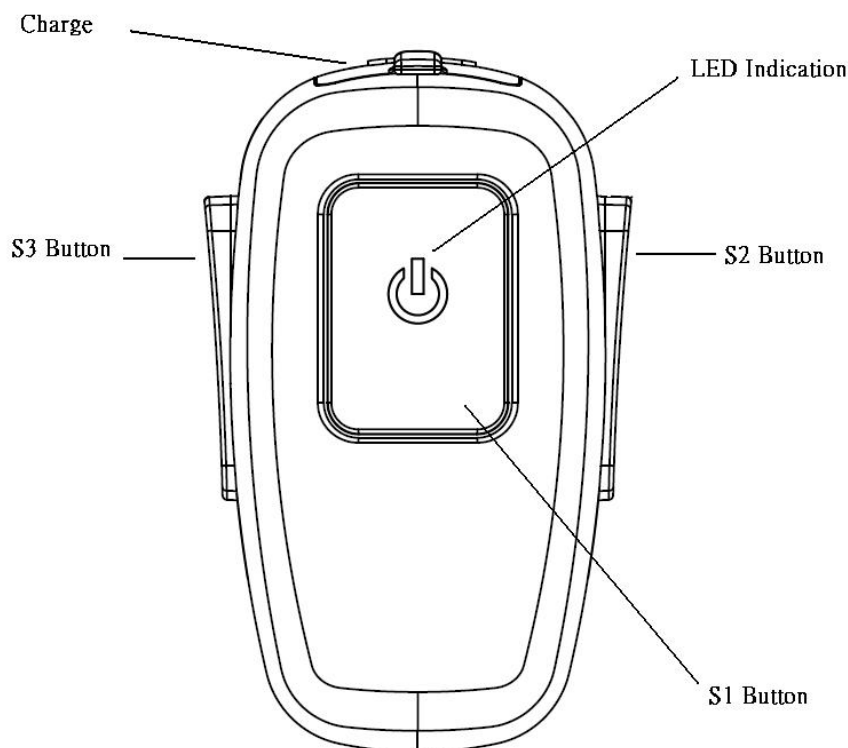# Bluetooth V2.1 Mono Headset
VH-2000

Mini Bluetooth Headset

The Mini Bluetooth Headset is a Bluetooth device developed with the latest bluetooth technology, which can connect to other bluetooth devices such as mobile phone, desktop or notebook computer, PDA (with audio gateway profile supported) wirelessly.

Package Content and Picture

- Mini Bluetooth Headset
- AC Adapter or USB cable
- Earplugs
- Quick Guide

Bluetooth V2.1 Mono Headset
VH-2000

Getting Started

- **Charging Battery**

   The Headset comes with a rechargeable battery included. The battery is not fully charged when it is new. For first time use, it takes 2 hours to fully charge the battery. Afterwards, it will take about 1.5 hours to fully charge the battery.
   Plug the adapter into an AC outlet. The red indicator on the headset will turn on.
   When the battery is full, the red indicator will turn off.

- **Check the Headset buttons**

   S1 Button: Power on/off, Answer calls, End Call, Pairing, Voice Dial, Last Number Redial, Reject Call, Transfer Audio, Three Way Call
   S2 Button: Voulme Up, Mute
   S3 Button: Volume Down, Mute

- **Turning the Headset On or Off**

   To turn the Headset on
   Press and hold the S1 button for 3 seconds, then the blue indicator of the Headset flashes. The Headset is now turned on. (*Note: When it is on low battery, the red indicator will flash.*)
   To turn the Headset off
   Press and hold the S1 button for 3 seconds, then the Red indicator will flash, and then the Headset will turn off.

- **Pairing the Headset**

   You are required to pair the Headset with your mobile phone before using the Headset.
   Step 1 : The Headset must be powered off before initiating the paring. Hold and keep pressing the S1 button for 6 seconds until the **blue** and the **red** indicators are flashing alternatively. The headset is now ready for pairing.
   Step 2 : Initiate pairing process on your Bluetooth mobile phone to pair with the Headset. After search, you can find the device name "VH-2000"
   Step 3 : When asked the Passkey by the mobile phone, enter 1234 and confirm it.
   (*Note: The 1234 is a Default pin-code pre-stored in the Headset.*)
   When pairing is successful, the red indicator will turn off and the blue indicator will flash.

   Note:
   If the Headset is not in pairing mode, your mobile phone won't find the Headset. Please set the Headset into pairing mode before letting your mobile phone search for the Headset.
   If no pairing is possible for a period of time (approx. two minutes), the Headset will automatically power off, and so the previous pairing (if any) is revoked. You may need to repeat steps 1 to 3 until pairing succeeds.

20F-1, No.77, Sec.1 , Hsin Tai Wu Rd., Hsi-Chih, Taipei Taiwan R.O.C.
Tel. No.:+886-2-2698-3608   Fax No.:+886-2-2698-3648
Nov.04"2008   V1.1

2/2

Bluetooth V2.1 Mono Headset
VH-2000

- **Making Call**

  Using voice dialing
  Press the S1, waiting for a beep, and say the name of the person you want to call.

  Using Last Number Redial
  Press the S1 for 2 seconds and then release, then mobile phone will dial out the last number dialed.

  Using the phone keys to make call
  Dial the number on the mobile phone as you normally do. Once the call has been set up, the sound will be transmitted to your Headset automatically.

- **Answering Calls and Ending Call**

  When the Headset is powered on, and there is an incoming call, you will hear a ring tone. When the Headset rings, press the S1 button to answer.
  Adjust the Headset volume by press the S2 to increase the volume or S3 to decrease the volume.
  End calls by pressing S1 or don't press any button.

- **Mute**

  Press both S2 and S3 keys in the same time to enable Mute function, To press both S2 and S3 in the same time again to disable Mute function.

- **Transfer Audio**

  If you want to transfer the audio from headset to phone, press S1 for 2 seconds and then release.

- **Reject Call**

  When the headset ring and you do not want to answer this call. To press S1 for 2 seconds and then release to reject this call.

- **Three Way Call**

  To double press S1 to be able to accept waiting call and hold the active call
  To press S1 to be able to accept waiting call and end the active call
  To press both S1 and S3 to add the on hold call to three way call.

20F-1, No.77, Sec.1 , Hsin Tai Wu Rd., Hsi-Chih, Taipei Taiwan R.O.C.
Tel. No.:+886-2-2698-3608   Fax No.:+886-2-2698-3648
Nov.04″2008   V1.1

3/3

Bluetooth V2.1 Mono Headset
VH-2000

Connect with a PC or PDA

You are allowed to connect the Headset with a Bluetooth enabled PC or PDA that is with Audio Gateway Profiles supported. Please refer to the user manual of your Bluetooth enabled PC or PDA for a setup information.

Low Battery

When the **red** indicator starts to flash, it indicates that the Headset is running low on battery. Charge the Headset until the **red** indicator turns off.

20F-1, No.77, Sec.1 , Hsin Tai Wu Rd., Hsi-Chih, Taipei Taiwan R.O.C.
Tel. No.:+886-2-2698-3608   Fax No.:+886-2-2698-3648
Nov.04"2008   V1.1

4/4

Bluetooth V2.1 Mono Headset
VH-2000
FCC ID: VHVBTVH2000

FCC Compliance and Advisory Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, according to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

1.Reorient the receiving antenna.

2.Increase the separation between the equipment and receiver.

3.Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.

4.Consult the dealer or an experienced radio/TV technician for help.

Any special accessories needed for compliance must be specified in the instruction manual.

Warning: A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used. Use only shielded cables to connect I/O devices to this equipment.

CAUSION: Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

20F-1, No.77, Sec.1 , Hsin Tai Wu Rd., Hsi-Chih, Taipei Taiwan R.O.C.
Tel. No.:+886-2-2698-3608   Fax No.:+886-2-2698-3648
Nov.04″2008   V1.1

Bluetooth V2.1 Mono Headset
VH-2000

CE Statement

Hereby, Vencer Co., Ltd. declares that this VH-2000 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

20F-1, No.77, Sec.1 , Hsin Tai Wu Rd., Hsi-Chih, Taipei Taiwan R.O.C.
Tel. No.:+886-2-2698-3608   Fax No.:+886-2-2698-3648
Nov.04"2008   V1.1

6/6