


Bluetooth Ear-type Stereo Headset VS-7100

The Bluetooth Stereo Headset is a Bluetooth device developed with the Bluetooth technology, which can connect to other Bluetooth devices such as mobile phone, desktop or notebook computer, PDA which supported HSP or HFP(for voice) or A2DP(for music) profile.



Bluetooth Ear-type Stereo Headset VS-7100

Getting Started

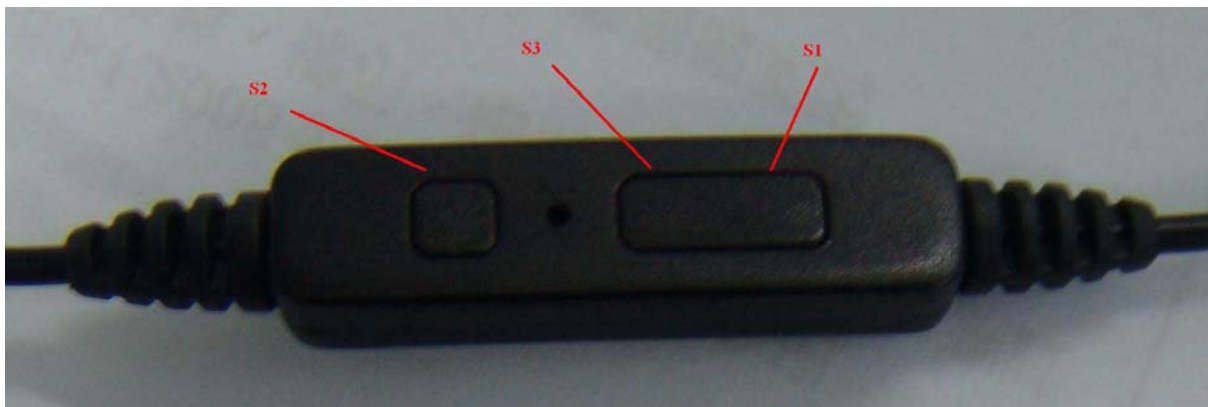

Buttons:

	Short	Long (2 second)	Very Long (4 second)
S2	Play/Pause/ Answer Call /End Call	Reject Call /Power on & Power Off	Pairing
S3	Volume(-)	FWD	
S1	Volume(+)	REV	
S2+S3	Voice Dial		
S1+S3	LNR/Stop		
S1+S2	Mute		

Bluetooth Ear-type Stereo Headset

VS-7100

LED Indicator:

	BLUE	RED
Power ON	blink 3 times	
Power OFF		blink 3 times
Pairing	alternate blink	
Standby	blink 1 time / 3 sec	
Music play (A2DP connect)	blink 1 time / 4 sec	
Call active (HSP/HFP connect)	blink 1 time / 5 sec	
Changing		always ON
Charge finished		OFF
Low Battery		double blink / 30 sec

1. Charging Battery

The Headset comes with a rechargeable battery included. The battery is not fully charged when it is new. It will take about 1~1.5 hours to fully charge the battery. Plug the mini USB charge cable(or adapter) . The RED indicator on the headset will light on.(If the headset is power ON state, the headset will power off due to headset reset) when battery is charging.

When the battery is full, the RED indicator will turn off.

2. Turning the Headset On or Off

- To turn the Headset on

Press S2 and hold for 2 seconds, then the blue indicator of the Headset flashes. The Headset is now turned on.

- To turn the Headset off

Press S2 and hold for 2 seconds when headset is on, then the Headset will turn off.

Bluetooth Ear-type Stereo Headset VS-7100

3. Pairing the Headset

You are required to pair the Headset with your Bluetooth mobile phone/audio device/PC/PDA before using the Headset.

Step 1 : Turn OFF the headset. Hold and keep pressing S2 for 4 seconds until the **blue** and the **red** indicators are flashing alternatively. The headset is now ready for pairing.

Step 2 : Initiate pairing process on your Bluetooth mobile phone/Audio Device/PC/PDA to pair with the Headset. After search, you can find the device name "VS-7100"

Step 3 : When asked the Passkey by the mobile phone, enter 1234 and confirm it.
(Note: The 1234 is a Default pin-code pre-stored in the Headset.)

When pairing is successful, the red indicator will turn off and the blue indicator will flash..

If pairing can not finish in a period of time (approx. 2 minutes), the Headset will return to standby mode. You may need to repeat steps 1 to 3 until pairing succeeds.

4. Listening to Music

If the Bluetooth Device supported Bluetooth stereo audio (A2DP profile), you can listen music by the headset. And adjust the Headset volume by press the Volume Up (S1)and Volume Down (S3)button.

If the Bluetooth Device supported AVRCP profile also, you can control music playback by headset button

Short press S2 for PLAY / PAUSE

Long press S3 for 2 seconds for FWD

Long press S1 for 2 seconds for REV

Short press S1+S3 for STOP

5. Making Calls

Using the phone keys to make call

Dial the number on the mobile phone as you normally do. Once the call has been set up, the sound will be transmitted to your Headset automatically.

Using voice dial

Press S2 and S3 together, headset will initial voice dial function of mobile phone.

Using last number redial

Press S1 and S3 together, headset will initial last dial number function of mobile phone.

Mute microphone

Press S1 and S2 together, the microphone will be mute when during a call. Press S1 and S2 together again to release mute function.

Bluetooth Ear-type Stereo Headset VS-7100

7. Answering Calls and Ending Call

When the Headset is powered on, and there is an incoming call, you will hear a ring tone.

- (1) When the Headset rings, press the Answer button (S2) to answer.
- (2) Adjust the Headset volume by press the Volume Up (S1) and Volume Down (S3) button.
- (3) End calls by pressing End button (S2) or don't press any button.

8. Reject call

By long press S2 for 2 seconds when call is incoming, it will reject the incoming call.

Low Battery

When the **RED** indicator starts to flash and heard alert at headset, it indicates that the Headset is running low on battery.

Charge the Headset until the **RED** indicator turns off.

Bluetooth Ear-type Stereo Headset VS-7100

General Product

Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.