

WH2000iXLT

Digital Inverter Generator



1800 / 2200
RUNNING WATTS STARTING WATTS

XLT Series
Extreme Low Tone



Westinghouse

INNOVATION YOU CAN BE SURE OF

WH2000iXLT Units Are Parallel Capable

Parallel capability allows you to combine (2) units for **DOUBLE** the power using our simple to use WHPC parallel power cord (not included).



No bulky, complicated junction boxes, hardware or complicated ground terminal wiring needed with this easy-to-use, compact system.


WH2000iXLT Parallel Capable* Digital Inverter Generator

*Cord Sold Separately. Please request WHPC P/N 260041

What is a Digital Inverter Generator?

Digital inverter generators work by generating AC (alternating current) power at a high frequency. It is then converted to DC (direct current), then back to alternating current that can be used by electronic equipment and appliances. This process is often called "clean power" which means stable and consistent current and a stable sine wave delivery. This will not cause a fluctuation in voltage which happens with traditional generators. Uncontrolled fluctuations of power are very dangerous to many high-tech and sensitive electronics such as computers. Inverter generators are a perfect fit for recreational use and emergency backup power.

The engine speed of inverter generators is regulated to match the load on the generator, unlike traditional generators that run at a constant speed with no variation to engine speed. Inverter generators have the ability to adjust engine speed to produce the correct amount of power required to run the appliances being used. Inverter generators are more fuel efficient and make less noise and vibration than traditional generators. This makes inverter generators economical to operate and environmentally friendly.

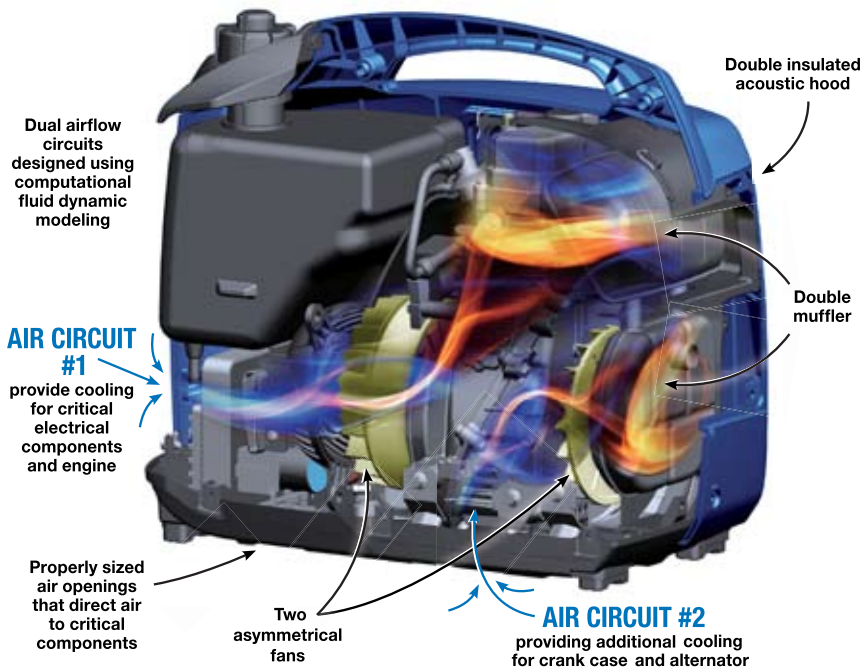


When you are ready to go camping, tailgating or just need a reliable portable power supply, the Westinghouse WH2000iXLT provides efficient, quiet and clean energy for all your sensitive electronic needs - while offering parallel capabilities.

Producing 1800 running watts of power and weighing only 43 lbs., this 4 cycle, gasoline powered unit will run 13 hours at 50% load. This unit provides two, 120V, AC outlets and contains all you need to get started right out of the box - **including the oil**. The WH2000iXLT is very quiet making it the perfect companion for all your recreational needs.



Oil & Tools Included

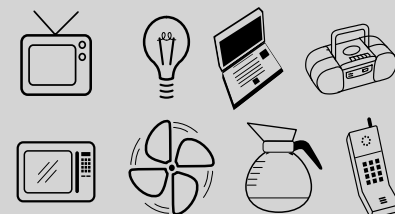

Specifications

Generator Type	WH2000iXLT Digital Inverter
Running Watts	1800
Starting Watts	2200
Amps	15A / 18.3A
Engine Type	Westinghouse, 4 Stroke, 79cc, OHV
Starting Method	Recoil
Outlets	(1) Duplex, NEMA 5-15R 120V, (1) 12V DC8.3A
Fuel Tank	1.3 Gallon
Run Time	17 hours at 25% load / 13 hours at 50% load
Housing	High impact plastic, vibration mounted, sound attenuated, double insulated case
Portability	Light weight, ergonomically designed

Accessories	Tool kit, 13.5 oz engine oil & EZ fill oil bottle
Warranty	2 Year Limited
Sound Output	52 dbA at 25% load / 59 dbA at 50% load
Emissions	EPA & CARB Certified
Benefits & Features	



- 1) Power indicator light
- 2) AC overload reset
- 3) High efficiency run mode
- 4) Low oil shut down
- 5) Color coded user touch points
- 6) Parallel Capable*

Dimensions & Weight

Carton Dimensions	21.3" L x 13.8" W x 20.0" H
Unit Dimensions	20.3" L x 12.5" W x 17.8" H
Unit Weight	43 Pounds

Westpro Power Systems, LLC
W237 N2889 Woodgate Road, Unit B
Pewaukee, WI 53072 USA

*Cord Sold Separately. Request Parallel Cord WHPC Part Number: 260041

Service Hotline: (855) 944-3571
www.westpropower.com

Model: WH2000iXLT

March 2014

©, WESTINGHOUSE, and INNOVATION YOU CAN BE SURE OF are trademarks of Westinghouse Electric Corporation. Used under license by Westpro Power Systems. All Rights Reserved. Content may change without notice.



Westinghouse

INNOVATION YOU CAN BE SURE OF

XLT Series
Extreme Low Tone

