

Welcome to use UTEL T11 bluetooth headset

UTEL T11 wireless Bluetooth headset surpass the tradition. It is compact, small and lightweight, also easy to use. Bluetooth V2.0 transmit more fast, voice quality more better and high ability to avoid interference, Although you don' t need wire connect anymore, but you will more close with the pioneer global Bluetooth science and technology. Free to communicate with others. Please read this manual carefully before starting operation and keep it for future reference.

Introduction

What is Bluetooth Wireless Technology?


Bluetooth devices communicate without wires, using built-in radio transceivers that operate on a globally available radio frequency to ensure worldwide compatibility. Your Bluetooth wireless headset can communicate with other Bluetooth devices within a range of approximately 10 meters (33feet).

How Can I Use My Wireless Headset?


Your Wireless headset, with Bluetooth technology, lets you connect with other similarity equipped devices.

- Use your phone hands free
- Handle incoming and outgoing call with the handset Multifunction control button (MFB)
- Use voice activation to make calls

Headset Scheme

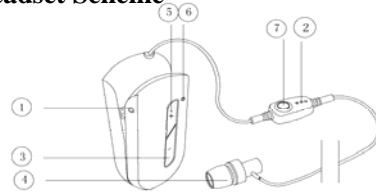

1. **Charging Port**-accepts the plug for your headset battery charge
2. **Microphone**-Picks up your voice input
3. **Volume control buttons**-Adjusts speaker volume down.
4. **Speaker**-Plays the sound you receive on the call
5. **Volume control buttons**-Adjusts speaker volume up
6. **LED**: work and charger light
7. **Multifunction Button**- controls multiple headset function



Using Your Headset

Charging Your Headset Battery

When to charge

First Time Use-Before you can use your headset, charge its self-contained battery for two hours.

Recharging-when you hear five rapid high tones through the headset speaker, repeated at 20-second intervals, the headset battery needs recharging.

Over extended periods of time, batteries gradually wear down and require longer charging times. This is normal.

Additionally, your battery will have less standby time the more you talk on the phone with your headset.

The rechargeable batteries that power your wireless headset must be disposed of properly and may need to be recycled. Contact your local recycling center for proper disposal methods.

Warning: Never dispose of batteries in a fire because they may explode.

How to charge

1. Plug the charger into the headset.
2. Plug the other end the charger into an electrical outlet.
As the picture indicator.

During charging, the headset indicator turns on and remains on until charging completes.

The headset will not work while charging. Your headset fully charges in approximately two hours.

3. When charging completes (indicator off), remove the charger for electrical outlet..
-
-

Note: You can also use a Original Vehicle Power Adapter to charge the headset battery while in your vehicle.

A fully charged headset battery provides approximately

*8 hours talk time

* 160 hours standby time

Wearing Your headset

Step

1. This new item is line-clip Bluetooth, you can wear in shoulder, collapsible or frock pocket
2. Put the earphone into the ear.
3. Point the microphone toward your mouth near 7-8 cm
4. The earphone can keep in the handsfree hook when not use it.
5. The volume adjustable.



How to Power On/Off Your Headset

To Power Your Headset On

Action

Press and hold the MFB for 3 seconds until the LED flashes rapidly.

To Power Your Headset Off

Action

Press and hold the MFB for 3 seconds until the LED flashes rapidly.

Pairing Your Headset and Phone

Note: You must pair your headset and phone before you can make a call.

“Pairing” creates a link between devices with Bluetooth wireless technology, and allows the phone to remember the headset’s unique ID. When your headset and phone are paired, your headset automatically connects to your phone.

Pairing

With the headset and phone close together

Action

1. With the headset off, hold the multifunction Button until the LED remains on (about 5 seconds).
2. Perform a device discovery for your phone, refer to the phone’s user’s guide. When the scan is complete, the phone displays the devices found.
3. Select the **Logo and model number** from the discovered devices

- list and confirm following the on screen prompts.
4. When prompted by the phone enter the passkey 0000 and confirm to pair the headset with the phone.
 5. The device ID is now stored in the phone's memory pairing is successful when the headset indicator flashes rapidly.

Pairing to Additional Devices

Your headset can store pairing information for up to eight different devices when Bluetooth wireless technology. Devices are stored in a "Paired Device List" in memory in the order entered.

When an attempt to pair to more than eight devices is made, the oldest paired device is removed from the list.

Any of the eight paired devices can initiate a connection to the headset. The headset will only automatically initiate a connection (upon power-up) with the last device it was connected to. If you want to connect the headset to another device in the paired device list. You must initiate the connection from that device. Whichever of the eight devices initiates a connection to the headset afterwards. That device then becomes the "last connected" device.

Adjusting Headset Volume

Increasing or Decreasing Volume

To increase speaker volume, press the top (+) volume button repeatedly until you reach the desired volume level.

To decrease speaker volume, press the bottom (-) volume button repeatedly until you reach the desired volume level.

Making and Receiving Calls

Your headset supports both handsfree and headset profiles.

Accessing call functions depends on which profile your phone supports.

Note: Some phone do not support all features listed. See your phone user's guide you can activate call functions for the Handsfree profile according to the following

Using Your Headset Indicator LED

With charger plugged in:

Headset Indicator	Status
On	Charging in progress
Off	Charging complete

With no charger plugged in:

Headset Indicator	Status
Off	Power off
ON (Steady)	Pairing mode
10 rapid flashes	Pairing successful
Flashes at a 3-second interval (1. seconds ON 2.9 seconds OFF)	Standby (not on a call)
Pulses at an 8-second interval (2.0 seconds ON 6.0 seconds OFF)	Connected (on a call)

Note: When the wireless headset is paired to the phone and there is no activity for 5 minutes, the blue flashing LED turns off, any button press on the headset, resets the timer and the flashing resumes. If you press the up and down volume buttons at the same time during a call the pulsing LED turns off for the duration of the call.

Audio Tones

Audio Tone	Headset Status
Single high tone when pressing volume button	Volume maximum or minimum reached
Five rapid high tones, repeated every 20 seconds	Low battery
No audio indications, deteriorating audio quality	Out of range
Series of 4 tones, low to high	Audio link open (headset mode). Active call (hands free mode)
Ring tone	Incoming call
Single high tone	Pairing confirmation
Single low tone	Initiate voice activation
Dual high/low tone	Voice tag not recognized
Single high tone	End call
Series of 4 tones, high to low	Audio link closed (headset mode) Call ended (hands free mode)
Fast high/low tone every 5 seconds (max & min. volume confirm beep)	No network/service
No tone	Power ON/OFF

Troubleshooting

*** When the Bluetooth headset can not connect with the handset. Please do follow operation:**

1. Make sure the Bluetooth headset was turn on and was paired with the handset.
2. The Bluetooth function was startup.
3. The distance between handset and Bluetooth headset no over 10M, or there are some stumbling block between the Bluetooth headset and handset like wall or other electron equipments.
4. The paired Bluetooth list was full in the message. One Bluetooth headset can be linked up (or "paired") with up to 8 devices. Please pair the headset again when the paired handsets was full.

*** When the headset can not connect with the selected handset automatically.**

Please use the charger to plug in again or turn off the power and pair it again.

Warning:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications to this unit not expressly approved by the party responsible for compliance will void the user's authority to operate the equipment. Any change to the equipment will void FCC grant.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate

radio frequency energy and, if not installed used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

--Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limit set forth for uncontrolled Environment