

Table of Content

Introduction to CLIP ULTRA 2.....	2
① Charging the Headset.....	5
② Wearing the Headset	6
③ Powering On/Off the Headset	7
④ Pairing with Mobile Phones.....	7
⑤ Pairing with Additional Devices.....	11
⑥ Making Calls and Adjusting Volume.....	12
⑦ Turning the Beeper on/off	12
Operation guide table	13
LED Chart	15
Troubleshooting.....	16
Maintenance.....	17

Introduction to CLIP ULTRA 2

CLIP ULTRA 2 wireless Bluetooth headset surpasses the tradition. It is compact, small and light weight, as well as easy to use. Bluetooth V2.1 enables faster connection speed, better voice quality and less power cost.

Please read this manual as well as your mobile phone's user instructions carefully before using headset Clip Ultra 2. And keep the manuals well for future reference.

What is Bluetooth technology?


Bluetooth devices communicate without wires, using built-in radio transceivers that operate on a globally available radio frequency to ensure worldwide compatibility. Your Bluetooth wireless headset can communicate with other Bluetooth devices

within a range of approximately 10 meters (33feet).

Your wireless headset enables you to connect with other Bluetooth enabled devices, use your phone hands free, answer calls and make calls with a single multi function button and is equipped with voice dialing.

Clip Ultra 2 support both hands free and headset profiles.

Bluetooth Headset CLIP ULTRA 2 Illustration

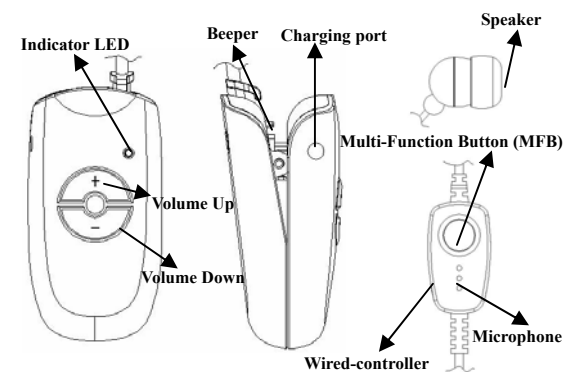

How to Use Bluetooth Headset CLIP ULTRA 2

◆ ① Charging the Headset

1. Before using for the first time, Clip Ultra 2 needs to be fully charged. And it takes approximately 2 hours.
2. When you hear five rapid tones which repeat every 20 seconds from the headset, it indicates your headset needs to be recharged.
3. When the red indicator LED flashes twice and then constantly on, which means your headset is charging; when the headset is fully charged the red indicator LED turns to blue.

Note: when fully charged, the battery offers:

*** Over 8 hours talking time**

*** Over 200 hours standby time**

Attention: Please only charge your Bluetooth headset Clip Ultra 2 with the original travel charger, in car charger or USB charging cable supplied in the box.

◆ ② Wearing the Headset

Bluetooth headset Clip Ultra 2 is a clip design with wire. It can be clipped easily onto your clothes for more comfort.

1. To use the headset, simply put the headphone into your ear.
2. Adjust the microphone toward your mouth, about 7-8 cm.
3. The earphone can rest on the headset when not being used.



◆ ③ Powering ON/OFF the Headset

☆ Power ON

Hold the multi-function button for 3 seconds and release it when the indicator LEDs (red and blue) light which indicates the headset is in Power On mode. Then the red indicator LED will flash.

Note: The red indicator LED flashes when the headset is ready to connect.

☆ Power OFF

When the headset is on, please hold the multi-function button for 3 seconds and release it when the indicator LEDs turn off which means the headset has been turned off properly.

◆ ④ Pairing with Mobile Phones

Attention: Please make sure the Bluetooth headset has been paired with mobile phones before you start using it to make calls.

("Pairing" creates a link between devices with Bluetooth wireless technology, and allows the phone to remember the headset's ID. Once they are paired, your headset will automatically connect to your phone.)

Pairing with single mobile phone :

1. Place the headset and phone together at a maximum of 1 meter distance between each other. When the headset is powered off, hold the headset's multi-function button until the blue and red indicator LEDs flash alternately (the whole process takes about 8 seconds). The headset is in pairing mode.
2. Activate your mobile phone's Bluetooth function and search for new devices (please refer to your mobile phone's instruction manual).
3. Select "CLIP ULTRA 2" in the searched list and confirm the steps as requested by your mobile phone.
4. Enter the password "0000" to confirm and connect the headset to the phone. The headset's blue LED will flash to indicate the pairing was successful.

Pairing with the second mobile phone:

Bluetooth headset Clip Ultra 2 supports the multi-point function which enables you to pair with 2 mobile phones simultaneously.

1. Once the first mobile phone has been paired successfully following the instruction given above, you will need to turn the Bluetooth function of the already paired mobile phone off before you start the pairing process of the second mobile phone with the headset. The headset will connect to the second phone automatically once you have followed the same pairing instructions as the one described previously.

2. Connecting the headset to the first paired phone:

You can either:

1) Turn off the Bluetooth headset and power it on again after the Bluetooth function of the first phone has been activated. Then the Bluetooth headset will connect automatically to both paired phones and enter Standby mode which enable to switch between the two mobile phones.

2) Press both the “Volume Up” and “Volume Down” keys on the headset simultaneously once; then activate the Bluetooth function of the first phone to connect with Bluetooth headset “Clip Ultra 2”.

Note: If the Bluetooth headset has been paired with more than 2 mobile phones, for example, it has been paired with four phones in A \ B \ C \ D order, then it can connect to any two phones of the four automatically,

When the headset is connected to 2 phones, for example, phone C and D, only certain functions (Voice dialing, last call redial) will be activated for phone C (the first connected phone).

When the headset is connected with two mobile phones, you can only make or take calls from one phone at a time. For example, when the headset is on a call from phone C, it will disconnect from phone D automatically and reconnect with phone D after the call from phone C is ended.

Attention: Clip Ultra 2 can only be connected to 2 phones at a time.

◆ ⑤ Pairing with Additional Bluetooth Devices

- The headset can store up to eight different devices. Devices are stored as one of the “Paired Devices List” in order of pairing. When the headset attempts to pair with the ninth device, the first paired device will be removed from the list.
- Any of the eight paired devices can initiate connection to the headset.
- The headset will only automatically connect to the latest two paired devices. If you want to connect the headset to the others of the paired device list, you have to manually initiate the connection from that device; after any two of the eight devices initiate a connection to the headset, they will become the default “last connected” devices.

◆ ⑥ Making Calls and Adjusting Volume

CLIP ULTRA 2 supports both, Headset and Hands-free modes.

1. Press the Multi-function button to answer an incoming call.
2. Please keep pressing the Volume Up or Down key to increase or decrease the volume to its desired level.
3. To end a call, press the Multi-function button.

◆ ⑦ Turning the Beeper Function ON/OFF

CLIP ULTRA 2 has a Beeper indicator function which can be turned ON or OFF according to your preference. The default is set to ON. User can turning OFF the Beeper function to extend the battery life

1. **Turning the Beeper function on:** When the headset is connected with mobile phone (s) and the Beeper function is off, you can press and hold the “Volume Up” key or “Volume Down” for 4 seconds until one indicator sound is heard from the speaker. The Beeper function is activated. The

Beeper will indicate an incoming call and the indicator LED won't flash. The indicator LED will flash normally during the call.

2. **Turning the Beeper function off:** When the headset is connected with mobile phone (s) and the Beeper function is activated, press and hold the “Volume Up” key” or “Volume Down” key for 2 seconds until one indicator sound is heard from the speaker. The Beeper function is now turned off. The indicator LED flashes normally when there is an incoming call and when the Beeper function is off.

Note: You can do the above operations when the phone is ringing. The headset will use more power when the Beeper function is activated.

Operation Guide Table

Bluetooth headset CLIP ULTRA 2 supports all following functions, and you can activate them according to the guide table below (*continue to P14*):

Function	Phone mode	Headset mode	Headset operation
Enter pairing mode	ON	OFF	Hold the Multi-Function Button (MFB) until the red and blue indicator LEDs flash alternately
Voice dialing	standby	Connected and standby	Quickly press the MFB once
Redial a call	standby	Connected and standby	Quickly press the MFB twice
Answer calls	With incoming call indication	With incoming call indication	Press the MFB once
End a call	On a call	On a call	Press the MFB once
Reject a call	With incoming call indication	With incoming call indication	Press and hold the MFB for 3 seconds and then release

Attention: The functions listed above are dependent on your mobile phone. Please refer to your mobile phone instruction manual for more details.

LED Chart

With charger plugged in:

Red LED comes on and then flashes twice	Begin to charge
Red LED comes off and blue LED comes on	Charge complete

When Clip Ultra 2 is not plugged in:

Indication	Description
Blue and red LEDs flash alternately	Enter pairing mode
Blue LED flashes 3 times rapidly	Connected and standby
Red LED flashes 3 times rapidly	Ready to connect
Red LED flashes rapidly	Low power indicator

Note: Once paired, if the headset is disconnected from a device for 30 minutes, the headset will turn off automatically to save power.

Troubleshooting

When the Bluetooth headset is not connecting to the mobile phone:

- Make sure the Bluetooth headset is turned on and is paired with the handset.
- The Bluetooth function on the handset is on.
- Check the distance between the handset and Bluetooth headset is not over 10 meters or whether there are some interferences between them, such as walls or other electronic equipments.
- The paired Bluetooth list may be full. One Bluetooth headset can be linked (or "paired") with up to 8 devices. Please pair the headset again when the paired list is full.
- If the headset can not be connected with the selected or last used handset automatically, please charge it or turn it off and pair it again.

Maintenance

Your Bluetooth headset is a high-tech product that should be treated with care. Following suggestions will help ensure its good maintenance.

- Keep all accessories out of children's reach.
- Keep the device dry. Rain, water, humidity and all types of liquids or moisture may corrode its electronic circuits, if your headset gets wet, please dry it before using it.
- Do not use or store the device in dusty or dirty areas.
- Do not store the device in heat. High temperatures will shorten the lifetime of electronic devices, damage batteries, and could melt certain plastic parts.
- Do not store the device in areas which are too cold. When the device returns to its normal temperature, moisture will be formed inside and damage its electronic circuit board.

- Do not attempt to drop, knock or shake the device. Rough handling will damage its inside circuit board.

- Do not use harsh chemicals, cleaning solvents or strong detergents to clean the device.

- Do not paint the device, painting may clog the moving parts and prevent proper operation.

All the above suggestions are applicable for your headset, battery, charger, or any spare part. If any one of them doesn't work properly, please return it where you purchased the Clip Ultra 2 from.



Warning:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) The device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radio Frequency Exposure Statement

This product has been evaluated under FCC Bulletin OET 65C and found compliant to the requirement as set forth in CFR 47 section 2.1093 and 15.247(i) addressing RF Exposure from radio frequency device. The radiated output power of this product is far below the FCC radio frequency exposure limits.