

GSM Dual-Band GPRS Digital

**Mobile Phone
User Manual**

The manual is applicable for the Movistar Vision mobile phone.

文档信息

版本	修订日	修订	软件版本	备注
1.0	2010 年	赵琼		

Copyright © 2010 by ZTE Corporation

All rights reserved.

No part of this publication may be quoted, reproduced, translated or used in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.

The Bluetooth[®] trademark and logos are owned by the Bluetooth SIG, Inc. and any use of such trademarks by ZTE

Corporation is under license. Other trademarks and trade names are the property of their respective owners.

ZTE Corporation reserves the right to make modifications on print errors or update specifications in this manual without prior notice.

Version 1.0 in Aug. 2010

Contents

Let's get started	1
Lost or stolen?	2
Using your phone safely	3
Battery care and safety	6
Charger care and safety	8
Getting to know your phone	10
Inserting and removing the SIM	17
Inserting and removing a memory card	19
Using the battery	21
Inserting the battery	21
Removing the battery	23
Charging the battery	23
Power on/off	25
Using your phone	27

Common functions.....	30
Making and receiving calls	30
Making a call.....	30
Receiving a call	31
Adjusting the volume	31
Hands-free.....	32
Call options.....	32
Sending messages.....	33
Viewing messages.....	34
Adding a new contact	35
sending and receiving Email	36
using your phone as memory.....	38
Main Function list.....	40
Input what you want, how you want... ..	51
Appendix	52
Care and maintenance	52
Health and safety.....	54

FCC Regulations	56
Declaration of RoHS compliance	57
Disposal of your old phone.....	58
Problems and their solutions	60

Let's get started

Thanks for choosing the Movistar Vision. It's a GSM dual band GPRS digital mobile phone, which we'll simply call 'phone' from now on.

If you'd like your phone to live a long and fruitful life, please read this guide carefully and keep it for future reference. You never know when you might need it.

And don't worry if the pictures we use to demonstrate your phone's functions look a little different from what you see on its screen. It's the functions they show that matter.

Lost or stolen?

If your phone goes missing, please tell your service provider as soon as you know. That way other people can be barred from using it.

Obviously, it's best to keep your phone with you at all times, and we'd strongly advise you to set a PIN, and change it from time to time.

Using your phone safely



on the road

- Using a phone while driving is illegal in many countries. Please follow local laws and drive safely at all times.



near sensitive electronics

- Don't use your phone near sensitive electronic equipment – particularly medical devices such as pacemakers – as it could cause them to malfunction. It can also interfere with the operation of fire detectors and other automatic-control equipment.

- For more information about how your phone affects pacemakers or other electronic equipment, please contact the manufacturer or your local distributor.
- Your phone may cause interference when used near TVs, radios or automated office equipment.



while flying

- Your phone can cause interference with aircraft equipment. So it's essential you follow airline regulations. And if airline personnel ask you to switch off your phone, or disable its wireless functions, please do as they say.



in hospital

- Your phone may interfere with the normal operation of medical equipment. Follow all hospital regulations and turn it off when you're asked to by posted warnings or medical staff.



at a petrol station

- Don't use your phone at petrol stations. In fact, it's always best to switch

off whenever you're near fuels, chemicals or explosives.



around water

- Keep your phone away from water (or any other liquid). It's not a waterproof model.



making repairs

- Never take your phone apart. Please leave that to the professionals. Unauthorised repairs could break the terms of your warranty.



broken antenna

- Don't use your phone if the antenna is damaged, as it could cause injury.



around children

- Keep your mobile out of children's reach. It should never be used as a toy and it might not be good for their health.



original accessories

- Only use the original accessories supplied with your phone or those approved by the manufacturer. Using unapproved accessories may affect performance, make the warranty void, break national regulations on the use of mobile phones, or even cause injury.



near explosives

- Turn off your phone in or near areas where explosive materials are used. Always obey local laws and turn off your phone when requested.



emergency calls

- To make an emergency call your phone must be turned on and in an area where there's network coverage. Dial the national emergency number and press 'send'. Explain exactly where you are and don't hang up until help has arrived.

Battery care and safety

- Keep the battery in a cool, ventilated place and out of direct sunlight.

- Although the battery is rechargeable, it'll eventually start to lose its ability to recharge. If you find that the battery won't recharge, it's time to replace it.
- Please don't throw old batteries into your household rubbish. You'll find there are special bins for batteries at refuse collection points. And some high street electrical stores provide a battery recycling service too.
- Never throw the battery into a fire – it's highly inflammable and could explode, hurting you or somebody else.
- When you put the battery into your phone, there's no need to use force. Exerting too much pressure could make it leak, overheat, explode or burst into flame.
- Never take the battery apart. This may result in leakage, overheating, explosion or fire.
- If the battery becomes hot, changes colour or shape at any time (when in use, charging or even while in storage) please stop using it immediately and replace.
- Keep the battery dry. Damp or wet conditions can cause it to overheat or corrode.
- Don't leave the battery in direct sunlight or anywhere really hot, like in a car on a summer's day. That could make it leak or overheat, while

lowering its performance and shortening its life.

- Don't charge the battery continuously for 24 hours. Overcharging is not good for it.



Note:

Please avoid contact with the materials inside a damaged or leaking battery. If they get on your skin, wash with lots of water and seek medical assistance if required.

Charger care and safety

- Only plug into voltages between 110VAC and 220VAC. Using a voltage outside that range can damage the phone/charger – and cause the battery to leak or catch fire.
- Never short-circuit the charger – this may cause electrocution, overheating or damage.
- Don't charge the phone in direct sunlight or in an area where it's damp,

dusty, or on a vibrating surface. And charging your phone near – or on – a TV or radio could interfere with transmission.


- Don't use the charger if the power cable is damaged. It may cause a fire or give someone an electric shock.
- Keep water well away from the charger. If the charger does get splashed by water, or any other kind of liquid, immediately unplug it to avoid overheating, fire or electrocution.
- Don't take the charger apart. It could cause injury, give you an electric shock or catch fire.
- Never touch any charger, electric cable or socket with wet hands.
- Don't place heavy objects on the electric cable.
- If the cable is damaged, don't try to mend it yourself – it could cause a fire or electrocute you.
- Always unplug the charger before you clean it.
- When unplugging the charger, hold the plug itself, rather than pulling on the cable. A damaged cable can cause electrocution or fire.

Getting to know your phone

Hanging

Let's get started



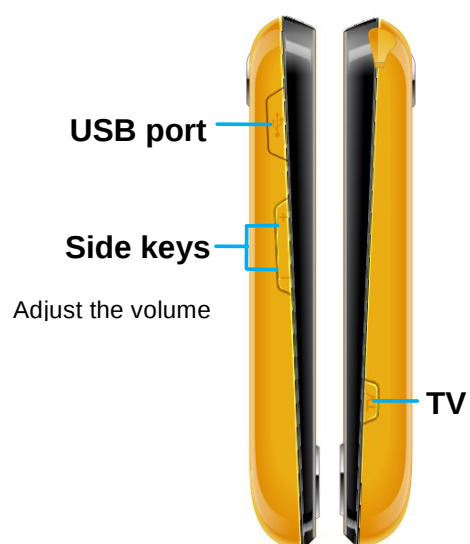

Let's get started



Note:

In this user guide, 'press' means pressing the key and then releasing.

'Hold' means pressing and holding the key for two seconds or more; 'click' means clicking the corresponding icon on the screen with touch-pen.

Onscreen icons

Icons	Descriptions	Icons	Descriptions
	Show the phone's network signal strength		Show the phone's battery capacity.
	Calling or in call		Call Forwarding
	You have unread SMS.		You have unread MMS.
	You have unread Email		You have unread voicemail
	The ringing type is set to Ring.		The ringing type is set to Vibration.
	The ringing type is set to Vibration and ring tone.		Flight
	A GPRS packet data connection is active.		The phone is under roaming status.
	A clock alarm is active.		Music
	The keypad is locked.		The keypad is unlocked.
	FM Radio ON		Bluetooth® ON

Inserting and removing the SIM


Your phone needs a valid SIM card to work (...To keep it simple, we'll just call it 'SIM' from now on). Your network connection data and your SIM address book are saved on the SIM. So, to avoid damaging your SIM or losing data, try not to touch the metal surface when you're handling it – and keep well away from any magnetic or electric source.

here's what you do...

1. Switch off your phone and disconnect any external

power.


2. Remove the back cover and then the battery.
3. Hold your SIM on the cut corner, and slide it – face down – into the card holder.



4. Insert the battery.
5. Replace the back cover.

Inserting and removing a memory card

1. Turn off your mobile phone, remove the battery and disconnect any external power.
2. Insert the memory card into the slot.
3. Slide into place to secure the card.

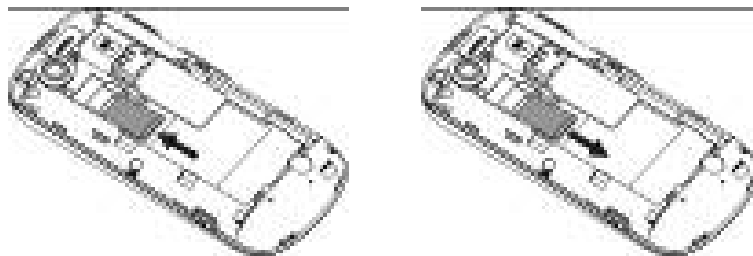

And to remove the memory card, simply reverse those steps.


But always remember to turn your phone off and take the SIM out before removing the memory card.

Using the battery

Inserting the battery

1. Open the battery cover
on the back of your
phone.

2. Align the battery's
contact points with
those of the phone and

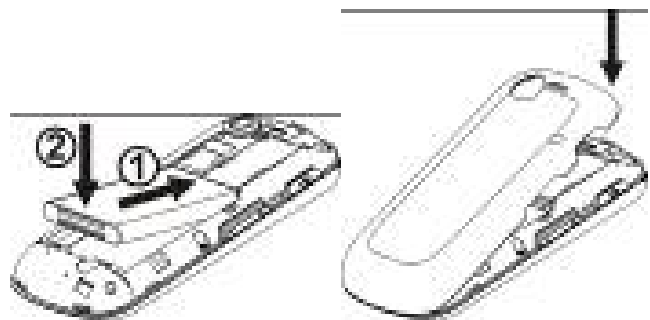


gently press the battery
down into place.

3. Replace the battery
cover clicking it back
into position.

Removing the battery

1. Switch off your phone.
2. Open the battery cover.
3. Lift the battery up and out of your phone.

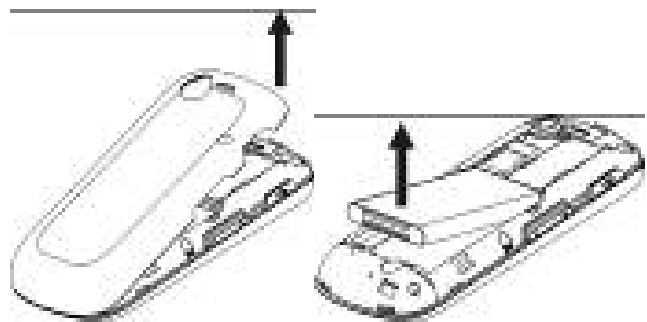

Charging the battery

The rechargeable Li-ion battery that comes with your phone is ready to use, but is not charged. That's easy to do. We'll show you how below.

The first three times you use the battery, make sure it's completely drained before recharging. And then recharge it fully. That will help to ensure its optimum performance and a long life.

1. Connect the charger to your phone, and plug it into an

110V/220V socket.

2. The battery indicator in the corner of the screen will scroll to show you it's charging. If the phone's battery has been fully drained, the battery indicator may not immediately appear on the screen when charging starts. And please don't worry if the phone and charger become warm while charging. That's completely normal.
3. When fully charged, the battery indicator will stop scrolling up and down.
4. Disconnect the charger from your mobile, and unplug.

Power on/off

Press the power key until the power-on/off icon appears.

When you turn your phone on, it'll automatically check the SIM and show the following information on screen:

- ◆ **Input phone lock code:** If you've set a lock code.
- ◆ **Input SIM PIN:** If you've set a PIN for your SIM.



Note:

The PIN is supplied with your SIM. Please replace it with your own PIN code as soon as possible. Enter the wrong PIN three times, and your SIM will be locked. Then you'll need to contact your network service provider to ask for a PUK code to unlock it.

-
- ◆ **Searching:** The mobile phone will search for the available network.

Using your phone

Select 'Menu' to enter the main menu...

Call center

Call history
Call settings

Movistar**Multimedia**

Mobile TV
Camera
Album
Video recorder
Video player
Audio player
Sound recorder
FM radio

Gallery

Album

Messaging

Write message
Inbox
Drafts
Outbox
Sent messages
Delete messages
Email
Broadcast message
Templates
Message settings

Fun & Games

Games

Services

STK Services

Audio player**Extra**

Calculator
Alarm
World clock

TV**Settings**

User profiles
Pen calibration
Phone settings
Network settings
Security settings
Connectivity
Restore factory settings

File manager

Internet service

Phonebook

Licence manager

Common functions

Making and receiving calls

Making a call

- **Direct dial:** In idle mode, select  to display the dialling keyboard and click the numeric keys to input the number. Select  to dial.
- **Dialling from the Contacts:** In idle mode, select  to enter 'Phonebook', then select your contact and press the Send key to dial.
- **Dialling from call history:** In idle mode, press the Send key to enter the list of call logs, select the call record, and press the Send key to dial.
- **Saving a number:** On the dialling screen, type in a contact's phone number, select 'Options' → 'Save to Phonebook' to save it as a new entry, or save it over an existing entry.
- **Dialling an extension:** Sometimes you can't dial an extension directly. If this happens, dial the direct line first, select  continuously until 'P'

appears on the screen and then dial the extension number.

- **Dialling international calls:** To make an international call, select  continuously until '+' appears. Now you can dial anywhere in the world, without even having to enter the international dialling code.

Receiving a call

Someone's calling? Press the Send key to answer.

Adjusting the volume

During a conversation, you can raise or lower the volume by using the side keys.

Hands-free

Select 'H-Free' to use your phone hands-free. Select 'H-Held' to be hands-on again.

Call options

Need to multitask while you're on a call? Just select 'Options' if you want to access your phonebook, messaging, or other functions.

Sending messages

1. In idle mode, click 'Menu' to enter the main menu, then select 'Messaging' → 'Write Message' to edit the message text.
2. Writing your message:
 - ◆ If you want to add a picture, sound, video... select 'Options' followed by 'Add picture', 'Add sound' or 'Add video' or whatever you want.
 - ◆ If you want to send a multimedia message, please select 'Switch to MMS'.
3. Add the recipient: input the recipient's number and select the recipient from 'Phonebook'.
4. After editing the message, select 'Send' to send the message.

Viewing messages

Your phone is very versatile. According to what you've selected, it can tell you that you've received a new message in three different ways: a ringtone, a prompt, or a new message icon.

Press the OK key to open your inbox and read the message:

1. In idle mode, press 'Menu' to select 'Messaging' ⇒ 'Inbox'.

2. All your received messages will be displayed on the screen. Use the Up/Down key to select the message, and select 'View' to see the content.
3. Then go to 'Options' to select 'Reply', 'Forward', 'Delete', or whatever you want to do...

Adding a new contact

1. In idle mode, select 'Menu' and go to 'Phonebook'.
2. If you'd like to add a new contact to your phone memory, simply select 'Add new contact'. Then you can enter all the details you want.
3. If you'd prefer to add a new contact to the SIM memory, select 'Options' → 'Phonebook settings' → 'Preferred storage' → 'SIM'. There you can add the name, number and details, etc.
4. Select 'Save' when you're happy with what you've done.

sending and receiving Email

You can send and receive Emails over the GPRS network after the mobile phone has connected to the mail server.

You have to change the following settings before using Emails. For different email providers, the settings may be slightly different. Please consult your email provider. The following guide is for your reference only.

1. In idle mode, press the OK key and then click 'Messaging' to select 'Email'⇒'Email accounts'.
2. Select 'Options'⇒'New account' to create a new account.

- **Email address:** input your E-mail address, e.g., abc@gmail.com
 - **Protocol:** select 'POP3' or 'IMAP4' (Please consult your email provider).
 - **Data account:** set Movistar MMS as default. You could press 'Options'⇒'Select' to select.
 - **Incoming server:** input 'imap.gmail.com' (for other email accounts, you need change the mail server name, or consult your email provider).
 - **Outgoing server:** input 'smtp.gmail.com' (for other email accounts, you need to change the mail server name, or consult your email provider).
 - **User name:** you can remove the mail server name and just keep 'abc', for example.
 - **Password:** the logon password you have set for your email account.
 - **Account name:** set a name randomly.
3. After the settings, select the newly created account.
- Press 'Options'⇒'Edit'⇒'Advance settings'⇒'Outgoing server', and set 'Outgoing port' as '25', set 'Authentication' as 'On'. Press 'Edit' to enter 'Authentication' and then set 'Use POP3/IMAP' as 'Yes' or 'No'. When setting as 'No', you could input your User name and Password.

- Press 'Options'⇒'Edit'⇒'Advance settings'⇒'Incoming server', set 'Incoming port' as '110'.
- 4. Return to 'Email accounts', select the newly created account, and press 'Options' ⇒'Activate'.
- 5. After settings, you should be able to send/receive mails.

using your phone as memory

Make sure the memory card is installed and your phone is switched off, then connect the phone to your PC with the USB data cable, and switch your phone back on. Then select 'Mass storage', and you can use your phone as extra memory.

Main Function list

In idle mode, click 'Menu' to enter the main menu. Those marked with '*' need support from network operators.

Function	Description	Operation
View call history	See who's recently called you, who you've called and which calls you've missed.	Call center → Call history → Missed calls/ Dialed calls/ Received calls
Delete a call log	Delete a call log on the SIM.	Call center → Call history → Select one call log → Options → Delete
View call duration	See how long your previous call – dialled or received – lasted.	Call center → Call history → Call timers

Function	Description	Operation
Call waiting	Activate this if you want to be prompted about incoming calls.	Call center → Call settings → Call waiting
Call divert	Divert incoming calls to another designated number.	Call center → Call settings → Call divert
Call barring	Set the outgoing call restriction or incoming call restriction.	Call center → Call settings → Call barring
Auto redial	Set your phone to automatically redial a number if your call is not answered.	Call center → Call settings → Advance settings → Auto redial
Movistar	Log on to Movistar.	Movistar
Mobile TV	Provides TV function.	Multimedia → Mobile TV
Camera	Capture digital photos.	Multimedia → Camera
Album	Browse photos saved on your phone	Multimedia → Album

Function	Description	Operation
	and memory card.	
Video recorder	Record video files.	Multimedia → Video recorder
Video player	See and play your video files.	Multimedia → Video player
Audio player	Play the audio file.	Multimedia → Video recorder
Sound recorder	Record audio files.	Multimedia → Sound recorder
FM radio	Listen to FM broadcasts.	Multimedia → FM radio
File manager	View files saved on the phone or memory card.	Gallery → File manager
View	Browse all contacts in your Address	Phonebook → View contacts

Function	Description	Operation
contacts	book. To find a contact, input the first letter of their name.	among All contacts, SIM contacts, Group contacts and Phone contacts
Add contacts	Save the telephone number and name.	Phonebook → Add new contact
Edit contact	Edit the information on an existing contact.	Phonebook → Select one contact → Options → Edit
Copy contacts	Copy all contacts from your SIM to phone or from phone to SIM.	Phonebook → Move the highlight to Add new contact → Options → Phonebook Settings → Copy contacts
Move contacts	Move all contacts from SIM to phone, or from phone to SIM.	Phonebook → Move the highlight to Add new contact → Options → Phonebook Settings → Move contacts
Delete all contacts	Delete all contacts in SIM or phone.	Phonebook → Move the highlight to Add new contact → Options → Phonebook Settings → Delete all contacts

Function	Description	Operation
Preferred storage	Select the preferred storage as phone or SIM.	Phonebook → Move the highlight to Add new contact → Options → Phonebook settings → Preferred storage
Speed dial	Assign up to 8 phone numbers to keys 2-9. In idle mode, hold the key number that corresponds to your desired contact.	Phonebook → Move the highlight to Add new contact → Options → Phonebook settings → Speed dial
Caller groups	Divide the contacts into different groups. You can only add/delete group members when they're saved in your phone's memory.	Phonebook → Caller groups
Send message	Send text messages/multimedia messages to other mobile phones.	Messaging → Write message
View message	Read the messages (received, unsent, saved and sent).	Messaging → Inbox/ Drafts /Outbox /Sent messages
Delete	Delete the messages in your Inbox, Outbox, Sent messages, Drafts or all	Messaging → Delete messages

Function	Description	Operation
message	messages.	
Templates	Choose the template for a text or multimedia message.	Messaging → Templates
Voicemail*	A caller can leave a message and you can listen to it in your voicemail.	Messaging → Message settings → Text message → Voicemail server In idle mode, hold '1' key to call the first voicemail number.
Check memory status	Check the memory status for text messages on your SIM card and phone.	Messaging → Message settings → Text message → Memory status
Preferred storage	Save messages on the SIM card or phone.	Messaging → Message settings → Text message → Preferred storage
Email	Send email to other mobile phones.	Messaging → Email

Function	Description	Operation
Broadcast messages*	Receive messages from a network operator.	Messaging → Broadcast messages
Games	Your phone comes with free games. You can discover how to play it in the games menu.	Fun & Games → Games
Internet services	Get access to WAP service.	Internet services
Audio player	Play the audio file.	Audio player
Calculator	Do your sums on your phone.	Extra → Calculator
Alarm	Set multiple alarms or the power-off alarm.	Extra → Alarm
World clock	Check the current time in different	Extra → World clock

Function	Description	Operation
	cities around the world.	
TV	Provides TV function.	TV
User profiles	Personalise your phone settings, such as ringtone, volume, etc. according to where you are and what you're doing.	Settings→User profiles→Select Profile (General/Meeting, etc.)→Activate
Pen calibration	Adjust the screen as you prefer.	Settings→Pen calibration
Time and date	Set the date and time displayed on the phone.	Settings→Phone settings→Time and date
Schedule power on/off	Set a time for your phone to power on/off automatically.	Settings→Phone settings→Schedule power on/off
Language	Select the menu language.	Settings→Phone settings→Language

Function	Description	Operation
Touch Shake Settings	Turn on/off Touch Shake Settings.	Settings→Phone settings→Touch Shake Settings
Auto date and time update	Choose whether the date and time updates automatically.	Settings→Phone settings→Auto update of date and time
LCD backlight	Set the backlight time and brightness.	Settings→Phone settings→Misc. settings→LCD backlight
Network settings	Select a network and set GPRS connection.	Settings→Network settings
SIM lock	Activate your PIN to prevent unauthorised use of your SIM. Please replace it with your own PIN as soon as possible.	Settings→Security settings→SIM lock

Function	Description	Operation
Phone lock	Stop others using your phone. The default phone lock password is 0000.	Settings → Security settings → Phone lock
Keypad lock	Prevent accidental operation of your phone.	Settings → Security settings → Auto keypad lock In idle mode, press Send key and click the center of the icon to unlock.
Bluetooth®	Exchange data with other Bluetooth® devices. Also listen to music or talk hands-free with a Bluetooth® headset.	Settings → Connectivity → Bluetooth®
Data account	View the Data account.	Settings → Connectivity → Data account
Restore factory	Restore the settings your phone had	Settings → Restore factory

Function	Description	Operation
settings	when it first came out of the box.	settings

**Note:**

When copying files from a PC to a memory card, make your life easier by putting them in the relevant folder. For example, music files should go in the 'My Music' folder and video files in the 'Videos' folder and electronic books in the "Ebook" folder.

Input what you want, how you want...

With your phone you can write in: capitals (ABC/ES/PT); lower case (abc/es/pt); predictive text input(eZi ABC/eZi abc/eZi ES/eZi es/eZi PT/eZi pt); numbers (123) or even in symbols!

Here's how to make those choices...

Switch input method

Press  to change the input method.

Insert a space

Press  under any input method (except for 123 input method).

Delete

Select 'Clear' to delete anything (letter by letter or number by number) in front of the cursor or hold 'Clear' to delete everything.

Input ABC/abc

Each key is used to input multiple letters. Rapidly press the key until the letter you want appears.

Input numbers

After selecting the 123 input method, choose the numbers you want.

Input symbols

Press  to open the virtual keypad and select symbols.

Appendix

Care and maintenance

Your phone is a delicate device. The following advice will help you to keep it looking good and performing well...

- Use a soft dry cloth to clean your phone, battery and charger. Don't use liquids such as alcohol, dilution agents or benzene.
- From time-to-time, clean the socket where the charger cable connects to the phone. Dust tends to gather there. This will ensure a really good connection.
- Don't use needles, pen points or other sharp objects on the keypad or screen.
- Don't use your phone with wet hands – it could injure you and damage the phone.

- Don't use your phone in dusty or dirty environment.
- Keep your phone away from extremes of heat – like radiators or ovens. It may explode if it gets too hot.
- If your phone gets wet and the colour of the label on it changes, the warranty will be void, even if the warranty period hasn't expired.
- If there's anything wrong with the phone, battery, charger, or any accessory, please send them to your nearest service centre for inspection.

Health and safety

SAR certification information

The model meets international guidelines for exposure to radio waves.

Your phone is a radio transmitter and receiver. It's designed not to exceed the limits for exposure to radio waves recommended by international guidelines. The guidelines were developed by ICNIRP, an independent technical standards body, and include margins designed to assure the protection of all persons, regardless of age and health.

These guidelines use a unit of measurement known as Specific Absorption Rate, (SAR). The SAR limit for mobile devices is 1.6 W/kg and the highest SAR value for this device when tested was¹...

Position	850MHz (W/Kg)	1900MHz (W/Kg)
Head	0.063	0.213
Body	0.082	0.137

As SAR is measured when the phone is on its highest transmitting power, the actual SAR of this device while operating normally is typically below the levels shown above. This is because your phone automatically changes its power level to ensure it only uses the minimum level required to reach the network.

The World Health Organization has stated that present scientific information does not indicate the need for any special precautions for the use of mobile devices.

1. The tests are carried out in accordance with IEEE standard P1528-2003.

important safety information

For your own health and safety, please follow the radio frequency (RF) radiation exposure guidelines and keep your phone no less than 1.5cm away from your body. Failure to do this could mean that your RF exposure exceeds the guideline limits.

how to limit your radio frequency (RF) exposure

The World Health Organization (WHO) gives the following advice to people who want to limit their exposure to RF radiation...

Present scientific information does not indicate the need for any special precautions for the use of mobile phones. If individuals are concerned, they may choose to limit their own or their children's RF exposure by limiting the length of calls, or using 'hands-free' devices to keep mobile phones away from the head and body.

Further information on the subject can be obtained from the World Health Organization website at <http://www.who.int/peh-emf> WHO Fact sheet 193: June 2000.

FCC Regulations

This mobile phone complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This mobile phone has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiated radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

Declaration of RoHS compliance

We're determined to reduce the impact we have on the environment and take responsibility for the earth we live on. So this document allows us to formally declare that the Movistar Vision, manufactured by ZTE CORPORATION, fully complies with the European Parliament's RoHS (Restriction of Hazardous Substances) Directive 2002/95/EC, with respect to all the following substances:

- (1) Lead (Pb)
- (2) Mercury (Hg)
- (3) Cadmium (Cd)
- (4) Hexavalent Chromium (Cr (VI))
- (5) Polybrominated biphenyl (PBB)
- (6) Polybrominated diphenyl ether (PBDE)

Our compliance is witnessed by written declaration from our suppliers. This confirms that any potential trace contamination levels of the substances listed above are below the maximum level set by EU 2002/95/EC, or are exempt due to their application.

The Movistar Vision manufactured by ZTE CORPORATION, meets all the requirements of EU 2002/95/EC.

Disposal of your old phone

1. When the wheelie bin symbol is attached to a product, it means the product is covered by the European Directive 2002/96/CE.

2. All electrical and electronic products should be disposed of separately from normal household waste via designated collection points provided by government or local authorities.
3. The correct disposal of electrical and electronic products will help protect the environment and human health.

Problems and their solutions

Symptoms	Possible Causes	Solutions
Phone won't turn on	The battery is flat	Charge the battery
	Poor contact	Reinstall the battery
Phone turns itself	Battery very low	Charge the battery
Poor standby time	Decreasing of battery performance	Replace the battery
	Weak network signal	Turn off the phone
Can't connect to the network	Weak network signal	Move to where the signal is
	Out of the service area	Make sure you're in a network service area.
Calls keep cutting	Weak network signal	Move to where the signal is
Phone doesn't ring when I receive incoming	Phone is set to 'Mute' or minimum volume.	Enter 'User profiles' to select a Non-silent mode, or increase the

calls		ring volume.
Received prompt asking me to input 'PUK'	SIM locked because wrong PIN entered three times.	Contact Orange and ask for a PUK.