

Product Safety Information

- Read the Safety Information section of this user guide on page 1
- Do not use while re-fuelling
- Do not use hand-held while driving
- This device may produce a bright or flashing light
- For body-worn operation maintain a separation of 15 mm
- Do not dispose of it in a fire
- Small parts may cause a choking hazard
- Avoid contact with magnetic media
- This device may produce a loud sound
- Avoid Extreme Temperatures
- Keep away from pacemakers and other personal medical devices
- Avoid any contact with liquid, keep it dry
- Switch off when instructed in hospitals and medical facilities
- Do not attempt to disassemble
- Switch off when instructed in aircrafts and airports
- Do not rely on this device for emergency communications
- Switch off in explosive environments
- Only use approved accessories

* The tests are carried out in accordance with IEC standard PT62209-1.

** Please see page 3 about body worn operation.

Body Worn Operation

Important safety information regarding radiofrequency radiation(RF) exposure.

To ensure compliance with RF exposure guidelines the phone must be used with a minimum of 5 mm separation from the body.

Failure to observe these instructions could result in your RF exposure exceeding the relevant guideline limits.

Limiting Exposure to Radio Frequency (RF) Fields

For individuals concerned about limiting their exposure to RF fields, the World Health Organisation (WHO) provides the following advice:

Precautionary measures: Present scientific information does not indicate the need for any special precautions for the use of mobile phones. If individuals are concerned, they might choose to limit their own or their children's RF exposure by limiting the length of calls, or using 'hands-free' devices to keep mobile phones away from the head and body.

Further information on this subject can be obtained from the WHO home page <http://www.who.int/peh-emf> WHO Fact sheet 193: June 2000.

Regulatory Information

The following approvals and notices apply in specific regions as noted.


The declaration for CE conformity and RoHS compliance can be read on page 25-26 and page 23.

Battery

The lithium ion battery of the mc used after unpacking. A new battery performs best after performing a full charge/discharge 3 times.

Installing the battery

1. Insert the battery by aligning the gold contacts on the battery with the gold contacts in the battery compartment on the phone.
2. Push down on the upper section of the battery until it clicks into place.
3. Replace the battery cover and press it gently until you hear a click.

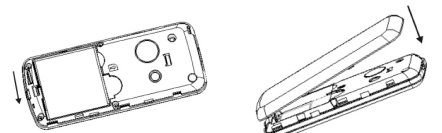

Pull down the battery Press the cover until you hear a click

Removing the battery

1. Ensure that your mobile phone is switched off.
2. Remove the battery cover.
3. Pull the battery up and remove it from the mobile phone.

What is a SIM card?

Every mobile phone has a SIM card (Subscriber Identity Module). This is a micro-chip that holds your personal information such as names and phone numbers. Your phone won't work without it. If you already have contacts on your SIM card, they can be transferred in most cases.


How to charge the battery

Your phone is powered by a rechargeable battery. The battery needs to be charged for at least 6-8 hours before you can make your first call.

- Connect your travel adapter to the bottom of your mobile phone as shown in the diagram.

Note: The side with arrow should be upright while connecting.

- Connect the other end of the travel adapter to the mains socket.
- If you are charging the battery when the mobile is switched off, the display will show the battery icon with the bars moving from right to left. If charging the battery when the mobile is switched on, the display will show the battery icon with a lightning strike.
- When the battery is fully charged, disconnect the charger.



- 4.2 Display settings
- 4.3 Clock settings
- 4.4 Call settings
- 4.5 Fixed dialling number
- 4.6 Service dialling number
- 4.7 Network settings
- 4.8 Security settings
- 4.9 Factory settings
- 5. Tools
- 5.1 Alarm
- 5.2 Calculator
- 5.3 World clock
- 5.4 Torchlight
- 6. SIM

Writing text

- Change input mode: Press # key to change the input mode (input modes: Eng, abc, Abc, ABC and 123).
- Input Letters: In abc/Abc/ABC mode, press the corresponding letter key till the letter appears.
- Input Words: In Eng mode, key in any letter with a single key press. Press each key only once for every letter. The word changes after each key stroke. When you have finished writing the word and it is correct, confirm it by pressing 0 key or Centre key. Pressing a Navigation key moves the cursor. Predictive text input is based on a built-in dictionary.
- Input Digits: In 123 mode, press digit key once to key in a digit. In Eng mode, press the digit key, and select the number by pressing a Navigation key. In ABC/abc/Abc mode, constantly press or hold the digit key until the number appears.
- Input Symbol: Press * key to enter a symbol. In ABC/abc/Abc mode, constantly press 1 key till the required symbol (common symbols) appears.
- Selecting Template: Hold * key to open Templates. Select the required template.

How to make and receive calls

The most basic way to make a call is to key in the number in the standby mode and press **Send key**. One advantage of a mobile phone is that you can also store people's names and numbers in your mobile **Contacts** and call them more easily. To call someone:

- Select Menu then [Contacts]. From here use the Up/Down keys to find the name of the person you want to call. You can also type in the first letter of the name of the person you want to call.
- Now simply press Send key.
- To receive a call: Press Send key.
- To end a call: Press End key.

Make sure you are in an area with sufficient coverage to make calls. The strength of the network signal is indicated on top left corner of the screen.

How to send and receive text messages

You can use your mobile phone to send and receive text messages.

1. Go to **Menu**→**Messaging**→**New message**.
2. Write your message. For more information on writing, see section 'Writing text'.
3. Press **Left soft key** [Options] and select **Send to one** to send the message to one person. To send to more than one person, select **Send to contacts** and select the names from the contact list. Select **Send and save** to send the message and save it to Sent folder. Select **Save as draft** to save it to **Draftbox**.

Vodafone User Manual

RF Exposure


General Statement on RF Energy

Your phone contains a transmitter and a receiver. When it is ON, it receives and transmits RF energy. When you communicate with your phone, the system handling your call controls the power level at which your phone transmits.

Specific Absorption Rate (SAR)

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organisation ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health. The guidelines use a unit of measurement known as Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 1.6 W/kg and the highest SAR value for this device when tested at the ear was 1.24W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this user guide**.

As SAR is measured utilising the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum power required to communicate with the network. This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference. Caution: Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

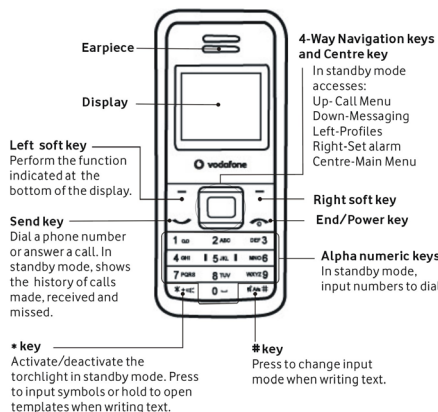


Interface icons

Icon Description

- Signal strength
- Vibration
- New message
- Keypad locked

Icon Description

- Silent profile
- Alarm clock set
- Battery status
- Headset

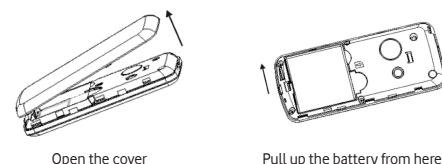


Open the cover Pull up the battery from here

How to insert the SIM card

You want a mobile phone that is sophisticated yet easy to use and here it is in your hands! Naturally you are eager to start using it, but first you need to insert the SIM card. Insert the SIM card as follows:

- Ensure that the phone is switched off and the charger is disconnected from the phone.
- Turn the phone over and remove the back cover.
- If the battery is already inside, remove it!
- Hold your SIM card with the cut corner oriented as shown and then slide it into the card holder face down.
- Replace the battery first.
- Replace the back cover.

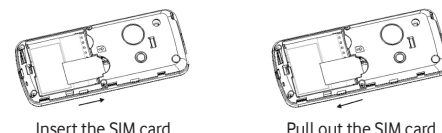

Insert the SIM card Pull out the SIM card

Power on/ off your phone

- Ensure that your SIM card is in your mobile phone and that the battery is charged.
- Please hold **End key** to power on/off the phone. The phone will automatically search for the network.

Display information

Besides sending and receiving calls, you can also do:

- In the standby mode, press **Left soft key** to enter main Menu.
- In the standby mode, press **Right soft key** to view Contacts.
- In the standby mode, hold * key to turn the Torchlight on/off.
- Press **Send key** in standby mode to enter **Call Menu**.
- Press **End key** to exit to standby mode.
- You can customise the fastkey settings of **4-Way Navigation keys** for standby mode.

Note: In this User Manual, "press a key" means to press the key and release it, while "hold a key" means to keep pressing the key.

Menu tree

- 1. **Messaging**
 - 1.1 New message
 - 1.2 Inbox
 - 1.3 Sent folder
 - 1.4 Draftbox
 - 1.5 Msg settings
 - 1.6 Voicemail
- 3.3 Outdoor
- 3.4 Silent
- 3.5 Headset (appears only when headset is connected)
- 4. **Settings**
 - 4.1 Phone settings
- 1.7 Cell info.
- 2. **Call Menu**
 - 2.1 Calls
 - 2.2 Diverts
- 3. **Profiles**
 - 3.1 Normal
 - 3.2 Meeting

- Input Space: Press 0 key to input space. It does not work in 123 mode.
- Delete Character: Press Right soft key to clear a character. Press and hold Right soft key to delete all characters and clear the display.
- Move Cursor to Left or Right: Press Left/Right navigation keys to move the cursor left or right.

How do I add people to my Contacts

There are some phone numbers that you may want to call again and again so it makes sense to add these to your **Contacts**. You can then access these numbers quickly and easily.

- Press right soft key [Contacts].
- Press Left soft key [Options], and then select **Add new Contact**.
- Enter the contact's phone number.
- Press Left soft key [OK] or Centre key, then enter a name and confirm by clicking Centre key or Left soft key [OK] again.
- You can also save a number right after you've made or received a phone call or a text message from someone who is not yet in your Contacts list.
- To delete someone from your Contacts list, first select the name, then press **Left soft key** [Options] and choose **Delete**.

4. Enter the recipient's phone number or select from **Contacts**. Then select **OK** to send the message. Upon receiving a message, the mobile phone indicates with ringtone, prompt, or a new message icon.
 1. Press **Left soft key** [Select] to open the new message. You can also go to **Inbox** to read the message.
 2. Use **Up/Down keys** to read the message.
 3. While the message is open, use **Left soft key** [Options] to reply, delete, or forward the message. You can also call back to the sender or extract the sender's number.

Menu functions

Here are some brief instructions of the menu functions of the phone.

| Function | Description | Selection |
|--------------|---|--|
| Recent calls | View all recent calls | Menu→Call Menu →Calls→All calls/Received calls/Dialled calls/Missed calls or select Send key from the standby screen |
| Divert calls | Divert the incoming calls to other preset numbers(need network support) | Menu→Call Menu →Diverts |
| Calculator | Execute basic mathematical calculation | Menu→Tools →Calculator |

| Function | Description | Selection |
|---------------------|---|--|
| World Clock | Check time in major cities | Menu→Tools→World clock |
| Ringtone /Vibration | Set ringtone or Vibrator | Menu→Profiles →Select Profile (Normal/Meeting etc.)→Personalise →Ringtone/ Vibration |
| Send message | Send text messages to other mobile phones | Menu→Messaging →New message |
| Read message | Read text messages (received, sent) | Menu→Messaging →Inbox/Sent folder /Draftbox |
| Templates | Preset messages to help make Sending text messages easier and quicker | Menu→Messaging →Msg settings →Templates |
| Voicemail | Receive and listen to voice messages | Menu→Messaging →Voicemail or hold 1 key to call voicemail |
| Alarm | Set alarm alert time | Menu→Tools→Alarm |
| Fastkey settings | Set the shortcuts for the navigation keys (Up/Down/Left /Right key) | Menu→Settings →Phone settings →Fastkey settings |
| Automatically | Automatically lock the | Menu→Settings |

- 13 -

| Function | Description | Selection |
|-------------------------|---|--|
| Service dialling number | Phone numbers preset by network service provider can be dialed (need network support) | Menu→Settings →Service dialling number |
| Network settings | Set network searching mode | Menu→Settings →Network settings |
| Security settings | Access your phone's security settings * Default phone code is 1234 | Menu→Settings →Security settings |
| Factory settings | Restore to original factory settings | Menu→Settings →Factory settings |

Distraction

Driving

Full attention must be given to driving at all times in order to reduce the risk of an accident. Using a phone while driving (even with a hands free kit) causes distraction and can lead to an accident. You must comply with local laws and regulations restricting the use of wireless devices while driving.

Operating Machinery

Full attention must be given to operating the machinery in order to reduce the risk of an accident.

- 15 -

Small Children

Do not leave your phone and its accessories within the reach of small children or allow them to play with it. They could hurt themselves or others, or could accidentally damage the phone. Your phone contains small parts with sharp edges that may cause an injury or which could become detached and create a choking hazard.

Demagnetisation


To avoid the risk of demagnetisation, do not allow electronic devices or magnetic media close to your phone for a long time.

Electrostatic discharge (ESD)

Do not touch the SIM card's metal connectors.

Antenna

Do not touch the antenna unnecessarily.

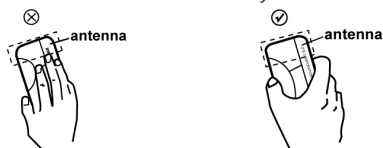

- 17 -

Emergency Calls

This phone, like any wireless phone, cannot guarantee connection in all conditions. Therefore, you must never rely solely on any wireless phone for emergency communications.

Loud Noise

This phone is capable of producing loud noises which may damage your hearing.

Bright Light

The phone can produce a flashing light, so it can be used as a torch. However, do not use it too close to the eyes.

Phone Heating

Your phone may become warm during charging and during normal use.

Electrical Safety

Accessories

Use only approved accessories.

Do not connect with incompatible products or accessories. Take care not to touch or allow metal objects, such as coins or key rings, to contact or short-circuit in the battery terminals.

Connection to a Car

Seek professional advice when connecting a phone interface to the vehicle electrical system.

- 19 -

Medical Devices

Please consult your doctor and the device manufacturer to determine if operation of your phone may interfere with the operation of your medical device.

Hospitals

Switch off your wireless device when requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive medical equipment.

Aircraft

Switch off your wireless device whenever you are instructed to do so by airport or airline staff. Consult the airline staff about the use of wireless devices on board the aircraft, if your device offers a 'flight mode' this must be enabled prior to boarding an aircraft.

Interference in Cars

Please note that because of possible interference to electronic equipment, some vehicle manufacturers forbid the use of mobile phones in their vehicles unless a handsfree kit with an external antenna is included in the installation.

Explosive Environments

Petrol Stations and Explosive Atmospheres

In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other radio equipment.

- 21 -

Declaration of RoHS Compliance

To minimise the environmental impact and take more responsibility to the earth we live in, this document shall serve as formal declaration that the VODAFONE 236G+ manufactured by ZTE CORPORATION is in compliance with the Directive 2002/95/EC of the European Parliament - RoHS (Restriction of Hazardous Substances) with respect to the following substances:

- (1) Lead (Pb)
- (2) Mercury (Hg)
- (3) Cadmium (Cd)
- (4) Hexavalent Chromium (Cr (VI))
- (5) Polybrominated biphenyls (PBB's)
- (6) Polybrominated diphenyl ethers (PBDE's)

(Compliance is evidenced by written declaration from our suppliers, assuring that any potential trace contamination levels of the substances listed above are below the maximum level set by EU 2002/95/EC, or are exempted due to their application.) The VODAFONE 236G+ manufactured by ZTE CORPORATION, meets the requirements of EU 2002/95/EC.

- 23 -

EC DECLARATION OF CONFORMITY

It is hereby declared that following designated product :

Product Type : GSM Dual-band Digital Mobile Phone

Model No. : Vodafone 236G+

Complies with the essential protection requirements of Low Voltage Directive 2006/95/EC (previous 73/23/EEC), Electromagnetic Compatibility Directive 2004/108/EC (previous 89/336/EEC), Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/05/EC) and their amendments.

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to Low Voltage Directive 2006/95/EC (previous 73/23/EEC), Electromagnetic Compatibility Directive 2004/108/EC (previous 89/336/EEC), Radio and Telecommunication Terminal Equipment Directive 1999/05/EC and their amendments was performed by Germany EMCert. DR. RASEK GmbH (Notified Body No. 0678), based on the following standards :

| Essential Requirement | Applied Specifications/Standards |
|-----------------------|----------------------------------|
| Art.3.1(a) Health | EN50360, EN50361 |
| Art.3.1(a) Safety | EN60950-1 |
| Art.3.1(b) EMC | EN301489-1, EN301489-7 |
| Art.3.2 Radio | EN301511 |

- 25 -

| Function | Description | Selection |
|-----------------------|---|--|
| lock keypad | keypad after 2 minutes in standby mode | →Phone settings →Auto lock keypad |
| Any key answer | Press any key to answer an incoming call except End key and Right soft key | Menu→Settings →Call settings →Any key answer |
| Clock settings | Set date and time | Menu→Settings →Clock settings →Date and Time |
| Minute minder | Sound an alert tone ahead of every minute | Menu→Settings →Call settings →Minute minder |
| Connected minder | Sound an alert tone when a call is connected | Menu→Settings →Call settings →Connected minder |
| Call waiting | Hold the first call and answer the second call (need network support) | Menu→Settings →Call settings →Call waiting |
| Hide my number | Choose whether to show/hide my number when calling someone (need network support) | Menu→Settings →Call settings →Hide my number |
| Fixed dialling number | Phone numbers preset in the list can be dialled (need network support) | Menu→Settings →Fixed dialling number |

- 14 -

Product Handling

General Statement on Handling and Use

You alone are responsible for how you use your phone and any consequences of its use.

You must always switch off your phone wherever the use of a phone is prohibited. Use of your phone is subject to safety measures designed to protect users and their environment.

- Always treat your phone and its accessories with care and keep it in a clean and dust-free place.
- Do not expose your phone or its accessories to open flames or lit tobacco products.
- Do not expose your phone or its accessories to liquid, moisture or high humidity.
- Do not drop, throw or try to bend your phone or its accessories.
- Do not use harsh chemicals, cleaning solvents, or aerosols to clean the device or its accessories.
- Do not paint your phone or its accessories.
- Do not attempt to disassemble your phone or its accessories, only authorised personnel must do so.
- Do not expose your phone or its accessories to extreme temperatures, minimum - [5] and maximum + [50] degrees Celsius.
- Please check local regulations for disposal of electronic products.
- Do not carry your phone in your back pocket as it could break when you sit down.

- 16 -

Normal Use Position

When placing or receiving a phone call, hold your phone to your ear, with the bottom towards your mouth.



Air Bags

Do not place a phone in the area over an air bag or in the air bag deployment area. Store the phone safely before driving your vehicle.

Seizures/ Blackouts

The phone can produce a bright or flashing light.

Repetitive Motion Injuries

To minimize the risk of RSI when texting or playing games with your phone:

- Do not grip the phone too tightly.
- Press the buttons lightly.
- Use the special features which are designed to minimize the times of pressing buttons, such as Message Templates and Predictive Text.
- Take lots of breaks to stretch and relax.

- 18 -

Faulty and Damaged Products

Do not attempt to disassemble the phone or its accessory. Only qualified personnel must service or repair the phone or its accessory.

If your phone or its accessory has been submerged in water, punctured, or subjected to a severe fall, do not use it until you have taken it to be checked at an authorised service centre.

Interference

General Statement on Interface

Care must be taken when using the phone in close proximity to personal medical devices, such as pacemakers and hearing aids.

Pacemakers

Pacemaker manufacturers recommend that a minimum separation of 15 cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this, use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.

Hearing Aids

People with hearing aids or other cochlear implants may experience interfering noises when using wireless devices or when one is nearby.

The level of interference will depend on the type of hearing device and the distance from the interference source, increasing the separation between them may reduce the interference. You may also consult your hearing aid manufacturer to discuss alternatives.

- 20 -

Areas with potentially explosive atmospheres include fuelling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles, such as grain, dust, or metal powders.

Blasting Caps and Areas

Turn off your mobile phone or wireless device when in a blasting area or in areas posted turn off "two-way radios" or "electronic devices" to avoid interfering with blasting operations.

- 22 -

Disposal of your old appliance



1. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/CE.
2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.

For this product's Recycling Manual based on WEEE directive, please send an email to weee@zte.com.cn, or visit the website below to download the document: <http://ensupport.zte.com.cn>

- 24 -

This declaration is the responsibility of the manufacturer :

ZTE Corporation
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,
Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China


Authorised person signing for the company :

Xu Feng Quality Director of ZTE Corporation

Name in block letters & position in the company

Shenzhen, 3 Apr. 2008

Place & date



Legally valid signature

- 26 -