Quick Start

AT&T Wireless Home Phone and Internet





Getting to Know Your Device




For more information, refer to your User Guide, visit att.com/homebasesupport, or call AT&T Support at 1-800-331-0500.

Before You Begin

The AT&T Home Base uses the AT&T cellular network and DOES NOT use your home phone wall jacks.

Your device should be located:

- Where you have a strong signal from a cell tower, typically near a window or outside wall. Signal strength may vary in different parts of your home.
- · Near an electrical wall outlet.
- In the general area where you'll be using your home phone, computer, or Wi-Fi enabled devices.



STEP 1: Set Up Your Device




(A) Install the Back-up Battery

1. Remove the bottom of the device by pushing the entire cover in the direction of the arrow.




2. Insert the back-up battery.

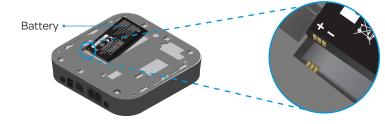

3. Replace the cover.

Turn on Your Device


- 1. Plug the power cord into an electrical wall outlet.
- 2. Connect the other end of the power cord into the Power Input port on the back of your AT&T Home Base.
- 3. Press and hold down the round On/Off button for 3 full seconds until the power light stays steady green.

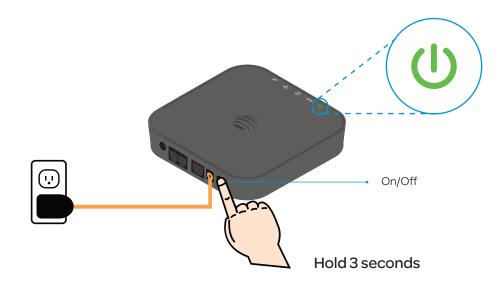

Check the Wireless Signal

Wait a few seconds for the signal strength light to turn on, while your device connects to the cellular network.

Confirm signal strength light is green for optimal performance. Yellow indicates a moderate signal and may be sufficient.

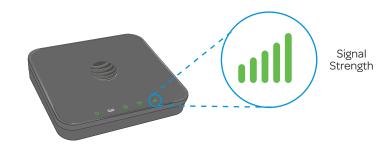


STEP 2: Connect Your Phone



(A) Unplug Your Phone from the Wall Jack


The AT&T Home Base is not used with your home phone wall jack. NOTE: If you have a cordless phone, keep it plugged into a power outlet.



Connect Your Phone to the Device

Plug your phone into the "Phone 1" port on the AT&T Home Base, using your existing phone cable or the included phone cable.

NOTE: Do not plug the device into your home phone wall jack.

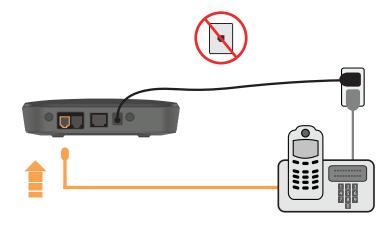

Place a Test Call

Place a test call from your connected home phone. Make sure to dial the 10-digit phone number, including area code.

For best results, place the cordless phone base at least 12 inches from the AT&T Home Base.

Transferring a Phone Number from Your Prior Provider

Transferring a phone number can take about 4 days, so you should keep a phone plugged into your wall jack to receive calls on your old service (including 911) until your transfer completes. However, you can <u>make</u> calls immediately on your AT&T Home Base. Check transfer status at att.com/port.

Important Phone Tips

- · Voicemail is included with your service. Dial "1" to set up and access. If you choose to use an answering machine instead, set it to fewer than 4 rings.
- To place phones throughout your home, use a cordless phone system with multiple handsets. Wall jacks are not used with the AT&T Home Base.




STEP 3: Connect to the Internet



Select Your Internet Connection

To Connect via Wi-Fi:

- 1. Open the Wi-Fi network manager on your computer or Wi-Fi enabled device.
- 2. Find and select the AT&T Home Base Wi-Fi network name (SSID) (e.g., ATT-HOMEBASE-XXXX).



To Connect via Ethernet:

Use an Ethernet cable (not included) to connect your computer or other device to the Ethernet port on the back of your AT&T Home Base. Go to att.net (or your favorite website) to confirm your Internet connection. Skip Steps 3B and 3C.

Enter Wi-Fi Network Password

When prompted, enter the Wi-Fi password found on the bottom of the AT&T Home Base.



Confirm Internet Connection

Go to att.net (or your favorite website) to confirm your Internet connection. When your device is transmitting to and from the Internet, the Wi-Fi light will flicker green.




AT&T Home Base Manager

To customize your device or view important messages about your device and data usage, use the AT&T Home Base Manager.

On any device connected to the AT&T Home Base, enter http://att.homebase directly into your browser address field and use "attadmin" as your login.

NOTE: The information light will blink green when you have a message.



Email Setup (Optional)

To set up a free AT&T email account, go to att.net/signup and select Start Now.

 ${\sf AT\&T\:Home\:Base^{\intercal}} \ (\text{``Home\:Base''}) \ is \ a \ mobile \ device. \ It \ may \ be \ used \ in \ the \ U.S. \ with \ home \ phone$ equipment, computers, and other Wi-Fi compatible devices. For emergency calls, you may have to provide your location address to the 911 operator. Home Base has a back-up battery in the event of a power outage. However, a cordless phone connected to the Home Base will not operate (including 911) during a power outage. To use backup battery power, you must plug a corded phone into the Home Base. Corded or other landline phone equipment and Internet capable devices (e.g. PCs, tablets) not provided with service. Provides voice and wireless data service. Not compatible with wireless messaging services, security systems, fax services, medical alert and monitoring systems, credit card machines, IP/PBX Phone systems, or dial-up Internet service. May not be compatible with DVR/Satellite systems; please check with your provider. DSL customers should contact their provider before transferring a phone number to ensure uninterrupted DSL Internet service. Home Base sold for use on the AT&T wireless network and cannot be activated on other carriers' wireless networks. If your Home Base is roaming, AT&T's off-net usage restrictions apply. Service provided by AT&T Mobility. © 2016 AT&T Intellectual Property. All rights reserved. AT&T is a registered trademark of AT&T Intellectual Property.