


www.tuv.com

### 1.5 User Manual

    <p><b>Clip II mini 606</b> Bluetooth Clip Headset</p> <p>User Guide </p>	<p>English..... 1-22          繁體中文 ..... 23-40          简体中文..... 41-57          Thai..... 58-67          Pedoman Pengguna..... 68-91</p>
---	---

<p><b>Table of Contents</b></p> <p>i.Tech Clip II mini 606 Overview ..... 2          Getting Started ..... 3          Charging Your Headset ..... 4-6          Turning your Headset On and Off ..... 6-7          Pairing Your Headset ..... 7-9          Using Your Headset ..... 10-12          Multipoint Function ..... 13-14          Adjusting the Volume ..... 14          Resetting the Headset ..... 15          Care and Maintenance ..... 15-17          Safety Information ..... 17-18          Troubleshooting ..... 19          Declaration of Conformity (DoC) ..... 20          Product Specifications ..... 21</p> <p style="text-align: right;">1</p>	<p><b>i.Tech Clip II mini 606 Overview</b></p>  <p style="text-align: center;">(fig.1)</p> <ol style="list-style-type: none"> <li>1. Microphone</li> <li>2. Volume Key</li> <li>3. Status Indicator</li> <li>4. Built-in Buzzer</li> <li>5. Charging Socket</li> <li>6. Built-in Rechargeable Battery</li> <li>7. Multi-function Button (MFB)</li> <li>8. Earphone</li> </ol> <p style="text-align: right;">2</p>
---	---

### Getting Started

To use your i.Tech Clip II mini 606 ("the headset"), please follow these simple steps:


- Charge your headset
- Pair your headset with a Bluetooth-enabled mobile handset



3

### Charging Your Headset

The headset comes with a built-in rechargeable battery. Prior to using the headset for the first time, it is recommended to fully charge the battery first.

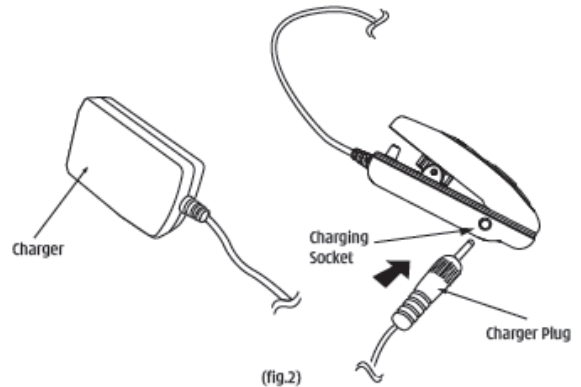

4

### Charging Your Headset

Connect the charger to an AC wall outlet (mains socket) and the charger plug to the headset's charging socket (fig.1). The status indicator will be red while charging.

**IMPORTANT** Charging indication will be delayed for a few seconds if the headset has not been used for a long time or the battery is drained.

#### Charging Time

Charging the battery fully is normally within 3 hours. When the battery is fully charged, the status indicator will turn blue and remain on. Disconnect the charger from AC wall outlet (mains socket) and the headset. Press and hold the MFB (fig.1) for 2 seconds to turn the headset on, please refer to "Turning Your Headset On and Off".

#### Talk & Standby Time

The fully charged battery offers up to 8 hours talk time and up to 140 hours standby time. When no calls are in progress, the headset remains turned on in standby mode.

5

### Charging Your Headset

#### Low Battery

When the headset is on and the battery becomes low, the status indicator flashes red and the headset emits a beep every 1 minute. Please recharge the battery as described above.

If you are setting up the headset and your mobile phone in a noisy environment, we advise you to put on the earphone first so that the beep will be more audible.

### Turning Your Headset On and Off

#### Turning On the Headset

Press and hold the MFB for 2 seconds until you hear a short beep. The status indicator will then flash blue.

**IMPORTANT** Press the MFB again after the headset switched on each time you turn on the headset to reactivate pairing so that the connection between the headset and the mobile handset is resumed. For pairing, please refer to "Pairing Your Headset" on page 8-9.

6

### Turning Your Headset On and Off

#### Turning Off the Headset

Press and hold the **MFB** for approximately 2 seconds until you hear a long beep. The status indicator will stop flashing.

**IMPORTANT** To disconnect the Bluetooth connection, press the MFB firmly to turn off your headset. If you will not be using the headset for a while, you should consider turning off the Bluetooth function on your mobile phone as well.


### Pairing Your Headset

The headset only works with Bluetooth-enabled mobile phones. Prior to using and pairing your headset for the first time, please check if your mobile phone is Bluetooth-enabled.

The pairing instructions for a typical Bluetooth-enabled mobile phone are explained on the next page. The headset pairing procedure may vary depending on the model of your mobile phone. Please contact the manufacturer of your mobile phone or its agent for further information.

7

### Pairing Your Headset

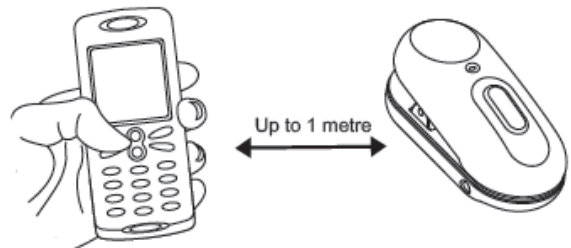

1. Place the headset and the mobile handset no more than 1 metre apart and ensure there is nothing in between.
2. Ensure the headset is OFF.
3. Press and hold the MFB approximately 8 seconds until the headset status indicator alternately flashes **blue and red**.
4. Activate your mobile handset's Bluetooth function by referring to your mobile handset user guide for details.
5. Set the mobile handset to search for Bluetooth devices within 1 metre range as instructed in the mobile handset user guide and select "Clip II mini 606" from the list.

8

### Pairing Your Headset

6. Enter the preprogrammed passkey "0000" and press "OK" to pair your headset and mobile handset. When the pairing is complete, the headset status indicator will flash **blue** rapidly 5 times followed by a long beep.
7. Press "Return" to go back to your mobile handset's main menu. For certain mobile handset models, a headset icon will be shown on the screen. You should now be able to make and receive calls using your headset.

**IMPORTANT** If the pairing cannot be completed within 2 minutes while the pairing mode is activated, the headset status indicator flashes purple followed by 3 beeps and the headset is turned off. Please repeat the above pairing procedures.

9

### Using Your Headset

#### Answering a Call

When there is an incoming call, you will hear ringing through the earphone and the built-in buzzer. Press the **MFB** to accept the call or answer the call via your mobile handset in the normal way.

**IMPORTANT** You can stop the buzzer alert by pressing the volume key once. The buzzer will ring again when there is another incoming call.

#### Ending a Call

Press the **MFB** to end your call or end the call via your mobile handset in the normal way.

#### Dialing from Your Mobile Handset

Simply make calls on your mobile handset in the normal way.

#### Muting the Built-in Buzzer





Press and hold the **volume key** for two seconds to mute the buzzer while in standby mode. The status indicator will flash **red**. Press the **volume key** for 2 seconds to deactivate the

10

<h3>Using Your Headset</h3> <p>muting function while in standby mode. The status indicator will flash <b>blue</b>.</p> <p><b>IMPORTANT: If you do not wish to be disturbed at all, you may consider resetting the mobile phone setting to restrict incoming calls. Please refer to your mobile phone user guide for set up details.</b></p> <p>Muting the Microphone</p> <p>You can put a call on hold by muting the microphone. Press and hold the <b>volume key</b> for two seconds until status indicator flashes <b>Red</b> to mute built in Microphone and press and hold the <b>volume key</b> for 2 seconds to deactivate the muting function while conversation.</p> <p>Voice Dialling from Your Headset</p> <p>If your mobile handset is equipped with a voice dialling function, simply press the <b>MFB</b> on your headset, and when you hear a beep say the voice tag.</p> <p><b>IMPORTANT</b> For voice dialling, you must record the voice tag</p> <p style="text-align: right;">11</p>	<h3>Using Your Headset</h3> <p>(the person's name) into your mobile handset first before using the voice dialling function. Please refer to your mobile handset's user guide on how to record the voice tags .</p> <p>Last Number Redialling from Your Headset</p> <p>Short press the <b>MFB</b> on your headset twice.</p> <p><b>IMPORTANT</b> The above functions are only applicable to mobile handsets with Bluetooth Handsfree Profile. Functionality varies depending on the mobile handset model you have. Please refer to your mobile handset user guide for additional information.</p> <p>Rejecting a Call (Handsfree Profile ONLY)</p> <p>Press and hold the volume key then press and hold the <b>MFB</b> until the incoming call is rejected.</p> <p>Transferring a Call (Handsfree Profile ONLY)</p> <p>Press and hold the volume then press and hold the <b>MFB</b> until the audio is transferred from headset to your mobile handset during conversation.</p> <p style="text-align: right;">12</p>
<h3>Multipoint Function</h3> <p>i.Tech Clip II mini 606 supports <b>Multipoint</b> function which allow simultaneous pairing with two mobile handsets.</p> <p>Pairing with the second mobile handset</p> <p>Repeat the pairing procedures in the user guide with the new device.</p> <p>Answer a call</p> <p>Whilst there is an incoming call, the ringer tone will ring through your earpiece and the headset internal buzzer will also alert. To answer the call, please press the <b>MFB</b> once.</p> <p>Voice Dialling</p> <p>To make a call by voice dialling with the headset, please press the <b>MFB</b> once. The headset will always make the call on the mobile phone that you have recently used.</p> <p>Last Number Redial</p> <p>To make a last number redial call with the headset, please press the <b>MFB</b> rapidly twice. The headset will always make the call on the mobile phone that you have recently used.</p> <p style="text-align: right;">13</p>	<h3>Multipoint Function</h3> <p>Answer a call on the second phone whilst talking on the other Whilst there is a second incoming call, you will <b>NOT</b> be able to on hold the first caller. Therefore, to answer the second call, the first call must be terminated.</p> <p>To terminate the first call, please press the <b>MFB</b> once and you will then hear the ringer tone coming through the earpiece. Press the <b>MFB</b> again to pick the second call up. Alternatively, if you do not wish to answer the second call and you have voice mail on the second phone, the call will be forwarded to the voice mail.</p> <p><b>IMPORTANT</b> <b>The headset can only be used for answering ONE call at a time; call waiting function is not supported.</b></p> <h3>Adjusting the Volume</h3> <p>Press the volume key repeatedly until you reach the desired volume level. The listening volume may be affected by the volume setting of the caller's handset as well. Re-adjust the listening volume again when necessary.</p> <p style="text-align: right;">14</p>

<h3>Resetting the Headset</h3> <p>You may reset the headset to its original settings anytime. To do this you also clear all current pairing settings.</p> <ol style="list-style-type: none"> <li>1. Ensure the headset is off.</li> <li>2. Press and hold the <b>Volume key</b> and the <b>Multifunction Button (MFB)</b>, at the same time recharge the headset.</li> <li>3. The headset is then turned off and returned to its original settings. All previous pairing settings are cleared.</li> </ol> <p><b>Note: If the reset is completed successful, when you turn the headset ON, the LED will flash purple.</b></p> <h3>Care and Maintenance</h3> <h4>Headset</h4> <ul style="list-style-type: none"> <li>• Consider turning your headset off before placing it in your pocket or bag. If the <b>MFB</b> is accidentally depressed, your mobile handset may place an unintended call.</li> <li>• Do not expose the headset to liquid, moisture or humidity as it is not waterproof.</li> <li>• Do not use abrasive cleaning solvents to clean the headset.</li> <li>• Do not expose the headset to extremely high or low temperatures.</li> </ul> <p style="text-align: right;">15</p>	<h3>Care and Maintenance</h3> <ul style="list-style-type: none"> <li>• Do not dispose of the headset in a fire as it will result in explosion.</li> <li>• Do not expose your headset to contact with sharp objects as this will cause scratches and damage.</li> <li>• Do not stick anything inside the headset as this may damage internal components.</li> <li>• Do not attempt to disassemble the headset as it does not contain serviceable components.</li> <li>• If you do not use the headset for long periods, be sure to store it in a dry place, free from extreme temperatures and dust.</li> </ul> <h4>Built-in Battery</h4> <ul style="list-style-type: none"> <li>• Do not attempt to replace the headset's battery yourself as it is built into the headset and is not changeable.</li> <li>• Charge the battery in accordance with the instruction supplied with this user guide.</li> <li>• Only use the manufacturer supplied charger when charging the headset.</li> </ul> <p style="text-align: right;">16</p>
<h3>Care and Maintenance</h3> <h4>Charger</h4> <ul style="list-style-type: none"> <li>• Only use the manufacturer supplied charger when charging the headset.</li> <li>• Do not disassemble the charger as it may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the headset is subsequently used.</li> <li>• Do not use the charger outdoors or in damp areas.</li> <li>• Only charge the headset's built-in battery in accordance with the instructions in this user guide.</li> <li>• Avoid charging the headset in extremely high or low temperatures.</li> </ul> <h3>Safety Information</h3> <ul style="list-style-type: none"> <li>• Check local laws regarding use of a mobile handset and headset whilst driving. If you use the headset while driving, ensure your attention and focus remain on the road and you drive in a responsible and safe manner.</li> </ul> <p style="text-align: right;">17</p>	<h3>Safety Information</h3> <ul style="list-style-type: none"> <li>• Never allow children to play with the headset - small parts may be a choking hazard.</li> <li>• Observe all signs that require an electrical device or RF radio product to be switched off in designated areas. These could include hospitals, blasting areas, and potentially explosive environments.</li> <li>• Turn off your headset prior to boarding an aircraft. Do not use your headset in an aircraft.</li> <li>• Never mount or store your headset over any air bag deployment area as serious injury may result when an air bag deploys.</li> <li>• Do not open or mutilate the built-in battery.</li> <li>• Dispose of batteries according to local regulations. Do not dispose as household waste.</li> <li>• Dispose of the packaging and this product in accordance with the latest provisions.</li> </ul> <p style="text-align: right;">18</p>

<p><b>RF exposure warning:</b> This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device must not be co-located or operating in conjunction with any other antenna or transmitter. End users must follow the specific operating instructions for satisfying RF exposure compliance.</p> <p><b>Troubleshooting</b> If you are unable to connect your headset with your mobile handset or Bluetooth enabled device, please try the following:</p> <ul style="list-style-type: none"> <li>• Ensure your headset is turned on and is properly charged.</li> <li>• Ensure the headset is paired with your mobile handset.</li> <li>• Ensure your mobile handset's Bluetooth feature is activated. Please refer to your mobile handset user guide for specific instruction.</li> <li>• Ensure the headset is within a maximum of 10 meters of your mobile handset(s) and there are no obstructions, such as walls or other electronic devices in between.</li> </ul> <p style="text-align: right;">19</p>	<p>If the above suggestions do not solve your problem, please recharge the headset and remove your mobile phone battery for a while. Then start pairing again.</p> <p>The i.Tech Clip II mini 606 Headset is compliant with and adopts the Bluetooth Specification v2.1 + EDR Class 2. However, interoperability between the device and other Bluetooth-enabled products is not guaranteed because it depends on compatibility. For more information on the compatibility between the device with other Bluetooth-enabled products, please check with the manufacturer or browse: <a href="http://www.itechdynamic.com">http://www.itechdynamic.com</a></p> <p><b>Declaration of Conformity ( DoC )</b></p> <p>We, i.Tech Dynamic Ltd., declare that the following product: Product Name: i.Tech Clip II mini 606 Model No.: C51-B606-XX Is in conformity with the following essential requirements of Council Directive 1999/5/EC ( referred to as R&amp;TTE Directive ) : Article 3.1a, 3.1.b and 3.2. and the product is manufactured in accordance with Annex II of above directive. A copy of the Declaration of Conformity can be found at: <a href="http://www.itechdynamic.com">http://www.itechdynamic.com</a></p> <p style="text-align: right;">20</p>
--	--

<p><b>Product Specifications</b></p> <table> <tr> <td>Bluetooth Specification:</td> <td>v2.1 + EDR Class 2</td> </tr> <tr> <td>Bluetooth Profiles Supported :</td> <td>Headset and Handsfree</td> </tr> <tr> <td>No. of mobile phone connected :</td> <td>Max. 2 for stand-by (Handsfree Profile ONLY)</td> </tr> <tr> <td>Range of Frequency:</td> <td>2.4GHz Spectrum</td> </tr> <tr> <td>Talk Time*:</td> <td>up to 8 hours</td> </tr> <tr> <td>Standby Time* :</td> <td>up to 140 hours</td> </tr> <tr> <td>Nominal Charging Time:</td> <td>Within 3 hours</td> </tr> <tr> <td>Dimensions:</td> <td>45(L) x 22(W) x 22.2(H) mm</td> </tr> <tr> <td>Weight:</td> <td>16.5 grams</td> </tr> </table> <p style="font-size: small;">* May vary due to users' operation mode and mobile phone settings. The manufacturer has the right to modify infos, product spec. and product IDs without any advice.</p> <p style="text-align: right;">21</p>	Bluetooth Specification:	v2.1 + EDR Class 2	Bluetooth Profiles Supported :	Headset and Handsfree	No. of mobile phone connected :	Max. 2 for stand-by (Handsfree Profile ONLY)	Range of Frequency:	2.4GHz Spectrum	Talk Time*:	up to 8 hours	Standby Time* :	up to 140 hours	Nominal Charging Time:	Within 3 hours	Dimensions:	45(L) x 22(W) x 22.2(H) mm	Weight:	16.5 grams	<p>©2010 Hutchison Harbour Ring Enterprises Limited All rights in this publication are reserved and no part may be reproduced without the prior written permission of the publisher. The contents of this publication are believed to be correct at the time of going to press, but any information, specifications, products or services mentioned may be modified, supplemented or withdrawn without further notice.</p> <p>The Stylized i.Tech logos are trademarks owned by Hutchison Harbour Ring Enterprises Limited or its affiliates. Bluetooth® and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc, USA and licensed to i.Tech Dynamic Limited.</p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>i.Tech declares under our sole responsibility that the headset is in conformity with the provisions of the following Council Directives: 1999/5/EC</p> <p style="text-align: center;">     </p> <p style="font-size: x-small;">Dispose of the packaging and this product in accordance with the latest provisions. <a href="http://www.itechdynamic.com">www.itechdynamic.com</a> Printed in China 01/2010</p> <p style="text-align: right;">22</p>
Bluetooth Specification:	v2.1 + EDR Class 2																		
Bluetooth Profiles Supported :	Headset and Handsfree																		
No. of mobile phone connected :	Max. 2 for stand-by (Handsfree Profile ONLY)																		
Range of Frequency:	2.4GHz Spectrum																		
Talk Time*:	up to 8 hours																		
Standby Time* :	up to 140 hours																		
Nominal Charging Time:	Within 3 hours																		
Dimensions:	45(L) x 22(W) x 22.2(H) mm																		
Weight:	16.5 grams																		