

Home MultiRoom

SKU: 470144

MAP: \$549.99

FEATURES

- Stylish, MultiRoom-exclusive Inside Antenna.
- Powerful, precision-mount Outside Antenna.
- Enhances cell coverage for up to 3 large rooms.
- Tool-free installation. No need to drill holes.

⚠️ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

About

The weBoost **Home MultiRoom** cell signal booster boosts networks speeds across all available signal bands (including Band 25 for enhanced Sprint support) for up to three large rooms.

The Home MultiRoom also features an exclusive, Inside Antenna—featuring a built-in kickstand and stylish fabric cover while also providing best-in-class performance. Wall-mount installation is effortless with the included 3M® Command™ strips. The proprietary Outside Antenna offers a tool-free, finger-tightened precision mount. Users will experience faster data speeds, better voice quality, fewer dropped calls, and superior streaming capability. Home MultiRoom works with all US carriers—including Verizon, AT&T, T-Mobile, Sprint, and more.

It also comes with 2-year manufacturer's warranty, and 30-day money-back guarantee.

Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●●● -89 AND LOWER About 5 bars	UP TO 5,000 sq. ft.
●●●●○ -90 dB About 3 to 4 bars	UP TO 3,500 sq. ft.
●●○○○ -100 dB About 1 to 2 bars	UP TO 1,000 sq. ft.
○○○○○ No existing	A signal booster likely will not work



BOOSTS SIGNAL ON ALL AVAILABLE NETWORK SPEEDS

UP TO 5,000 sq. ft. COVERAGE

UP TO +65 dB GAIN

MULTI-USER WIRELESS BOOSTER

Kit Includes



Home MultiRoom



Outside Directional Antenna (314445)



Fabric Inside Panel Antenna (314440)



Power Supply (850018)



15' (x2) & 30' Cables (YX030-15W), (950630)



Flat Window Cable (951177)



Outside Antenna Mounting Bracket



Wall Mount Brackets w/Command Strips




Cable Mounting Clips (x15)

Specifications

MODEL NUMBER	470144†
FREQUENCIES	Band 12/17 700 MHz
	Band 13 700 MHz
	Band 5 850 MHz
	Band 4 1700/2100 MHz
	Band 25/2 1900 MHz
MAX GAIN	65 dB
IMPEDANCE	75 Ohm
POWER	110-240 V AC, 50-60 Hz, 8 W
CONNECTORS	F-Female
BOOSTER DIMENSIONS	6.5 x 6 x 2.625 in.
BOOSTER WEIGHT	1.9 lbs.

Installation

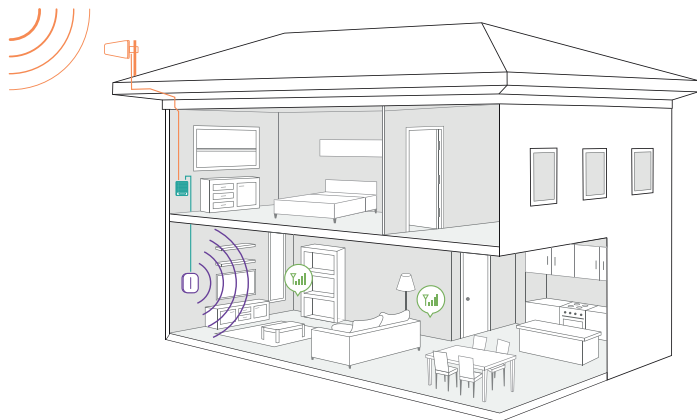

- 1 Receives signal:** The outside antenna reaches out to access the existing strong outdoor cell signal and delivers it into the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Support



2-Year Warranty from Purchase.

ASSEMBLED IN THE USA



* **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.



UPC

