


**Yealink**

# **T55A Teams<sup>®</sup> Edition User Guide**

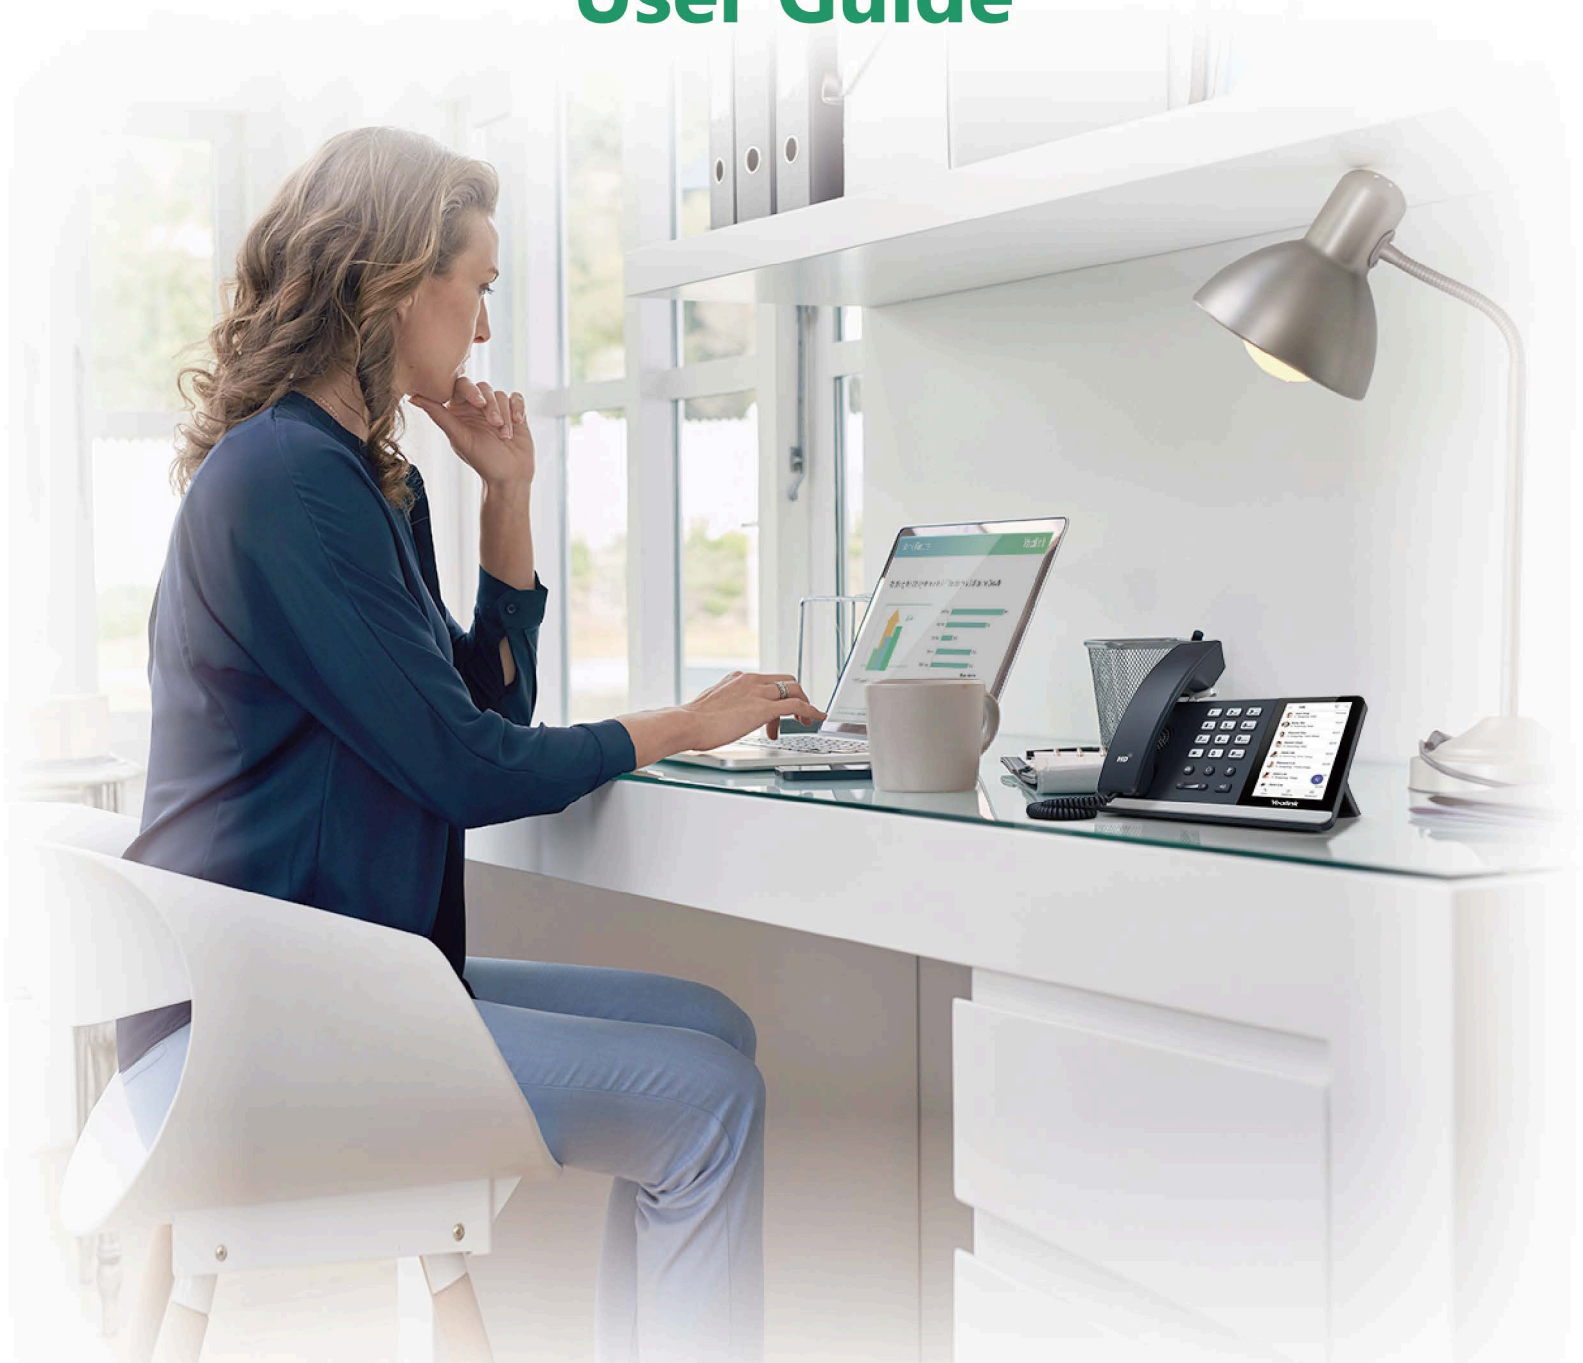

Version 15.104 | May. 2020

# Contents

<b>About This Guide.....</b>	<b>6</b>
Related Documentations.....	6
<b>Getting Started.....</b>	<b>6</b>
Hardware of T55A.....	6
Power LED Indicator.....	8
Accessing Screens on Yealink Teams Phones.....	8
Accessing the Calls Screen.....	8
Accessing the Calendar Screen.....	10
Accessing the Voicemail Screen.....	10
Entering Data and Editing Fields.....	11
Using the On-screen Keyboard.....	12
Using the On-screen Dial Pad.....	13
Using the Phone Keypad.....	13
<b>Signing into Microsoft Teams and Locking Your Phone.....</b>	<b>13</b>
Signing into Your Device.....	13
Signing into Microsoft Teams on Your Device.....	14
Signing into Microsoft Teams via Web Sign-in.....	15
Signing out of Your Teams Device.....	16
Phone Lock.....	16
Creating a Lock PIN.....	17
Enabling Phone Lock.....	17
Setting the Idle Timeout for Phone Lock.....	17
Unlocking Your Phone.....	17
Changing Your Lock PIN.....	18
Disabling Phone Lock.....	18
Using a Teams Phone as a Common Area Phone.....	18
Signing into a CAP/Meeting Account.....	19
Signing out of a Common Area Phone.....	21
Signing into a Teams Phone as a Guest User.....	21
Signing in as a Guest User.....	22
Signing out of the Guest User.....	22
<b>Changing Your Presence Status.....</b>	<b>22</b>
<b>Favorites.....</b>	<b>23</b>
Adding Favorites.....	23
Removing Favorites.....	24
<b>Managing Delegates.....</b>	<b>24</b>
Adding a Delegate from Settings.....	25
Forwarding All Incoming Calls to Delegates.....	26
Forwarding Incoming Calls to Delegates if Unanswered.....	26

Synchronizing Incoming Calls to Delegates.....	26
<b>Boss/Admin Delegate Call Feature.....</b>	<b>26</b>
Call on behalf of.....	27
Boss's Call Status.....	27
Boss' Held Call.....	29
<b>Operating Calls.....</b>	<b>29</b>
Switching among the Handset, Speakerphone and Headset Modes.....	30
Placing Calls.....	30
Calling Contacts.....	30
Dialing the Number.....	31
Placing Multiple Calls.....	31
Placing a Call from Call History.....	31
Placing a Call from Voicemail.....	31
Placing an Emergency Call from a Locked Phone.....	31
Auto Dial for Extension Dialing.....	32
Answering Calls.....	32
Answering a Call.....	32
Answering a Call When in a Call.....	32
Muting and Unmuting Audio.....	32
Holding and Resuming Calls.....	32
Placing a Call on Hold.....	33
Resuming a Call.....	33
Ending or Rejecting an Active Call.....	33
Ending All Calls in the Process.....	33
Transferring Calls.....	33
Performing a Blind Transfer.....	33
Performing a Consultative Transfer.....	34
Forwarding All Incoming Calls.....	34
Forwarding Calls to Voicemail.....	34
Forwarding Calls to a Contact or Number.....	34
Forwarding Incoming Calls if Unanswered.....	34
Synchronizing Incoming Calls to the Specified Contact.....	35
Parking and Retrieving Calls on the Teams Server.....	35
Parking Teams Calls.....	35
Retrieving Parked Calls.....	35
Call Queue.....	36
Blocking Calls with No Caller ID.....	36
Anonymous Call.....	36
Group Call Pickup.....	37
<b>Conference Calls.....</b>	<b>37</b>
Initiating a Conference by Calling Multiple Contacts.....	37
Initiating a Conference Call by Inviting Other Contacts.....	37
Initiating a Conference Call From Call History.....	38
Managing the Conference Participants.....	38
Muting All Conference Participants.....	38
Muting Individual Conference Participants.....	38
Removing the Participants from the Conference.....	38
Re-inviting the Participants Who Have been Removed.....	39
Viewing the Details of Participants.....	39
Adding Participants to a Conference Call.....	39

Leaving the Conference.....	39
<b>Using the Teams Meeting Feature.....</b>	<b>39</b>
Scheduling a Meeting on the Teams Phone.....	40
Viewing the Meeting Details.....	40
Joining a Scheduled Meeting.....	40
Responding to the Meeting Invitation.....	41
Canceling the Scheduled Meeting.....	41
Editing the Scheduled Meeting.....	42
Deleting the Scheduled Meeting.....	42
<b>Using the Voicemail.....</b>	<b>42</b>
Listening to the Voicemail.....	42
Deleting Voicemail Messages.....	43
Viewing the Details of the Contacts.....	43
<b>Teams Device Settings.....</b>	<b>43</b>
Using the Dark Theme.....	43
Setting the Language.....	44
Time and Date Display.....	45
Setting the Time and Date Manually.....	45
Changing the Time and Date Format.....	45
Screen Savers.....	45
Changing the Waiting Time for Screen Saver.....	46
Changing the Screen Saver Background.....	46
Changing the Screen Backlight Brightness and Time.....	46
Bluetooth.....	47
Activating the Bluetooth Mode.....	47
Pairing and Connecting the Bluetooth Headset.....	47
Editing Your Device Name.....	47
Disabling Your Device Discovery.....	48
Renaming the Paired Bluetooth Devices.....	48
Disconnecting the Bluetooth Device.....	48
Un-pairing the Bluetooth Devices.....	48
Deactivating the Bluetooth Mode.....	48
Better Together over Bluetooth (BToB).....	49
Pairing the Device with PC.....	49
BToB Lock.....	50
Accessibility Features.....	50
Large Text.....	50
High Contrast Mode.....	50
Color Correction.....	50
Setting Ringtones.....	51
<b>Wireless Network.....</b>	<b>51</b>
Activating the Wi-Fi Mode.....	52
Connecting to the Wireless Network.....	52
Connecting to an Available Wireless Network Manually.....	52
Connecting to the Wireless Network Using WPS.....	52
Adding a Wireless Network manually.....	53
Viewing the Wireless Network Information.....	54
Disconnecting the Wireless Network Connection.....	54

Deactivating the Wi-Fi Mode.....	54
<b>Optional Accessories with Your Phone.....</b>	<b>54</b>
Bluetooth Headset.....	54
USB Headset.....	55
Wireless Headset.....	55
USB Speakerphone CP900 / CP700.....	55
<b>Hybrid Mode Settings.....</b>	<b>55</b>
Hybrid Mode.....	55
Enabling the Quick Ball.....	56
Switching to Survivability App.....	56
Switching to Teams App.....	56
Survivability App Screens.....	56
Call Features of Survivability App.....	57
Sending Multicast Paging.....	58
Setting a Paging Key.....	59
Sending a Paging by a Paging Key.....	59
Setting a Paging List Key.....	60
Setting a Paging Group.....	61
Editing a Paging Group.....	61
Sending a Paging by a Paging List Key.....	62
Deleting a Paging Group.....	62
Receiving Multicast Paging.....	63
<b>Getting More Information About Microsoft Teams.....</b>	<b>63</b>
Viewing More Information About Microsoft Teams.....	63
Company Portal.....	63
Entering Microsoft Teams Help Center.....	64
Sending Feedback.....	64
<b>Maintaining Teams Devices.....</b>	<b>64</b>
Rebooting Your Device.....	64
Viewing Device Status.....	65
Resetting Your Device.....	65
<b>Troubleshooting.....</b>	<b>65</b>
Why is the screen blank?.....	65
Why does the device display “Network unavailable”?.....	65
Why does the device display time and date incorrectly?.....	66
How can I obtain the MAC address of a device when the device is not powered on?.....	66
Why can't I receive calls?.....	66
Why doesn't my handset work?.....	66
Checking the IP Address of Device.....	66

## About This Guide

---

Thank you for choosing Yealink T55A Teams phone, which is mainly designed to work with the Microsoft Teams client. This guide provides everything you need to quickly use your new device. Firstly, verify with your system administrator that the IP network is ready for device configuration. Also, be sure to read the Quick Start Guide in the product package.

- [Related Documentations](#)

## Related Documentations

---

You can find the following types of documents from each product support page on [Yealink Support](#):

- Release Notes: This guide describes what's new for a new device firmware.
- Quick Start Guide: This guide describes the contents of your package, how to assemble the device or accessory, and how to use the basic features. This guide is also included in your device package.
- Administrator Guide: This guide provides detailed information about setting up your network and configuring features.
- Regulatory Notice: This guide provides information for all regulatory and safety guidance.

## Getting Started

---

This chapter aims to make you familiar with the phone user interface.




**Note:** As you read this guide, keep in mind that some features are configurable by your system administrator or determined by your device environment. As a result, some features may not be enabled or may be operated differently on your device. Additionally, the examples and graphics in this guide may not directly reflect what is displayed or is available on your device.

- [Hardware of T55A](#)
- [Power LED Indicator](#)
- [Accessing Screens on Yealink Teams Phones](#)
- [Entering Data and Editing Fields](#)

## Hardware of T55A

---

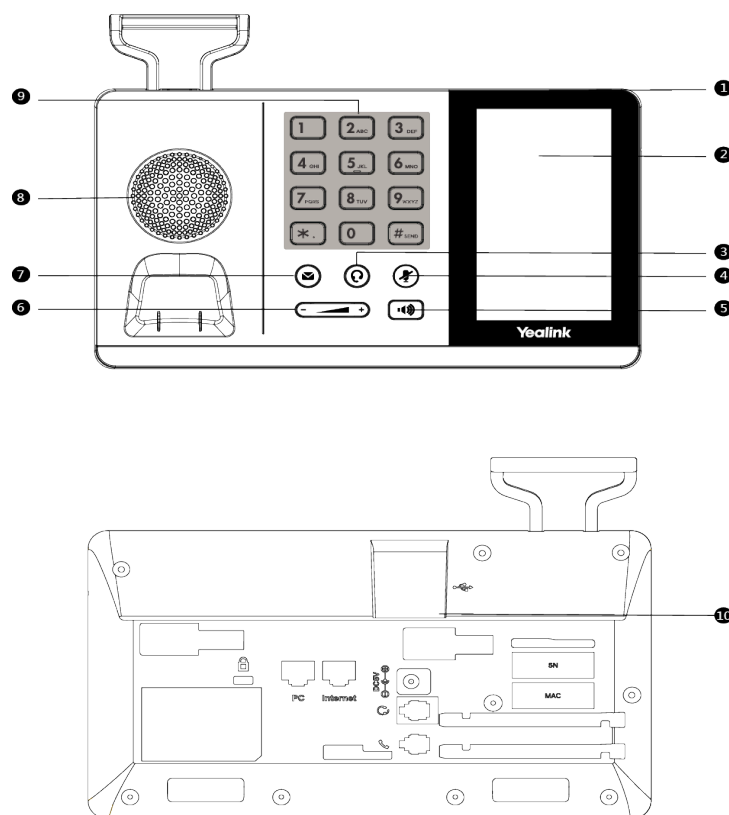

	Item	Description
1	Power LED Indicator	Indicates call statuses: <ul style="list-style-type: none"> <li>• When receiving an incoming call, it fast flashes.</li> <li>• When receiving a voice message, it slowly flashes.</li> </ul>
2	Touch Screen	4.3 inches (480 x 272) capacitive touch screen, tap to select items and navigate menus.
3	HEADSET Key	Toggles the headset on or off. The LED indicator glows green when the headset is activated.
4	MUTE Key	Toggles the microphone on or off. The LED indicator glows red when the mute feature is activated.
5	Speakerphone Key	Toggles the speakerphone (hands-free) mode or not. The LED indicator glows green when the speakerphone is activated.
6	Volume Key	Adjust the volume of the handset, headset, speaker, ringer, or media.
7	MESSAGE Key	Accesses your voice messages.
8	Speaker	You can hear the voice from the speaker when you choose hand-free phone.
9	Keypad Keys	Enable you to enter numbers, letters, and special characters.
10	USB2.0 Port	Comes ready for the future connection of an optional USB flash drive.

## Power LED Indicator

---

LED Status	Description
Red	The phone is initializing.
Fast-flashing red (300ms)	The phone is ringing.
Slowly-flashing red (1s)	The phone receives a voicemail or misses a call.



**Note:** The above introduces the default LED status. Your system administrator can configure the status of the power LED indicator.

## Accessing Screens on Yealink Teams Phones

---


You can navigate the menu bar at the bottom of the touch screen to access the following screens easily.




- [Accessing the Calls Screen](#)
- [Accessing the Calendar Screen](#)
- [Accessing the Voicemail Screen](#)

### Accessing the Calls Screen

The Calls screen is displayed after the phone startup. You can place a call from the history entry or view the favorites information from the Calls screen.

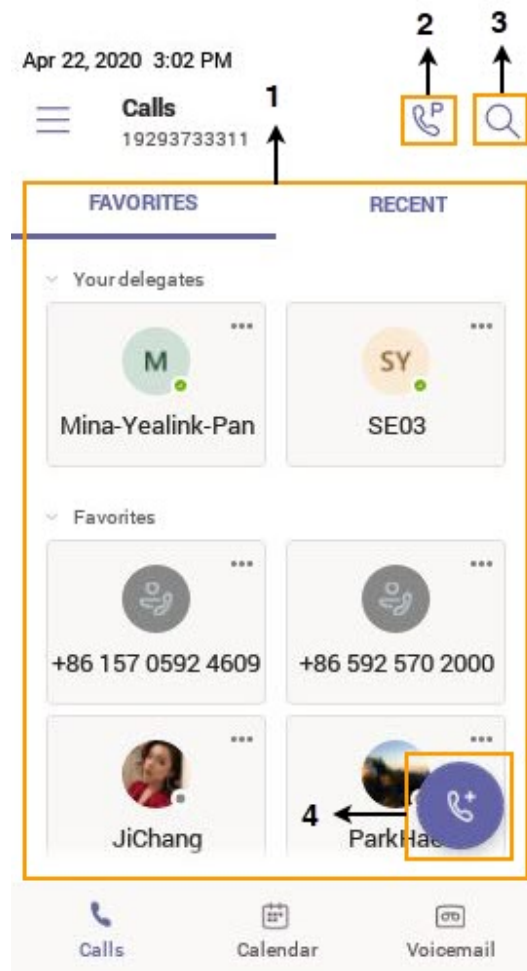






NO.	Name	Description
1	Favorites & Call History	Favorites: Displays favorite contacts. Call History: Displays recent calls.
2		Tap to retrieve a parked call.
3		Tap to search for a contact.
4		Tap to initiate a call.

## Accessing the Calendar Screen

You can access the **Calendar** screen to join or schedule meetings.

### 1. Tap **Calendar**.

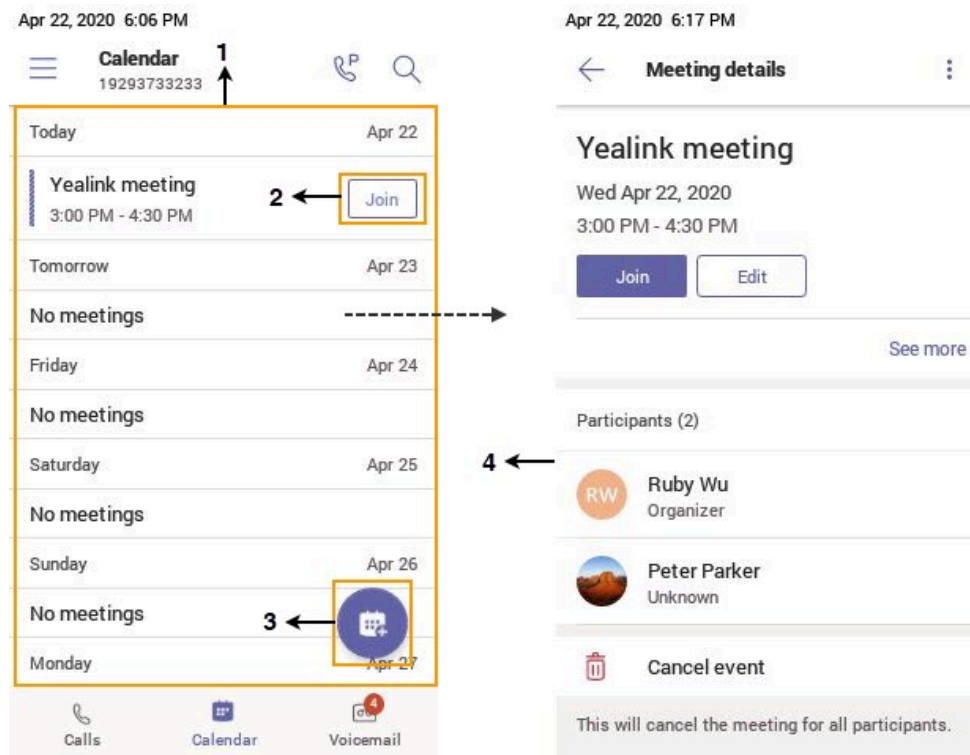








NO.	Name	Description
1	Scheduled meeting list	Displays all the scheduled on the Teams phone, from Teams client or Outlook.
2		Tap to join the corresponding scheduled meeting.
3		Tap to schedule a meeting.
4	Meeting details	Tap the corresponding scheduled meeting to view the meeting details.
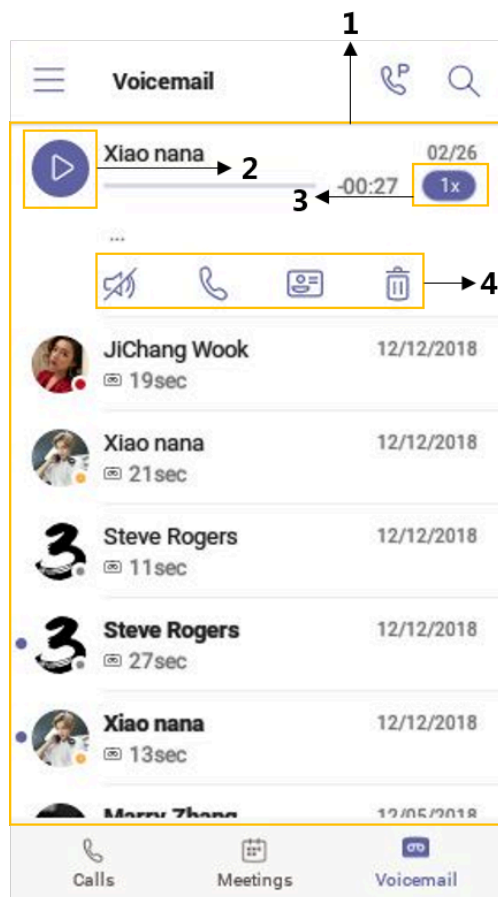
## Accessing the Voicemail Screen

You can listen to voicemails or place calls to contacts from the **Voicemail** screen.

## 1. Tap Voicemail.



NO.	Name	Description
1	Voicemail list	Displays all the voicemails stored in the voicemail list.
2		Tap to play the voicemail.
3		Tap to change the playback speed of the voicemail.
4	Operation options	<ul style="list-style-type: none"> <li>• Tap  to view information of contact.</li> <li>• Tap  to call the contact.</li> <li>• Tap  to delete the voicemail.</li> </ul>
5	Contact details	Displays the contact details and tap  to place a call.


## Entering Data and Editing Fields



- [Using the On-screen Keyboard](#)

- [Using the On-screen Dial Pad](#)
- [Using the Phone Keypad](#)

## Using the On-screen Keyboard

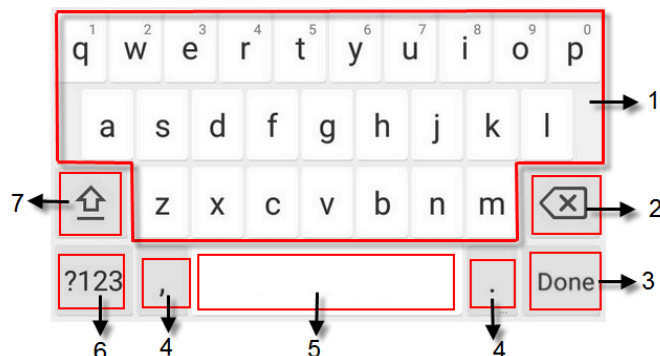Before using the on-screen keyboard to enter data, you need to know the function of the keys on the on-screen keyboard. The Teams phone supports the Android Keyboard (AOSP)- English (US) input method.





NO.	Item	Description	
1	26 English Letters	<ul style="list-style-type: none"> <li>• Tap to enter letters.</li> <li>• Long tap a key then slide to choose one of the options to enter an alternate character.</li> </ul>	
2	Delete Key	<ul style="list-style-type: none"> <li>• Tap to delete the entered characters one by one.</li> <li>• Long tap to delete two or more characters.</li> </ul>	
3	Label automatically to identify the context-sensitive features.	Next Key	Tap to go to the next field.
		Done Key	Tap to confirm the settings.
		Go Key	Tap to search for the contact.
			Tap to start a new line.
4	Two Special Characters	<ul style="list-style-type: none"> <li>• Tap to enter special characters.</li> <li>• Long tap point key (.) then slide to choose one of the options to enter an alternate character.</li> </ul>	
5	Space Key	Tap to enter spaces.	
6	Input Method	Tap to switch between input modes.	
7		Tap to switch between the uppercase input mode and lower case.	

## Using the On-screen Dial Pad

Instead of using the on-screen keyboard, you can also use the dial pad on the dialing screen to enter data. The on-screen dial pad only provides digit keys and the following special characters: \* # , + ;.

### Procedure

1. Do one of the following:
  - Pick up the handset.
  - Press the Speakerphone key.
  - Press the HEADSET key.
  - Tap  on the Calls screen and then tap .
2. Use the on-screen dial pad to enter numbers.

## Using the Phone Keypad

Instead of using the on-screen keyboard, you can also use the phone keypad to enter data. The phone keypad only provides digit keys and the following special characters: \* # , + ;.

### Procedure

Press digit keys, pound key and star key on the phone or long press the pound key or star key to provide more characters.

# Signing into Microsoft Teams and Locking Your Phone

---

You can sign into the device with your Microsoft online account and use phone lock feature when necessary.

- [Signing into Your Device](#)
- [Signing out of Your Teams Device](#)
- [Phone Lock](#)
- [Using a Teams Phone as a Common Area Phone](#)
- [Signing into a Teams Phone as a Guest User](#)

## Signing into Your Device

---

You can sign into your Microsoft online account directly on your device or sign into your device via a web sign-in, which includes your sign-in address and password.

### About this task

Contact your system administrator to get your sign-in account.



**Note:** If your system administrator enables the device management feature, the phone supports synchronizing account registration status to YDMP/YMCS.

- [Signing into Microsoft Teams on Your Device](#)
- [Signing into Microsoft Teams via Web Sign-in](#)

## Signing into Microsoft Teams on Your Device

### Procedure

1. Tap **Sign in**.

Microsoft Teams 



Welcome to Microsoft  
Teams! A happier place  
for teams to work  
together.

Sign in

You will be connected to the Company Portal automatically.

2. Enter your user credentials.
3. After the device signs in successfully, tap **Got it**.

## Signing into Microsoft Teams via Web Sign-in

### Procedure

1. Tap **Sign in**.

Microsoft Teams 




Welcome to Microsoft  
Teams! A happier place  
for teams to work  
together.

Sign in

You will be connected to the Company Portal automatically.

2. Tap **Sign in from another device** from the **Sign in** screen.

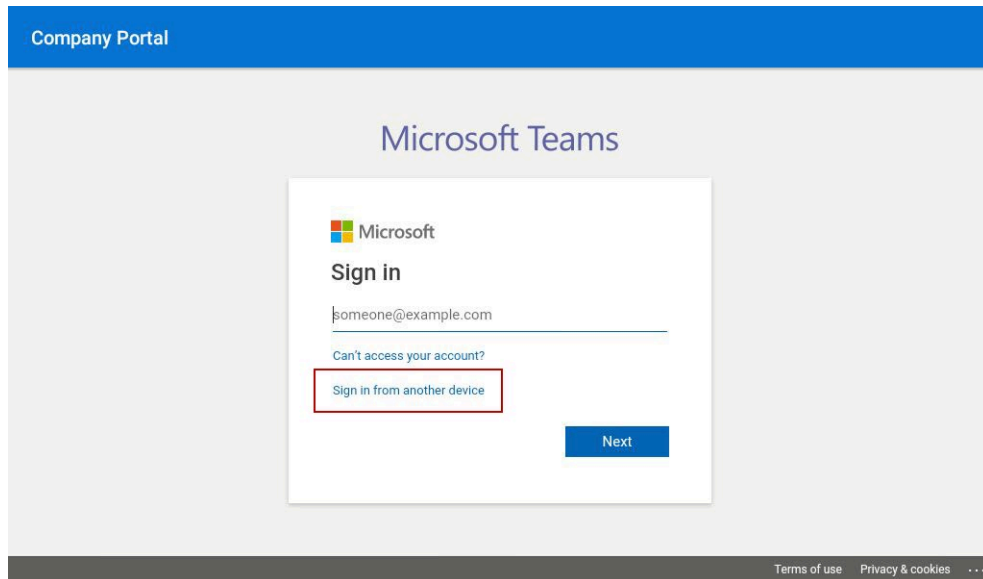

3. Go to <https://microsoft.com/devicelogin> on your computer.
4. Enter the code shown on your device and select **Next**.
5. Enter your user credentials or select the desired account to sign in.

A confirmation message is displayed after you successfully sign into Microsoft Intune Company Portal.

## Signing out of Your Teams Device

After you sign out of your account, you can only use the phone settings feature.

### Procedure

1. Go to  > **Settings** > **Sign out**.
2. Select **OK**.

## Phone Lock

When the phone is not used, you can enable the phone lock to prevent unauthorized users from viewing or modifying phone information, such as your scheduled meetings. When the phone is locked, you can still answer the incoming call. If the administrator forcibly enables the phone lock feature on the Microsoft Teams & Skype for Business Admin Center, you cannot disable it on the phone. For more information, contact your system administrator.



**Note:** The phone lock feature is not available to Common Area Phones.

- [Creating a Lock PIN](#)
- [Enabling Phone Lock](#)
- [Setting the Idle Timeout for Phone Lock](#)
- [Unlocking Your Phone](#)
- [Changing Your Lock PIN](#)
- [Disabling Phone Lock](#)




## Creating a Lock PIN

If your administrator sets security restrictions and enables the phone lock for you, you are prompted to set up a lock PIN, which is used for unlocking your phone.

### Procedure


1. Tap **OK** to create a lock PIN on the pop-up menu.

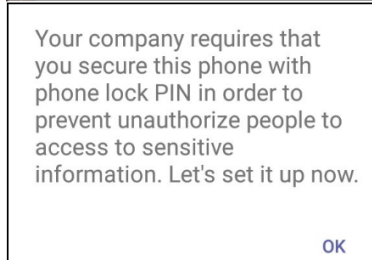

2. Enter the lock PIN in the **New PIN** field.
3. Enter the lock PIN again in the **Confirm PIN** field.
4. Tap **OK**.

## Enabling Phone Lock


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Phone Lock**.
2. Enable **Lock Enable**.
3. Enter the lock PIN in the **New PIN** field.
4. Enter the lock PIN again in the **Confirm PIN** field.  
You can use your lock PIN to unlock your phone.
5. Save the change.

## Setting the Idle Timeout for Phone Lock


You can configure the idle timeout, after which the phone will be locked automatically.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Phone Lock**.
2. Enter the unlock PIN and tap **Unlock**.
3. Tap the **Idle time-out** field and then select the desired value.
4. Save the change.

## Unlocking Your Phone

### Procedure

1. Tap  on the touch screen.
2. Enter the unlock PIN.




**Note:** You will be forced to sign out after five unsuccessful unlock attempts.

## Changing Your Lock PIN

You can change your lock PIN at any time.


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Phone Lock**.
2. Enter the unlock PIN and tap **Unlock**.
3. Enter the new lock PIN in the **New PIN** field.
4. Enter the lock PIN again in the **Confirm PIN** field.
5. Save the change.

## Disabling Phone Lock

If your system administrator sets security restrictions and enables the phone lock, you are restricted from disabling it.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Phone Lock**.
2. Enter the unlock PIN and tap **Unlock**.
3. Disable **Lock Enable**.

## Using a Teams Phone as a Common Area Phone

---

Your phone can be set as a Common Area Phone (CAP). Instead of being located in someone's office, common area phones are typically placed in an area like a lobby or another area that is available to many people to make a call; for example, a reception area, lobby, or conference room.


You have access to certain features for the common area phones:

- **CAP account:** You have calls capability. You also have the searching capability if your system administrator enables it on the Microsoft Teams & Skype for Business Admin Center.
- **Meeting account:** You have calls capability and can join the scheduled meeting.
- [Signing into a CAP/Meeting Account](#)
- [Signing out of a Common Area Phone](#)

## Signing into a CAP/Meeting Account

### Procedure

1. Tap **Sign in**.

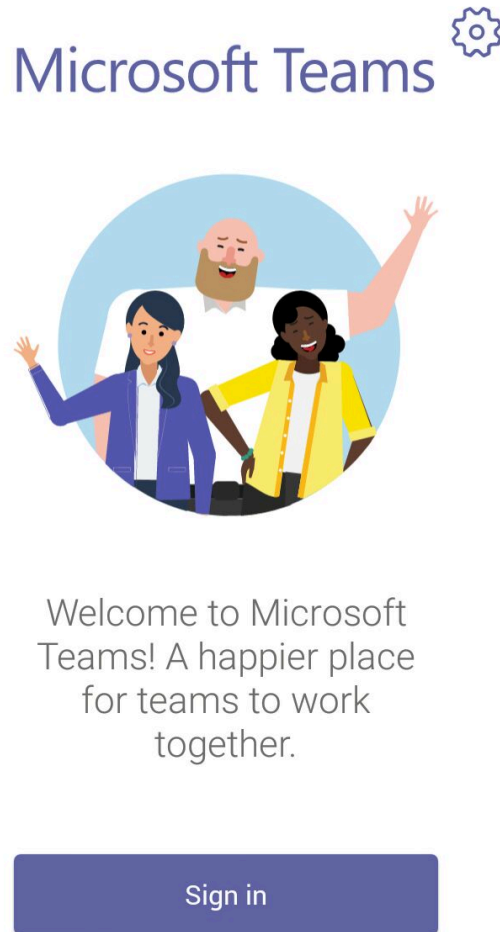


You will be connected to the Company Portal automatically.


2. Enter your user credentials.

3. After the phone signs in successfully, tap **Got it**.

After signing into the CAP account, the screen is displayed as below:

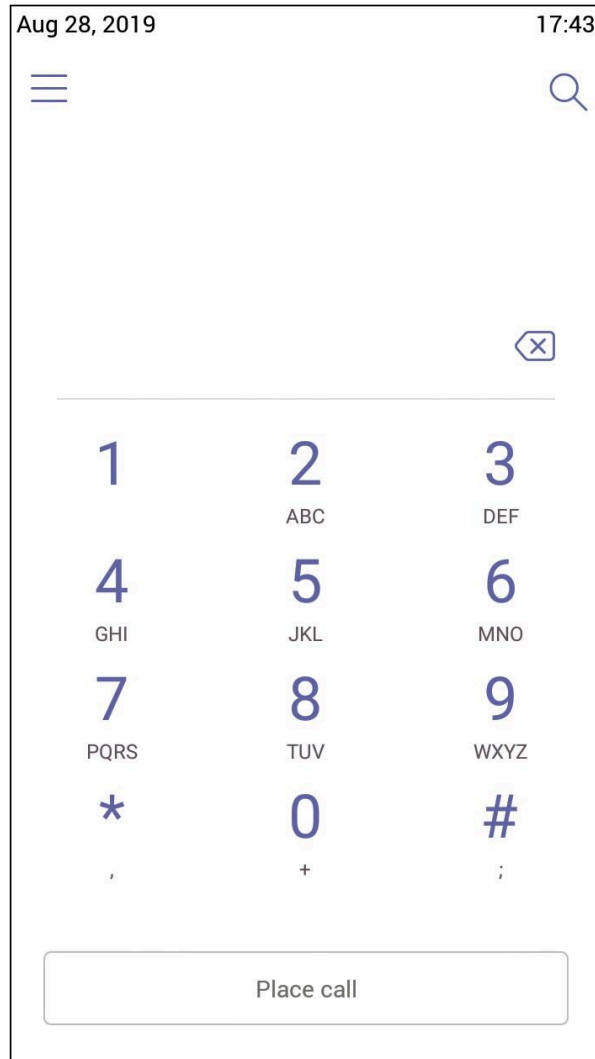


After signing into the Meeting account, the screen is displayed as below:

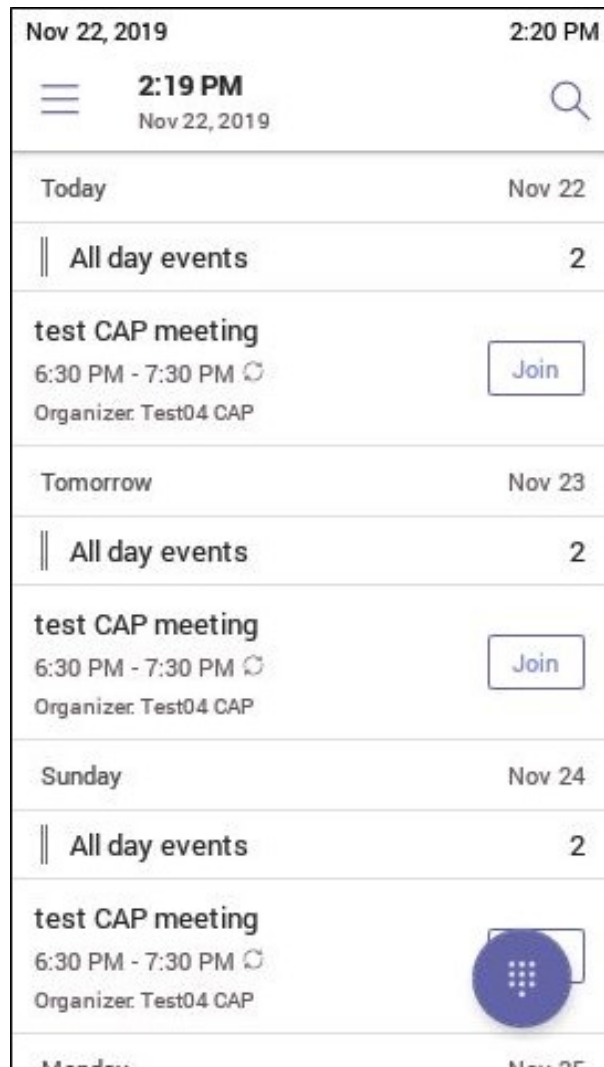

## Signing out of a Common Area Phone

### Procedure

1. Go to  > **Settings** > **Device Settings**.
2. Tap the **Admin Password** field and then enter the admin password (default: admin).
3. Tap **Sign Out**.
4. Tap **OK**.

## Signing into a Teams Phone as a Guest User


You can sign into a phone as a guest user. Hot Desking feature is convenient for different employees to share one Teams phone. When you sign out, any changes you made on the phone while signed in are removed and the host user settings are restored.

- [Signing in as a Guest User](#)
- [Signing out of the Guest User](#)

## Signing in as a Guest User

You can sign into Teams on your phone as a guest user.

### Procedure

1. Do one of the following:
  - When the phone is unlocked, go to ☰ > **Hot desk**.
  - When the phone is locked, tap  on the touch screen and tap **Hot Desk**.
2. Enter your user credentials and tap **Sign in**.

## Signing out of the Guest User

You can sign out of the guest user after you use the phone.

### Procedure

1. Go to ☰ > **Stop hot desking**.  
The phone prompts you whether to stop hot desking.
2. Tap **END**.  
The guest user is signed out and the host user is signed in automatically.



**Note:** The guest user will automatically be signed out after the phone is idle for a designated time (this time is configured by system administrator). Before logout, the phone prompts you that it will automatically sign out in 15 seconds.

# Changing Your Presence Status


---

You can update your presence status on the phone. For example, when you are busy with urgencies, you can change your status to DND to avoid being disturbed.

### Procedure

1. Tap ☰ at the top-left of the touch screen.

2. Tap the presence status field and then select the desired status from the drop-down menu.

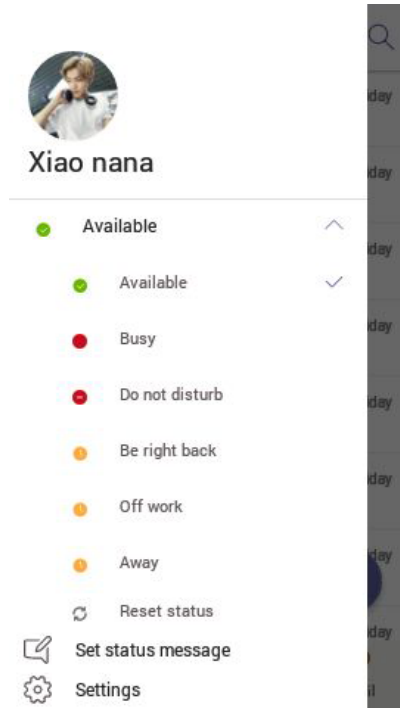

**i** **Tip:** You can reset your presence status to be available from any other status by tapping **Reset status**.

## Favorites

---

By default, all favorite contacts from the Teams desktop client are marked as favorite contacts on the phone. You can add favorites or remove favorites.

- [Adding Favorites](#)
- [Removing Favorites](#)


## Adding Favorites

---

### Procedure

1. From the **Calls** screen, tap **RECENT**.
2. Tap the desired contact.

3. Tap ☆.

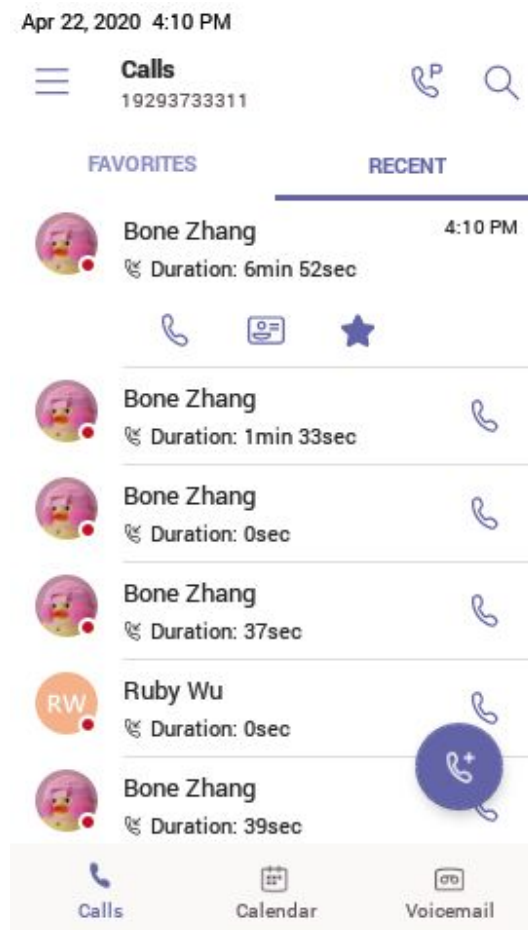

The contact appears in the **FAVORITES** list.

## Removing Favorites

### Procedure

1. From the **Calls** screen, tap **FAVORITES**.
2. Tap ⋮ on the desired contact.
3. Tap **Remove favorites**.

## Managing Delegates

You can pick someone to be your delegate—to receive and make calls on your behalf. When you add a delegate, you're essentially sharing your phone line with them, so they can see and share all of your calls.

Teams phones provide the ability to setup and manage delegates.

- [Adding a Delegate from Settings](#)
- [Forwarding All Incoming Calls to Delegates](#)
- [Forwarding Incoming Calls to Delegates if Unanswered](#)




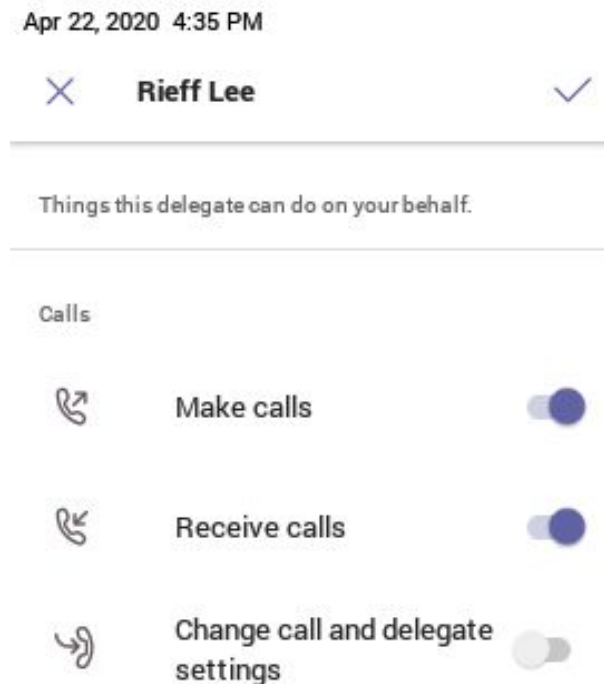
- [Synchronizing Incoming Calls to Delegates](#)

## Adding a Delegate from Settings

---

### Procedure

1. Go to  > **Settings** > **Manage delegates**.
2. Type the person's name in the **Add delegates** box and select your delegate.
3. Select the permission you want to give your delegate.



4. Save the change.

### Results


Your new delegate will now appear in your delegates list.

## Forwarding All Incoming Calls to Delegates

---

You can forward all incoming calls directly to your delegates.

### Procedure


1. Go to  > **Settings** > **Calling**.
2. Enable **Call forwarding**.
3. Tap the **Forward to** field and then select **My delegates**.

## Forwarding Incoming Calls to Delegates if Unanswered

---

You can configure the forwarded destination if the incoming call is not answered.

### Procedure

1. Go to  > **Settings** > **Calling** > **If unanswered**.
2. Tap **My delegates**.

## Synchronizing Incoming Calls to Delegates

---

You can synchronize incoming calls to delegates so that you and your delegates can receive the incoming calls simultaneously.

### Procedure

1. Go to  > **Settings** > **Calling** > **Also ring**.
2. Tap **My delegates**.

## Boss/Admin Delegate Call Feature

---


- [Call on behalf of](#)
- [Boss's Call Status](#)
- [Boss' Held Call](#)

## Call on behalf of

---

When placing an outgoing call, the delegate can call either on behalf of themselves or on behalf of the boss.

### About this task

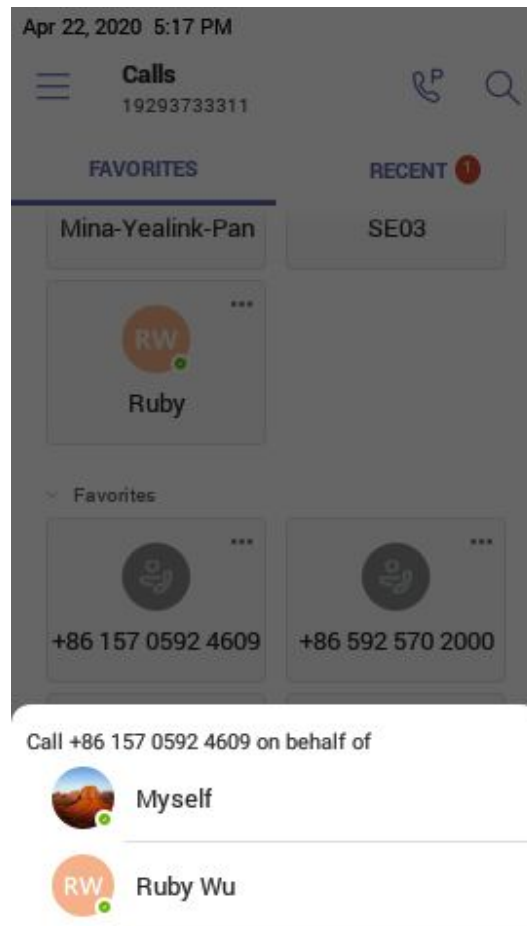


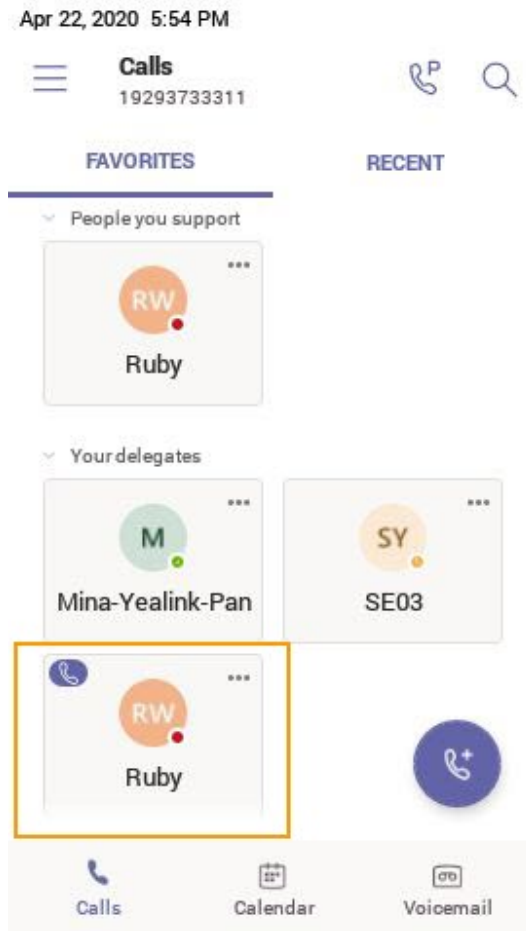
## Boss's Call Status

---

Delegates can see and monitor boss' call status on the delegate's phone.

### About this task


In the example below, the icon  on the Boss' tile shows the delegate that the boss is in an active call. You can tap the icon to view additional details about the call.



## Boss' Held Call

When the boss puts a call on hold, call status is reflected on the delegate's phone and the delegate can pick up the call on behalf of the boss.

### About this task

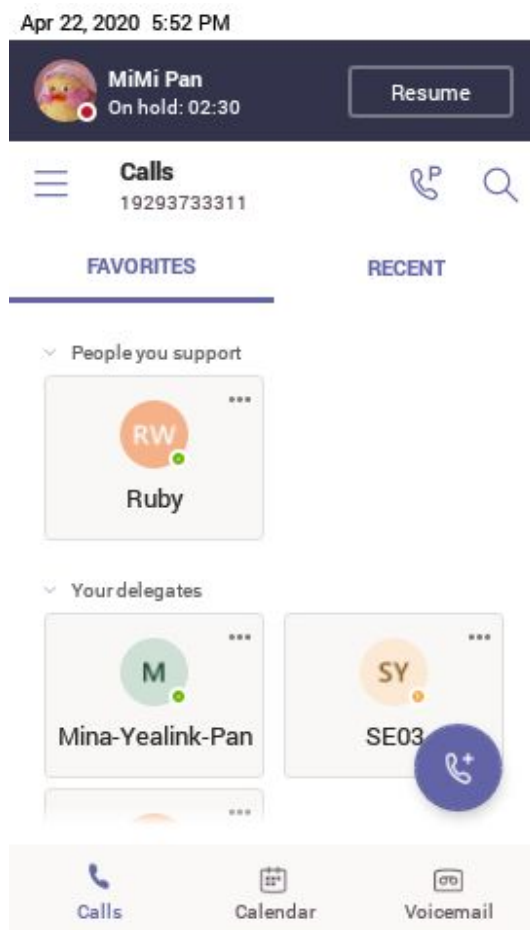

## Operating Calls

This chapter shows you how to handle calls on your device.

- [Switching among the Handset, Speakerphone and Headset Modes](#)
- [Placing Calls](#)
- [Answering Calls](#)
- [Muting and Unmuting Audio](#)
- [Holding and Resuming Calls](#)
- [Ending or Rejecting an Active Call](#)
- [Ending All Calls in the Process](#)
- [Transferring Calls](#)
- [Forwarding All Incoming Calls](#)
- [Forwarding Incoming Calls if Unanswered](#)

- [Synchronizing Incoming Calls to the Specified Contact](#)
- [Parking and Retrieving Calls on the Teams Server](#)
- [Call Queue](#)
- [Blocking Calls with No Caller ID](#)
- [Anonymous Call](#)
- [Group Call Pickup](#)

## Switching among the Handset, Speakerphone and Headset Modes

---

You can select the desired mode before placing a call, or you can alternate among Speakerphone, headset, and handset modes during a call.

You can switch the audio output modes of a phone.

- Switching to handset mode: Pick up the handset .
- Switching to speakerphone (hands-free) mode: Press the Speakerphone key . The Speakerphone LED indicator glows green when the speakerphone is activated.
- Switching to headset mode: Press the HEADSET key. The HEADSET LED indicator glows green when the headset is activated.

## Placing Calls



---

You can use your phone like a regular phone to place calls in many ways easily.

- [Calling Contacts](#)
- [Dialing the Number](#)
- [Placing Multiple Calls](#)
- [Placing a Call from Call History](#)
- [Placing a Call from Voicemail](#)
- [Placing an Emergency Call from a Locked Phone](#)
- [Auto Dial for Extension Dialing](#)

## Calling Contacts

### Procedure




1. From the **Calls** screen, tap .
2. Enter the contact account information to search for the desired contact.
3. Tap  beside the contact to place an audio call.



**Tip:** You can tap  to search for a contact.

## Dialing the Number




### Procedure

1. Do one of the following:
  - Pick up the handset.
  - Press the Speakerphone key.
  - Press the HEADSET key.
  - Tap  on the Calls screen and then tap .
2. Enter the contact number.
3. Tap .

## Placing Multiple Calls

When you are in a call, you can hold your current call and place a new call. Only one active call (the call that has audio associated with it) can be in progress at any time.


### Procedure

1. During a call, tap  to return to the **Calls** screen.
  2. Tap  on the Calls screen or tap  to search and then dial out the contact.
- The active call is placed on hold and the new call is set up.

## Placing a Call from Call History


You can place calls to contacts from the call history list, which contains incoming, outgoing, and missed calls.

### Procedure

1. From the **Calls** screen, tap the desired contact.
2. Tap  to place an audio call.

## Placing a Call from Voicemail


### Procedure

1. From the **Voicemail** screen, tap the voice mail record that you want to call.
2. Tap  to place an audio call.

## Placing an Emergency Call from a Locked Phone

Once locking the phone, you can dial an emergency number without having to unlock it.

### Procedure

1. Tap  on the touch screen.
2. Tap **Emergency Call**.
3. Enter an emergency number and then tap **Place call**.

## Auto Dial for Extension Dialing

Tenant admins can add dial plans for their organization with normalization rules to enable extension dialing in Teams. Teams phones will auto dial in 3 seconds after an approved extension is dialed by the user using the dial pad.

## Answering Calls

---


When you receive an incoming call on your phone, you can choose to answer it in various ways.

- [Answering a Call](#)
- [Answering a Call When in a Call](#)

### Answering a Call

#### Procedure


Do one of the following:

- Pick up the handset.
- Press the Speakerphone key.
- Press the HEADSET key.
- Tap  .

### Answering a Call When in a Call

You can answer the incoming call when you are in an active call.

#### Procedure

Tap  on the touch screen.



The active call is placed on hold and the incoming call becomes active.

## Muting and Unmuting Audio

---

You can mute the microphone during an active call so that the other party cannot hear you.

#### Procedure

1. During a call, press the mute key on the phone or tap  on the touch screen.  
The mute key glows red.
2. To unmute audio, press the mute key on the phone or tap  on the touch screen.  
The mute key glows green.

## Holding and Resuming Calls

---

When you are in a call, you can place an active audio call on hold and resume the call when you are ready.

- [Placing a Call on Hold](#)
- [Resuming a Call](#)



## Placing a Call on Hold

### Procedure

During a call, tap  > **Put call on hold**.

## Resuming a Call

### Procedure

Do one of the following:

- If only one call is placed on hold, tap **Resume**.
- If multiple calls are placed on hold, tap  on the right side of the desired held call.

## Ending or Rejecting an Active Call

---

### Procedure

Tap .

## Ending All Calls in the Process

---

You can end all calls in the process at a time.

### Procedure

Do one of the following:

- If you are using the handset, hang up the handset.
- If you are using the headset, press the HEADSET key.
- If you are using the speakerphone, press the Speakerphone key.

## Transferring Calls

---


You can transfer a call to another party using the blind transfer or consultative transfer method.

- [Performing a Blind Transfer](#)
- [Performing a Consultative Transfer](#)

## Performing a Blind Transfer

You can transfer calls to other contacts immediately without consulting with them first.



### Procedure

1. During a call, tap  > **Transfer** > **Transfer now**.  
The call is placed on hold.
2. Enter the contact information to search and then select the desired contact.  
Then the call is connected to the number which you are transferring to.

## Performing a Consultative Transfer

You can transfer calls to other contacts after consulting with them first.

### Procedure

1. During a call, tap  > **Transfer** > **Consult first**.
2. After the party answers the call, tap  beside the contact.  
It prompts you whether to transfer the call or not.
3. Enter the contact information to search and then select the desired contact.
4. Tap **OK** to complete the transfer.  
After the transferred party answers the call, the call is transferred successfully.

## Forwarding All Incoming Calls

---


You can set up your phone to forward all incoming calls to a specified destination.

- [Forwarding Calls to Voicemail](#)
- [Forwarding Calls to a Contact or Number](#)

### Forwarding Calls to Voicemail

You can forward all incoming calls to your voicemail.


#### Procedure

1. Go to  > **Settings** > **Calling**.
2. Enable **Call forwarding**.
3. Tap the **Forward to** field and then select **Voicemail**.

### Forwarding Calls to a Contact or Number

You can forward all incoming calls to a contact or number.

#### Procedure


1. Go to  > **Settings** > **Calling**.
2. Enable **Call forwarding**.
3. Tap the **Forward to** field and then select **Contact or number**.
4. Add the desired number.  
The incoming calls are automatically forwarded to the contact or number.

## Forwarding Incoming Calls if Unanswered

---

You can configure the forwarded destination if the incoming call is not answered.

#### Procedure

1. Go to  > **Settings** > **Calling** > **If unanswered**.

2. Select a desired forwarded destination:

- Select **Voicemail** directly.
- Tap **Contact or number**, add the target contact.

#### Related tasks


[Forwarding All Incoming Calls to Delegates](#)

## Synchronizing Incoming Calls to the Specified Contact

---

You can synchronize incoming calls to a specified contact so that you and they can receive the incoming calls simultaneously.

#### Procedure

1. Go to  > **Settings** > **Calling** > **Also ring**.
- 2.

## Parking and Retrieving Calls on the Teams Server

---

Call park and retrieve feature allows a user to place a call on hold in the Teams service in the cloud. When a call is parked, the service generates a unique code for call retrieval. The user who parked the call or someone else can use that code to retrieve the call.

#### About this task

If the call park and retrieve feature is not available, contact your administrator for more information.

- [Parking Teams Calls](#)
- [Retrieving Parked Calls](#)


### Parking Teams Calls

If you want to receive the call on a mobile device instead of the desk phone for convenience or if the caller wants someone else to answer the call, you can park the call on the Teams server. When a call is parked, you can use the code to retrieve the call on another device.

#### About this task

If the parked call is not retrieved within five minutes, you will receive a ringback.

#### Procedure

During a call, go to  > **Park Call**.

The call is parked and the code to retrieve the call is displayed on the phone.


#### Related tasks

[Retrieving Parked Calls](#)


### Retrieving Parked Calls

After the call is parked, you can retrieve the call on another phone or provide another contact with the call retrieval code to retrieve the call.

#### Procedure

1. Tap  when the phone is idle.

2. Enter the code.

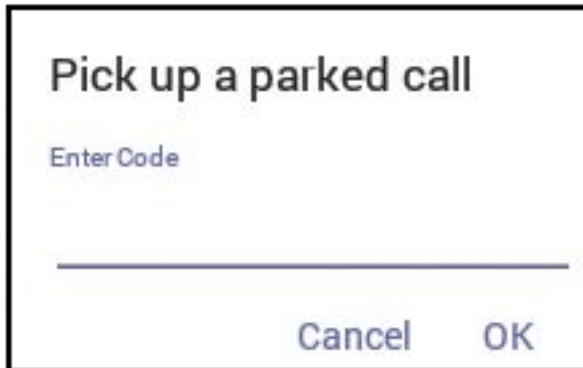

Pick up a parked call

Enter Code

Cancel OK

3. Tap OK.

## Call Queue

---

Call queue is a feature that route and queue incoming calls to group members, called agents, such as to a help desk or a customer service desk.

When someone calls into a phone number that is set with a call queue, they will hear a greeting first (if any is setup), and then they will be put in the queue and wait for the available call agent. The person calling in will hear music while they are placed on hold and waiting, and the call in the queue will ring all call agents at the same time by default. After a call agent accepts the call, other agents' phones stop ringing.

If you are assigned as an agent of the call queue, the incoming calls to the call queue will display the name of the call queue to distinguish it from common calls.




**Note:** The routing method (**Attendant routing**, **Serial routing**, or **Round Robin**) is decided by your administrator. For more information on call queue, refer to [Create a Cloud call queue](#).


## Blocking Calls with No Caller ID

---

### Procedure

1. Go to  > **Settings** > **Calling**.
2. Enable **Block calls with no caller ID**.



**Note:** If your phone is set as a common area phone, go to  > **Settings** > **Device Settings** > **Calls (Admin only, default password: admin)** to enable **Block calls with no caller ID**.

## Anonymous Call

---


You can hide your phone number when dialing people who are outside of Microsoft Teams.

### Procedure

1. Go to  > **Settings** > **Calling**.

2. Turn on **Hide your phone number when dialing people who are outside of Microsoft Teams**.



**Note:** If your phone is set as a common area phone, go to  > **Settings** > **Device Settings** > **Calls (Admin only, default password: admin)** to enable **Hide your phone number when dialing people who are outside of Microsoft Teams**.

## Group Call Pickup

---

You can accept/decline incoming call notifications for call groups from anywhere on the phone.

## Conference Calls

---



This chapter provides basic operating instructions about initiating and managing a conference call.

- [Initiating a Conference by Calling Multiple Contacts](#)
- [Initiating a Conference Call by Inviting Other Contacts](#)
- [Initiating a Conference Call From Call History](#)
- [Managing the Conference Participants](#)
- [Adding Participants to a Conference Call](#)
- [Leaving the Conference](#)

### Initiating a Conference by Calling Multiple Contacts

---

#### Procedure




1. Tap  from the **Calls** screen.
2. Enter the contact information to search and then select the desired contact.  
You can add multiple contacts.
3. Tap .

### Initiating a Conference Call by Inviting Other Contacts

---

You can initiate a conference call by inviting contacts to join the active call.


#### Procedure

1. During a call, tap .
2. Tap  on the touch screen.
3. Enter the participant account information to search and then add members.
4. Tap  to initiate a conference.

## Initiating a Conference Call From Call History

---

### Procedure

1. Tap **Calls** from the touch screen.
2. Select a desired entry from the call history.
3. Tap .

## Managing the Conference Participants

---


Everyone in the conference call can manage call participants.

- [Muting All Conference Participants](#)
- [Muting Individual Conference Participants](#)
- [Removing the Participants from the Conference](#)
- [Re-inviting the Participants Who Have been Removed](#)
- [Viewing the Details of Participants](#)

### Muting All Conference Participants

Everyone can mute all other conference participants in the conference call. The participants being muted can only unmute themselves.


#### Procedure

1. During the conference call, tap .  
All participants are displayed in the participants list.
2. Tap **Mute all**.  
All other participants in the conference call are muted.

### Muting Individual Conference Participants

Everyone can mute any other conference participants in the conference call.


#### Procedure

1. During the conference call, tap .  
All participants are displayed in the participants list.
2. Tap the desired participant and then select **Mute participant**.  
The participant is muted.

### Removing the Participants from the Conference

Everyone can remove other conference participants from the conference.


#### Procedure

1. During the conference call, tap .  
All participants are displayed in the participants list.
2. Tap the desired participant and then select **Remove from the call**.  
The participant is displayed in the **Other participants** list.

## Re-inviting the Participants Who Have been Removed

You can re-invite the participants who have been removed from the conference call from the **Other participants** list .


### Procedure

1. During the conference call, tap .  
All participants are displayed in the participants list.
2. Tap the desired participant from the **Other participants** list and then select **Invite in the call**.

## Viewing the Details of Participants

You can view the details of participants who are in the conference call or in the lobby (Other participants list).

### Procedure




1. During the conference call, tap .  
All participants are displayed in the participants list.
2. Tap the desired participant and then select **View profile**.

## Adding Participants to a Conference Call

---

Everyone in the conference call can add others to the conference.

### Procedure


1. During the conference call, tap .
2. Tap  on the touch screen.
3. Enter the participant account information to search and then add members.
4. Tap  to add the participants.

## Leaving the Conference

---

All participants can leave the conference at any moment.

### Procedure

Tap .

Other participants remain connected.

## Using the Teams Meeting Feature

---

Teams meetings are a great way to come together with your colleagues and clients both inside and outside of your organization. You can join a Teams meeting as long as you have a Teams online account.

You can schedule meetings on the Teams phone, the Teams client, or the Outlook. Meetings are synced automatically among them. Meeting screen shows all the meeting scheduled in the last 7 days.

- [Scheduling a Meeting on the Teams Phone](#)
- [Viewing the Meeting Details](#)
- [Joining a Scheduled Meeting](#)
- [Responding to the Meeting Invitation](#)
- [Canceling the Scheduled Meeting](#)
- [Editing the Scheduled Meeting](#)
- [Deleting the Scheduled Meeting](#)

#### Related tasks



[Signing into Microsoft Teams on Your Device](#)

## Scheduling a Meeting on the Teams Phone

---

You can schedule meetings on the Teams phone.

#### Procedure

1. From the **Meetings** screen, tap .
2. Enter the title, add the participants, and select start time and end time.  
You can enable the **All day** feature to set up whole-day meetings.
3. Enter the location and select the repetition period.
4. To show others your status during this time, tap the **Show as** field and then select **Busy**, **Free**, **Tentative**, or **Out of office**.
5. Optional: Enter the description of the meeting.
6. Tap  to set up the meeting.

## Viewing the Meeting Details

---

You can view details of scheduled meetings such as the conference dial-in number and conference ID.

#### Procedure

1. From the **Meetings** screen, tap the desired meeting.
2. Tap **See more** on the right of the screen.

## Joining a Scheduled Meeting

---

You can join a Teams meeting scheduled on the Teams phone, the Teams client, or the Outlook.

#### Procedure

From the **Meetings** screen, tap **Join** beside the desired meeting.




## Responding to the Meeting Invitation

Participants can respond to the meeting scheduled on the Teams phone, the Teams client, or the Outlook.

### Procedure

1. From the **Meetings** screen, tap the desired meeting.
2. Tap **RSVP** on the right of the screen.
3. Select the desired response:
  - Accept (Accept the invitation)
  - Tentative (Tentatively accept the invitation )
  - Decline (Decline the invitation)

Your response is shown below:

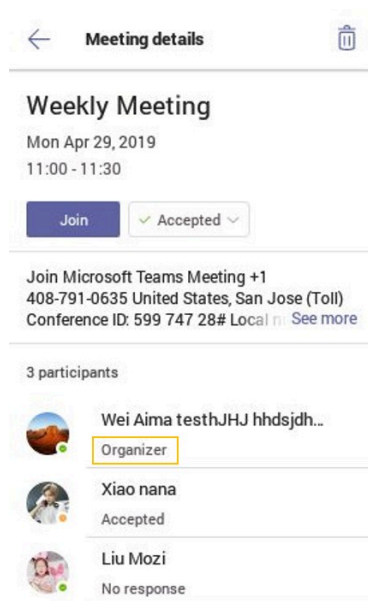

**Tip:** You can tap the selected response to edit the response to the scheduled meeting.

## Canceling the Scheduled Meeting

If you are the organizer, you can cancel the scheduled meetings.

### Procedure



1. From the **Meetings** screen, tap the desired meeting.
2. Tap > **Cancel event**.  
It prompts if you want to cancel this event.
3. Tap **OK**.

## Editing the Scheduled Meeting

---

If you are the organizer, you can edit the scheduled meetings, such as adding participants.

### Procedure


1. From the **Meetings** screen, tap the desired meeting.
2. Tap  > **Edit event**.
3. Edit the meeting.
4. Tap .

## Deleting the Scheduled Meeting

---

You can delete the meeting that is not started and remove it from your calendar. It will not affect other participants.

### Procedure

1. From the **Meetings** screen, tap the desired meeting.
2. Tap  at the top right.  
It prompts if you are sure to delete the meeting.
3. Tap **OK**.

## Using the Voicemail

---

After you sign into the phone, all voice mails received on your account will be displayed on your phone. You can view the duration and receiving time of each voicemail stored in your voicemail. After reading the voicemail, you can delete it.

- [Listening to the Voicemail](#)
- [Deleting Voicemail Messages](#)
- [Viewing the Details of the Contacts](#)





### Related tasks

[Signing into Microsoft Teams on Your Device](#)

## Listening to the Voicemail

---

### Procedure


1. From the **Voicemail** screen, tap the desired voicemail.
2. Tap  to play the voicemail.
3. To change the playback speed of the voicemail, tap .  
You can also change the speed to **2x** or **.5x**.
4. To pause the playback, tap . Then tap  to resume the playback.

## Deleting Voicemail Messages

---

After you listen to a message, you can delete it.

### Procedure


1. From the **Voicemail** screen, tap the desired voicemail.
2. Tap  below the voicemail.  
It prompts if you are sure to delete the voicemail.
3. Tap **DELETE**.

## Viewing the Details of the Contacts

---

You can view the details of the person who left you a message.

### Procedure

1. From the **Voicemail** screen, tap the desired voicemail.
2. Tap  below the voicemail.

## Teams Device Settings


---

- [Using the Dark Theme](#)
- [Setting the Language](#)
- [Time and Date Display](#)
- [Screen Savers](#)
- [Changing the Screen Backlight Brightness and Time](#)
- [Bluetooth](#)
- [Better Together over Bluetooth \(BToB\)](#)
- [Accessibility Features](#)
- [Setting Ringtones](#)

## Using the Dark Theme


---

### Procedure

1. Go to  > **Settings**.
2. Enable **Dark theme**.  
It prompts that it will restart the app to switch the theme.

3. Confirm the option.

After the phone is restarted, the screen is displayed as follows:

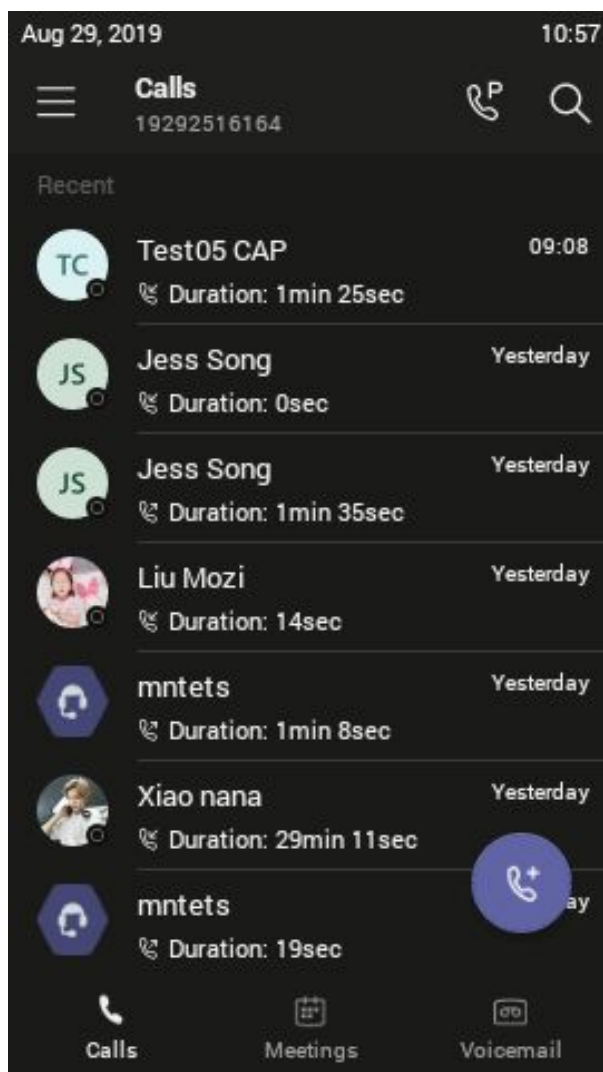

## Setting the Language

The default language of the device depends on what you set after the device starts up. You can change the language.

### Procedure

1. Go to > **Settings** > **Device Settings** > **Language**.
2. Select the desired language.  
It prompts if you are sure to change the language.
3. Tap **OK**.



**Note:** If your phone is set as a common area phone, go to > **Settings** > **Device Settings** > **Language(Admin only, default password: admin)** to set the language.

## Time and Date Display

---


You can set the time and date manually. The time and date format is also customizable.

- [Setting the Time and Date Manually](#)
- [Changing the Time and Date Format](#)

### Setting the Time and Date Manually

If your device cannot obtain the time and date automatically, you can set the time and date manually.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Time & Date**.
2. Tap **Manual Settings** from the **Type** field, and tap **OK**.
3. Enter the specific date and time in the **Date** and **Time** field respectively.

### Changing the Time and Date Format


You can change the time and date format.

#### About this task

The built-in date formats are listed below:

Date Format	Example(2018-05-30)
WWW MMM DD	Wed May 30
DD-MMM-YY	30-May-18
YYYY-MM-DD	2018-05-30
DD/MM/YYYY	30/05/2018
MM/DD/YY	05/30/18
DD MMM YYYY	30 May 2018
WWW DD MMM	Wed 30 May
MM/DD/YYYY	05/30/2018

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Time & Date**.
2. Select the desired date format from the **Date Format** field.
3. Select the desired time format from the **Time Format** field.

## Screen Savers

---


The screen saver automatically starts each time your device is idle for a certain amount of time. You can stop the screen saver at any time by pressing any key or tapping the touch screen. When your device is idle again for a preset waiting time, the screen saver starts again.

- [Changing the Waiting Time for Screen Saver](#)
- [Changing the Screen Saver Background](#)


## Changing the Waiting Time for Screen Saver

You can change the waiting time for the screen saver.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Display**.
2. Select the desired time from the **Screensaver Waiting Time** field.
3. Tap **OK**.




**Note:** If your phone is set as a common area phone, go to  > **Settings** > **Device Settings** > **Screen Saver(Admin only, default password: admin)** > **Screensaver Waiting Time** to change the waiting time for the screen saver.


## Changing the Screen Saver Background

You can change the screen saver background of the device. You can also set the device to display the custom background.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Display**.
2. Select the desired type from the **Screen Saver Type** field.
  - If you select **System**, select the desired background from the **Screensaver background** field.
  - If you select **Custom**, the device automatically set the custom pictures uploaded from the web user interface as the screen saver, and display these pictures alternately.
3. Tap **OK**.



**Note:** If your phone is set as a common area phone, go to  > **Settings** > **Device Settings** > **Screen Saver(Admin only, default password: admin)** > **Screensaver background** to change the screen saver background.

## Changing the Screen Backlight Brightness and Time

---

You can change the backlight brightness of the LCD when the device is active (in use). The backlight brightness automatically changes after the device has been idle for a specified time.

### About this task


You can change the screen backlight brightness and time in the following settings:

**Backlight Active Level:** The brightness level of the phone screen when the phone is active.

**Backlight Time:** The delay time to change the brightness of the LCD screen when the device is inactive. Backlight time includes the following settings:

- **Always On:** Backlight is on permanently.
- **15s, 30s, 1min, 2min, 5min, 10min, 30min, 45min or 1h:** Backlight is turned off when the device is inactive after the designated time.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Display**.
2. Slide the **Backlight Active Level** slider to change the brightness of the LCD backlight.
3. Select the desired time from the **Backlight Time** field.

4. Tap **OK**.

## Bluetooth

---

The Teams device supports Bluetooth. You can pair and connect the Bluetooth headset with your phone.

- [Activating the Bluetooth Mode](#)
- [Pairing and Connecting the Bluetooth Headset](#)
- [Editing Your Device Name](#)
- [Disabling Your Device Discovery](#)
- [Renaming the Paired Bluetooth Devices](#)
- [Disconnecting the Bluetooth Device](#)
- [Un-pairing the Bluetooth Devices](#)
- [Deactivating the Bluetooth Mode](#)

### Activating the Bluetooth Mode

You need to activate Bluetooth mode to use the Bluetooth feature.

#### Before you begin

Make sure the Bluetooth USB Dongle BT41 is connected to the phone.

#### Procedure



1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Turn on **Bluetooth**.

### Pairing and Connecting the Bluetooth Headset

#### Before you begin

Make sure that you have activated the Bluetooth mode and the Bluetooth headset is discoverable.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Tap  > **Scan** to search for the Bluetooth devices.
3. Tap your Bluetooth device in the **AVAILABLE DEVICES** list.  
The Bluetooth headset is paired and connected successfully.

#### Related tasks

[Activating the Bluetooth Mode](#)


### Editing Your Device Name

You can change the Bluetooth device name for your device.

#### Before you begin

Make sure you have activated the Bluetooth mode.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Enter the desired name in the **Device Name** field.

## Related tasks

[Activating the Bluetooth Mode](#)

## Disabling Your Device Discovery

After the Bluetooth is turned on, your device is visible to other Bluetooth-enabled devices by default. You can disable this feature not to allow your device to be discovered by other Bluetooth devices.


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Turn off **Open Discover**.

## Renaming the Paired Bluetooth Devices

You can rename the paired Bluetooth devices for better recognition.


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Long tap the paired device and then select **Details**.
3. Enter the desired name in the **Rename** field.
4. Tap **OK**.

## Disconnecting the Bluetooth Device

You can disconnect the Bluetooth device from your device. After the Bluetooth device is disconnected, it stays in the paired devices list, so that you can easily connect it to your device next time.


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Select the connected Bluetooth device.  
It prompts if you are sure to disconnect.
3. Select **OK**.

## Un-pairing the Bluetooth Devices

You can unpair your Bluetooth devices with your Teams phone. After unpaired, the Bluetooth devices disappear from the paired devices list.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.
2. Long tap the paired device and then select **Unpaired**.  
It prompts if you are sure to unpair.
3. Tap **OK**.

## Deactivating the Bluetooth Mode

You can deactivate the Bluetooth mode when you no longer use a Bluetooth device.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Bluetooth**.



2. Turn off **Bluetooth**.

## Better Together over Bluetooth (BToB)

After the phone is paired with PC, it supports lock / unlock and screen off / screen awake operations via BToB.


- [Pairing the Device with PC](#)
- [BToB Lock](#)


## Pairing the Device with PC

### Before you begin

Make sure the Bluetooth is enabled on the phone (enabled by default).

### Procedure

1. Sign in on Microsoft Teams client installed on laptop or PC.
2. Enable Bluetooth on laptop or PC.
3. Sign in on the phone with the same account on Microsoft Teams client.
4. Go to  > **Manage devices**.

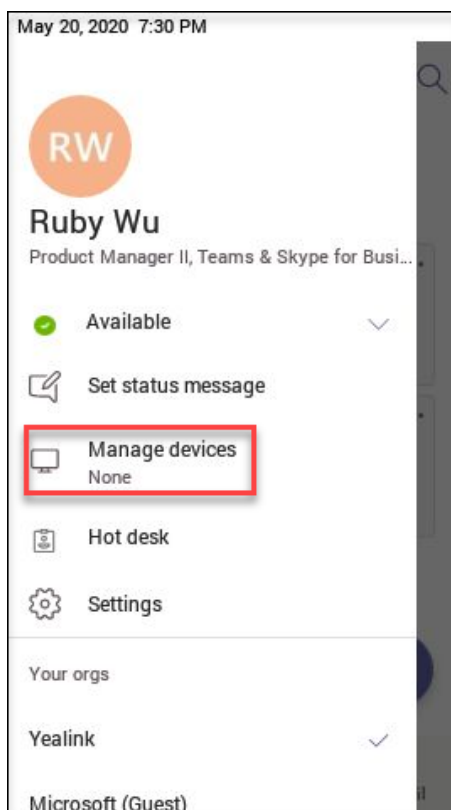

The phone shows the available device to connect.

5. Pair the device with laptop or PC.  
Laptop or PC will get the notification to accept the connection.
6. On the Microsoft Teams client, click on **Connect** in the notification.

## BToB Lock

When the phone is paired with the laptop or PC and phone lock is enabled on the phone, lock / unlock on the phone is in sync with the laptop or PC.

### Related tasks

[Pairing the Device with PC](#)

[Enabling Phone Lock](#)

## Accessibility Features

---

The device includes a number of features to accommodate vision-impaired users.

- [Large Text](#)
- [High Contrast Mode](#)
- [Color Correction](#)

### Large Text

You can change the displayed text size.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Accessibility**.
2. Turn on **Large Text**.

### High Contrast Mode

You can change contrast if any difficulties in reading text on the screen.


#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Accessibility**.
2. Turn on **High Contrast Mode**.

### Color Correction

You can change color mode if any difficulties in color recognition.


#### Procedure


1. Go to  > **Settings** > **Device Settings** > **Accessibility**.
2. Select the desired value from the **Color Correction** field.
  - Off
  - Deuteranomaly (red-green)
  - Protanomaly (red-green)
  - Tritanomaly (blue-yellow)
3. Tap **OK**.

## Setting Rintones

You can set different ringtones for incoming calls, forwarded calls, and delegated calls.

### Procedure

1. Go to  > **Settings** > **Calling**.
2. Select a desired ringtone from an available list of ringtone options.

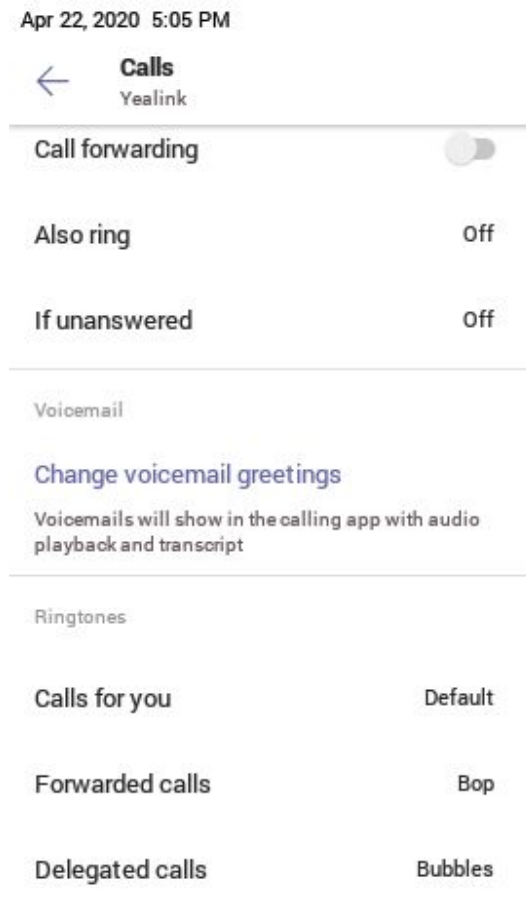

## Wireless Network

The Teams device supports the Wi-Fi feature. If there is available Wi-Fi, you can enable the Wi-Fi feature to connect the device to the wireless network.



**Note:** The phones can automatically connect to the wireless network via a Yealink-supplied App. For more information, refer to [Easy Way to Connect to a Wireless Network via App](#).

- [Activating the Wi-Fi Mode](#)
- [Connecting to the Wireless Network](#)
- [Viewing the Wireless Network Information](#)
- [Disconnecting the Wireless Network Connection](#)
- [Deactivating the Wi-Fi Mode](#)

## Activating the Wi-Fi Mode

---

### Before you begin

Make sure the Wi-Fi USB Dongle WF50 is connected to the phone.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Turn on **Wi-Fi**.

## Connecting to the Wireless Network

---

There are three ways to connect the device to the wireless network:



- [Connecting to an Available Wireless Network Manually](#)
- [Connecting to the Wireless Network Using WPS](#)
- [Adding a Wireless Network manually](#)

### Connecting to an Available Wireless Network Manually

#### Before you begin

Get the password of the wireless network from your system administrator. Make sure that the Wi-Fi mode is activated.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Tap  > **Scan** to search the available wireless network.
3. Select the desired wireless network.
4. If the network is secure, enter its password.
5. Tap **CONNECT**.

### Connecting to the Wireless Network Using WPS

Wi-Fi Protected Setup (WPS) provides simplified mechanisms to configure secure wireless networks, which can automatically configure a wireless network with a network name (SSID) and strong WPA data encryption and authentication.

#### About this task

Two methods supported by Yealink devices in the Wi-Fi protected setup:

- **Push Button Configuration (PBC)**: The user simply presses the WPS key on both the device and router to connect.
- **Personal Identification Number (PIN)**: The user has to enter a PIN generated randomly by the device on the router to connect.
- [Connecting to the Wireless Network Using PBC](#)
- [Connecting to the Wireless Network Using PIN](#)

## Connecting to the Wireless Network Using PBC

### Before you begin

Make sure Wi-Fi Mode is activated.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Tap  > **WPS**.

The device screen prompts that you need to press the Wi-Fi Protected Setup button on your router.

3. Long press the WPS key on your gateway/router.



Once the WPS setup has completed successfully, the touch screen will prompt connect successfully.

## Connecting to the Wireless Network Using PIN

### Before you begin

Make sure that the Wi-Fi mode is activated.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Tap  > **WPS-PIN** to search the available wireless network.

The device screen prompts that you need to enter the PIN xxx on your WLAN router.

3. Log into your gateway/router's web interface, and configure it to search the clients.

Once the WPS-PIN setup completes successfully, the web interface of the gateway/router will prompt success.



## Adding a Wireless Network manually

If your gateway/router has SSID broadcast disabled, it might not appear in the scanning results. In that case, you must manually add a wireless network.

### Before you begin

Make sure Wi-Fi Mode is activated.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Tap  > **Add**.
3. Enter the SSID and then select a security mode from the **Security** drop-down menu:
  - If you select **None**, tap **Save**.
  - If you select **WEP** or **WPA/WPA2-PSK**, enter the password and then tap **Save**.
  - If you select **802.1x/EAP**, select the desired EAP method and Phase-2 authentication, enter the desired values in the **Identity**, **Anonymous identity**, and **Password** fields and then tap **Save**.


If you enable **Show advanced options**, select a desired value in the **Proxy** field; and if you select **Manual**, enter the information about the proxy server in the corresponding fields.

## Viewing the Wireless Network Information

---

After connecting to the wireless network, you can view the wireless network information (such as wireless status, link speed, security, IP address, signal strength, and so on.)


### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Select the connected wireless network.

## Disconnecting the Wireless Network Connection

---

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Select the connected wireless network.
3. Tap **FORGET**.

The wireless network is disconnected. You can tap it again to connect.

## Deactivating the Wi-Fi Mode

---

You should deactivate the Wi-Fi mode when you need to connect your device to the wired network.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Wi-Fi**.
2. Turn off **Wi-Fi**.

## Optional Accessories with Your Phone

---

This chapter describes the optional accessories that you can use to extend your phone's capabilities.

- [Bluetooth Headset](#)
- [USB Headset](#)
- [Wireless Headset](#)
- [USB Speakerphone CP900 / CP700](#)

## Bluetooth Headset

---

You can use a Bluetooth headset to handle calls on the phone. For more information, refer to the documentation from your Bluetooth headset manufacturer.

### Related tasks

[Pairing and Connecting the Bluetooth Headset](#)

## USB Headset

---

You can use a USB headset to handle calls on the phone.

For the supported headsets, refer to [Tested headset list compatible with Yealink IP Phone](#). USB headsets that are not listed may not function properly if you connect them to your phone. For more information on how to use your USB headset, refer to the related documentation from the manufacturer.

## Wireless Headset

---

You can use most wireless headsets with your phone.

EHS40 provides the technical interface between your phone and an EHS-compatible wireless headset, such as Sennheiser/Jabra (GN Netcom) or Plantronics headset. After the EHS40 and your headset are connected successfully, you can handle calls by your headset.

For more information on how to connect EHS40, see the EHS40 User Guide on [Yealink Technical Support](#) page. For more information on how to use your headset, refer to the related documentation from the manufacturer.

## USB Speakerphone CP900 / CP700

---

You can connect a USB speakerphone CP900 / CP700 on the phone to control calls.

You can do the following:

- Tap the **Answer Call** button to answer a call.
- Tap the **End Call** button to reject or end a call.
- Tap the **Mute** button to mute the microphone.
- Tap the **Volume Up/Volume Down** button to adjust the volume.



**Note:** The volume will be synchronized between the speakerphone and the phone.

For more information, refer to [Yealink USB Speakerphone CP700 & CP900 User Guide](#).

## Hybrid Mode Settings

---

After the hybrid mode is enabled, users can receive a paging call in the teams app mode.

- [Hybrid Mode](#)
- [Sending Multicast Paging](#)
- [Receiving Multicast Paging](#)

## Hybrid Mode

---

Teams phone supports hybrid mode: survivability app mode and teams app mode. If the phone disconnects with the local MS server, you can switch to the survivability app to implement the call features.



**Note:** The hybrid mode is disabled by default. Contact your system administrator to enable it.


- [Enabling the Quick Ball](#)
- [Switching to Survivability App](#)

- [Switching to Teams App](#)
- [Survivability App Screens](#)
- [Call Features of Survivability App](#)

## Enabling the Quick Ball

You can use the quick ball to quickly switch between the survivability app mode and teams app mode.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Hybrid Mode**.
2. Enable **Quick Ball**.  
The screen displays a quick ball. You can tap it to change the app mode quickly.

## Switching to Survivability App

### Procedure

Do one of the following:

- Go to  > **Settings** > **Device Settings** > **Hybrid Mode**, and then tap **Access Survivability App**.
- Tap the quick ball .



**Note:** In a teams call, the quick ball does not appear, so you cannot switch to the survivability app mode.

### Related tasks

[Enabling the Quick Ball](#)

## Switching to Teams App

### Procedure

Tap the quick ball .




**Note:** In a SIP call, the call is placed on hold when you switch to the Teams app mode.

### Related tasks

[Enabling the Quick Ball](#)

## Survivability App Screens

The survivability app includes the following screens:

- Dial: Tap  to open the dialer.
- Directory: Displays local contacts, you can search for contacts, manage local directory groups and contacts.
- History: Includes missed, placed, received, and forwarded calls, you can view call details and manage the history record.



**Note:** The phone only supports one SIP account.







## Call Features of Survivability App

In survivability app mode, you can perform basic call features.



**Note:** If your phone is locked, you may need to unlock it before using call features.

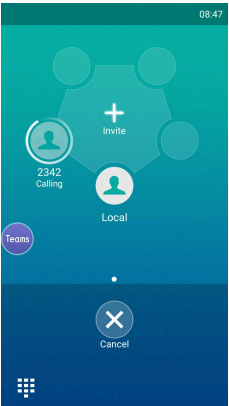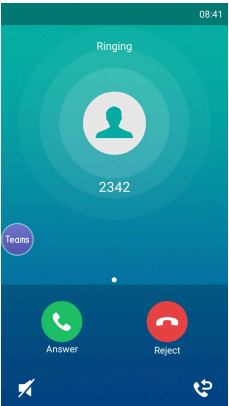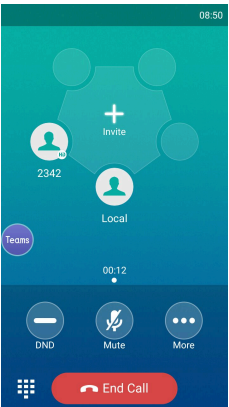Call Status	You can
<p>Ring back</p> 	<ul style="list-style-type: none"> <li>• Cancel a call</li> <li>• Invite a new party</li> </ul>
<p>Call in</p> 	<ul style="list-style-type: none"> <li>• Answer a call</li> <li>• Reject a call</li> <li>• Silence a call</li> <li>• Forward a call</li> </ul>
<p>Talk (peer to peer call)</p> 	<ul style="list-style-type: none"> <li>• Enable DND</li> <li>• End a call</li> <li>• Mute a call</li> <li>• Hold a call</li> <li>• Transfer a call</li> <li>• Place a new call</li> <li>• Invite a new party</li> </ul>

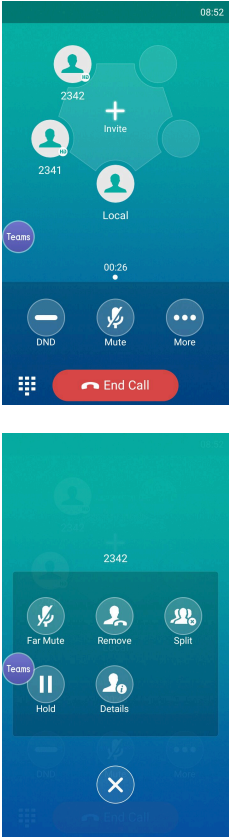Call Status	You can
<p>Conference</p> 	<p>For the conference originator:</p> <ul style="list-style-type: none"> <li>• Enable DND</li> <li>• End a conference call</li> <li>• Mute a conference call</li> <li>• Hold a conference call</li> <li>• Place a new call</li> <li>• Invite a new party</li> <li>• Split a Conference Call</li> </ul> <p>For other conference participants: the same as the peer to peer call.</p> <p>Manage a participant:</p> <ul style="list-style-type: none"> <li>• Mute the participant</li> <li>• Remove the participant</li> <li>• Split the participant</li> <li>• Hold the participant</li> <li>• View the detail of participant</li> </ul>

## Sending Multicast Paging

Your phone supports up to 31 groups for paging. You can assign a label to each group to identify the phones in the

group, such as All, Sales, or HR.

You can set a line key as Paging key or Paging List key on the phone, which allows you to send announcements to the phones with pre-configured multicast address(es) on specific channel(s).



**Note:** It is available only when hybrid mode is enabled.

- [Setting a Paging Key](#)
- [Sending a Paging by a Paging Key](#)
- [Setting a Paging List Key](#)
- [Setting a Paging Group](#)
- [Editing a Paging Group](#)
- [Sending a Paging by a Paging List Key](#)
- [Deleting a Paging Group](#)


### Related information


[Hybrid Mode](#)

## Setting a Paging Key

You can set a Paging key for a paging group, which allows you to send announcements quickly on the idle screen.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **DSS Keys**.
2. Select the desired line key.
3. Select **Key Event** from the **Type** field.
4. Select **Paging** from the **Key Type** field.
5. Enter the paging group name in the **Label** field.
6. Enter the multicast IP address and port number (for example, 224.5.6.20:10008) in the **Value** field.
7. Enter the desired channel between 0 and 30 in the **Channel** field.

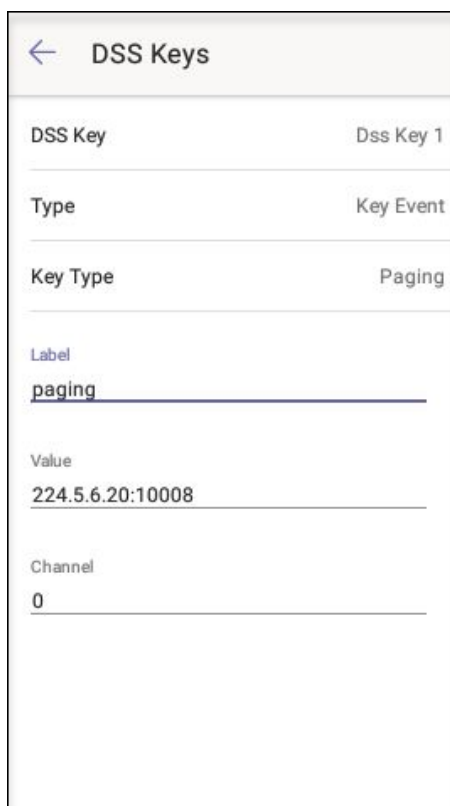

DSS Keys	
DSS Key	Dss Key 1
Type	Key Event
Key Type	Paging
Label	<u>paging</u>
Value	<u>224.5.6.20:10008</u>
Channel	<u>0</u>

8. Save the change.


## Sending a Paging by a Paging Key

You can send a paging by using the Paging key when the phone is idle.

### Procedure

1. Switch to survivability App.

2. Tap the Paging key when the phone is idle.

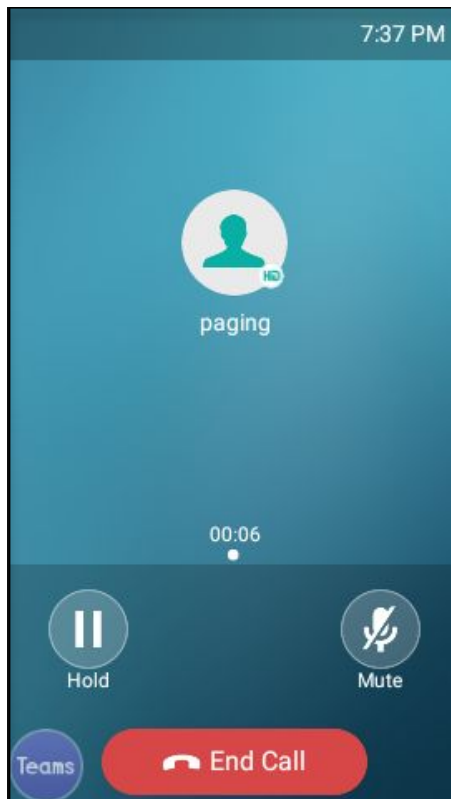

#### Related tasks


[Switching to Survivability App](#)

[Setting a Paging Key](#)

### Setting a Paging List Key

You can use the quick ball to quickly switch between the survivability app mode and teams app mode.

#### Procedure

1. Go to  > **Settings** > **Device Settings** > **DSS Keys**.
2. Select the desired line key.
3. Select **Key Event** from the **Type** field.
4. Select **Paging List** from the **Key Type** field.


5. Enter the paging group name in the **Label** field.

The screenshot shows a mobile application interface for 'DSS Keys'. At the top is a header bar with a back arrow and the title 'DSS Keys'. Below the header is a list of settings. The first setting is 'DSS Key' with the value 'Dss Key 1'. The second setting is 'Type' with the value 'Key Event'. The third setting is 'Key Type' with the value 'Paging List'. Below these settings is a 'Label' field, which is currently empty. The text 'Label' is shown in a small, light blue font above the input field. The text 'paging list' is entered into the field. At the bottom left of the screen is a blue circular button with the text 'SIP' in white.

6. Save the change.

## Setting a Paging Group

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Paging List**.
2. Select the desired paging group.  
*The default tag is Empty if it is not configured before.*
3. Enter the multicast IP address and port number (for example, 224.5.6.20:10008) in the **Address** field.
4. Enter the string that will display on the phone screen in the **Label** field.
5. Select the desired channel between 0 and 30 in the **Channel** field.
6. Save the change.


## Editing a Paging Group

You can edit the information of the paging group.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Paging List**.

2. Long tap the desired paging group and select **Edit**.

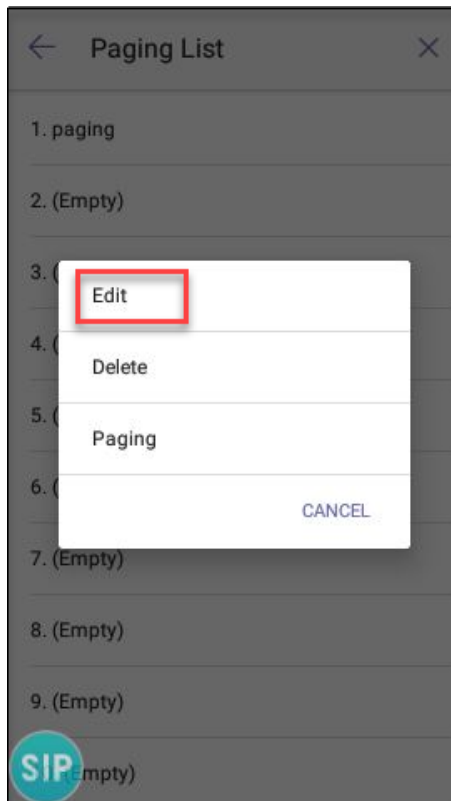

3. Edit the information.
4. Save the change.

## Sending a Paging by a Paging List Key

You can send a paging by using the Paging List key when the phone is idle.

### Procedure

1. Switch to survivability App.
2. Tap the Paging List key when the phone is idle.
  - Tap the desired paging group.
  - Long tap the desired paging group and select **Paging**.


### Related tasks

[Setting a Paging List Key](#)

## Deleting a Paging Group

You can edit the information of the paging group.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Paging List**.
2. Long tap the desired paging group and select **Delete**.  
The phone prompts you whether to delete the paging group.
3. Select **OK**.

## Receiving Multicast Paging

---

Your system administrator has set a listening paging group for you, you can automatically receive a paging call when the phone is idle.

## Getting More Information About Microsoft Teams

---

This topic provides you to view more information about Microsoft Teams. If you encounter problems when using the Teams device, you can send feedback to Microsoft.

- [Viewing More Information About Microsoft Teams](#)
- [Company Portal](#)
- [Entering Microsoft Teams Help Center](#)
- [Sending Feedback](#)

## Viewing More Information About Microsoft Teams

---

You can view more information about Microsoft Teams such as the version, calling version, and the details of Privacy& Cookies, Microsoft Software License Terms, and Third-party Notices.

### Procedure

Go to  > **Settings** > **About**.

You can select **Privacy& Cookies**, **Terms of Use**, or **Third-party Notices** to view the details.

## Company Portal

---

Microsoft Intune helps organizations manage access to corporate apps, data, and resources. Company Portal is the app that lets you, as an employee of your company, securely access those resources. Before you can use this app, make sure your IT admin has set up your work account and have a subscription to Microsoft Intune.

Company Portal helps simplify the tasks you need to do for work:

- Enroll your device to access corporate resources, including Office, email, and OneDrive for Business
- Sign into corporate resources with company-issued certificates
- Reduce the number of times you need to sign into corporate resources with single sign-on
- Browse and install approved business apps from your IT department or the Microsoft Store for Business
- View and manage your enrolled devices and wipe them if they get lost or stolen
- Get help directly from your IT department through the available contact information



**Note:** Every organization has different access requirements and will use Intune in ways that they determine will best manage their information. Some functionality might be unavailable in certain countries. If you have questions about how this app is being used within your organization, contact your company's IT administrator.

## Entering Microsoft Teams Help Center

---

Microsoft Teams help center provides more information about Microsoft Teams, such as what is Microsoft Teams, how to get started with Microsoft Teams, the features of Microsoft Teams, and so on.

### Procedure


Go to  > **Settings** > **Help**.

## Sending Feedback

---

If you encounter problems while using the Teams device, please feel free to send feedback to let us know.

### Procedure

1. Go to  > **Settings** > **Report an issue**.
2. Select a desired report type in the **Type** field.
3. Enter the alias (your email address).
4. Select a desired type of issue and then enter the issue title.
5. Tap **SEND**.

## Maintaining Teams Devices

---

When the device cannot be operated properly, you can investigate or troubleshoot issues along with any other tasks your administrator may ask you to perform.


- [Rebooting Your Device](#)
- [Viewing Device Status](#)
- [Resetting Your Device](#)

## Rebooting Your Device

---

Your system administrator may ask you to reboot your device if it malfunctions or to assist in troubleshooting.

### Procedure

1. Go to  > **Settings** > **Device Settings** > **Debug**.
2. Tap **Reboot phone**.  
It prompts if you are sure to reboot the device.
3. Tap **OK**.



## Viewing Device Status

---

Your system administrator may ask you to view the device status such as network, MAC, firmware, Partner APP version, Company Portal version, and Teams version.

### Procedure


Go to  > **Settings** > **Device Settings** > **About**.

## Resetting Your Device

---

You can reset the device to factory settings with the need for entering the Administrator's password.

### Procedure

1. Go to  (More) > **Settings** > **Device Settings** > **Debug (Admin only, default password: 0000)**.
2. Tap **Reset to Factory Settings**.  
It prompts if you are sure to reset to factory default.
3. Tap **OK**.



**Tip:** You can also long press the pound key (#) and the star key ( \* ) for about 6 seconds when the phone is idle.

## Troubleshooting

---

If you are having issues with your device, you can try the troubleshooting options and solutions in the following topics to resolve certain issues.

- [Why is the screen blank?](#)
- [Why does the device display "Network unavailable"?](#)
- [Why does the device display time and date incorrectly?](#)
- [How can I obtain the MAC address of a device when the device is not powered on?](#)
- [Why can't I receive calls?](#)
- [Why doesn't my handset work?](#)
- [Checking the IP Address of Device](#)

### Why is the screen blank?

---

- If the device is powered from PoE, ensure you use a PoE-compliant switch or hub.
- Ensure that the device is properly plugged into a functional AC outlet.

### Why does the device display "Network unavailable"?

---

- Ensure that the Ethernet cable is plugged into the Internet port on the phone and the Ethernet cable is not loose.
- Ensure that the switch or hub in your network is operational.

## Why does the device display time and date incorrectly?

---

Check whether your device obtains the time and date from the SNTP server automatically. If the device fails to connect the SNTP server, contact your system administrator for more information. You can also configure the time and date manually.

## How can I obtain the MAC address of a device when the device is not powered on?

---

You can use one of the following ways to obtain the MAC address of a device:

- The PO (Purchase Order) provided by the supplier.
- The label of the carton box.
- The phone's bar code on the back of the phone.

## Why can't I receive calls?

---

- Check if the account is logged in.
- Check whether your status is DND mode, if it is, you should reset status.
- Check whether the call forward is enabled on the phone.

## Why doesn't my headset work?

---

- Check that the headset cord is fully connected to the headset jack on the phone.

## Checking the IP Address of Device

---

### Procedure

Go to  > **Settings** > **Device Settings** > **About**.