



Feit Electric App User Guide Flood Light Security Camera




FEIT ELECTRIC APP USER GUIDE

Setup instructions for Siri Shortcuts, Alexa and Google Assistant.

Home Flood Light Security Camera Works with Siri Shortcuts, Alexa and Google Assistant

- Records in 1080p HD video - see license plates and faces clearly
- 128 GB microSD™ card (included) stores up to 10 days (240 hours)* of continuous video (accessible 24/7 via free mobile app)
- Share video or pictures from smart device via text or email
- Save video and screen shots on your smart device
- 3000 lumens extra bright for true security
- Records continuously, with motion or app
- Two-Way Communication
- Reliable Notifications
- Night vision camera



CONTENTS


Network Connect and App Setup.....	1
App Setup.....	2-3
Security Camera Setup	4-6
Profile: Overview / Security / Location / Alarm / Family / Notifications / Settings / Sharing / Help / Alexa / Google / About	7-13
Camera Control Panel Overview	14
Settings	15
Sound/Screen Resolution	16
Fullscreen.....	17
Record.....	18
Talk/Screenshot.....	19
Troubleshooting.....	20-22
Motion	23
Light.....	24
Playback.....	25-26
Siren/911	27
Room Management	28
Creating Smart Scenes	29-37
Siri Shortcuts.....	38-39
Alexa	40-43
Google Assistant.....	44-46

NETWORK CONNECT AND APP SETUP

1

Connect to a 2.4GHz Wi-Fi Network. Download and install the Feit Electric App

NOTE: Only works with 2.4GHz Wi-Fi networks



Go to your Wi-Fi settings and connect your phone to your 2.4GHz Wi-Fi network.




Download and launch the Feit Electric App



2


Register

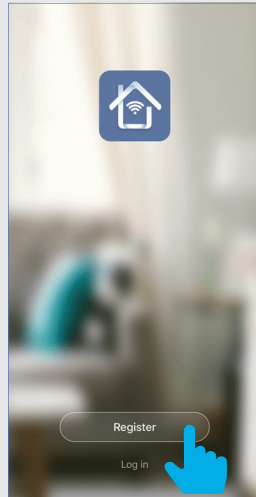

Tap **Register** to create a new account or Tap **Log in** if you have an existing account.

3a

Privacy Policy

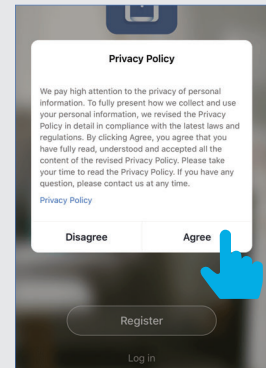

Tap **Agree**.

3b

Log in

United States of America +1 >

Email / Mobile

Password

Log in

Verify via SMS

Forgot Password

Returning users **Log in** and skip to step 10.

APP SETUP

4

Register

Register by email

United States of America +1

Email

Continue

Register by Phone

United States of America +1

Mobile

Continue

You may use an email or mobile number to create an account. Then tap **Continue**.
(A verification code will be sent to your email or mobile number.)

5

Verification/Password

Verification Code

Verification code has been sent to: satisfy.artdept@feit.com, Resend (44s)

1	2 ABC	3 DEF
4 GHI	5 JKL	6 MNO
7 PQRS	8 TUV	9 WXYZ
	0	<

Enter **Verification Code** sent to your email or mobile number.

Set Password

Password must contain 6-20 letters and numbers

Done

Create a Password then tap **Done**.

6

Permissions

"Feit Electric" Would Like to Use Bluetooth

This will allow "Feit Electric" to find and connect to Bluetooth accessories. This app may also use Bluetooth to know when you're nearby.

Don't Allow OK

Allow Bluetooth
(Recommended).

"Feit Electric" Would Like to Send You Notifications

Notifications may include alerts, sounds, and icon badges. These can be configured in Settings.


Don't Allow Allow

Allow Notifications
(Highly Recommended).

APP SETUP

7


Location Access

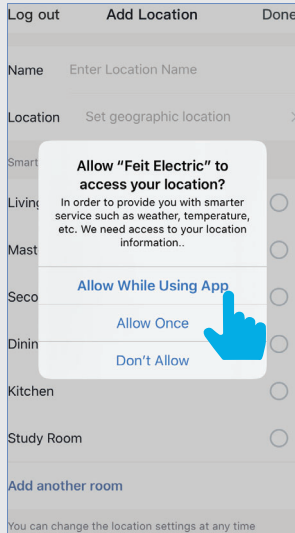

You must **Allow** Feit Electric App to access your location to connect to your device.

8


Name Location

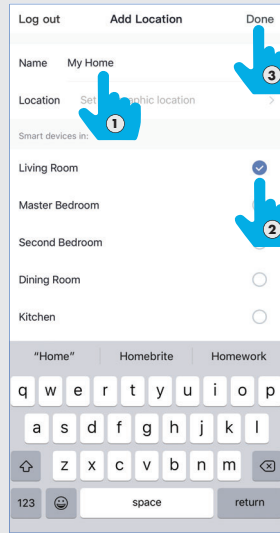

- ① Enter your location name.
- ② Check where your device is located.
- ③ Tap **Done**.

9

Confirm Home Added

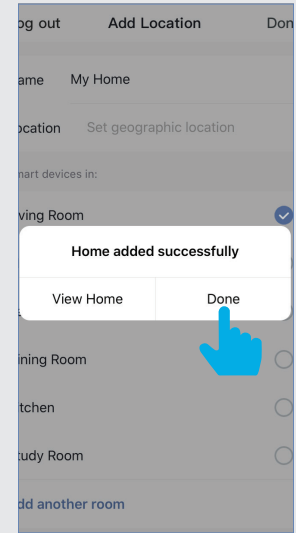

Tap **Done** or **View Home** for location settings.


SECURITY CAMERA SETUP

1

Add Device

IMPORTANT!


Install and Power On your Security Camera(s) before proceeding.

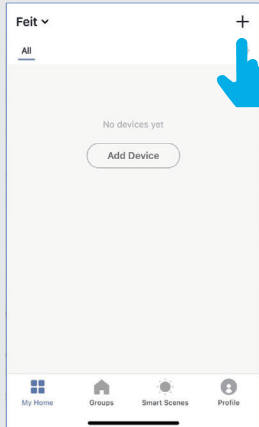

Tap **+** in the upper right corner
NOTE: If this is the first device you are setting up, you can also select **Add Device**.

2


Add Camera

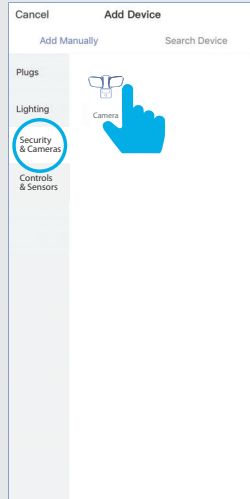

Tap **Security & Cameras**
then tap **Camera**.

3



Confirm Pairing

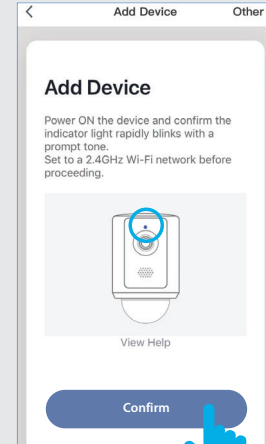

The first time you power up the camera, it will automatically go into pairing mode, the LED indicator light will blink blue.
Tap **Confirm** to continue.
(If it is blinking blue move to step 4.)

SECURITY CAMERA SETUP

Reset Button Troubleshooting




Reset Button

If the LED indicator light is not blinking blue, press and hold Reset Button for 15 seconds or until you hear an audible tone.

To access **Reset Button**, remove cover using a small screwdriver (included).

4


Confirm Wi-Fi connection

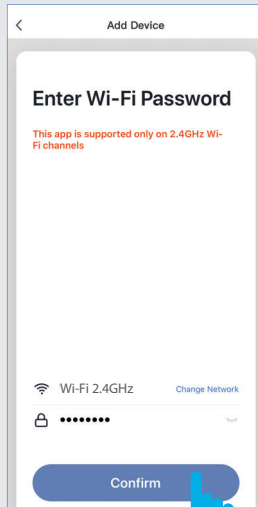

After confirming that you are on a 2.4GHz Wi-Fi network, enter your password then tap **Confirm**.

5


Connect

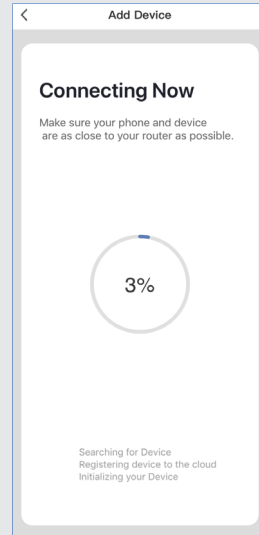

The connecting status window will appear. Wait until it's completed.

SECURITY CAMERA SETUP

Troubleshooting

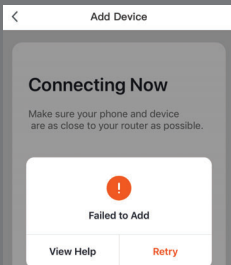


Connecting Now
Make sure your phone and device are as close to your router as possible.

Failed to Add

[View Help](#) [Retry](#)

If you see a **Failed to Add** notification, check to be sure your Wi-Fi password was entered correctly. Close the app and repeat the previous steps to try connecting again or **View Help** for further assistance.



You can also select **Other** for additional connection options.

6 Device Added



Device added successfully

Feit floodlight

Once device is successfully added, tap the **Pen** icon to rename the device, then save the name and tap **Done**.



Device added successfully

Edit Device Name

Porch Security Camera


Cancel Save

Once device has been renamed, ① Tap **Save** ② then tap back "←".




Then tap **Done**.

Adding Additional Devices



Home

All



Porch Security Camera

NOTE: Constant power to the bulb(s) is required at all times.


My Home Groups Smart Scenes Profile

To add additional devices tap the plus (+) sign in the upper corner. Repeat steps **2, 3, 4, 5** and **6**.


PROFILE: OVERVIEW

Profile

From the Home screen
Tap **Profile**.

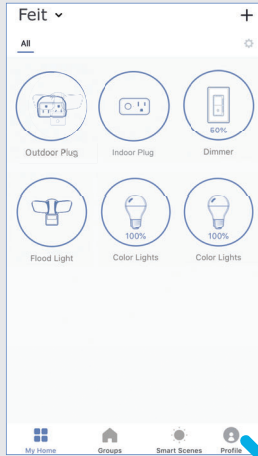

From the **Control Panel** you can access
features and control your flood light.

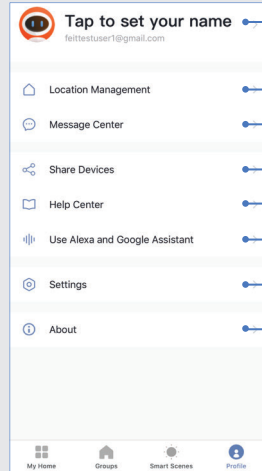

- 1 **Tap to set your name** profile photo, change password, gesture password, close account
- 2 **Location Management** add locations
- 3 **Message Center** view detection alerts, Family and notifications
- 4 **Share Devices** share devices
- 5 **Help Center** FAQ's, Network Diagnostics and Report Issues (Chat)
- 6 **Use Alexa and Google Assistant** add devices
- 7 **Settings** turn sound on/off, push notifications, clear cache
- 8 **Rate Us**, About Feit Electric, Service Agreement, Current Version

PROFILE: PASSWORD

1 **Modify Profile**

Tap to set your name >

Tap "Tap to set your name".

Profile

- Profile Photo >
- Name Tap to set your name >
- Account Security >
- Temperature Unit °F >
- Time Zone America/Los_Angeles >

Log out

Tap to change time zone
Tap to change Temperature Units
Tap for for Account Security submenu
Tap to set your name
Tap to upload photo

Account Security

Account Security

Mobile phone number Unbound >

Email

Region North America >

Change Login Password

- 1 Tap **Account Security** then tap
- 2 **Change Login Password**.

Verification Code

Verification Code

Verification code has been sent to:
felix@fkit.com, Resend (57s)

You will receive an email (or text) with a **Verification Code** to input here.

Change Password

Set Password

Password must contain 6-20 letters and numbers

Done


Passwords

q w e r t y u i o p
a s d f g h j k l
z x c v b n m
123 globe space done


Once you input the Verification Code, you will be brought to this window to input new **Password**.




PROFILE: SECURITY / LOCATION / ALARM / FAMILY

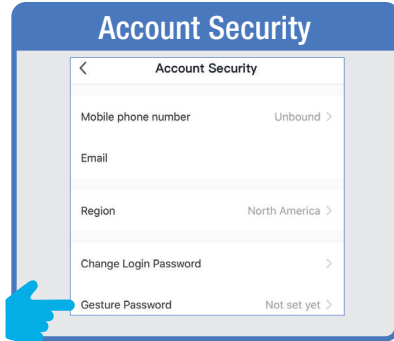

Tap **Gesture Password**.

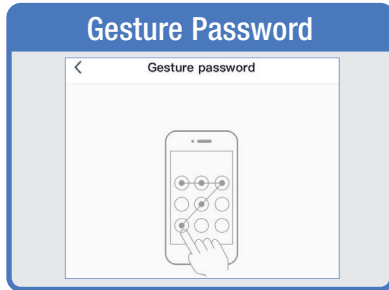


Set your **Gesture Password**.

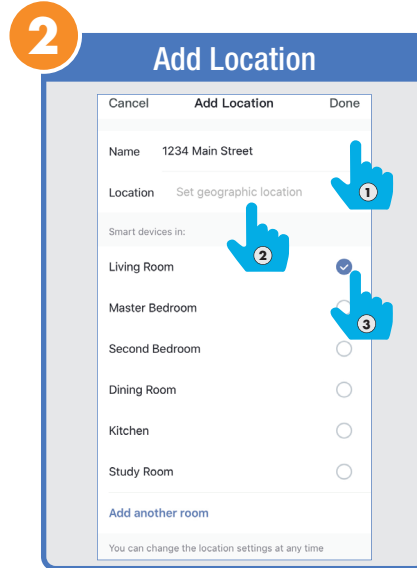

From the **Profile Home Screen**,
Tap **Location Management**.

- 1 Name your Location,
- 2 Tap Location (Set Geographic Location).
- 3 Select a Room or create your own (Add another room).

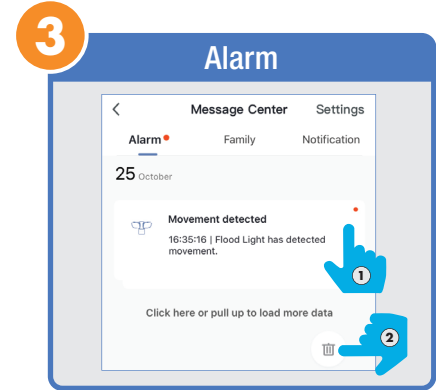


From the **Profile Home Screen**,
Tap **Message Center**.
Under the tab Alarm you can view
activities recorded by the Security Camera.
1 Once selected, you can
2 delete them by tapping the trash icon.



Share **Messages** with Family.


PROFILE: NOTIFICATIONS / SETTINGS / SHARING

Notifications

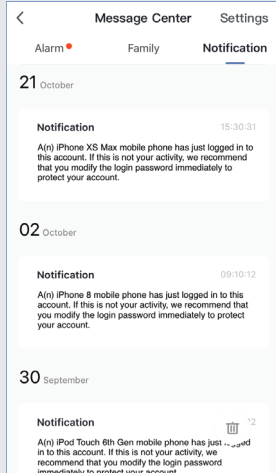

Tap **Notifications** for Notifications.


Settings

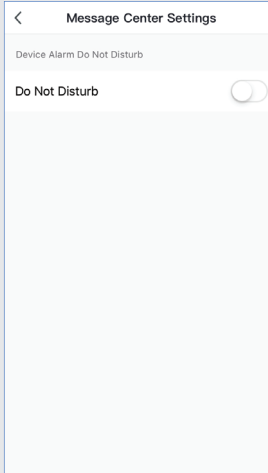

Tap **Settings** for the
Do Not Disturb option.

4


Device Sharing

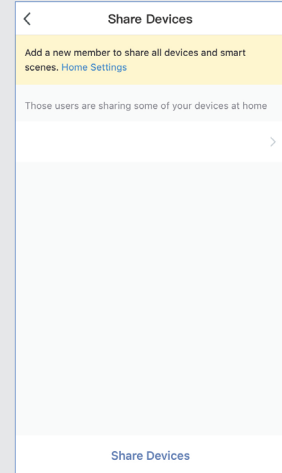


From the Profile Home Screen
tap **Share Devices**.

PROFILE: DEVICE SHARING

Device Sharing




From the Home Page tap **Profile**.

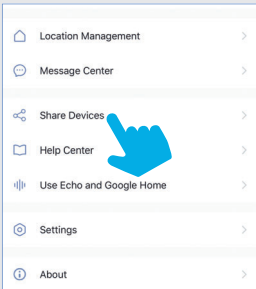


Tap **Share Devices**.

Device Sharing




Tap **Share Devices** at the bottom.

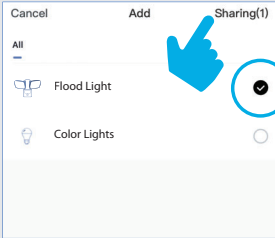

Select the device that you wish to share. Then tap **Sharing (1)** in the upper right corner.

Device Sharing

NOTE: New members must set up an account before sharing is possible.

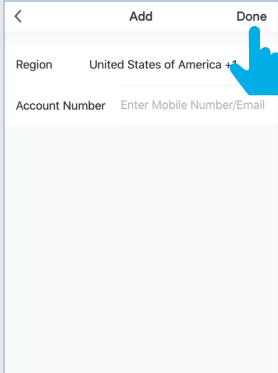


Enter the new member's mobile number or email address then tap **Done**.

PROFILE: HELP CENTER


5

FAQ's

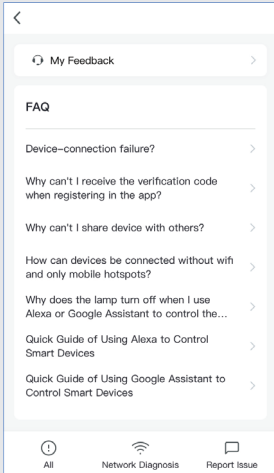


From the Profile Home Screen tap **Help Center**.

Network Diagnostics

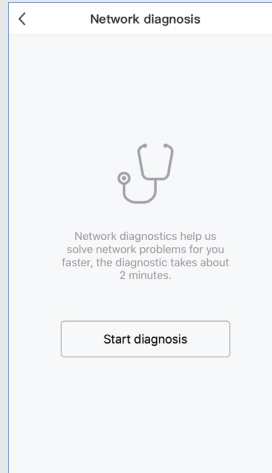

From the **Help Center** tap **Network Diagnostics** for network issues,.

Report Issues

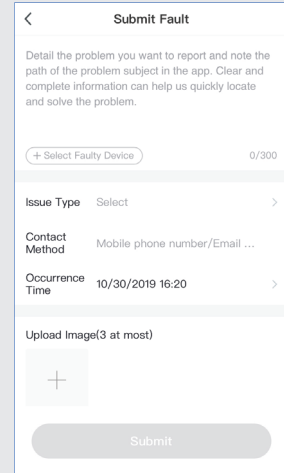


From **Help Center** tap **Report Issues**. Start a chat to help resolve an issues. Will show in My Feedback.

PROFILE: ALEXA / GOOGLE / SETTINGS / ABOUT

6


Alexa / Google

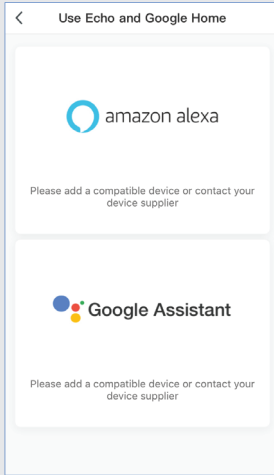

From the Profile Home Screen tap either the **Amazon Alexa** or **Google Assistant** logo's for step by step instructions how to set up these devices.

7


Settings

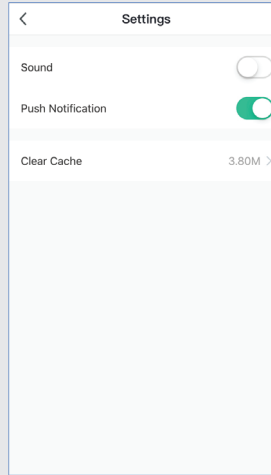

From the Profile Home Screen tap **Settings**. Turn Sound On/Off, Push Notifications On/Off and Clear Cache.

8

About

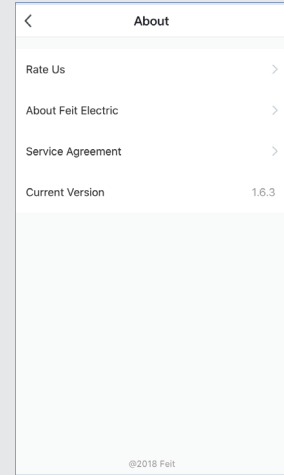


From the Profile Home Screen tap **About**. Tap on Rate Us, About Feit Electric, Service Agreement and Current Version for more options.

CAMERA CONTROL PANEL OVERVIEW

Control Panel

Press and hold the device icon to enter the **Control Panel**.

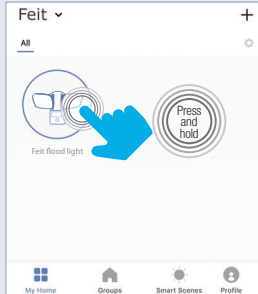

Scroll to access more features (if hidden from view).



From the **Control Panel** you can access features and control your flood light.



1 **Pen icon** to edit the **Settings**


Wi-Fi Signal Strength

Date/Time/Day

2 **SD or HD icon** to change between screen resolutions

3 **SD or HD icon** to change between screen resolutions

4 **Fullscreen icon** to enter fullscreen view

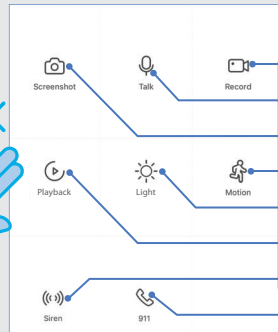

5 **Record** to manually capture and save video to your mobile device

6 **Talk** to speak to visitors. Be sure the **Sound Icon** is **On**

7 **Screenshot** to save a screenshot of the video to your mobile device

8 **Motion** to configure motion preferences

9 **Light** to control light features and set light schedules

10 **Playback** to view or download events from your local SD card


11 **Siren** to activate siren

12 **911** to call 911


SETTINGS

(Access **Settings** by tapping the **Pen** icon in the Home Screen.)

1

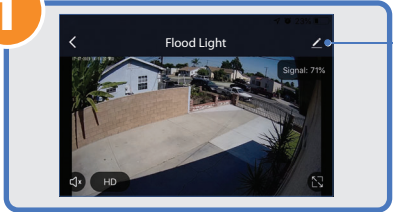

Pen Icon.

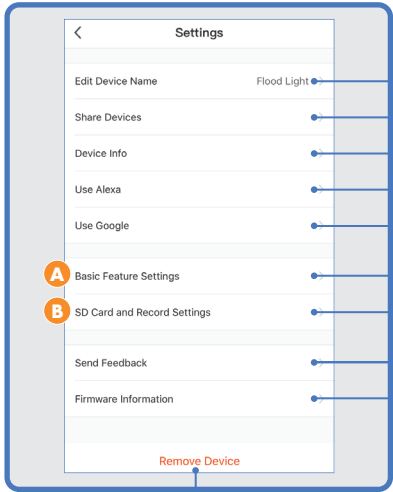


Edit device name
Share devices here or thru Profile on the home screen
See Owner, Virtual ID, IP Address, etc.
Instructions how to connect to Alexa
Instructions how to connect to Google Assistant
Basic Feature Settings submenu
SD Card and Record Settings submenu
Report problems with the Camera
Check for Firmware Updates
Remove Device from App

A Basic Feature Settings
B SD Card and Record Settings

Send Feedback
Firmware Information
Remove Device


A

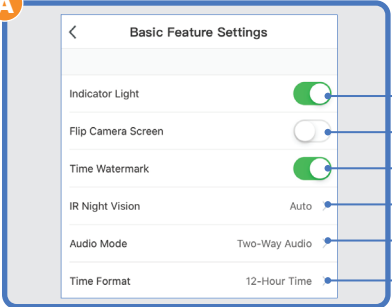

Turn Indicator Light On/Off
Flip Camera Image On/Off
Time Stamp On/Off
Night Vision; Auto, On or Off
Audio Mode Control
Two-Way or One-Way
12 Hr or 24 Hr Mode

Indicator Light
Flip Camera Screen
Time Watermark
IR Night Vision
Audio Mode
Time Format

B

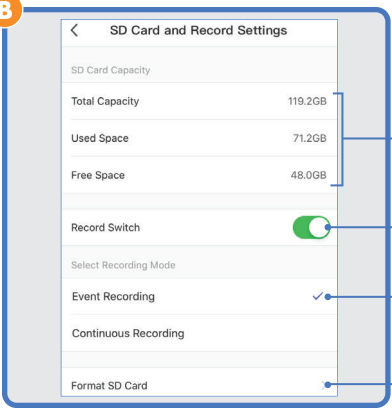


SD Card Capacity
Record Switch (Must be ON to record video)
Select between Event (When motion is detected) or Continuous Recording (24/7)
Format SD Card
Only compatible with FAT32 format. Will not support micro SD cards larger than 128GBs. (WARNING: Formatting will erase any data)

SD Card Capacity
Total Capacity
Used Space
Free Space
Record Switch
Select Recording Mode
Event Recording
Continuous Recording
Format SD Card

SOUND / SCREEN RESOLUTION

2 Sound

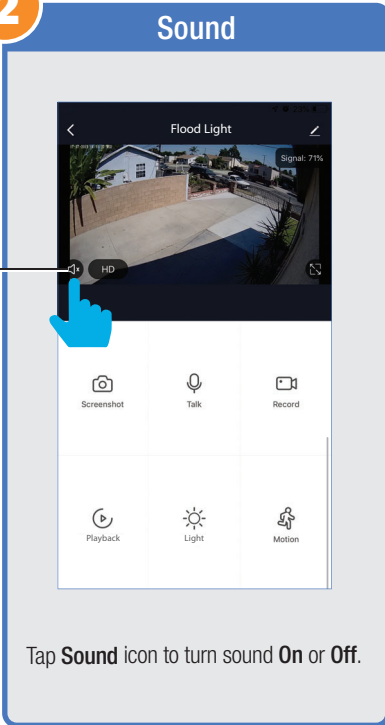


The screenshot shows the Flood Light app interface. At the top, there is a camera view of a house with a signal strength indicator of 71%. Below the camera view is a control bar with an 'HD' icon and a volume icon. A blue hand icon is pointing to the volume icon. Below the control bar are six icons: Screenshot, Talk, Record, Playback, Light, and Motion.

Sound ON

Sound OFF

Tap **Sound** icon to turn sound **On** or **Off**.

3 Screen Resolution

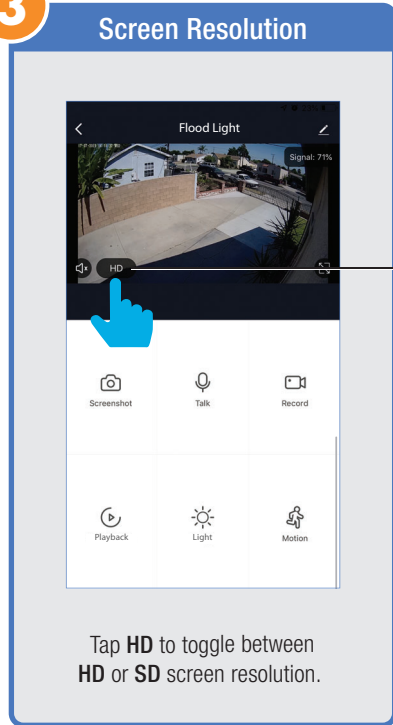

The screenshot shows the Flood Light app interface. At the top, there is a camera view of a house with a signal strength indicator of 71%. Below the camera view is a control bar with an 'HD' icon and a volume icon. A blue hand icon is pointing to the 'HD' icon. Below the control bar are six icons: Screenshot, Talk, Record, Playback, Light, and Motion.

SD
720p


HD
1080p

Tap **HD** to toggle between **HD** or **SD** screen resolution.

NOTE: Motion activated video always records in HD to the camera SD card for clear playback.

FULLSCREEN


4 Fullscreen

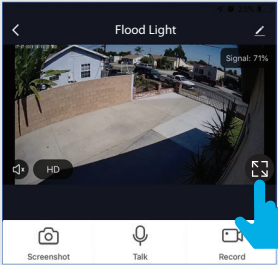

Tap **Fullscreen** icon to enter fullscreen view.

The screenshot shows a mobile app interface for a 'Flood Light' camera. At the top, there's a back arrow, the title 'Flood Light', and a signal strength indicator 'Signal: 71%'. The main area is a live video feed of a courtyard. At the bottom, there are three icons: 'Screenshot', 'Talk', and 'Record'. A blue hand icon is pointing to the 'Record' icon, which is the fullscreen icon.

Live Streaming

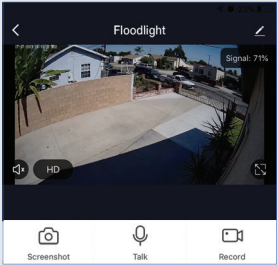


You will see live streaming video from your camera and be able to take action if needed.

This screenshot is identical to the one above, showing the 'Flood Light' app interface with the live video feed and control icons.




Fullscreen is always in landscape profile.
Tap the back arrow to return to the Control Panel.

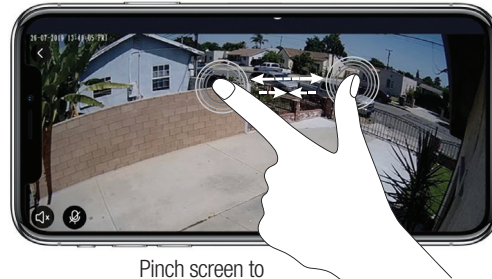

Pinch screen to
Zoom In / Zoom Out.

RECORD


Allow Photo Access

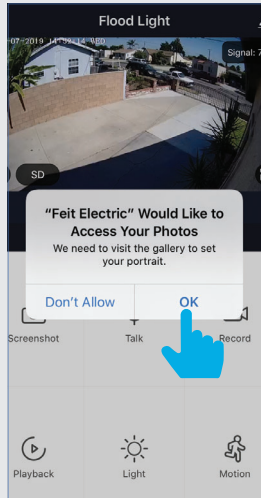

Allow Feit Electric App access to your Photos.


5

Record

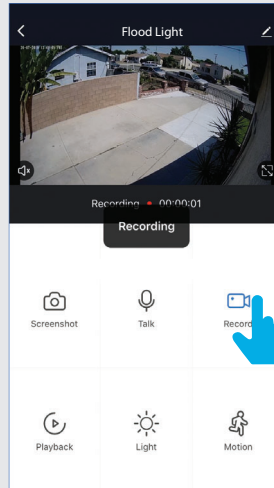

Press **Record** to manually capture video to your Photo Gallery on your mobile device.


Video Saved

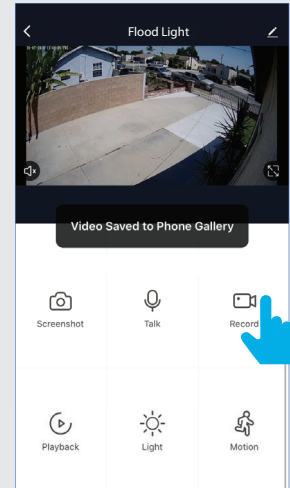

Press **Record** again to stop and save the video to your Photo Gallery on your mobile device.

TALK / SCREENSHOT


Allow Microphone Access

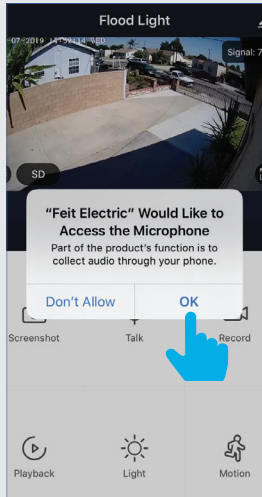

Allow Feit Electric App access to the microphone.

6


Talk

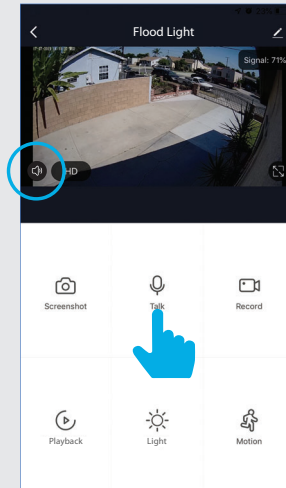

Tap **Talk** to speak to visitors.
(Make sure the sound icon is ON to hear audio).

7


Screenshot

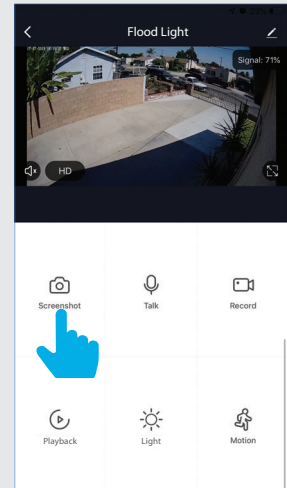

Tap **Screenshot** to save a screenshot of the video to your Photo Gallery on your mobile device.


TROUBLESHOOTING (Steps 5, 6 and 7)

App Settings (iOS)

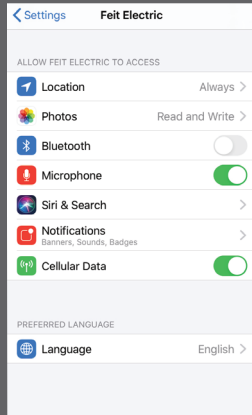


If you did not authorize access on your device to your **Photos** and/or **Microphone** when first prompted, you can do so in **Settings > Feit Electric App** on your mobile device.

App Settings (Android)

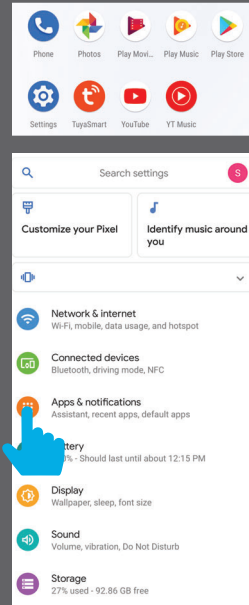

Tap Settings, then tap **Apps & notifications**.




App Settings (Android)

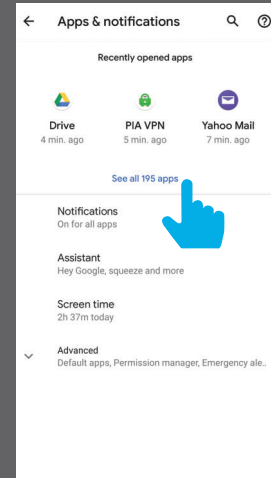



Tap **See all apps**.



TROUBLESHOOTING (Steps 5, 6 and 7)

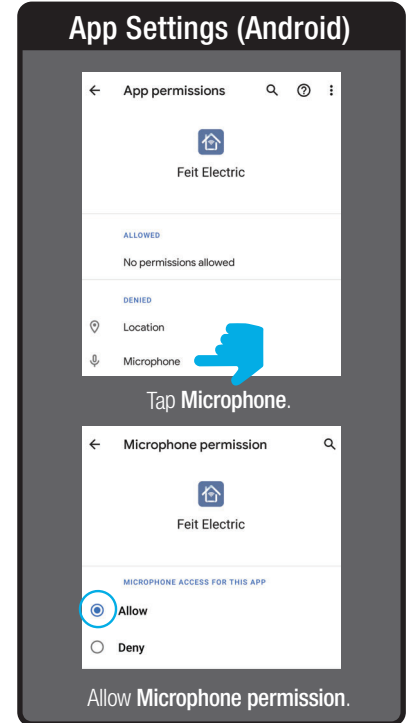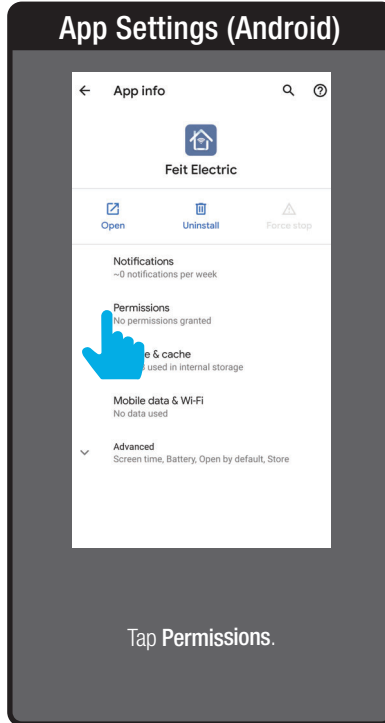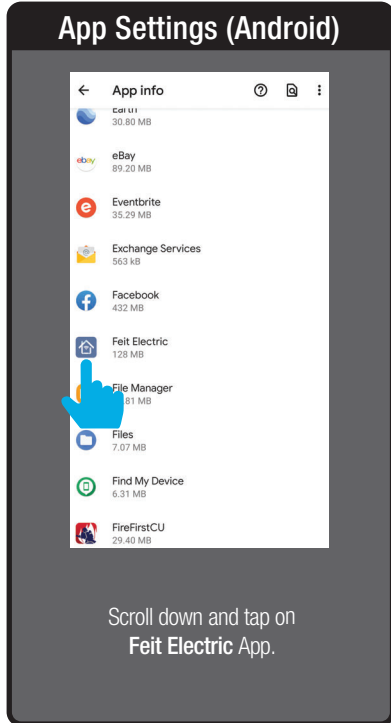


TROUBLESHOOTING (Steps 5, 6 and 7)

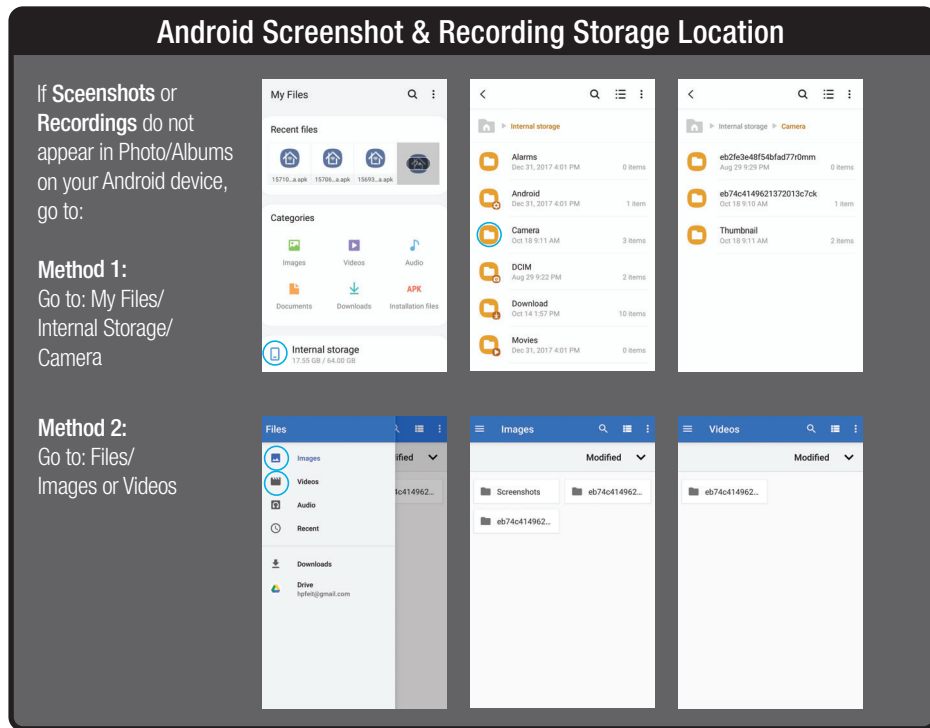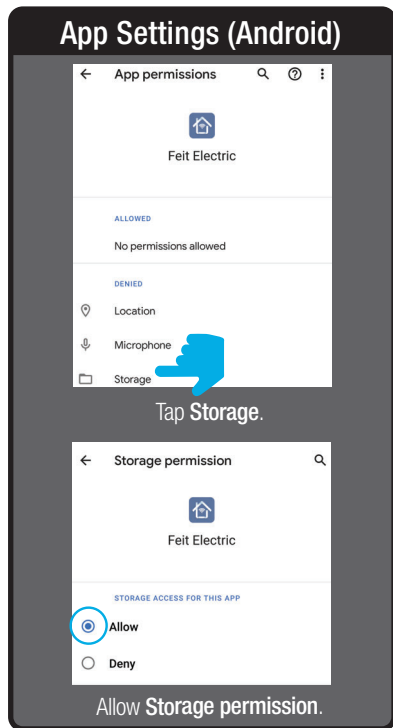

MOTION


8

Motion

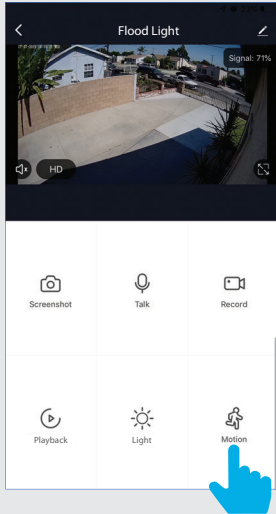


Tap **Motion** to open the submenu to set the motion detection zones, sensitivity and timer.

Motion Zones




Turn zones On/Off by tapping on zones.

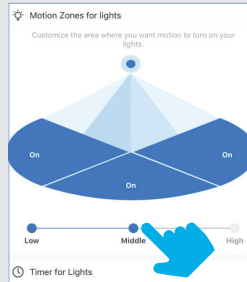

Adjust the motion detection sensitivity by tapping **Low**, **Middle** or **High**.

Motion Lights & Video

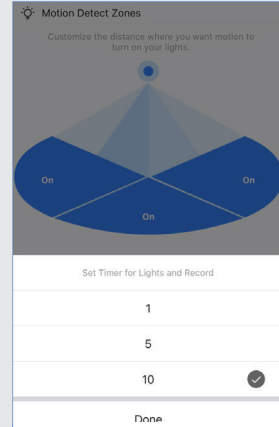


NOTE: Lights will go On at night if motion is detected. You can also turn lights On/Off via app Light Control Panel (🏠).

Select the duration of time lights and recorder will remain On.


LIGHT

9


Light Control

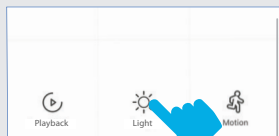

Tap **Light** to open submenus for **On/Off**, **Brightness**, and **Schedules**.

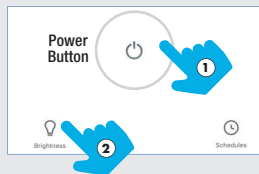


- 1 Tap **Power Button** to turn On/Off.
- 2 Tap **Brightness** to set light levels.

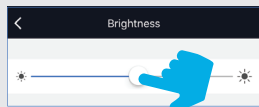


Use slide bar to adjust light levels.

Add Schedules

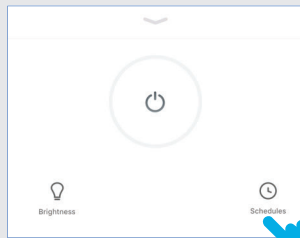


Tap **Schedules** from the light menu to set a Time and Date for your lights to go On/Off.




Tap **Add Schedule**.

Add Schedules




Choose a Start Time (On) and End Time (Off). To repeat on certain days of the week, tap **Repeat**. (Otherwise the schedule will only occur once.)



Tap on the day(s) of the week you would like the schedule to repeat, then tap back "←" then **Save**.

PLAYBACK


Note: Playback Options

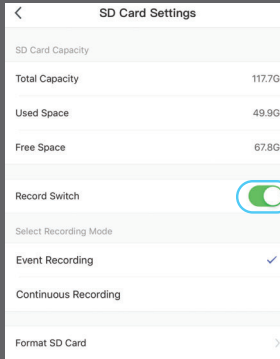

Available **Playback** depends on which **SD Card Settings** was selected: (Record Switch must be ON to record video) **Event Recording** or **Continuous Recording**. SD Card Settings are in the Submenu under Settings. **See Page 8.**


10

Playback

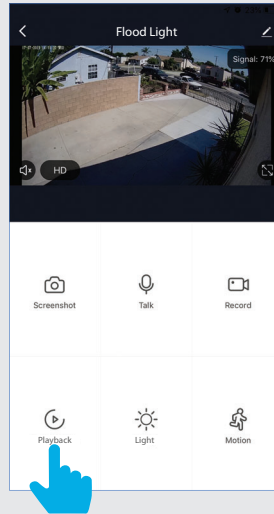

Tap **Playback** to display the Playback Submenu.

Playback Submenu

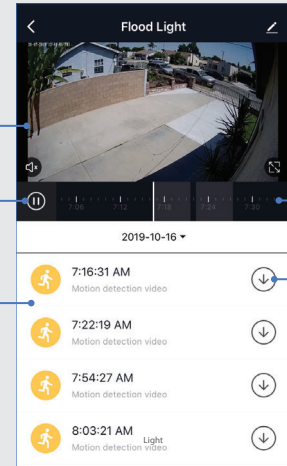

Event (Motion) Recordings

Download event to your mobile device

Pause/Play Button


Scroll Reel for backward or forward viewing

Playback Screen



PLAYBACK


Event Recordings

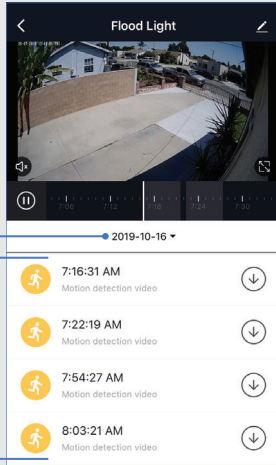

Event Recordings (Motion Trigger)
(Scroll down to view all)


Recording Date (Tap to view
Calendar for all recording dates.)

Calendar

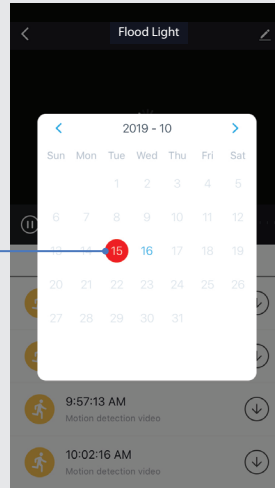

Available dates will be highlighted. Selected date will be circled red. Latest date will be in blue. Tap selected (in red) to view Event Recordings for that date.

Scroll Bar

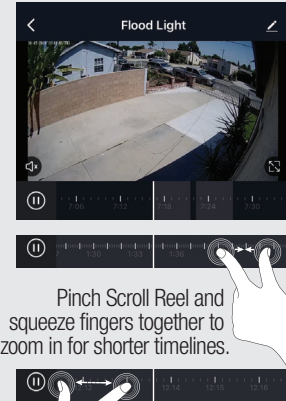

Pinch Scroll Reel and squeeze fingers together to zoom in for shorter timelines.




Pinch Scroll Reel and push fingers apart to zoom out for longer timelines.


SIREN / 911

11

Siren

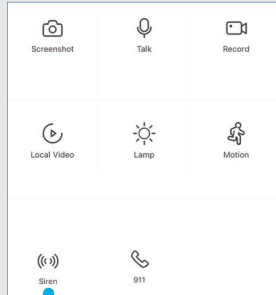


Tap Siren.

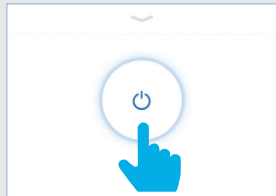


Then tap the On button to activate Siren. Tap again to shut off.

12

IMPORTANT: CALLING 911 INVOLVES A 2 STEP PROCESS!

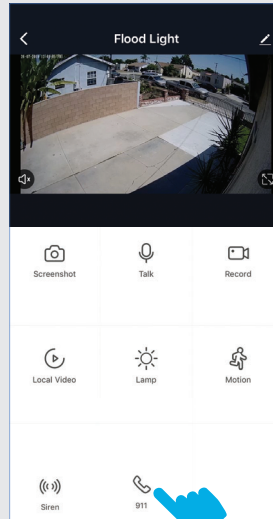

Step 1: Tap 911

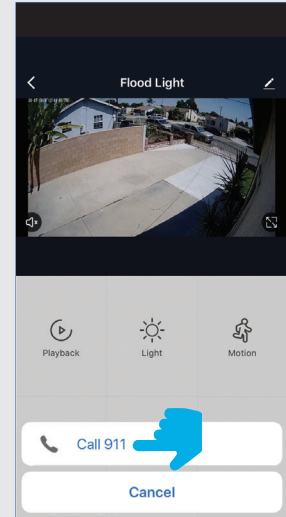


Step 2: Tap Call 911


ROOM MANAGEMENT

1

Add a Room

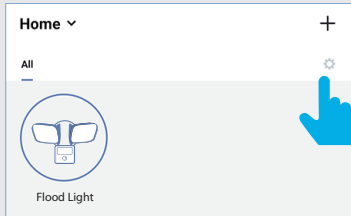


Tap the settings icon “⚙️” from the home menu.

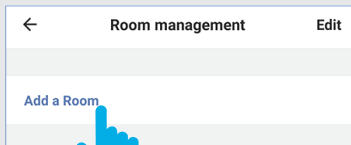


Tap **Add a Room**.

Room Settings

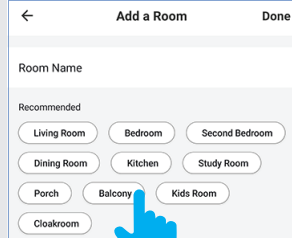


Tap on a preset room name or create your own.

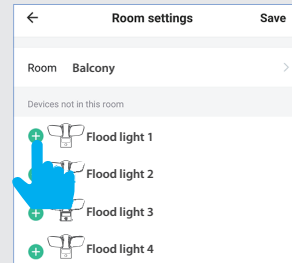


Add individual Flood lights by tapping on the **+** icon next to each device name.

Device Sharing

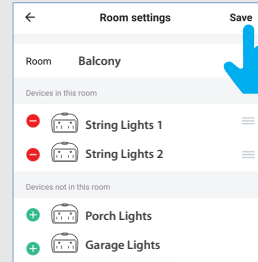

When finished, tap on **Save**.

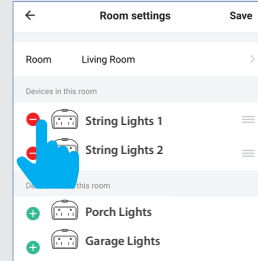

Remove individual Plugs by tapping on the **-** icon next to each device name.

CREATING SMART SCENES

1

Go to Smart Scenes




Use **Smart Scenes** to setup and name an action or group of actions to occur at the same time.

Open the Feit Electric App and tap **Smart Scenes** located at the bottom of the screen.

2


Add Scenario

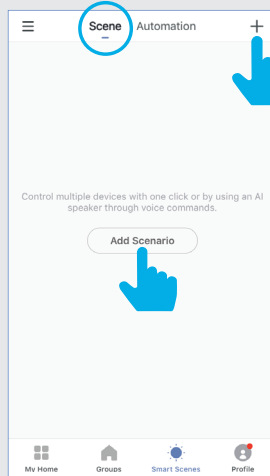

In the **Scene Tab** screen, tap **Add +** icon to create a new scenario.

3

Create Screen Name

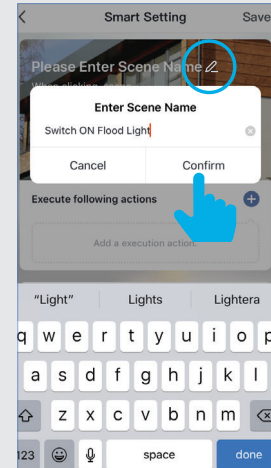


Enter the scene name by tapping on the **Pen** icon. Then, tap **Confirm**.

CREATING SMART SCENES

4


Add Actions

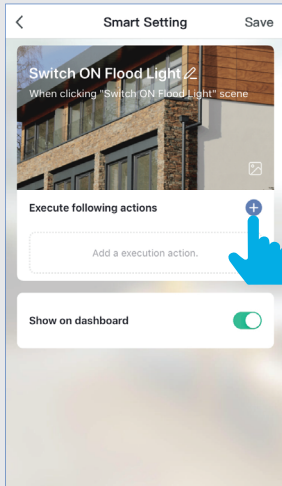

Next to “**Execute following actions**” tap the + icon or tap the **Add Action** box.

5


Select Action

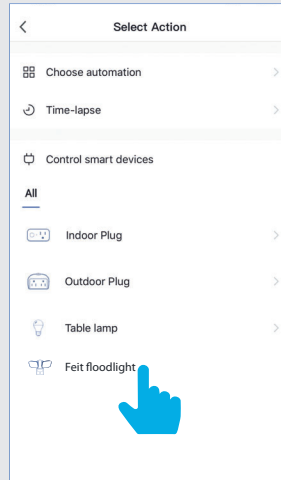

On the **Select Action** screen, tap on a Device or Group to execute an action on.

6

Select Function

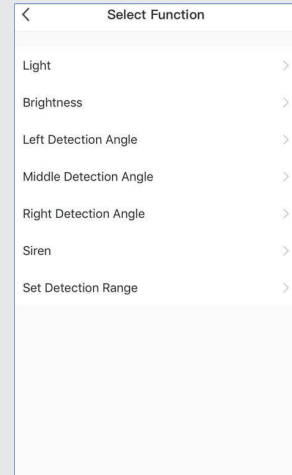


On the **Select Function** screen, tap on the action you want the device to perform.



CREATING SMART SCENES (Selecting Functions.)

Light

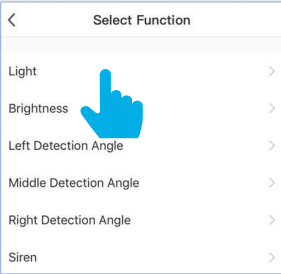

Select Function

- Light >
- Brightness >
- Left Detection Angle >
- Middle Detection Angle >
- Right Detection Angle >
- Siren >


Light

ON

OFF

On the **Light** screen, tap **ON** or **OFF**.

Brightness

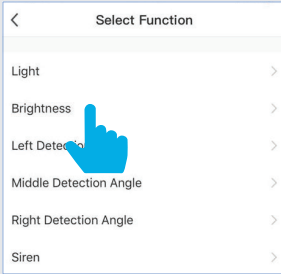

Select Function

- Light >
- Brightness >
- Left Detection Angle >
- Middle Detection Angle >
- Right Detection Angle >
- Siren >

Brightness Next

99%

100%


1%

2%

3%

e.g. On the **Brightness** screen, select your dimming option

Siren

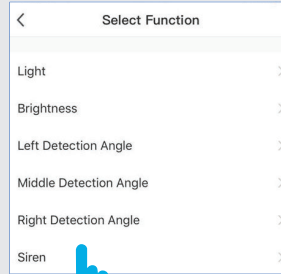

Select Function

- Light >
- Brightness >
- Left Detection Angle >
- Middle Detection Angle >
- Right Detection Angle >
- Siren >

Siren

ON


OFF

e.g. On the **Siren** screen, tap **ON** or **OFF**.




CREATING SMART SCENES (Selecting Functions.)

Left Detection Angle

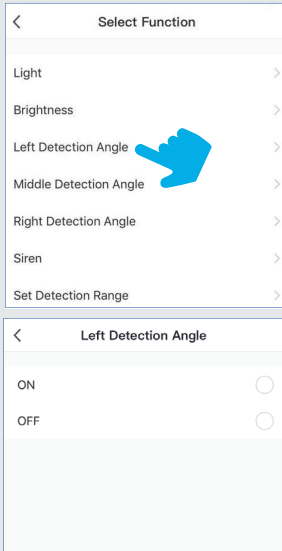


On the **Light** screen, tap
ON or **OFF**.

Middle Detection Angle

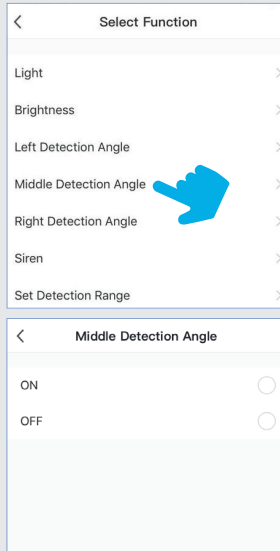

e.g. On the **Brightness** screen,
select your dimming option

Right Detection Angle

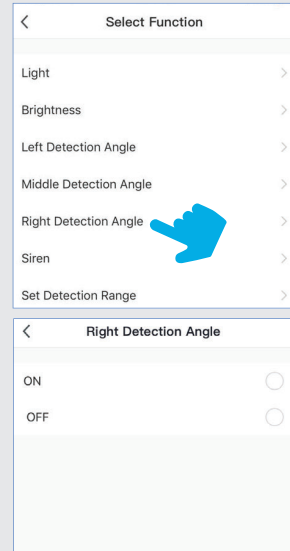


e.g. On the **Siren** screen, tap
ON or **OFF**.




CREATING SMART SCENES

Set Detection Range

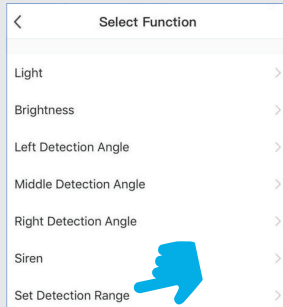


Tap **Set Detection Range**.

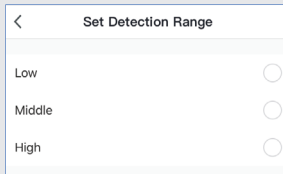

Select a Detection Range of **Low, Middle** or **High**.

7


Add Action

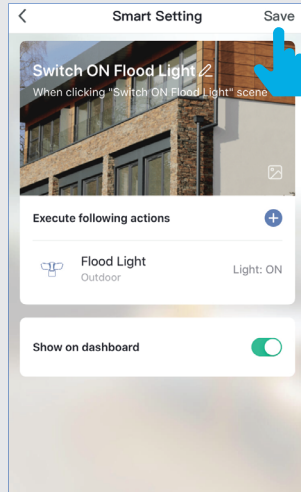

Once you have configured your actions tap **Save**.

8

Select Action

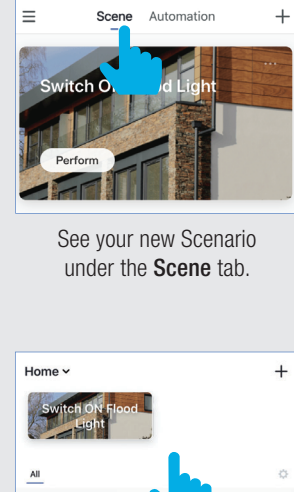


See your new Scenario under the **Scene** tab.

It will also appear on the top of your **Home** screen.


CREATING SMART SCENES (Automation)

9

Automation

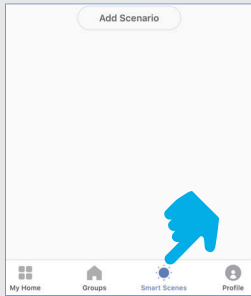


Set up actions that occur automatically. Automations can be triggered by other smart devices, sunrise/sunset etc. From the Home Page tap **Smart Scenes**.

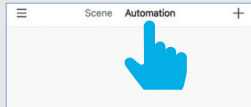


Tap **Automation** at the top of the screen.

Automation

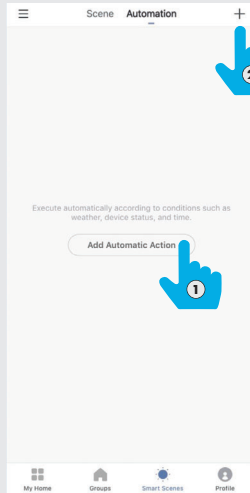

- ① Then, tap "Add Automatic Action"
- ② or tap the "+" icon on the top right.

Automation

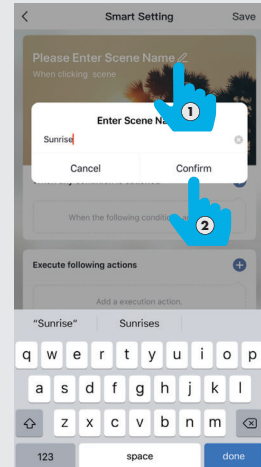

- ① Tap **Enter Screen Name**. Give it a name then tap ② **Confirm**.

CREATING SMART SCENES (Automation)

Automation

Automation

Smart Setting Save

Sunrise

When clicking "Sunrise" scene

When any condition is satisfied

When the following conditions are met

Execute following actions

Add a execution action.

② Select Condition

Select Condition for Task

- Temperature >
- Humidity >
- Weather >
- Sunset/Sunrise >
- Wind Speed >
- Schedule >
- Device >

① Tap +, then ② select a condition in the **Select Condition** window.

Automation

Example:

Automation

Example:

Sunset/Sunrise Next

Current City Whittier >

Sunrise

Sunset

Select your location under **Current City**.
Tap on a **Condition**
(in this example, **Sunrise**).

Sunset/Sunrise Next

Current City Whittier >

Sunrise

Sunset

Tap **Next**.

Automation

Automation

Smart Setting Save

Sunrise

When clicking "Sunrise" scene

When any condition is satisfied

Sunset/Sunrise: Sunrise
Whittier

Execute following actions

Add a execution action.


Valid Time Period All Day >

Then tap on "+" on **Execute following actions**.

CREATING SMART SCENES (Automation)

10


Select Action

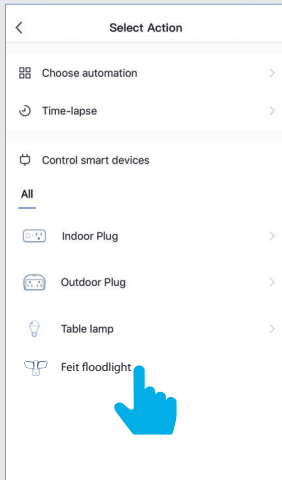

On the **Select Action** screen, tap on a Device or Group to execute an action on.


11

Select Function

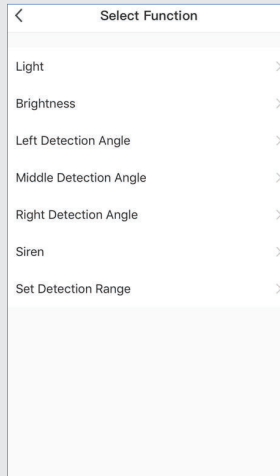

On the **Select Function** screen, tap on the action you want the device to perform.

Select Function

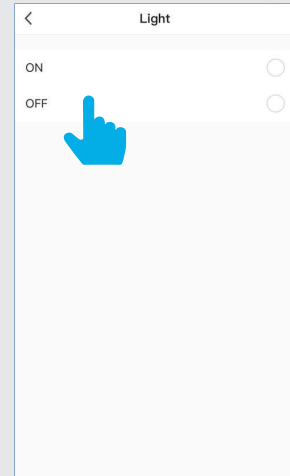


On the **Light** screen, tap **ON** or **OFF**.



CREATING SMART SCENES (Automation)

11


Add Action

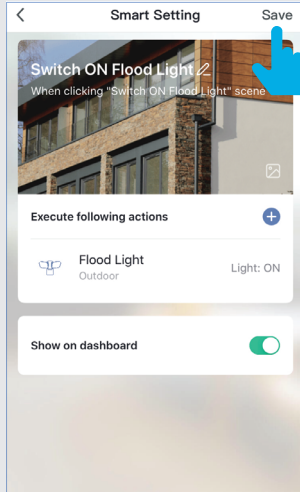

Once you have configured your actions tap **Save**.

12

Automated Actions

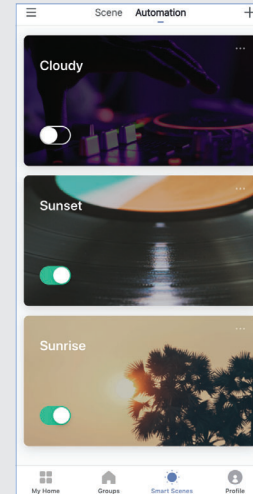


See your **Automated Actions** under the **Automation** tab.

ENABLE SIRI SHORTCUTS (For use with iPhone)

1


Control Function

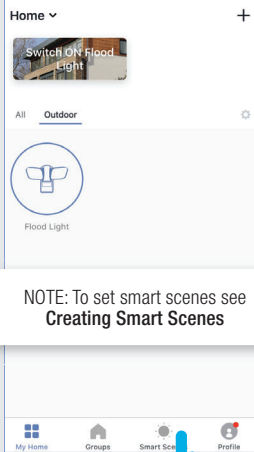

To enable Siri to recognize the scenario you have created, open the Feit Electric App and tap **Smart Scenes** located at the bottom of the screen.

2


Control Function

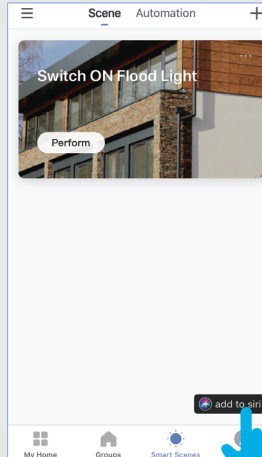

In the Scene Tab screen, tap **add to siri** at the bottom.

3

Control Function

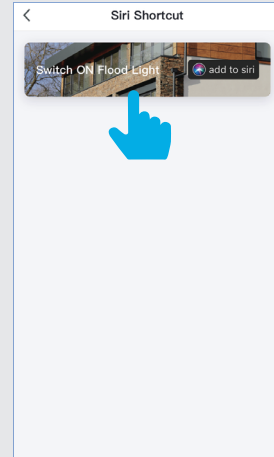


In the **Siri Shortcut** screen, tap on the scenario you would like to add.

ENABLE SIRI SHORTCUTS (For use with iPhone)

4


Adding Function

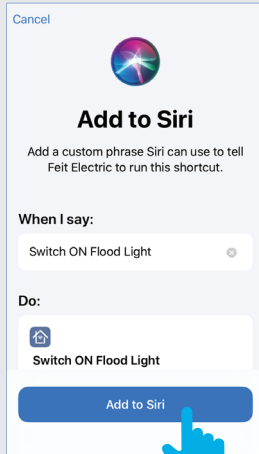

Once on the Add to Siri screen, tap on **Add to Siri** at the bottom of the screen.

5

Adding Function

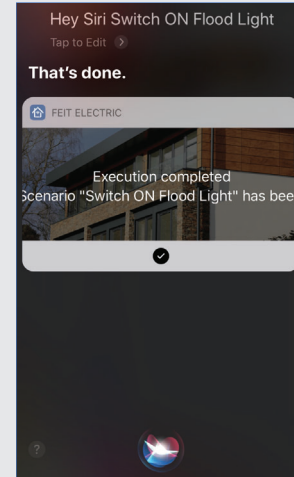


Now you can use the "Hey Siri" command to control this action from your iOS device. "Hey Siri" "Switch ON Flood Light".

CONNECTING TO ALEXA

1


Launch Alexa

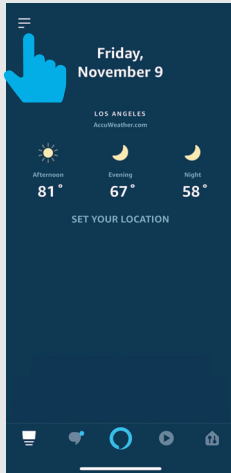

Launch the Alexa App then tap on the **Menu**.
(In the upper left corner)

2


Skills & Games

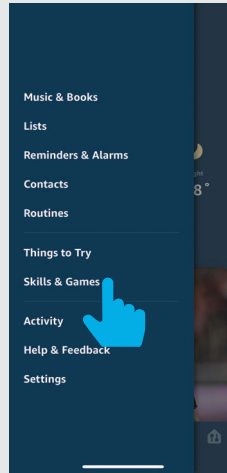

Tap **Skills & Games**.

3

Search Feit App

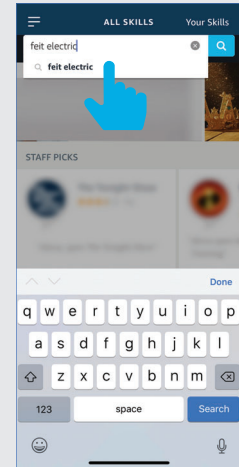


In the search menu type **Feit Electric**.

CONNECTING TO ALEXA

4


Select Feit App

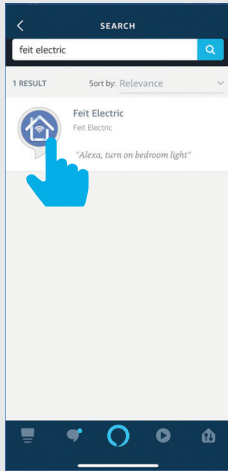

Select **Feit Electric** App.

5


Enable

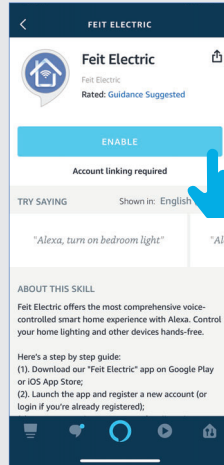

Tap **Enable**.

6

Link

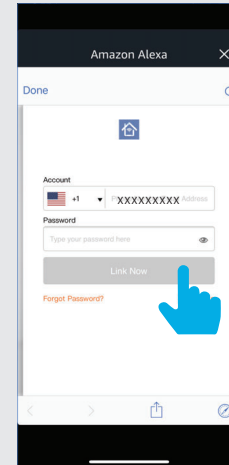


Enter the user & password from the Feit Electric App. Then tap **Link Now**.

CONNECTING TO ALEXA

7


Authorize

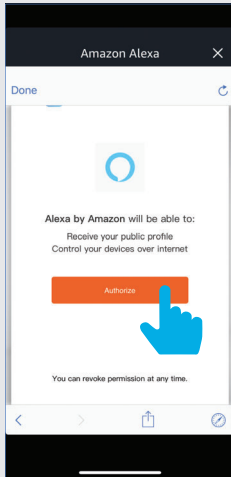

Tap **Authorize**.

8


Linking Feit App

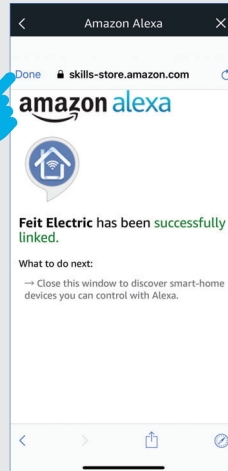

Tap **Done**
in the upper left corner.

9

Discover Devices

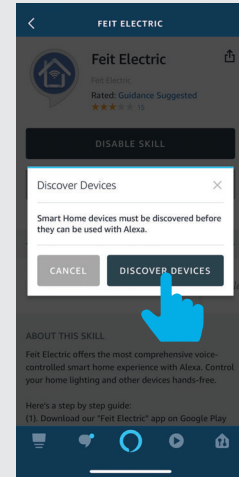


Tap **Discover Devices**.

CONNECTING TO ALEXA

10


Authorize

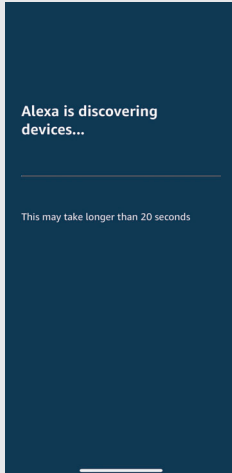

Alexa will now discover and add device(s).

11

Discover...

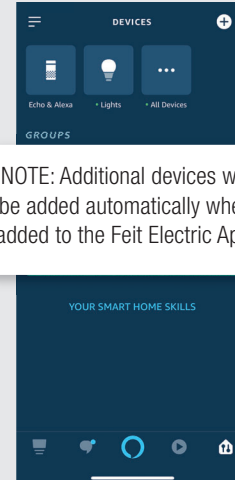


Once the device(s) are discovered they will appear under **Devices** (lower right corner).

CONNECTING TO GOOGLE ASSISTANT

1


Open Google App

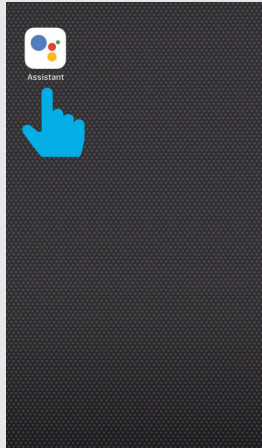

Open the
Google Assistant App.

2


Enable Feit App

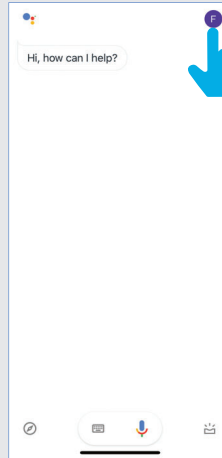

In the upper right corner tap
the **Circle** icon.

3

Google Assistant

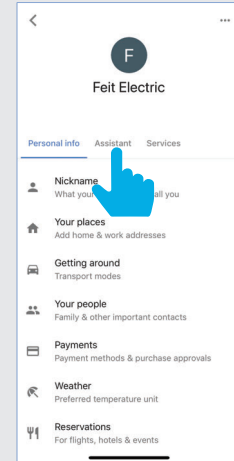


Tap **Assistant**.

CONNECTING TO GOOGLE ASSISTANT

4


Home Control

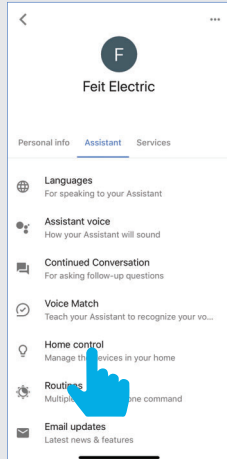

Tap **Home Control**.

5


Add Devices

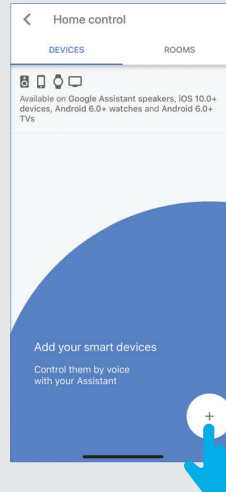

To add a device tap on the Circle (+) located in the lower right corner.

6

Enable Feit App

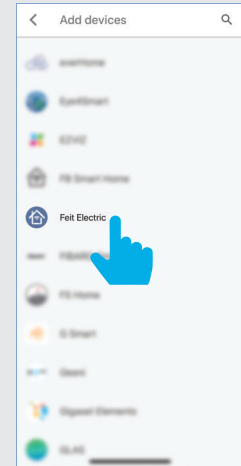


Scroll down and tap **Feit Electric App**.

CONNECTING TO GOOGLE ASSISTANT

7


Link

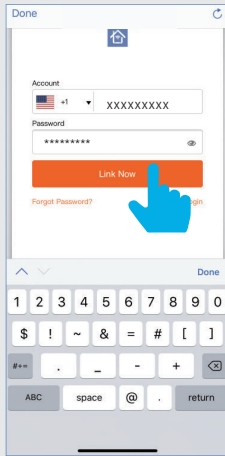

Enter the user & password from the Feit Electric App then tap **Link Now**.

8


Authorize

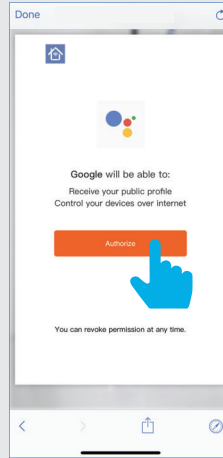

Tap **Authorize**.

9

Assign Rooms



NOTE: Additional devices will be added automatically when added to the Feit Electric App.

Once devices are connected tap **Done** to return to Devices or tap the **Pen** icon to assign a room.

May not be compatible with all devices.
If you are unable to download the app, the
product is not compatible with your device.

Instruction manual may not reflect the latest
version of the app. For the latest version, please
visit www.feit.com/smartwifibulb.

For Technical Support

Please contact Feit Electric at:

(562) 463-BULB (2852)
info@feit.com)

or visit us at
www.feit.com





Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

© Google Inc. All rights reserved. Google, Works with the Google Assistant and the Google Play Word are registered trademarks of Google Inc.

Apple, the Apple logo, iPad, iPhone and Siri and the Siri logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

SD™, microSD™, and SDHC™ are trademarks or registered trademarks of SD-3C, LLC in the United States, other countries, or both.

Need Help?

FAQs and the latest versions of user guides can be found at feit.com/help and feit.com/smart. To reach customer support please visit feit.com/contact-us