


LED CEILING PANEL 40W

Install Guide and Manual


EASY INSTALLATION RECESSED

Required Tools: Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil, Philips Screwdriver.


Prior to install, remove the existing light fixture (if any) from the ceiling.

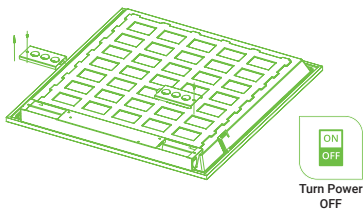


1. Turn off the switch and circuit breaker before installing this LED light fixture.
2. Turn the Ceiling Panel face down on a flat surface.
 - Unscrew the (2) driver covers and set aside the screws.
3. Pop out (2) knockouts (choice of 6).




4. Connect conduit to each knockout.
 - Pass wires through.




5. Connect the supply wires to the Ceiling Panel wires with included wire nuts.
 - Black to Black (live);
 - White to White (neutral);
 - Green to Green (ground).




6. (Optional) If using a dimmer (not included), connect DIM+ and DIM- wiring of Ceiling Panel to your dimmer with included wire nuts.




7. Replace driver covers.
 - Tighten the screws.



8. Locate the (2) protective brackets on back of panel. Bend up 90°.



9. Twist 90° so hook faces outside edge of Ceiling Panel.




10. Install LED Ceiling Panel light in ceiling, using protective brackets.
11. Turn on circuit breaker and test the light.

WARNING

- To reduce the risk of fire, electric shock or injury to people:
- Installation should be performed by a professional, qualified electrician familiar with the construction and operation of this product and the hazards involved.
 - Abide by related regional and local laws or regulations.
 - Proper grounding is required to ensure safety.
 - Not suitable for a wet environment.
 - LED must be installed in an appropriate environment to work. Harsh environments may shorten the life or damage the light.
 - Check for damage during shipping prior to install. If the product is damaged, do not use it.
 - Turn off the switch and circuit breaker before installing this LED light fixture. Accurately verifying no voltage on the lines with an appropriate meter is recommended prior to install.
 - After verifying no voltage, disconnect wires and remove existing light fixture from ceiling (if any).
 - To ensure efficient light, regularly clean the light panel. Don't clean with harsh solvents; use a dry cloth.
 - Use safety precautions. Safety eyeglasses and gloves are recommended.

WIRING DIAGRAM

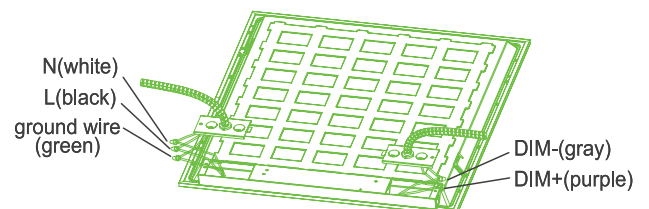

To make the light panel dimmable, connect a compatible dimmer (not included) to the dimming signal wires of the luminaire. Suitable for Constant Current Reduction Dimming 0-10V.

LED CEILING PANEL 40W


Install Guide and Manual




EASY INSTALLATION SUSPENSION

Required Tools: Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil, Philips Screwdriver.


NOTE: 2 piece suspension kits (not included) required for suspension install.




1. Turn off the switch and circuit breaker before installing this LED light fixture.
2. Turn the Ceiling Panel face down on a flat surface.
 - Unscrew the (2) driver covers and set aside the screws.
3. Pop out (2) knockouts (choice of 6).




4. Connect conduit to each knockout.
 - Pass wires through.




5. Connect the supply wires to the Ceiling Panel wires with included wire nuts.
 - Black to Black (live);
 - White to White (neutral);
 - Green to Green (ground).




6. (Optional) If using a dimmer (not included), connect DIM+ and DIM- wiring of Ceiling Panel to your dimmer with included wire nuts.




7. Replace driver covers.
 - Tighten the screws.



8. Drill (2) holes in the ceiling. Place the anchors into hole. Insert the wire rope and screw.
 - Refer to install manual of your suspension kit for complete details.



9. Adjust the support rope/wire so Ceiling Panel hangs horizontally.
 - Suspension kit is not included.



10. Install LED Ceiling Panel light in ceiling, using protective brackets.
11. Turn on circuit breaker and test the light.

WARNING

- To reduce the risk of fire, electric shock or injury to people:
- Installation should be performed by a professional, qualified electrician familiar with the construction and operation of this product and the hazards involved.
 - Abide by related regional and local laws or regulations.
 - Proper grounding is required to ensure safety.
 - Not suitable for a wet environment.
 - LED must be installed in an appropriate environment to work. Harsh environments may shorten the life or damage the light.
 - Check for damage during shipping prior to install. If the product is damaged, do not use it.
 - Turn off the switch and circuit breaker before installing this LED light fixture. Accurately verifying no voltage on the lines with an appropriate meter is recommended prior to install.
 - After verifying no voltage, disconnect wires and remove existing light fixture from ceiling (if any).
 - To ensure efficient light, regularly clean the light panel. Don't clean with harsh solvents; use a dry cloth.
 - Use safety precautions. Safety eyeglasses and gloves are recommended.

SPECIFICATIONS

Voltage	100-277V
Wattage	40W
Suitable for Locations Ingress	Damp
Housing	SPCC+PS lens
Weight	4.85 lbs
Warranty	10 years