




Instructions

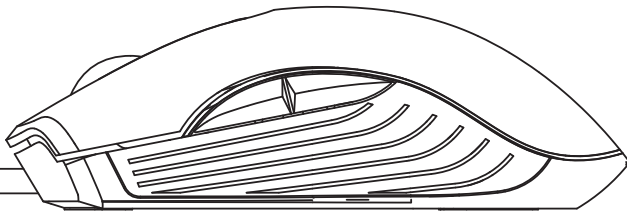

SC103

- RGB full-color marquee effect
- 20 million keyswitch life

RGB marquee gaming mouse

SPECIFICATIONS:

- Product model: SC103 RGB light effect gaming mouse
- 100% new mouse game
- Human body engineering design
- 7 buttons (not programmable)
- Light mode: RGB marquee effectlight .
- 4-level adjustable DPI, Max.6400 DPI
- Voltage rating / electric current: DC 5V / 100mA
- USB plug and play
- Switch life : 20million cycle
- Cable length: 150cm
- Item Weight:132g
- Item Size : 12.8*7.1*4.5cm(L * W * H)
- Package Weight:170g
- Package Size:14*9.5*5.5cm
- Support Windows 2000 / XP / win7 / win8 /win10 Vista 32bit IOS or latest.
- Packing list:
 - 1 x gaming mouse
 - 1 x User manual



SC103
RGB MARQUEE
GAMING MOUSE

LIGHT MODE SWITCHING INSTRUCTIONS:

SPECIAL COMBINATION KEYS:

- ② Middle key + ⑥ DPI+ : Turn on / turn off the light
- ① Left button + ⑦ DPI- : Switch light mode


DPI switching and sensor identification:

Sensor resolution	Four-speed DPI			
	First gear	Second gear	Third gear	Fourth gear
	1000	1600	3200	6400
	Green light	Purple light	Blue light	Red light

How to adjust different 9 RGB light mode?

- Enter first RGB running light when you connect USB
- Click Left+DPI- enter second 4 color breathing light mode
- Click Left+DPI- again enter rainbow running light mode
- Click Left+DPI- enter again enter 4 color running light mode
- Click Left+DPI- enter again enter mixed color running light mode
- Click Left+DPI- sixth enter turn off all light mode
- Next time click Left+DPI- enter first single **PURPLE** color light mode
- Click DPI- enter **GREEN** color single light mode
- Click DPI+ 2times enter **BLUE** color single light mode
- Click DPI+ 1time enter **RED** color single light mode

TECHNICAL PARAMETERS:

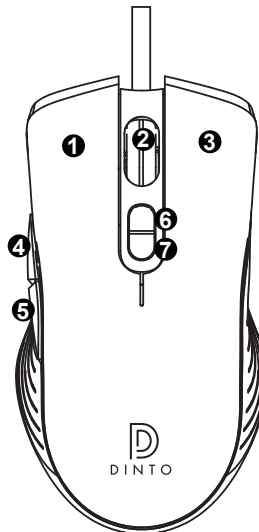

Feature:

- Sunplus SPCP190 professional game chips, with high-performance program control decoder chip, to achieve smooth movement and precise control.
- Light mode: RGB marquee effect, Up to 6 lighting pattern designs , The light can be turned off.
- SC103 Sensor can be set DPI resolution up to 6400DPI (1000/1600/3200/6400).
- Large and comfortable Mouse Wheel design.
- The SC103 uses Sunplus SPCP190 advanced navigation detection technology for maximum motion detection up to 32 inches per second (ips) with accelerations up to 12G.
- USB2.0 interface, Plug and play

- ①. Left Button
- ②. Scroll wheel
- ③. Right Button
- ④. forward
- ⑤. backward
- ⑥. DPI Loop +
- ⑦. DPI Loop -