

■General Specifications

Product name			ScanSnap S1100
Scanner type			CDF (Continuous Document Feeding), simplex sheetfed Two way paper pass (Straight path, U turned path)
Scanning modes			Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)
Image sensor			CIS (Contact Image Sensor) x 1
Light source			3 Color LED (Red / Green / Blue)
Optical resolution			600 dpi
Scanning speed (A4 portrait) *1	USB bus powered	Auto mode (default) *2	7.5 seconds / page
		Normal mode (150 dpi)	
		Better mode (200 dpi)	
		Best mode (300 dpi)	
		Excellent mode (600 dpi)	35 seconds / page
Document size		Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 25.4 x 25.4 mm (1 x 1 in.)) /Automatically recognizes document size
		Normal mode with Carrier Sheet	Use of a carrier sheet permits the scanning of A3, B4, 11 x 17 in. and photographs as well as the document sizes that are listed above
		Long paper scanning *3	Max: 216 x 863 mm (8.5 x 34 in.) (300 dpi or less)
Paper weight (Thickness)			● 52 to 209 g/m ² , or 14 to 56 lb (Straight path) ● 52 to 80 g/m ² , or 14 to 20 lb (U turned path) ● The card can be used. (portrait / landscape) Non-embossed: 0.76 mm or less Embossed: 0.76 + 0.48 mm (ISO7810 conforming)
Paper setting			Front side up
Interface *4			USB 2.0 (USB 1.1 compatible)
Power requirement			5 V / 0.5 A (x 1port)
Power consumption			During operation: 2.5 W or less, During sleep mode: 1 W or less, During off mode: Less than 0.5 W
Operation environment			Temperature: 5 to 35° C (41 to 95° F) Relative humidity: 20 to 80% (Non-condensing)
Dimensions (W x D x H) *5			273 x 47.5 x 34 mm (10.74 x 1.87 x 1.33 in.)
Device weight			350 g (0.77 lb)
Environmental compliance			ENERGY STAR® / RoHS
Multifeed detection			None
Driver			ScanSnap specific driver ● Windows®: Does not support TWAIN / ISIS™ ● Mac OS: Does not support TWAIN

*1 Scanning speeds may vary due to the system environment used. Scanning Speed means the time from "Start feeding document" to "Finish output document" after pre-pick and pushing Scan button. In case of "From pushing Scan button", Warm-up time is added. ●Warm-up time: Less than 2 seconds from ready status (Less than 3 seconds after opening chute cover) *2 Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode". *3 The S1100 is capable of scanning documents that exceed A4 size in length. This function is available for all modes except "Excellent mode". *4 PC with USB 3.0 works as USB 2.0. It is guaranteed only attached USB cable. *5 When the paper output guide is in the folded position.

■Software

	Windows®	Mac OS
Driver*1	ScanSnap Manager V5.1	ScanSnap Manager V3.2
	ScanSnap Organizer V4.1	-
Applications	CardMinder™ V4.1	-
	-	Cardiris™ 4.0 for ScanSnap
	ABBYY FineReader for ScanSnap™ 4.1	ABBYY FineReader for ScanSnap™ 4.1
	Scan to Microsoft® SharePoint® 3.4	-
	Evernote for Win 4.5	Evernote for Mac 3.3

*1 TWAIN or ISIS™ applications cannot be used directly

■Included items

- Safety Precautions
- Setup DVD-ROM
- USB cable (2.0 m)
- Rack2-Filer Smart with Magic Desktop (Exclusive to ScanSnap S1100 Deluxe)

■Consumables

Description	Part number	Remarks
Cleaner F1	PA03950-0352	100 ml bottle Used to clean Rollers
Cleaning Wipe	PA03950-0419	1 pack (24 sheets) Used to clean Rollers

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

*ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY. *Adobe, Acrobat are either registered trademarks or tradenames of Adobe Systems Incorporated in the United States and/or other countries. *Cardiris is a trademarks of I.R.I.S. *Evernote is a registered trademark or trademark of Evernote Corporation. *Google, Google Docs, Android and Google Play are registered trademarks or trademarks of Google Inc. *Intel, Pentium, and Intel Core are registered trademarks or trademarks of Intel Corporation in the United States and other countries. *ISIS™ is a registered trademark of EMC Corporation in the United States. *Mac, Mac OS, OS X, iPad, iPhone and App Store are trademarks of Apple Inc. *Microsoft, Windows, Windows Vista,Excel, PowerPoint, SharePoint and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. *Word is the product of Microsoft Corporation in the United States. *PowerPC is a registered trademark or trademark of International Business Machines Corporation in the United States, other countries, or both. *Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com, inc. in the United States and other countries. *ScanSnap, ScanSnap logo, ScanSnap Manager, ScanSnap Organizer, CardMinder and Rack2-Filer are registered trademarks or trademarks of Pfu LIMITED in Japan. *Wi-Fi and Wi-Fi Protected Setup are trademarks of Wi-Fi Alliance. *Other company names and product names are the registered trademarks or trademarks of the respective companies.

Visit the ScanSnap homepage for additional information : **<http://scansnap.fujitsu.com/>**

⚠ Safety Precautions		
Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.	Do not place this device in wet or oily areas; or subject it to environments high in dust or moisture. Doing so may result in electrical shock, fire, or product damage.	

Specifications are subject to change without notice.

■ScanSnap S1100 System Requirements

●Windows®

Compatible operating systems		Windows® 8 (32-bit/64-bit)	Windows® 7 (32-bit/64-bit)	Windows Vista® (32-bit/64-bit) *1	Windows® XP (32-bit) *2
Driver / Applications *3	ScanSnap Manager V5.1	Supported	Supported	Supported	Supported
	ScanSnap Organizer V4.1 *4	Supported	Supported	Supported	Supported
	CardMinder™ V4.1	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Scan to Microsoft® SharePoint® 3.4	Supported	Supported	Supported	Supported
Hardware requirements *5	Evernote for Win 4.5	Supported	Supported	Supported	Supported
	CPU *6	Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
	Memory capacity *6	64-bit: 2 GB or more 32-bit: 1 GB or more			
	Display	1,024 × 768 pixels or higher			
	Disk capacity *7	2,290 MB or more of free hard disk space 1 GB or more is required for ScanSnap S1100 Deluxe. For details, refer to the manual of Rack2-Filer Smart with MagicDesktop			
	DVD-ROM drive	Required for installation			
USB port *6 *8		USB3.0 / USB2.0 / USB 1.1			

*1 Service Pack 1 or later required. *2 Service Pack 3 or later required. *3 For the latest support information, visit the ScanSnap homepage. *4 Adobe® Acrobat® 7.0 or later (not included) is required in order to use the Adobe® Acrobat® search feature. Please check the Adobe homepage to find out which version of Acrobat is supported by the OS you are using. *5 The ScanSnap device may not work if the connected computer does not meet this requirement. *6 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *7 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. *8 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

●Mac OS

Compatible operating systems		OS X v10.8	Mac OS X v10.7	Mac OS X v10.6 ^{*1}	Mac OS X v10.5 ^{*2}	Mac OS X v10.4 ^{*3}
Driver / Applications ^{*4}	ScanSnap Manager V3.2	Supported	Supported	Supported	Supported	Supported
	Cardiris™ 4.0 for ScanSnap	Supported	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported	Supported
	Evernote for Mac 3.3	Supported	Supported	Supported	Not Supported	Not Supported
Hardware requirements ^{*5}	CPU ^{*6}	Intel® Core™ 2 Duo Processor (Recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Intel® Core™ Duo 1.83 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	● Power PC G5 1.6 GHz or higher ● Intel® Core™ Duo 1.83 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)		
	Memory capacity ^{*6}	2 GB or more	1 GB or more	512 MB or more (Recommended: 1 GB or more)		
	Display	1,024 x 768 pixels or more				
	Disk capacity	1,580 MB or more of free hard disk space				
	DVD-ROM drive	Required for installation				
	USB port ^{*6} ^{*7}	USB 3.0 / USB 2.0 / USB 1.1				

*1 Mac OS X v10.6.6 or later recommended. *2 Mac OS X v10.5.8 recommended. *3 Mac OS X v10.4.11 recommended. *4 For the latest support information, visit the ScanSnap homepage. *5 The ScanSnap device may not work if the connected computer does not meet this requirement. *6 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *7 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■Rack2-Filer Smart V1.0 / Magic Desktop V1.0 *1,*2,*3 System Requirements

Compatible operating systems		Windows® 8 (32-bit / 64-bit) *4	Windows® 7 (32-bit / 64-bit) SP1 or later	Windows Vista® (32-bit / 64-bit) SP2 or later	Windows® XP (32-bit) SP3 or later
Hardware requirements	CPU	Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
	Memory capacity	2 GB or more (Recommended: 4 GB or more)			
	Display	1,024 x 768 pixels or higher			
	Disk capacity	System drive *5	-	64-bit: 2 GB or more	-
		Installation drive	-	32-bit: 850 MB or more	
		1 GB or more disc space * *Additional space is required for the data created by Rack2-Filer Smart and Magic Desktop			
Supported scanners		ScanSnap iX500, S1500, S1300i, S1300, S1100			
Supported mobile devices	Model	iPad series, iPhone series (4 or later), iPod touch series (4th generation or later)			
	OS	iOS 4.3 or later			
	Application	Rack2-Filer Smart for iOS1.1.0 or later			

*1 This product only supports Microsoft® Windows®. *2 Please refer to the Rack2-Filer Smart Web site and the Magic Desktop Web site. *3 When installing Magic Desktop, Internet connection is required. *4 Rack2-Filer Smart and Magic Desktop runs as a desktop application. *5 This is the free capacity required when .NET Framework 4 is not installed.

■Options

Description	Part number	Remarks
ScanSnap S1100 Case*1	PA03610-0001	Intended for ScanSnap S1100 and included items
ScanSnap Carrier Sheets *2	PA03360-0013	5 Carrier Sheets Intended for ScanSnap S1500, S1500M, S1100, S510, S510M, S500, S500M and ScanSnap fi-S110EOX series scanners and included

*1 This product has been especially designed for storing and carrying ScanSnap S1100. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure. *2 Although ScanSnap Carrier Sheets have a lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m² or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

POWERED BY

ABBYY

FineReader

OCR

ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY

ABBYY and FineReader are trademarks of ABBYY.

ENERGY STAR

PFU LIMITED, a Fujitsu company, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.

Mac

Universal

ScanSnap

Color Image Scanner

S1100



Enhanced with new features

- Seamlessly sync to iPad/iPhone and Android™ devices
- Easily link to Dropbox and more from Quick Menu
- Link from an open software or cloud application with ScanSnap Folder*

*The application must support PDF and JPEG files.

Premium bundled software

- CardMinder™ (Win) & Cardiris™ (Mac)

Simple, Speedy & Compact.

From Paper to PDF in One Touch!



shaping tomorrow with you

**ScanSnap
S1100**

**Bring simple "One Touch" scanning
to new places!
Discover new levels of productivity!**



One of the smallest mobile A4 scanners in the world ※1

The ScanSnap S1100 document scanner pushes the limits of size for extreme portability while delivering smooth A4 size document scanning※2. All you need is your laptop and one USB cable to scan and share your documents anywhere, anytime.



※1 This statement was true as of October 1, 2010 based on comparisons of A4 document feed type scanners conducted by PFU.
※2 The S1100 measures approximately 1/4 the size and less than 1/4 the weight when compared to the ScanSnap S1300.

Scans plastic cards and other various document types*

In addition to standard paper types, the S1100 can scan plastic cards like the ones used for membership IDs.

※ Card type ISO 7810, ID-1 format = 86 x 54 mm (supports embossed cards)



Continuous Document Feeding (CDF Function)

Even though the S1100 is one of the world's smallest document-feed scanners, you can smoothly scan multiple page documents with remarkable speed. The Continuous Document Feeding function allows you to insert pages one after another without any extra button pressing by detecting when a sheet enters and exits the S1100.

●Scanning a two-sided document using the CDF Function



Scans to a greater range of mobile devices

Like all scanners of the ScanSnap series, the S1100 supports wireless scanning to iPad and iPhone devices for convenient mobile viewing via the mobile app ScanSnap Connect Application, which now comes in a version for Android™ smartphones and tablets.

※ To use the latest ScanSnap functions, download and apply the most recent software update.
※ ScanSnap Connect Application is available as a free download from the official application distribution service of the device (e.g., Google Play and Apple App Store). The Wi-Fi of the ScanSnap installed computer must be turned on to use this feature.



Efficiently organize data from scanned business cards

Business card organizer software

CardMinder™ V4.1 [Windows®]

Cardiris™ 4.0 for ScanSnap [Mac OS]

- Scan your collection of business cards into easy to navigate digital business card holders.
- Import the data from your scanned business cards into Excel, Outlook, Address Book (Mac OS) and other database programs for fast referencing and application.



CardMinder™ V4.1



Cardiris™ 4.0 for ScanSnap

Fast and flexible application of scanned data with Quick Menu

After scanning is complete, the Quick Menu appears. Navigate through the Quick Menu's easy to use interface to smoothly send your digitized document to an application of your choice.

※ To use the latest ScanSnap functions, download and apply the most recent software update.

ScanSnap Manager V5.1 [Windows®]

ScanSnap Manager V3.2 [Mac OS]

Quick Menu (Windows®)



Quick Menu (Mac OS)




Easily links documents to clouds

You can scan nearly effortlessly to Evernote, Google Docs, Salesforce, SugarSync and Dropbox, and then conveniently browse the data from computers, tablets or smartphones - anywhere, anytime.

●Introducing ScanSnap Folder [Windows®]

Replicating ScanSnap as a Windows folder, selecting this from a file selection screen directly applies your scanned documents to boost your work efficiency.

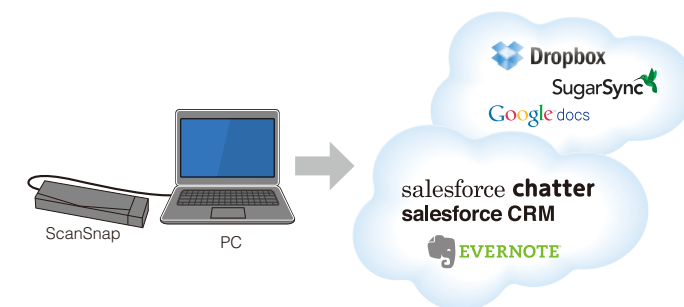

Automated features for near effortless scanning

The S1100 features a powerful set of automated image processing functions including Auto deskew, Auto orientation, and Auto color detection. These functions make pre-scan work like sorting pages and changing scan settings unnecessary, so you can scan your documents with minimal effort.

Generates Microsoft® Word, Excel®, PowerPoint® files

Top-class OCR engine

ABBYY FineReader for ScanSnap™ 4.1 [Windows®]

ABBYY FineReader for ScanSnap™ 4.1 [Mac OS]

Smoothly scan and convert paper documents into Word, Excel® and PowerPoint® documents.

※ Only Microsoft® Word and Excel® are available for Mac OS.
※ Generated images and text may vary from the original.

ScanSnap S1100 Deluxe model [Windows®]

Rack2-Filer Smart is filing-use software that conveys the sense of using bookcases and flipping through the pages of a paper document on a PC screen. In the era of mobile and cloud computing, it can be operated "easily", "anywhere", "anytime", and "with fun", while providing you with the functionality to utilize data in many ways. Magic Desktop is software that enables you to organize information such as the data scanned by ScanSnap scanners or memos and images created with mobile devices, as well as upload your information in communications on Facebook. You can save your processed data to Rack2-Filer Smart.



ScanSnap S1100 Case (Option)

A convenient carrying case intended for the S1100 is available.
(See disclaimer under "Options" in the next page)

