

Bluetooth keyboard Quick Start Guide

1. Button

OFF/ON

On/Off slider switch: slide switch ON or OFF to control the device power turn on or turn off

connect

Bluetooth connect button

2. Keyboard indicator lamp

Battery status light: Slide the OFF/ON button on, the power light will turn blue for 4 seconds and then turn off to save power. The keyboard is still on.

Bluetooth status light: Press on the "connect" button, the Bluetooth status light will be blink blue, indicator light will stay on until the keyboard connect with your device.

Caps lock light: Status light stay on when the keyboard uppercase.

Charging light: When the keyboard is charging, it is red. And when it is full, the lamp will go off.

3. Connect the bluetooth keyboard to table

- Step 1: Turn on the power toggle switch. The state indicator light will be on for 5 seconds, and then the light will go off.
- Step 2: Press the "connect" button, the Bluetooth indicator light will be blinking, the keyboard is now ready to be connect to tablet computer.
- Step 3: On the tablet, select: Setting-Bluetooth-on. The tablet computer will automatically search for a Bluetooth-available device. Wireless Keyboard is found and click on the device to connect. (The keyboard name: Bluetooth 3.0 keyboard)
- Step 4: Use the key board to enter the password code as displayed on screen.
- Step 5: Wireless Keyboard connected successfully. Bluetooth indicator light will go off.

4. Charging the bluetooth keyboard

When the battery power is low, the [power] indicator light will start blinking, it is time to recharge the keyboard.


Step 1: Connect power line to Micro interface in keyboard (make sure the direction is correct).

- Step 2: Connect USB port to the power adapter or computer's USB interface.
- Step 3: the "Charge" stay on when the keyboard is charging. Once it finished charging the "Charge".

5. Battery

The long-lasting rechargeable battery can service you for several weeks. With no memory effect, the lithium battery can be charged at any time. In order to extend service life, we recommend you turn the keyboard off when there is long time with no interactive.

6. Function keys

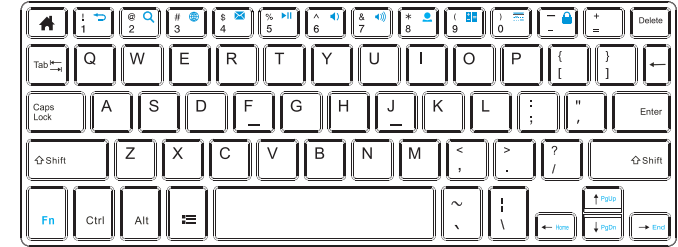

	Home		Play/pause		Calendar
	Back		Volume down		Lock
	Search		Volume up		
	Web browser		Contact		
	Email		Caculator		

7. Energy Saving Sleep mode

The keyboard will kick into sleep mode when it is inactive for 15 minutes and the keyboard "power" will go off. To wake up from sleep mode, just press any key and wait 3seconds, the keyboard will come back on.

8. Product Specification:

- 1) Built-in wireless Bluetooth module
- 2) can used together with leather case
- 3) MICRO interface, easy to charge
- 4) Built-in rechargeable lithium battery
- 5) Light weight, quiet keystrokes, water-proof, dust-proof
- 6) Energy saving keyboard in sleep mode

9. Keyboard Specification

- 1) Bluetooth interface standard
- 2) Operating distance up to 10 meters
- 3) Modulation system: GFSK
- 4) Operation voltage:3.0-5.0v
- 5) Operating current: <2.5mA
- 6) Standby current: <0.3mA
- 7) Sleep current: <40uA
- 8) Charge current: ≥200mA
- 9) Standby time: >40 days
- 10) Charge time: <2 hours
- 11) Lithium battery capacity:120mA
- 12) Sustainable working time :40 hours
- 13) Lithium battery life: 2 years
- 14) Key Strength: 80±10g
- 15) Key life: 5 million strokes
- 16) Working temperature: -10 - +55 °C

10. Safety Caution

- 1) Keep the item away from sharp objects.
- 2) Do not place heavy object on the keyboard.
- 3) Do not Microwave the item.
- 4) Do not force or distorted the keyboard
- 5) Keep away from oil, chemical or any other organic liquid.

11. Cleaning

Clean the keyboard with water, alcohol or alcohol based disinfectant.

12. Troubleshooting

A. Unable to connect

- 1) Make sure the keyboard is on (the power indicator is shine)
- 2) Make sure the keyboard is in operating distance (within 10 meters)
- 3) Make sure the battery can work (check ways: the power indicator is red when keyboard is connected by power line, if so, the battery needs to charge)
- 4) Make sure the Bluetooth in tablet pc is on
- 5) Press the key "connect" Bluetooth status
- 6) The solution of problems above 1-5:  
Maybe the reason is without charging for a long time. Charging is best way to solve them.

B. Unable to Charge Keyboard

- 1) Make sure the USB power cable is connected properly to the keyboard and the power source.
- 2) Make sure the wall charger is plug into the power outlet.  
Warm prompt: the output voltage and current of power adapter cannot surpass DC5.0V, 500mA,or it will damage the keyboard.

13. Special Keys Description

Long press [Fn], Combination media keys will make you operate computer easily.

14. Carry tablet PC on trip

- 1) Storage: Face toward the keyboard with one side of the magnet in tablet PC, shaft magnet will automatically adsorption up and then lid it correctly.
- 2) Disboard: Pull tablet PC out from card slot.

80g书写纸      尺寸400\*135mm ， 折叠后尺寸100\*135mm

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.