

Aquatic Swimming Pools Pvt Ltd

Product & Services

Swimming Pool Equipments

SWIMMING POOL FILTRATION SYSTEM.

Bobbin Wound Filter

The filter tank is made of an inner fibre glass bladder to resist implosion and high pressure capability with a gel coat layer to avoid capillarity which is then continuously wound with fibre glass strands to create a high strength vessel. This process is recognised as one of the strongest methods of manufacturing a noncorrosive high strength filter tank. All components are injection moulded from high strength engineering plastics. Available in Both Top & Side Mounted Model

Product Specifications

Max. Working Pressure	3.5 Bar
Factory Testing Pressure	4.5 Bar
Max. Operating Temp.	50°C
MOC	Filament wound with Isolthalic resin UV protection. FRP Liner
Filter Colours	Brown Beige
Base Colour	Black
Warranty	5 years for shell

LACUS - TOP MOUNT

PRODUCT CODE	FILTER DIA. INCH	MPV SIZE INCH	AREA M2	REQUIRED SAND	FLOW m3/hr
BWF-18-1.5TM	18	1.5	0.15	80	7.5
BWF-21-1.5TM	12	1.5	0.22	150	11
BWF-25-1.5TM	25	1.5	0.32	220	15
BWF-28-1.5TM	28	1.5	0.37	240	18
BWF-32-2TM	32	2.0	0.44	270	22
BWF-32-2TM	32	2.0	0.56	400	24
BWF-36-2TM	36	2.0	0.70	470	31

LACUS - SIDE MOUNT

PRODUCT CODE	FILTER DIA. INCH	MPV SIZE INCH	AREA M2	REQUIRED SAND	FLOW m3/hr
BWF-18-1.5SM	18	1.5	0.15	80	7.5
BWF-21-1.5SM	21	1.5	0.22	150	11
BWF-25-1.5SM	25	1.5	0.32	220	15
BWF-28-1.5SM	28	1.5	0.37	240	18
BWF-30-2SM	30	2.0	0.44	270	22

BWF-32-2SM	32	2.0	0.56	400	28
BWF-36-2SM	36	2.0	0.70	470	35
BWF-36-2.5SM	36	2.5	0.70	470	35
BWF-44-2.5SM	44	2.5	0.93	900	46
BWF-48-2.5SM	48	2.5	1.1	1300	55
BWF-48-3SM	48	3.0	1.1	1300	55



Multiport Valve

New 6 Ways Multiport valve Made of White / Black ABS can takes complete care of the pool filtration process, Backwash Process, Rinse Process, Recirculation, Drain & Closed. Available in Top and Side mounted versions for both 1.5", 2", 2.5" and 3".



Cartridge Filter

The Clean & Clear® Filters feature a chemical resistant tank with no-tool servicing and a coreless cartridge for easier cleaning. All models are equipped with easy spin-on unions for plumbing hook-ups. These filters are NSF listed for commercial applications and are available in 50, 75, 100, 150, and 200 square foot sizes.

Features

NSF listed

Unionized connections

Integrated continuous High Flow™ internal air relief *

Chemical resistant tank body

Lock ring with spring-loaded safety latches

Coreless cartridge for easy cleaning

High Flow manual air relief valve

1 in. drain and wash out

Single piece base and body design

PRODUCT	MODEL	FILTER AREA	FLOW RATE
CODE	NUMBER	Sq. Ft.	(m ³ /hr)
160314	CC 50	50	11
160315	CC 75	75	17
160316	CC 100	100	22
160317	CC 150	150	34
160318	CC 200	200	45



BOBBIN WOUND COMMERCIAL SAND FILTER

We are specialists in the production of bobbin wound polyester sand filters for large size installations, such as commercial and communal swimming-pools, aquatic parks, water treatment plants, aquariums, etc.

Features

Max. Working Pressure 2.5 bar**

Max. operating temperature 50°C

MOC Filament wound with Isothalic resin & UV protection on FRP Liner

Filter Colours Blue

Base Colour Black

Warranty 5 years on vessel

Visual No contamination / foreign Particles and internal surface smooth without any loose fibre or blisters

Product Specifications

Product	Filter Dia. (mm)	Filter Area (Sq Ft)	Connections
FSM 1400 - 55"	1400	16	4 inch
FSM 1600 - 63"	1600	21	4 inch
FSM 1800 - 70"	1800	27	6 inch
FSM 2000 - 78"	2000	33	6 inch



Swimming Pool Pumps

Energy Efficient IntelliFlo Pump

IntelliFlo® Variable Speed is the newest member of the IntelliFlo pump family with more features than ever before! The IntelliFlo® Variable Speed features 8 speeds with a programmable time clock for each speed and an LCD screen that displays actual wattage consumption and speed settings. It is the perfect solution for customers who want the savings and performance provided by dependable IntelliFlo technology with integrated time clock settings for code compliance or installations without automation systems. This new IntelliFlo offers the same reliable performance and energy-savings that has made the IntelliFlo the best selling variable speed pump on the planet.

Features

Energy savings up to 90% versus traditional pumps*

8 programmable speed settings and built-in timer to ensure the pump runs at optimum speed and duration

Ultra-efficient permanent magnet motor design reduces noise and vibration for greater efficiency and longer pump life

Dramatically quieter operation - as low as 45 decibels - about 4 times quieter than most traditional-style pumps.**

Totally enclosed fan-cooled (TEFC) design and low average operating speed makes IntelliFlo the quietest pump on earth

Fully compatible with IntelliTouch®, EasyTouch®, SunTouch® Pool Control Systems and other brands of digital pool/spa controls for managing pump, heating, lighting, spa jets and water features.

Built in diagnostics protect the pump for longer service life



Self-Priming Pump

The SuperFlo pump is a product of more than 40 years of innovative hydraulic engineering. The result is an ability to move more water more efficiently for lower operating cost and super-quiet operation. Plus, by

performing with less effort, there's simply less wear and tear-and that means longer life for a higher return on your pump investment. **Available from 0.25 HP to 3 HP**

Features

Minimal energy consumption

“Cam and Ramp™” lid for easy cleaning and maintenance

Interchangeable with competitive products

Extremely quiet operation

Thick-walled, single piece body for quiet operation

Corrosion resistant, high-grade stainless steel motor shaft

Thermal protection included in single phase motors

PRODUCT CODE	KW	HP	VOLT	PHASE
P-SFL-051	0.37	1/2	220-240V	1~
P-SFL-071	0.55	3/4	220-240V	1~
P-SFL-073	0.55	3/4	380-420V	3~
P-SFL-101	0.75	1	220-240V	1~
P-SFL-103E2	0.75	1	380-240V	3~
P-SFL-151	1.10	1.5	220-240V	1~
P-SFL-153E2	1.10	1.5	380-240V	3~
P-SFL-201	1.50	2	220-240V	1~
P-SFL-203E2	1.50	2	380-240V	3~
P-SFL-301	2.20	3	220-240V	1~
P-SFL-303E2	2.20	3	380-240V	3~



Commercial Pump for Swimming Pool

Especially designed for swimming pool, aquatic and aquaculture applications. Injection molded components of high quality glass-reinforced thermoplastic. **Available from 3.5 HP to 10 HP.**

Features

Self-priming pumps.

Seawater approved up to 4% salt concentration.

Available with or without large pre-filter.

CE & TÜV approved, IP55 protected, IE2 compliant TEFC motor.

Corrosion resistant, high grade stainless steel motor shaft.

Included connections are metric slip fit 110mm ID inlet and 90mm ID - outlet for 3,5 to 5,5 HP versions and 110 mm ID outlet for 7,5 and 10 HP versions.

High chemical resistance with all metal internal components being stainless steel.

2850 RPM Motor.

Product Specifications

Product	kW	HP	Volt	Port Size Metric ISO / DIN
				INLET/ OUTLET
5PSP-350-3	2.6	3.5	380V	4.33"/3.54"
5PSP-450-3	3.3	4.5	380V	4.33"/3.54"
5PSP-550-3	4	5.5	380V	4.33"/3.54"
5PSP-750-3	5.6	7.5	380V	4.33"/4.33"
5PSP-1000-3	7.5	10	380V	4.33"/4.33"



Submersible Pump Made in Stainless Steel

Submersible Pumps for Fountains and Water Features

The VERSAILLES pumps have been designed for fountains, water features and waterfalls in water gardens.

Available from 0.25 HP to 1.5 HP

Usage Limitation

Type of liquid: clean non-aggressive, non-explosive, free of solids

Maximum liquid temperature 30° C

Max. start-ups per hour: 20

Motor protection with thermal relay provided by the user

Maximum quantity of sand present: 40 g/m3

Motor

Dry motor with stainless steel casing

Level of protection IP68

Class F insulation

Single phase power supply with capacitor permanently activated

Thermal protection built into the motor winding

Completely insulated cable connection chamber

Self-lubricating ball bearings

Speed of rotation 2850 rpm

Suitable for continuous use Applications

For fountains, water features, waterfalls in water gardens.

Product Specifications

Product	Model	kW	HP	Volt
N2121010	VERSAILLES 160/8	0.37	0.51	1- 220 ÷ 240 V
N2121020	VERSAILLES 250/10	0.5	0.75	1 - 220 ÷ 240 V
N2121030	VERSAILLES 350/12	0.8	1.1	1 - 220 ÷ 240 V



Pool Basin Equipment's

Floor Inlet Nozzle

Floor Inlet Nozzle Made with UV Resistance and better grade of ABS used gives longer life span, Adjustable floor inlet allows easy control of flow into the pool by adjusting the screw available Maximum Flow 10 m³/h. with 2" Male threaded connection & 1.5" Push fit connection.



Wall Inlet Nozzle

Eye Ball type Wall Inlet Nozzle Made with UV Resistance and better grade of ABS used gives longer life span, Direction of flow into pool is easily controlled by adjusting the "Eyeball" BY adjusting the direction of flow, heating and chemical dispersion is made easier recommended Flow 5 m³/h. with 2" Male threaded connection & 1.5" Push fit connection.



VACUUM / SUCTION FITTING

Vacuum Point is installed where an automatic pool cleaner or vacuum hose is to be fitted, New suction fittings holds the hose gives more freedom for the maintenance of pool, with 2" Male threaded connection & 1.5" Push fit connection.



MAIN DRAIN MADE IN WHITE ABS

New StarGuard® Main Drains comply with provisions of the ANSI/ASME A112.19.8-2007 standard and the Virginia Graeme Baker Pool and Spa Safety Act. High quality StarGuard® Main Drains are available in white, black, gray, and dark gray as well as a variety of configurations to fit any residential inground pool or spa installation. Review the specifications to find the right StarGuard model for your application. StarGuard® Main Drains have an industry leading 15.35 square inches of open area for water flow. If you are in an area where water velocity through the grate is limited to 1.5 feet/second, the StarGuard covers allow flow rates up to 72 GPM.

Features

New, Improved 8" Round Main Drain

Now Available in Multiple Colors


Compliant with the Virginia Graeme Baker Act

NSF 50

Product Specifications

Product	Description	Flow Rate	
		Floor (m ³ /hr)	Wall (m ³ /hr)
500100	8" StarGuard cover with long ring (single), black	144	112
500108	8" StarGuard cover with long ring (single), white	144	112
500115	8" StarGuard drain with 2" side port ABS sump with ring & cover (2 pack), white	144	112
500120	8" StarGuard drain with dual 2" bottom ports ABS sump & cover (2 pack), white	144	112
500121	8" StarGuard drain with dual 2" bottom ports ABS sump & cover (2 pack), black	144	112
500400EX	VGBA FRAME & GRT 9x9, white	270	270
500401EX	VGBA FRAME & GRT 9x9, black	270	270
500500EX	VGBA FRAME & GRT 12x12, white	360	360
500501EX	VGBA FRAME & GRT 12x12, black	360	360
500600EX	VGBA FRAME & GRT 18x18, white	740	740

500601EX	VGBA FRAME & GRT 18x18, black	740	740
500700EX	VGBA FRAME & GRT 24x24, white	1428	1428
500701EX	VGBA FRAME & GRT 24x24, black	1428	1428

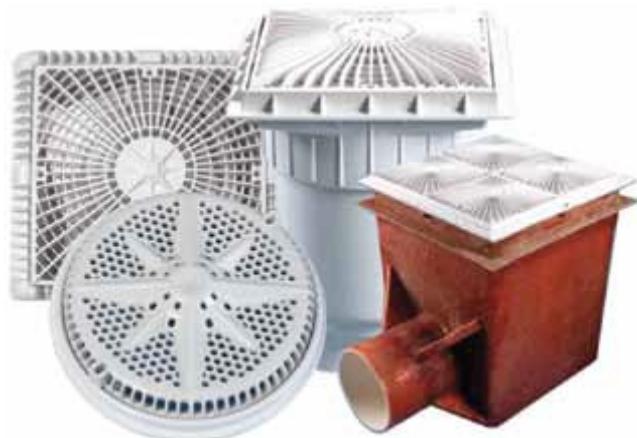

MAIN DRAIN MADE IN STAINLESS STEEL

Main Drain manufactured in Stainless Steel AISI 304 / 316, On commercial or shallow pool applications stainless steel main drain grilles must be used.



Code	Size
AS150	150 x 150 mm
AS300	300 x 300mm
AS450	450 x 450 mm

Skimmer for Swimming Pool

Admiral™ S15 skimmers offer a variety of bases and throats for a wide variety of plumbing and construction requirements, configurations and materials. These skimmers have an exclusive lock-down lid that can be personalized with custom logo disks. S15 skimmers are injection moulded of high strength ABS and are available with a flap weir for superior skimming action.

FEATURES

Admiral S15: High strength ABS body

Slip FIPT, 1-1/2 inch or 2 inch

Variety of throat lengths

Easy to install

1-1/2 inch or 2 inch ports

Lid extension collars



Pool Side Equipment's

Overflow Gratings / swimming Pool Overflow Grating

Overflow Grating made of special, high density polyethylene and treated for resistance to ultraviolet light, Grating is suitable for use even in the hardest climates. This unique material is designed to withstand the effects of any pool chemicals available today – season after season.

FEATURES

Manufactured in weather proof (UV Protected) Polypropylene for long life

Single spine to match the pool shape


Heavy duty with Non slip surface for safety

Available in white, Blue & black colour to best suit the deck

Available in three standard widths 195mm, 245mm and 295mm with 22/23mm height

PRODUCT SPECIFICATIONS

Product	Description	No. of gratings per running mtr	Packing
G-295 (White/Black/Blue)	Overflow Grating 295mm (43 PCS/RM)	43	5 mtr / box
G-245 (Black/White/Blue)	Overflow Grating 245mm (44 PCS/RM)	44	6 mtr / box
G-195 (Blue/Black/White)	Overflow Grating 195mm (44 PCS/RM)	44	7 mtr / box

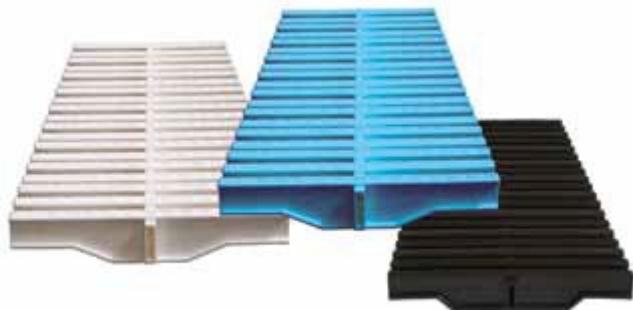

SWIMMING POOL LADDER

ASPPL 1.7"/43mm ladders are now supplied with stainless steel anti-slip treads as standard, as well as the new ASPPL 1.7"/43mm pinch anchor. The pinch anchor provides a secure, sturdy installation on all types of pool surround. All 1.7"/43mm ladders are now manufactured in 304 /316 grade stainless steel as standard. Suitable for concrete & liner pools

Available in Both Overflow & Skimmer Type Pool

PRODUCT CODE	DESCRIPTION
ASPL2S	Mixed Ladder 2Steps (Aslip) AISI 304
ASPL3S	Mixed Ladder 3Steps (Aslip) AISI 304

ASPL4S

Mixed Ladder 4Steps (Aslip) AISI 304

ASPL5S

Mixed Ladder 5Steps (Aslip) AISI 304



GUTTER DRAIN

Gutter Drain to be fixed on Overflow Channel, Made in white ABS connection 2" Push fit type



Junction Box / Deck Box

Deck Box Made in White ABS



WATER DISINFECTION SYSTEM / WATER SANITATION SYSTEM / WATER SANITIZER

Chemical Dosing Pump

Membrane Dosing Pump for Residential & commercial swimming pool Flow rates starts from 0-15 ltr /Hr @12 Bar.

Featured Highlights

"F" series metering pumps comes with CE marked

PVDF head offers more resistant to chemicals

All "F" series pump comes with Viton® O-rings

IP 65 enclosure results in longer life and durability

Can withstand wide range of environment changes (-10°C to 45°C)



AUTOMATIC CHLORINE & Ph DOSING SYSTEM

Panel mounting for pH and Chlorine readings and regulation.

Consists of:

Dual pH and chlorine digital regulator LDPHCL/6 model

Ammeter probe and probe holder. ECL6/P model

Combined pH electrode. EPHS model

Proximity sensor. SEPR model

NFIL model filter

Temperature sensor (optional)

2 Continuous metering pumps. VCO model (option with a single pump for acid and tablet-based chlorine regulation).



ULTRA VIOLET CLARIFIER

The UV system incorporates a high quality Philips UV lamp and all models come with electronic ballast which is able to withstand variable voltages.

Features

Provides fresh, clean and crystal clear water

UV-C disinfects your water efficiently and safely

Keeps the formation of algae and microorganisms under control

Can reduce the use of chlorine and other chemicals up to 80%

Prevents chlorine smell and irritation of skin and eyes

Better for the environment than traditional methods

UV-C Timer with special Philips UV lamp

UV-C demolishes bonded chlorine

Integrated adjustable time meter for the UV-C lamp

UV-Tech special with Blue Lagoon Tech UV lamp

Product Specifications

Description	B210006	B900000	B900001	B900002
Lamp	130 Watt	16 Watt	40 Watt	75 Watt
Output	50 Watt	39 Watt	15 Watt	25 Watt
Pool capacity (L.)	15.0000 L	15.000 L	40.000 L	75.000 L
Max. flow	30.000 l/h	7.200 l/h	20.000 l/h	25.000 l/h
Max. pressure	3 bar	3 bar	3 bar	3 bar
Connection	Ø63mm	Ø63mm	Ø63mm	Ø63mm
Length device	100cm	56cm	100cm	100cmt



OZONE GENERATOR

The State of the Art Technology High frequency CD Technology ozone generators are designed for high performance in low cost. Our Ozonator works from external oxygen or dry air as feed gas to produce ozone gas. Our Ozonator produces high concentration ozone of upto 8% by weight. Higher the concentration, lesser the oxygen feed needed and better the dissolved ozone efficiency.

This Ozonator designed for continuous running and maintenance free operation. Our Ozonator has a wide range of models from 10 g/h to 500 g/h. We have both air and water cooled models – both using specific patented technologies.

It has very good life on ozone cells compared with Air Feed Ozone Generators because of moisture free dry oxygen. We also supply suitable high purity Industrial Oxygen concentrators needed for the Ozonators. Upto 50 g/h it is built on Glass Reinforced Polyester - GRP enclosure that is safe, rugged, has longer durability and withstands harsh weather conditions. From 100 g/h its built on Stainless steel enclosure. This series consumes very little power and is the most compact size across the world.

Features

High Frequency Power Supply Circuit

Corona Discharge Technology

EMF Controlled Circuit

Ozone Block

Water Cooled Ozone Cells

GRP Weather Proof Cabinet

Longer Life Design

Product Specifications

Model	Description
ASPPLO10G	Ozonator 10 G/Hr
ASPPLO20G	Ozonator 20 G/Hr
ASPPLO30G	Ozonator 30 G/Hr
ASPPLO40G	Ozonator 40 G/Hr
ASPPLO50G	Ozonator 50 G/Hr
ASPPLO60G	Ozonator 60 G/Hr
ASPPLO100G	Ozonator 100 G/Hr
ASPPLO200G	Ozonator 200 G/Hr
ASPPLO300G	Ozonator 300 G/Hr



SALT CHLORINE GENERATOR / SALT CHLORINATOR

IntelliChlor® Salt Chlorine Generator uses common table salt to produce all the chlorine a pool needs, safely, effectively, and automatically. Same sanitation performance as manual chlorine addition without the drawbacks. No need for customers to buy, transport and store chlorine compounds.

FEATURES

Full diagnostic capabilities, including cell life tracking that communicates remaining hours of cell life in real-time. Captures all performance data daily (production settings, hours of operation, chlorine output, cell cleaning cycles, salt readings, and water temperature averages)

Push-button operation and easy-to-view displays enable fast checking of salt levels, cell cleanliness, sanitizer output, and water flow

Automatic shut-off feature protects the unit and prolongs cell life under low water temperature conditions

On-time cycling prevents calcium and scale build-up to maximize cell life

Ability to communicate with IntelliTouch®, EasyTouch®, and SunTouch® Automation Systems

Certified to UL 1081 standard for safety

NSF approved

PRODUCT SPECIFICATIONS

Product	Description
520888	IntelliChlor IC15 Cell for Above Ground Systems
520554	IntelliChlor IC20 Cell
520555	IntelliChlor IC40 Cell

521105

IntelliChlor IC60 Cell

520556

IntelliChlor Power Center



CHLORINE / BROMINE FEEDER

Years of customer use and satisfaction have proven Rainbow feeders to be the performance leader in pool & spa chemical dispensers.

Features

300 and 320 series filters available in clear amber for easy tablet level monitoring

Completely enclosed system – no special venting required

No escaping gases

50 PSI maximum operating pressure In-Line Feeders

320 Series. For permanent installation in return line of new or existing pools or spas. Installs in return line on pressure side of pump downstream of all equipment.

PRODUCT SPECIFICATIONS

Product	Description
R1710961	Holds 11 large or 98 small Bromine or slow dissolving Trichlor tablets. Treats 6,500 to 27,000 gallons bottom feed and 18,000 to 70,000 gallons top feed.
R1712181	Holds 11 large or 98 small Bromine or slow dissolving Trichlor tablets. Treats 6,500 to 27,000 gallons in a bottom feed configuration and 18,000 to 70,000 gallons in a top feed configuration with see-through amber body.



UNDER WATER ILLUMINATION

UNDER WATER LIGHT 100 W

Extra flat wall mounted niche less lights are built of stable, heat-resistant plastic materials. This flood lamp has been designed to be used fully submerged. It is a class III electric part with low safety voltage & complies with

1PX8 degree of protection at a normal depth of 2 meters. Cross head mount with screws are supplied as part of light to fix in the wall. This light comes with 100w/12v Halogen bulb



UNDER WATER LIGHT 300 W

This under water light incorporates features absent from the competition. The unique fittings at the Niche and Deck box enable the installer to fit Non-Standard conduit lights. Locating lugs and combination pozidrive/slotted housing screws for quick and easy bulb changing. This light comes with PAR56 (300w/12v) bulb.



UNDER WATER LED LIGHT

High intensity LED lighting. Environmentally friendly, Thanks to its long life (100,000 hrs), High energy efficiency (uses 80% less power than a traditional lighting system), Available on Cool White / warm white / Extra Bright



UNDER WATER COLOUR CHANGING LED LIGHT / SWIMMING POOL COLOUR CHANGING LED LIGHT

IntelliBrite® 5g automated color-changing pool and spa lights feature LED technology; the wave of the future in energy efficiency, lifetime value, quality of light, and controllability. With IntelliBrite 5g, combinations of individual colored LEDs are mixed and matched to achieve a vibrant spectrum of colors. These combinations are power sequenced to illuminate and cycle through colors at varying speeds, and in different sequences of color. Combined with a custom reflector and unique lens design, the IntelliBrite 5g offers super efficiency while being the brightest yet most energy efficient underwater LED light available.

Features

A superior reflector design assures more light is directed toward the pool bottom to further increase intensity and color effects, while minimizing glare

Superior lens geometry distributes light in an optimum way to avoid "hot spots" on the pool bottom. Light intensity and color are distributed more uniformly throughout your pool

Pool lens can be rotated to 180 degrees to provide wide beam pattern (standard) or narrow beam pattern.

IntelliBrite technology makes use of the brightest and most energy efficient LED's available in underwater pool and spa lights - up to 50% less energy consumption than competitor's lights.

Set one of 5 predetermined fixed colors to match or create the mood for the evening – blue, green, magenta, white, and red or select from 7 popular "color shows" that come preprogrammed into IntelliBrite

IntelliBrite was designed to work with IntelliTouch® and EasyTouch® the leading control systems for pool, spa, and pool scape equipment automation. In effect, you transfer control of IntelliBrite to the IntelliTouch or EasyTouch system which controls all your other backyard and pool features.

IntelliBrite 5g Color Pool lights are backwards compatible with first generation IntelliBrite lights.

Product Specifications

Product	Voltage	Wattage	Cord Length (Ft.)
601010	12	26	30
601011	12	26	50

Intellibrite 5g Spa Lights

640130	12	18	30
640131	12	18	50



UNDER WATER COLOUR CHANGING Mini LED LIGHT for Shallow Water Body

The Best and Brightest GloBrite® LEDs use advanced technology for energy efficient, high-quality light displays, delivered with enhanced LED brightness and superior optics, while using 18% less energy than its leading competitor. GloBrite® LED lights are compatible with IntelliTouch® and EasyTouch® control systems and IntelliBrite® 5g LED pool lighting. GloBrite® LED lighting is a brilliant way to showcase and enhance pool features like baja shelves, steps, beach entries and other shallow water features. GloBrite® LEDs are compatible with gunite, fiberglass and vinyl pools.

Features

The brightest and most efficient LEDs available.

5 brilliant fixed colors, 7 dazzling pre-programmed light shows.

The perfect complement to IntelliBrite® 5g LED Pool Lighting for dynamic, synchronized colored light shows.

Compatible with IntelliTouch® and EasyTouch® control systems for advanced control features.

When used with an optional IntelliBrite Controller, pool and spa owners without an automation system can enjoy fast and easy control of their pool lighting.

Does not require grounding or bonding for quick and easy installations.

GloBrite® lights are UL approved.

Product Specifications

Product	Description	Voltage Watt	Cord Length (Ft.)
----------------	--------------------	---------------------	--------------------------

Globrite LED Lights

602052	Globrite RGB LED light with 7 programs	12	23	10
--------	--	----	----	----

Globrite Niches

620042	Concrete Niche for GloBrite
620039	Vinyl Niche for GloBrite
620041	Fiberglass Niche for GloBrite



Swimming Pool Maintenance Accessories / Swimming Pools Maintenance Accessories Supplier

ROBOTIC POOL CLEANER / Automatic Pool Cleaner

High quality automatic pool cleaner and economically suitable for cleaning pools up to 300 m².

It works both ceramic and a liner surface, all the dirt collects in bag-filter in a cycle of 2.5 hours.

Filtration pump motor operates at 22 V, a cable of 17 m and a transformer available in 115 or 230 V with an attractive design.

It also climbs in wall and has a two year warranty.

You should not use the pool while in use. Remove from the water after finishing the cleaning cycle and periodic maintenance will increase life of cleaner.



Wall Brush / Curved Brush

Four rows of superior nylon bristle on a tough shaped polypropylene stock give the edge over all other brushes on the market. Guaranteed to give many years of service and not to be compared with cheaper alternatives



Algae Brush

Specially designed swivel head for easy cleaning of walls and floors. The high quality stainless steel bristles are ideal for removing algae from pool wall surfaces.



Deep Net / Deep Leaf Skimmer / Deep bag Net

Used to collect leaves and other material from the bottom of the swimming pool, the Leaf Rake has a deep polyester net welded to an extra wide frame ensuring greater strength and maximising the debris that can be collected with one sweep.



Leaf Net / Leaf Skimmer

The Leaf Net is perfect for collecting leaves from the water surface. Its polyester net is welded to its lightweight frame making the leaf net strong, yet light to use.




Telescopic Pole

Telescopic handles are adjustable with a twist-lock action and the correct handle should be selected in order that it is long enough to allow the centre of the pool to be cleaned.



Flexible Vacuum Head

Flexible Vacuum Head include a unique flexible body with encapsulated wheels, an extra long nozzle for 1.5" vacuum hose, vent holes and attractive design.

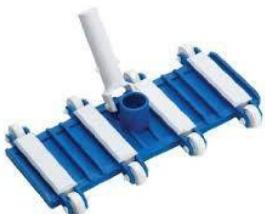

Anodized Aluminium Vacuum Head

Robust Designed specifically for use in concrete pools. With hard wearing bristles and a clear see-through body. It is supplied with an 1.5" vacuum hose nozzle.



Hose Pipe / Vacuum Hose

Flexible Hose pipes are available in the following lengths of 38mm/1.5": 10 metre, 15 metre & 30metre



Test Kit

Simple to use test kits for checking pH and chlorine or bromine levels.



Thermometer

Check the water temperature with one of our quality thermometers that have easy to read displays in both Celsius and Fahrenheit and come with a string for securing to a ladder or handrail. Scoop thermometers are designed to fill with water so that they sink below the water line, whereas the floating thermometer is designed to float at the water line.

Swimming Pool Heating System / Swimming Heating System Supplier

ELECTRICAL HEATER

Electric Heater thermoplastic 3-18kW Electric Heater made of thermoplastic for extra strength. Titanium for extra safety in installations where there is a high risk of corrosion, e.g. salt water pools. Supplied with a thermostat for adjusting pool temperature as well as overheating cut out and flow switch. Minimum flow 90 l/min. Max. pressure: 2.5 bar. Suitable for private pools up to 100m³

Features

Electric heater made of fiberglass reinforced thermoplastic

Housing of thermoplastic

Horizontal installation, eliminates air pockets and damage to the electric heating element

Heating element titanium

Equipped with overheating cutout and flow switch

Union couplings for Ø 50 mm pipes

Third-party tested and certified

Product Specifications

Product	Description
141600T-02	El heater 3kW plastic/titanium
141601T-02	El heater 6kW plastic/titanium
141602T-02	El heater 9kW plastic/titanium
141603T-02	El heater 12kW plastic/titanium
141604T-02	El heater 15kW plastic/titanium
141605T-02	El heater 18kW plastic/titanium



Electrical Heat & Cool Pump

Pentair Swimming Pool Heat Pumps adapt the most advanced heat pump technology for heating and keeping constant temperature for pools. The application of patented titanium double coil heat exchanger which is corrosion resisting, can not only improve the heating efficiency, but also extend the working life of the units. Meanwhile, the units can run stably at the temperature as low as - 10 C. Pentair Swimming Poll Heat Pumps are specially suitable for residential pools and commercial pools.

Features

Economic and High-Efficient

Intelligent Defrosting

Environmentally-Friendly

Long Operating life

Fashionable Casing

Available from 5 KW to 400 KW



GAS HEATER

High Performance Eco-Friendly Heaters

MasterTemp® offers all the efficiency, convenience and reliability features you want in a pool heater, plus a lot more. As easy to use as your home heating system, plus, user-friendly indicator lights make system operation and monitoring a snap. The compact design and super quiet operation won't intrude on your poolside leisure time. Heavy-duty (HD) unit with cupro-nickel exchanger stands up to the harshest of applications, like low pH, high flow or heavy use.

Features

Heats up fast so no long waits before enjoying your pool or spa

Best-in-class energy efficiency*

Manual gas shut-off when service is required

Eco-friendly MasterTemp® is certified for low NOx emission and outperforms industry standards

Rotating digital display allows for easy viewing

Tough, rustproof exterior handles the heat and weathers the elements

Note: The MasterTemp Heater is certified for Low NOx emissions.

* Standard Copper Heat Exchanger 84% Efficient. Heavy-duty (HD) Cupro-Nickel Heat Exchanger 82% Efficient

Part #	Gas Type	BTU (000's)	Carton Qty	Carton Wt (Lbs)
460792	Natural	175	1	128
460793	Propane	175	1	128
460730	Natural	200	1	128
460731	Propane	200	1	128
461000	Natural	200 ASME	1	138
461001	Propane	200 ASME	1	138
460732	Natural	250	1	133
460733	Propane	250	1	133
460771	Natural	250 ASME	1	120
460772	Propane	250 ASME	1	120
460806	Natural	250HD	1	136
460734	Natural	300	1	136
460735	Propane	300	1	136
460736	Natural	400	1	136
460737	Propane	400	1	136
460805	Natural	400HD	1	136
460775	Natural	400 ASME	1	149
460776	Propane	400 ASME	1	149



HEAT RETENTION POOL COVER

By offering solar gain, heat retention and a water-loss barrier, a solar blanket is a necessity when it comes to operating any outdoor pool. It is also an investment which will provide years of service and save money far beyond its original cost is a very short period of time. All Isothermal Pool cover have the advantage of being manufactured at floor level (to enhance layflat) with bubble materials which are purposely designed to offer high performance in a pool environment. We also offers a wide range of cover accessories which can enhance the performance of your cover.

Available in 400 & 500 Micron High quality LDPE.



SWIMMING POOL CHEMICALS / FOUNTAINS CHEMICALS / WATER BODY CHEMICALS/ SWIMMING POOL CHEMICALS SUPPLIERS

TCCA 90 / TRICHLOROISOCYANURIC ACID / GRANULAR CHLORINE

SLOW-DISSOLVING GRANULAR CHLORINE Continuous chlorination of pool water, preventing the loss of chlorine due to the effects of the sun. Does not change the pH of the water.

Dosage guidelines

Initial treatment: 10 g/m³ of TCCA90. Maintenance treatment: Add 1-2 g for every m³ of water every day.



SODIUM HYPO CHLORIDE / LIQUID CHLORINE

Sodium hypochlorite, ideal for quickly chlorinating pool water for maintenance purposes.

Dosage guidelines

Initial and shock treatment: 5 kg for every 100 m³ of water. Maintenance treatment: Adjust chlorination until you reach a free chlorine rate of approximately 1 ml/litre.



ALGAECIDE / NON-FOAMING ALGAECIDE AND POLISHER / SUPER CONCENTRATED ALGAECIDE DISINFECTANT

Powerful algaecide, very effective in removing all types of microalgae and bacteria present in the pool water.

Suggested dosage

Use the product as is or diluted in water, adding it to different points throughout the pool, according to the following dosage: Initial or shock treatments: 1 litres of Algaecide for every 100 m³ of water.

Maintenance treatment: add 0.5 litres for every 100 m³ of water every 7 days.



HCL / Hydrochloric Acid / Liquid pH Reducer / pH Minus

Liquid product especially formulated for adjusting the pH of the pool water when it is above 7.6. Recommended for dosage with an automatic pump.

Suggested dosage

The pH of the swimming pool water should be between 7.2 - 7.6. When this value is higher, add pH MINUS at a dosage of 1.2 l for every 100 m³ of water to reduce pH by 0.2.



SODA ASH / PH INCREASER / SOLID PH INCREASER

Granulated product especially formulated for adjusting the pH of the pool water when it is below 7.2.

Suggested dosage

The pH of the swimming pool water should be between 7.2 - 7.6. When this value is less, add Soda Ash at a dosage of 1.5 kg for every 100 m³ of water and to increase pH by 0.2



SWIMMING POOL CONSTRUCTION

Swimming Pool Construction Turnkey Basis

Glass Mosaics Tiles

Water Proofing Work for Swimming Pool / Water Feature / Fountains

Swimming Pool Decoration Equipment's

COUNTER CURRENT UNIT

JET SWIM 2000 Counter Current System is especially designed with small private pools in mind. With this unit installed in your pool you can swim as far as you like, for as long as you like.

JET SWIM 2000 System is equipped with a 3 HP / 5.5 HP pump to create a counter-stream of water which allows you to swim on the spot. The adjustable current means that swimmers of all levels can swim at their own pace for as long as they like. The directional inlet allows a 15-degree inclination in any direction and also features an adjustable air/water mixer for a relaxing bubble massage effect.

Specifications:

Flow max – 1300 LPM

Pump Capacity – 5.5HP

Electrical Requirement – 3 phase

Water return connection Ø75mm

Water impulsion connection Ø75mm


Air suction connection Ø20mm - includes air button Ø2 x 3.5 with flexible pipe.

Includes directional inlet Ø41mm, which allows a maximum angle adjustment of 15° as well as water and air regulation.



AIR LOUNGER

The Secret bubbling air your body float gently in the water, thanks to the harmonious interplay of water buoyancy and the soothing power of countless air bubbles. The tingling sensation of a massage and simultaneous relaxation ensure that your body and spirit enjoy an experience of perfect harmony. Air bubbles have a soothing and comforting effect on the skin, tissue and your nerves, promoting your circulation and targeting muscles and joints. The magic of air bubbles evaporates the stress and strain your tired body suffers and strength, endurance and placidity return.

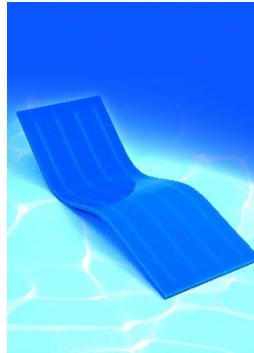

COBRA WATER FALL

The cobra fibre, is a genuinely high tech product with a wide range of surge and jet versions. The cobra's impressive round arch is carbon-reinforced and therefore particularly sturdy and also ideal for mineral and salt baths – an aesthetic highlight whose protected design stimulates your senses.



MAGIC STREAM LAMINAR JET

MagicStream® Laminars create totally clear, uniform arcs of moving water that originate from either your pool deck or surrounding landscape. At night, these translucent streams are brilliantly colored with an LED light source. The result is a water effect that adds an elegant bit of entertainment to your poolscape.

Features

Laminar water streams can reach up to 7 feet high and project outward up to 8 feet into your pool, spa, or other water feature.

Choose energy efficient LED lighting for a nearly endless array of color choices. Nighttime lighting effects include the ability to hold on a steady color or scroll through a range of available colors.

Installation is made flush to your deck or other surface; no unsightly or unsafe edges, just the magic of water erupting from a hidden source.

Water streams are easily adjusted in two ways - vertically from 62 degrees to 75 degrees to create different heights and arc shapes. Left and right direction can be adjusted up to 60 degrees total.

Laminar deck lids are available in tan, black, and gray to match or complement pool deck or other installation surface.

LED Laminars include 100' of electrical cable; simply connect to a 120/12VAC-100 Watt pool lighting transformer to provide power.

The technical principal behind Magic Stream Laminars is to remove all turbulence and air bubbles from the water before projecting it through a finely-machined nozzle. The laminar water flow is very non-turbulent, so it

keeps its surface tension and flows through the air in a smooth, clean, unbroken stream, instead of spraying apart into droplets.

Magic Stream Laminars ship fully assembled and ready to install

Energy efficient color LED lights - features 5 vibrant colors and 7 dazzling lights shows.

Perfectly synchronizes with IntelliBrite® 5g Underwater Color-Changing LED Pool and Spa Lights.

Optional IntelliBrite Controller provides fast, easy light control for pools and spas without automation systems.

Low voltage operation - 12 VAC/16W.

Product Specifications

Product	Description
580001B	Laminar LED, Black Lid with 30 feet (Cord)
580001G	Laminar LED, Gray Lid
580001T	Laminar LED Tan



MAGIC FALLS SHEET WATER FALL

The beauty and intrigue of falling water Perhaps no other feature contributes more to the beauty and tranquility of your poolscape than the sight and sound of falling water. Water effects can help transform your pool into a romantic oasis, a playful family water park, or a breathtaking focal point. No wonder they are one of the most popular accessories in today's most elegant backyard retreats. The many options available allow you to integrate these mesmerizing water effects in either dramatic or subtle ways that transform any pool environment from great to spectacular.

Features

Choose from sheet, curtain and rainfall or arc sheet and rainfall effects

Individual water effects are available in widths from 8 inches to 8 feet

Available in six finishes brass, bronze, copper, gray, silver, or white

Waterfalls can be straight, curved, or customized

Vary flow to any water effect with an energy-efficient IntelliFlo® VF, IntelliFlo® or IntelliPro® variable speed pumps to alter the height and distance of the water effect.

Different lip lengths add to the design freedom available to you.



READYMADE SWIMMING POOLS

FIBREGLASS SWIMMING POOL

Fibreglass Pools manufactures polyester pools with advanced and innovative technology. One of the main advantages of manufacturing process is layering: Fibreglass Pools has 10 independent layers of pool structure and 9 of them are fully hand laid!

Fiberglass pools, manufactured in our factory, are specially made for Indian climate, resistant to big temperature changes. All layers we use are of highest quality products from world famous producers. Surface coatings are UV and chlorine resistant, shell has in total 10 layers of structure.

All pools are manufactured with special OSMOSE prevention layer and innovative PU Polyurethane hard insulation foam to prevent shell from low earth temperatures.

Fibreglass Swimming Pool shell layers consist of:

3D Ultra Granicoat – first osmose prevention

Colour Gelcoat - second osmose prevention

Modified Vinylester - third osomose prevention

Second modified Vinylester - fourth osomose prevention

Third modified Vynilester with Ceramic Silica spheres

Thermolite acrylic shell - 1st layer

Thermolite acrylic shell - 2nd layer

Thermolite acrylic shell - 3rd layer

Honeycomb structure (in some parts of pool)

Hard PU foam for pool strength and insulation for side walls

All pools with straight walls have a thick steel beam inside the border structure!



Liner Swimming Pools

LEISURE & WELLNESS EQUIPMENT'S

Steam Bath

Steam Generator

Sauna Room

Sauna Systems.

Jacuzzi Equipment's Supplier

Fountains

Design & Construction of Fountains / Design & Construction of Water Feature / .

Glass Water Fall

Sheet Water Fall

Bubbler Fountains

Ball Fountains

Water Curtain

Musical Fountains

Fountain Nozzles

Floating Fountain

Fountain Lights

Design & Construction of Fountains.

Design & Commissioning of Water feature

Water Softening Plants.

Hydro pneumatic Systems.

Reverse Osmosis Systems

Counter Current Unit

Swimming Pool Ladder

Under water Lighting System

Swimming Pool Lighting System

Overflow Gratings

Swimming Pool Tiles

Magic stream Laminar Jet

Sheet Water Fall

Glass Water Fall

Heat & Chill Pump for Swimming Pool

Electrical Heater for Swimming Pool & Spa

Ultra Violet Clarifier

Ozone Generator for Chlorine Free Water

About Us

We provide industry leading solutions for commercial and residential pools. Aquatic Swimming Pools Pvt Ltd has a 20 year long tradition of R & D focused on the customers' needs and a growing global presence is testimony to the company's success with customers in over 4 states around the country.

No matter the size or shape, we have the capacity to provide the optimum solution for residential pools or Olympic size pools, indoor or outdoor, for [hotels](#) and water parks.

Aquatic Swimming Pools Pvt Ltd with its young & dynamic team has expert knowledge in both pool design and specification of products. The team place a high emphasis on safety and can advice on all aspects of pool design taking into consideration health and hygiene along with aesthetic requirements to ensure total customer satisfaction. Value for money is assured by offering a combination of innovative design with the latest energy-efficient and reliable products

Whys Us

We are recognized in the industry for the quality of products and services delivered by us. Our offered products and services are available as per the details provided by our valuable customers. With the aid of innovative techniques and expert professionals, we are able to become the prime choice of our customers. Owing to our prompt deliveries and principled business practices, we have gained the highest appreciation of our clients. Some of the other factors of our firm are:

Upgraded infrastructural unit

Competent crew of professionals

Excellent quality products

Cost effective prices

Easy payment modes

Stringent quality tests