

VMware Carbon Black EDR User Guide

VMware Carbon Black EDR 7.5



You can find the most up-to-date technical documentation on the VMware website at:

<https://docs.vmware.com/>

VMware, Inc.
3401 Hillview Ave.
Palo Alto, CA 94304
www.vmware.com

Copyright © 2021 VMware, Inc. All rights reserved. [Copyright and trademark information.](#)

Contents

1 About this Document 14

- Intended Audience 14
- Terminology 14
- What this Documentation Covers 15
- Other Documentation 17
- Community Resources 18
- Contacting Support 18

2 Overview 19

- What is Carbon Black EDR? 19
- System Architecture 22
 - Carbon Black Hosted EDR 22
 - Carbon Black EDR 23
- Data Flow Diagrams 24
- Workflow Overview 27
- Carbon Black Hosted EDR APIs 29

3 Getting Started 30

- Logging In to Carbon Black EDR 30
 - Logging In and Configuring Two-Factor Authentication 31
 - Logging In for the First Time from an Email Invitation (Carbon Black Hosted EDR) 31
 - Configuring Two-Factor Authentication (Carbon Black Hosted EDR) 32
 - Logging in After Initial Login (Carbon Black Hosted EDR) 33
 - Enabling/Disabling Two-Factor Authentication 34
- Logging Out 35
- Console Controls 35
 - Navigation Bar 35
 - Username Menu 37
 - EU Data Sharing Banner 37
 - Notifications 38
 - Help: User Guide and Customer Support 38

4 Managing User Accounts (on premise) 40

- Overview of User Management 40
- Managing User Access with Teams 41
 - Role-based Privileges for Teams 42
 - Analyst & Viewer Access by Feature 42
 - Adding Enhanced Permissions for Analysts 44

User/Team Permissions Example	46
Creating Teams	47
Modifying Teams	48
Deleting Teams	48
Managing User Accounts	48
Changing Passwords	49
Resetting API Tokens	50
Deleting User Accounts	50
Viewing User Activity	51
User Activity API Audit Logging	51
5 Managing User Accounts (Hosted)	53
Overview of User Management	53
Managing User Accounts	54
Inviting a New or Existing User to Access a Cloud Server	54
Activating an Account from an Invitation	56
Accessing Authorized Servers	57
User Account Lockout	57
Unlocking an Account	57
Viewing and Modifying User Accounts	58
Changing Security Settings, Email Address or Full Name	59
Changing Administrator / User Status	60
Resetting API Tokens	60
Viewing User Activity	61
Removing a User Account	61
6 Installing, Upgrading, and Uninstalling Sensors	62
Overview of Sensor Installation	62
Supported Operating Systems and Versions	63
Installing Sensors on Windows	63
HTTP Proxy Support in Windows Sensors	64
Uninstalling Windows Sensors	65
Installing Sensors on macOS Systems	65
Upgrading Sensors on macOS	66
Uninstalling Sensors on macOS	66
Installing Sensors on Linux Systems	67
Upgrading Sensors on Linux	68
Uninstalling Sensors on Linux	68
Upgrading Sensors	69
Uninstalling Sensors through the Console	69
Obtaining New Sensor Installation Packages	70

7 Managing Sensors 71

- Overview of Sensor Management 71
- Tamper Protection of Windows Sensors 72
- Monitoring Sensor Status and Activity 74
 - The Sensors Page 74
 - Searching for Sensors 76
 - Exporting Sensor Data 77
 - Sensor Actions 77
- Monitoring Sensor and Server Information 78
- Viewing Sensor Details 80
 - Sensor Details Heading and Options 80
 - Summary 80
 - Vitals and Configuration 81
 - Sensor Vitals 81
 - Computer Vitals 82
 - Configuration 83
 - Team Access 83
 - Recent Activity 83
 - Activity 83
 - Resource Status 83
 - Diagnostics 84
 - Communication Failures 84
 - Driver Diagnostics 84
 - Reducing the Impact of Netconn Data Collection (Windows) 86
 - Event Diagnostics 86
 - Status History 87
 - Component Status 87
 - Upgrade Status 87
 - Uninstall Status 87

8 Sensor Groups 88

- Overview of Sensor Groups 88
- Create or Edit a Sensor Group 89
 - General Settings 90
 - Sharing Settings 90
 - Advanced Settings 91
 - Permissions Settings 93
 - Event Collection Settings 94
- Exclusion Settings (OS X/macOS only) 97
 - Creating Exclusions 97
- Upgrade Policy Settings 99

[Moving Sensors to Another Group](#) 99

[Deleting Sensor Groups](#) 100

9 Managing Certificates 101

[TLS Server Certificate Management Overview](#) 101

[Certificate Management Feature Summary](#) 102

[Server-Sensor Certificate Requirements](#) 103

[Multiple Certificate Support](#) 104

[Using Multiple Active Certificates in a Cluster](#) 106

[Managing Certificates on the Server](#) 107

[Viewing Certificate Information in the Console](#) 107

[Substituting a Legacy Certificate during Server Installation](#) 108

[Adding Certificates through the Console](#) 109

[Choosing a Validation Option](#) 110

[Changing the Expiration Notification Period](#) 111

[Deleting Certificates](#) 111

[Upgrades from Previous Server Releases](#) 112

[Assigning Certificates to Sensor Groups](#) 112

[Assigning different certificates to different sensor groups](#) 112

[Assigning a new certificate to all sensor groups](#) 113

[Sensor Support for Certificate Management](#) 114

[Special Requirement for Windows Sensors](#) 115

[Upgrading to Sensors that Allow Certificate Management](#) 115

10 Troubleshooting Sensors 117

[Troubleshooting Windows Sensor Installations](#) 117

[Using Control Codes to Generate Logs of Diagnostic Data](#) 118

[Debugging Sensor Communications](#) 120

[Troubleshooting Linux Sensor Installations](#) 121

[General Logging](#) 121

[Installation Verification](#) 122

[Installation Failures](#) 123

[Sensor Communication History](#) 123

[Manual Sensor Daemon Start and Stop](#) 124

[Determine Server URL](#) 124

[Initiate an Immediate Checkin to the Server](#) 124

[Driver Debug Parameters](#) 124

[Sensor Version 6.1.x Driver Debug Parameters](#) 125

[Sensor Version 6.2.x Driver Debug Parameters](#) 125

[Daemon Debug Options](#) 126

[Debugging Parameters for 6.1.x Sensors](#) 126

Debugging Parameters for 6.2.x Sensors and Later	126
Determine Sensor Version	127
Trigger a Diagnostic Data Dump	127
Troubleshooting OSX Sensor Installations	127
Installation Verification	127
Installation Failures	128
Communications Logging	128
Manual Sensor Daemon Start and Stop	128
Determining Sensor Version	129
Determine Server URL	129
Initiate an Immediate Checkin to the Server	129
Initiate a Diagnostic Data Dump	129
Diagnostic Uploads Utility	129
Automatic Crash Data Upload	130
Manual Upload Option (Command Line Utility)	130
Enabling Sensor Diagnostics Uploads	131
File Transfer and Security	132
Data Collected by Sensor Diagnostics	132

11 Responding to Endpoint Incidents 134

Overview of Incident Response	134
Isolating an Endpoint	135
Isolation Exclusions	136
Using Live Response	137
Enabling and Configuring Live Response	138
Tuning Live Response Network Usage	139
Live Response Endpoint Sessions	140
Status, Error and Progress Messages	143
Ending Live Response Sessions	144
Registry Access in Live Response	144
Detached Session Management Mode	145
Extending Live Response	146
Live Response Activity Logging and Downloads	147
Banning Process Hashes	148
Creating Process Hash Bans	148
Banning a List of Hashes	149
Managing and Monitoring Hash Bans	151
The Manage Banned Hashes Page	152
Monitoring Banning Events	153
Searching for Blocked Processes	154
Enabling Alerts and Syslog Output for Banning Events	155

- Disabling a Hash Ban 157
- Disabling or Restricting the Hash Ban Feature 157
- Disabling Bans in a Sensor Group 157

12 Live Query (beta) 158

- Overview of Live Query 158
- Enable or Disable Live Query 158
- Create and Run a Query 159
- Query Results 161
- Export Live Query Results 162

13 Process Search and Analysis 163

- Overview of Process Search 163
- Time Filter 164
- Search Filters 164
 - Enable/Disable Filters 164
 - Select Multiple Filter Rows 165
 - Filter Row Percentages 168
 - Filter Search Fields 168
- Search Field 168
 - Save Searches 168
 - Clear Saved Searches 168
- Add Search Terms 169
- Reset Search 170
- Group by Process 170
- Search Result Messages 170
- Get Comprehensive Results 171
- Example Process Search 171
- Managing High-Impact Queries 171
 - Responding to Blocked Searches 172
 - Process Search Settings in the Console 172
 - Process Search Settings in cb.conf 173
- Results Table 173
 - Results Table Options 173
 - Results Table Row Details 175
- Process Analysis Page 175
 - Process Summary 176
 - Interactive Process Tree 178
 - Process Execution Details 179
 - Binary Metadata 180
 - EMET Protections Enabled (Windows Only) 181

- Event Timeline 181
- Process Event Filters 182
- Event List 183
 - Process Event Types 185
- Analysis Preview Page 187

14 Binary Search and Analysis 189

- Overview of Binary Search 189
- Entering Search Criteria 190
 - Additional Binary Search Page Features 191
- High-level Result Summaries 192
- Related Metadata 193
- Binary Search Results Table 193
- Binary Preview 194
- Binary Analysis 195
 - Binary Overview 196
 - General Info 197
 - Frequency Data 198
 - Digital Signature Metadata 198
 - File Version Metadata 199
 - Observed Paths 199
 - Observed Hosts and Sensor IDs 199

15 Advanced Search Queries 201

- Query Syntax Details 201
 - Terms, Phrases, and Operators 201
 - Restrictions on Terms 202
 - Whitespace 202
 - Parentheses 203
 - Negative Sign 203
 - Double Quotes 203
 - Leading Wildcards 204
 - Fields in Process and Binary Searches 204
 - Fields in Alert and Threat Report Searches 209
 - Field Types 210
 - domain 210
 - ipaddr 211
 - ipv6addr 211
 - text 211
 - count 212
 - datetime 212

keyword	212
md5	213
sha256	213
ja3	213
ja3s	213
path	213
Wildcard Searches	214
Modload Path Searches	214
Regmod Path Searches	214
bool	215
sign	215
cmdline	215
Tokenization Rules	215
Tokenization Changes on Server Upgrade	216
Retention Maximization and cmdline Searches	218
Searching with Multiple (Bulk) Criteria	218
Searching with Binary Joins	220
Example Searches	221
Process Search Examples	221
Binary Search Examples	224
Threat Intelligence Search Examples	225

16 Ingress Filtering 226

Overview of Ingress Filtering	226
Viewing and Configuring Ingress Filters	226
Adding an Ingress Filter	227
Regex Filters	229

17 Threat Intelligence Feeds 231

Overview of Threat Intelligence Feeds	231
Threat Intelligence Feed Scores	232
Firewall Configuration for Feeds	233
Managing Threat Intelligence Feeds	233
Checking for New Threat Intelligence Feeds	235
Syncing Threat Intelligence Feeds	235
Data Sharing Settings	235
Enabling, Disabling, and Configuring a Feed	238
On-Demand Feeds from VMware CB Threat Intel	239
Creating and Adding New Feeds	240
Searching for Threat Reports	242
Threat Report Searches and Results	242

Threat Report Details 244

Ignoring Future Reports 245

18 Configuring the Event Forwarder 246

Overview of the Event Forwarder 246

Configuring the Event Forwarder in the Console 247

 Edit and Status 247

 Events 247

 Output 248

 Splunk 249

 S3 249

 HTTP 250

 Syslog 251

 Certificates and Credentials 251

19 Creating and Using Investigations 252

Overview of Investigations 252

Viewing Investigations 253

 Investigations Menu Bar 253

 Event Types 253

 Bar Graph 254

 Events Table 255

 Edit Event Description 255

 Child Processes 256

Creating Investigations 256

Adding Events to Investigations 256

Removing Events from Investigations 257

Adding Custom Events to Investigations 257

Deleting Investigations 258

20 Watchlists 259

Overview 259

Viewing Watchlists and their Results 260

 The Watchlists Page 260

 The Watchlist Details Panel 261

Built-in and Community Watchlists 261

Creating Watchlists 262

Managing Watchlists 267

 Watchlist Status 267

 Watchlist Expiration 267

Slow or Error-producing Watchlists 268

[Editing Watchlists](#) 269

[Deleting Watchlists](#) 270

21 Console and Email Alerts 272

[Overview of Alerts](#) 272

[Enabling Console Alerts](#) 273

[Watchlist Alerts](#) 273

[Threat Intelligence Feed Alerts](#) 273

[Viewing Alert Activity on the HUD Page](#) 274

[Managing Alerts on the Triage Alerts Page](#) 275

[Displaying the Report Name](#) 276

[Reviewing Alerts](#) 277

[Alerts Table Data](#) 278

[Managing Alert Status](#) 279

[Ignoring Future Events for False Positive Alerts](#) 279

[Enabling Email Alerts](#) 281

[Configuring an Email Server](#) 281

[Enabling Specific Email Alerts](#) 282

22 Using the Head-Up Display Page 283

[Overview of HUD](#) 283

[Viewing the HUD Page](#) 283

[Customizing the HUD Page](#) 283

[Sortable Columns](#) 284

[Dwell Time Panel](#) 284

[Endpoint Hygiene Panel](#) 284

[Event Monitor Panel](#) 285

[Query Duration Panel](#) 286

[Resolution Time Panel](#) 286

[Saved Searches Panel](#) 287

[Sensors Panel](#) 287

[Task Errors Panel](#) 288

[Unresolved Alerts Panel](#) 289

23 Netconn Metadata 290

[Overview of TLS Fingerprinting](#) 290

[How TLS Fingerprinting Works](#) 290

[TLS Fingerprinting Implementation](#) 291

[Process Search](#) 291

[Process Analysis](#) 292

[Watchlists](#) 292

24 Sensor Parity 294

- [Sensor Feature Support 294](#)
- [Sensor Group Feature Support 295](#)

25 Sensor Health Score Messages 297

- [Windows Health Events 297](#)
 - [Priority List 297](#)
 - [Driver and Component Failures 298](#)
 - [Memory Usage 298](#)
 - [GDI Handle Count 299](#)
 - [Handle Count 299](#)
 - [Disk Space 300](#)
 - [Event Loss 300](#)
 - [Event Load 300](#)
- [macOS Health Events 301](#)
 - [Priority List 301](#)
 - [Memory Usage 301](#)
 - [Out of License 302](#)
 - [Upgrade Issue 302](#)
 - [Proxy Driver Failure 302](#)
 - [Procmon Driver 303](#)
 - [Netmon Driver 303](#)
- [Linux Health Events 304](#)
 - [Priority List 304](#)
 - [Out of License 304](#)
 - [Apply updated license to the Carbon Black EDR server. 304](#)
 - [Failed to get Event log Stats 304](#)
 - [Driver Failure 305](#)
 - [Memory Usage 305](#)

About this Document

1

This guide is written for both VMware Carbon Black EDR and VMware Carbon Black Hosted EDR.

This chapter includes the following topics:

- [Intended Audience](#)
- [Terminology](#)
- [What this Documentation Covers](#)
- [Other Documentation](#)
- [Community Resources](#)
- [Contacting Support](#)

Intended Audience

This documentation is written for administrators, Security Operations Center (SOC), and Incident Response (IR) personnel. It is intended for people who set up and maintain security for endpoints and networks, and for users who assess potential vulnerabilities and detect advanced threats. Staff who manage Carbon Black EDR activities should be familiar with:

- Linux, Microsoft Windows, and macOS operating systems
- Web applications
- Desktop infrastructure (especially in-house procedures for software roll-outs, patch management, and antivirus software maintenance)
- Effects of unwanted software

Terminology

The following table defines some key terms you will need to understand Carbon Black EDR and its features:

Term	Definition
Binary	<p>Executable file (for example, PE Windows file, ELF Linux file, or Mach-O Macintosh file) that is loaded onto a computer file in binary form for computer storage and processing purposes. Carbon Black EDR only collects binaries that execute. It does not collect scripts, batch files, or computer files that are created or modified.</p>
	<ul style="list-style-type: none"> ■ Carbon Black EDR collects the script or batch file names from command prompts and command lines. ■ Carbon Black EDR collects file names and paths as they are created or modified.
Carbon Black EDR Sensor	<p>Lightweight data gatherers installed on hosts on the deployed network. They gather event data on the hosts and securely deliver it to the Carbon Black EDR server for storage and indexing.</p>
Carbon Black EDR Server	<p>A CentOS server that exists on the deployed network. It receives data from sensors, stores and indexes that data, and provides access to the data through the Carbon Black EDR console.</p>
VMware CB Threat Intel Feeds	<p>Pre-configured threat intelligence feeds. These feeds contain threat intelligence data. These feeds come from various sources:</p>
	<ul style="list-style-type: none"> ■ Carbon Black ■ Our MSSP/IR partners ■ Our customers ■ Open-source
	<p>VMware CB Threat Intel feeds provide a list of Indicators of Compromise (IOCs) and contextual information based on binary/process attributes and events (MD5, SHA-256, IP, Domain). These attributes and events are scored and rated, and then correlated with any matching files in your environment. For more information, see Chapter 17 Threat Intelligence Feeds.</p>
VMware CB Threat Intel Server	<p>A server that is managed by Carbon Black and augments the functionality of the Carbon Black EDR server.</p>
Data File	<p>A computer file that is a resource for storing information that requires a computer program (executable or binary file) to run. Data files are not captured by the Carbon Black EDR sensor.</p>
Indicators of Compromise (IOCs)	<p>Carbon Black EDR sensors constantly monitor your computers for IOCs and send alerts to the Carbon Black EDR console when detected.</p>
	<p>Queries are dynamic indicators that look at behaviors that are continuously recorded by sensors on endpoints and centrally recorded for analysis.</p>
	<p>Hashes (MD5, SHA-256), IP addresses, and domain names are static indicators that are similar to signatures. They are used to identify suspected malicious activity.</p>
MD5	<p>Unique cryptographic hash identifier for a binary instance in Carbon Black EDR.</p>
Process	<p>An instance of the execution of a binary file.</p>
Watchlist	<p>Fully customizable searches that contain lists you can use to track specific IOCs. Watchlists are saved searches that are visible to all users. They can be used for searching either processes or binary executable files.</p>

What this Documentation Covers

This is your guide to managing Carbon Black EDR, installing sensors on endpoints, and using Carbon Black EDR to monitor file activity and threats on your endpoints. While this guide describes all features, access to some features requires particular user privileges. See [Chapter 4 Managing User Accounts \(on premise\)](#) or [Chapter 5 Managing User Accounts \(Hosted\)](#) for more information about user roles and privileges.

The following table summarizes the contents of the contents of this guide:

Chapter	Description
Chapter 2 Overview	Introduces Carbon Black EDR, explains key concepts, and suggests operating strategies for managing sensors and data to provide the visibility, detection, and response capabilities in the Carbon Black EDR solution.
Chapter 3 Getting Started	Explains how to log in and out of Carbon Black EDR and Carbon Black Hosted EDR, and introduces the main menu. Describes how to set up two-factor authentication.
Chapter 4 Managing User Accounts (on premise)	Describes how to manage access to the Carbon Black EDR console.
Chapter 5 Managing User Accounts (Hosted)	Describes how to manage access to the Carbon Black Hosted EDR console.
Chapter 6 Installing, Upgrading, and Uninstalling Sensors	Describes installing and upgrading sensors on Windows, macOS, and Linux systems.
Chapter 7 Managing Sensors	Provides an overview of how sensors work, the information that they provide, and how to modify their configuration.
Chapter 8 Sensor Groups	Describes creating, moving, editing, and deleting sensor groups, which determine what kind of information is provided by sensors and who can access the information.
Chapter 9 Managing Certificates	Describes how Carbon Black EDR uses HTTPS and TLS to secure and authorize server-sensor communications; describes certificate management features such as certificate addition and strict validation.
Chapter 11 Responding to Endpoint Incidents	Describes Carbon Black EDR features for incident response—endpoint isolation, Live Response, and process hash banning.
Chapter 12 Live Query (beta)	Describes how to run SQL queries against endpoints.
Chapter 13 Process Search and Analysis	Describes how to perform detailed process searches and in-depth analysis of the processes in search results.
Chapter 14 Binary Search and Analysis	Explains how to search for and analyze binary metadata.
Chapter 15 Advanced Search Queries	Describes Carbon Black EDR query syntax and how to construct advanced queries to search for processes and binaries.
Chapter 16 Ingress Filtering	Describes how to perform common tasks related to ingress filters.
Chapter 17 Threat Intelligence Feeds	Describes VMware CB Threat Intel feeds that, when enabled on a Carbon Black EDR server, improve threat verification, detection, visibility, and analysis on your endpoints.
Chapter 18 Configuring the Event Forwarder	Explains how to configure the Event Forwarder through the Carbon Black EDR console.
Chapter 19 Creating and Using Investigations	Describes how to work with investigations, which provide a way to group data for reporting, compliance, or retention purposes.
Chapter 20 Watchlists	Describes creating and using watchlists, which are saved searches that are visible to all users.
Chapter 21 Console and Email Alerts	Describes creating and managing Carbon Black EDR alerts, which can be displayed in the console and also sent through email.

Chapter	Description
Chapter 22 Using the Head-Up Display Page	Explains how to use the HUD (Head-Up Display) page customizable dashboard.
Chapter 23 Netconn Metadata	Explains how to use Transport Layer Security (TLS) fingerprinting in Carbon Black EDR 7.1 and later versions.
Chapter 24 Sensor Parity	Outlines the availability of features on sensor systems in different operating systems.
Chapter 25 Sensor Health Score Messages	Describes sensor health score messages that display on the Sensor Details page.

Other Documentation

Visit the Carbon Black User Exchange website at https://community.carbonblack.com https://bit9.my.salesforce.com/secur/login_portal.jsp?orgId=00D300000000S7D&portalId=06030000000D60J to locate documentation for additional tasks and Knowledge Base articles for technical support solutions. Documents include:

- VMware Carbon Black EDR *Release Notes* – Provides information about new and modified features, issues resolved and general improvements in this release, and known issues and limitations. It also includes required or suggested preparatory steps before installing the server.
- VMware Carbon Black EDR *Operating Environment Requirements (OER)* – Describes performance and scalability considerations in deploying a Carbon Black EDR server.
- VMware Carbon Black EDR *Server Configuration Guide (cb.conf)* – Describes the Carbon Black EDR server configuration file (`cb.conf`), including options, descriptions, and parameters.
- VMware Carbon Black EDR *Server/Cluster Management Guide* – Describes how to install, manage, and backup/restore a Carbon Black EDR server/cluster.
- VMware Carbon Black EDR *Unified View User Guide* – Describes how to install and manage Carbon Black *Unified View* .
- VMware Carbon Black EDR *Integration Guide* – Provides information for administrators who are responsible for integrating Carbon Black EDR with various tools and applications, such as VMware Carbon Black App Control, EMET, VDI, SSO, and more.
- VMware Carbon Black EDR *API* – Documentation for the Carbon Black EDR REST API is located at <https://developer.carbonblack.com/reference/enterprise-response> . Documentation for the Python module for easy access to the REST API is hosted at <https://cbapi.readthedocs.io> .
- VMware Carbon Black EDR *connectors* – Documentation describing how to install, configure and maintain various Carbon Black connectors is located at <https://developer.carbonblack.com/guide/enterprise-response/#connectors> . A connector enables communication between a third-party product and a Carbon Black EDR server.

Community Resources

The Carbon Black User Exchange at <https://community.carbonblack.com> provides access to information shared by Carbon Black customers, employees and partners. It includes information and community participation for users of all Carbon Black products.

When you log into this resource, you can:

- Ask questions and provide answers to other users' questions.
- Enter a "vote" to bump up the status of product ideas.
- Download the latest user documentation.
- Participate in the VMware Carbon Black developer community by posting ideas and solutions or discussing those posted by others.
- View the training resources available for Carbon Black products.

You must have a login account to access the VMware Carbon Black User Exchange. Contact your Technical Support representative to get an account.

Contacting Support

VMware Carbon Black Technical Support offers several support channels:

Technical Support Contact Options

VMware Carbon Black User Exchange: <https://community.carbonblack.com>

VMware Carbon Black Support Site: <https://www.carbonblack.com/resources/support>

Email: support@carbonblack.com

Phone: 877.248.9098

Fax: 617.393.7499

When you contact technical support, provide the following information:

Required Information	Description
Contact	Your name, company, telephone number, and email address
Product version	Product name and version number
Hardware configuration	Hardware configuration of the server or computer the product is running on (processor, memory, and RAM)
Document version	For documentation issues, the title, version and date of the manual that you are using. Date and version appear on the cover page.
Problem	Action causing the problem, error message returned, and any other appropriate output
Problem severity	Critical, serious, minor, or enhancement

Overview

2

This chapter introduces Carbon Black EDR, explains key concepts, and suggests operating strategies for managing sensors and data to provide the visibility, detection, and response capabilities in the Carbon Black solution.


This chapter includes the following topics:

- [What is Carbon Black EDR?](#)
- [System Architecture](#)
- [Data Flow Diagrams](#)
- [Workflow Overview](#)
- [Carbon Black Hosted EDR APIs](#)

What is Carbon Black EDR?

Carbon Black EDR provides endpoint threat detection and a rapid response solution for Security Operations Center (SOC) and Incident Response (IR) teams. With Carbon Black EDR, enterprises can continuously monitor and record all activity on endpoints and servers. The combination of Carbon Black EDR's endpoint visibility with CB Threat Intel helps enterprises to proactively hunt for threats, customize their detection, and respond quickly. The following diagram shows how Carbon Black EDR features work together to help you answer these questions:

- How did the problem start?
- What did the threat do?
- How many machines are infected?
- How can we resolve the threat?

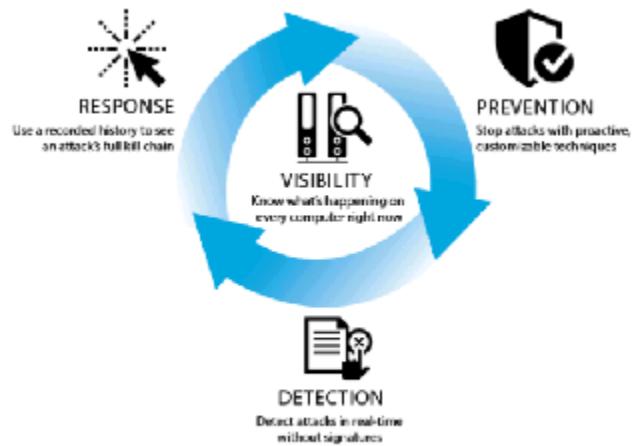

Carbon Black EDR provides these solutions:

- **Visibility** – Know what's happening on every computer at all times. With Carbon Black EDR, you have immediate real-time visibility into the files, executions, network connections, and critical system resources on every machine, and the relationships between them. You can see how every file got there, what created it, when it arrived, what it did, if it made a network connection, if it deleted itself, if a registry setting was modified, and much more.
- **Detection** – See and record everything; detect attacks in real time without signatures. Carbon Black EDR's threat research team analyzes threat techniques and creates Advanced Threat Indicators (ATIs) to alert you to the presence of an attack. These ATIs look for threat indicators and are not based on signatures. You can detect advanced threats, zero-day attacks, and other malware that evades signature-based detection tools—in real time. There is no wait for signature files, no testing and updating .dat files, and no sweeps, scans or polls. You get immediate, proactive, signature-less detection.
- **Response** – Use a recorded history to see the full “kill chain” of an attack, and contain and stop attacks. When you need to respond to an alert or threat, you will instantly have the information you need to analyze, scope, contain, and remediate the problem. With the recorded details about every machine, you can “go back in time” to see what happened on any of your machines to understand the full “kill chain” of an attack. You will also have a copy of any binary that ever executed, so you can analyze it yourself, submit it to a third party, and so on. You can also contain and stop attacks by globally blocking the execution of any file automatically or with a single click.
- **Prevention via Carbon Black App Control** – Stop attacks with proactive, signature-less prevention techniques by integrating the App Control with Carbon Black EDR. With App Control, you can choose from different forms of advanced endpoint protection to match your business and systems. App Control's proactive “Default-Deny” approach ensures that only software you trust can run on your machines. App Control's “Detect-and-Deny” technology

uses ATIs to detect malware and stop its execution, and App Control's unique “Detonate-and-Deny” approach automatically can send every new file that arrives on any endpoint or server to leading network security tools for “detonation.” If a tool reports finding malicious files, App Control can automatically stop them from running on all of your machines.

Carbon Black EDR accelerates detection by going beyond signatures, and reduces the cost and complexity of incident response. Using a real-time endpoint sensor, Carbon Black EDR delivers clear and accurate visibility and automates data acquisition by continuously recording and maintaining the relationships of every critical action on all machines, including events and event types such as executed binaries, registry modifications, file modifications, file executions, and network connections.

Carbon Black EDR provides a cross-process event type that records an occurrence of a process that crosses the security boundary of another process. While some of these events are benign, others can indicate an attempt to change the behavior of the target process by a malicious process.



Unlike scan-based security solutions, Carbon Black EDR can expand detection beyond the moment of compromise with its robust endpoint sensor and access to the information provided by CB Threat Intel.

CB Threat Intel provides three types of intelligence:

- **CB Threat Intel Reputation** – A cloud-based intelligence database that provides highly accurate and up-to-date insight into known-good, known-bad, and unproven software. It provides IT and security teams with actionable intelligence about the software installed in their enterprise. The capabilities of the reputation service are further enhanced by feeds from third party partners.
- **Carbon Black EDR Threat Indicators** – Search for patterns of behavior or indicators of malicious behavior. Unlike signature-based detection, threat indicators can recognize distinct attack characteristics, based on the relationships between network traffic, binaries, processes loaded, and user accounts. Carbon Black EDR also offers watchlists that are fully customizable saved searches that you can use to look for specific threat indicators.

- **Third Party Attack Classification** – Uses intelligence feeds from third-party sources to help you identify the type of malware and the threat actor group behind an attack. This enables security teams to have a better understanding of attacks so that they can respond more quickly and effectively. You can also leverage your own intelligence feeds to enhance response capabilities.

Carbon Black EDR compares endpoint activity with the latest synchronization of CB Threat Intel feeds as it is reported. You can add intelligence feeds that you already have set up to give you zero-friction consumption of threat intelligence in Carbon Black EDR, regardless of the source.

Carbon Black EDR's sensor is lightweight and can be easily deployed on every endpoint, requiring little to no configuration. This enables endpoint security analysts and incident responders to deploy thousands of sensors across their environment to immediately answer key response questions.

Carbon Black EDR's continuously-recorded sensor data is stored in a central server, which lets your team see and understand the entire history of an attack, even if it deleted itself.

Carbon Black EDR integrates with leading network security providers. This integration enables you to prioritize alerts that are detected on the network by correlating them with events that occurred on endpoints and servers. This enables you to fully investigate your entire enterprise instantly to accelerate detection, reduce dwell time, minimize scope, and immediately respond to and contain advanced threats.

You can use Carbon Black EDR's APIs to customize or integrate with existing security technologies that you are using, and Security Information and Event Management systems (SIEMs).


System Architecture

This section provides a system architecture overview for both Carbon Black Hosted EDR and Carbon Black EDR. In both systems, the server records *events* related to file changes, but copies of files and the data that changed are *not* recorded.

Carbon Black Hosted EDR

The following diagram illustrates the components of a Carbon Black Hosted EDR installation, which are:

- Sensors that can be installed on various endpoints such as laptops, desktops, servers, and point of sale (POS) machines.
- A cloud service that collects sensor data and makes it accessible with a web user interface or API.
- The threat intelligence that includes the VMware Carbon Black Threat Intel Reputation, App Control, and Carbon Black EDR threat indicators, and third-party attack classification using Threat Intel partner feeds.

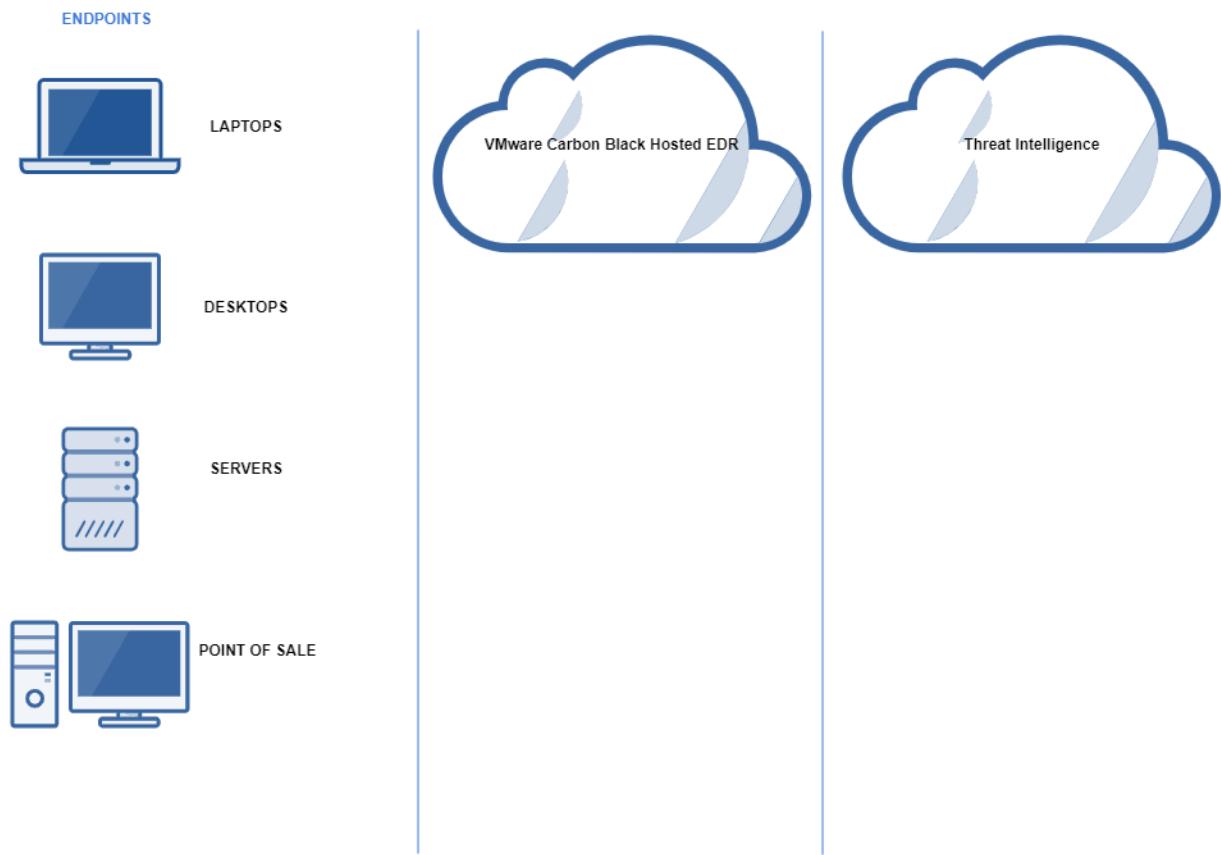


If your company is also using App Control, you can integrate it with Carbon Black Hosted EDR. By leveraging App Control, you can contain advanced threats by globally blocking or banning them through App Control's customizable prevention techniques in the midst of a response. See the VMware Carbon Black EDR Integration Guide.

Carbon Black EDR

A Carbon Black EDR server software is installed on a Linux server. The following diagram illustrates the components of a Carbon Black EDR installation, which are:


- Sensors that can be installed on various endpoints such as laptops, desktops, servers, and point of sale (POS) machines.
- A server that collects sensor data and makes it accessible with a web user interface or an API.
- The threat intelligence that includes the Carbon Black Threat Intel Reputation, App Control, and Carbon Black EDR threat indicators, and third-party attack classification using Threat Intel partner feeds.

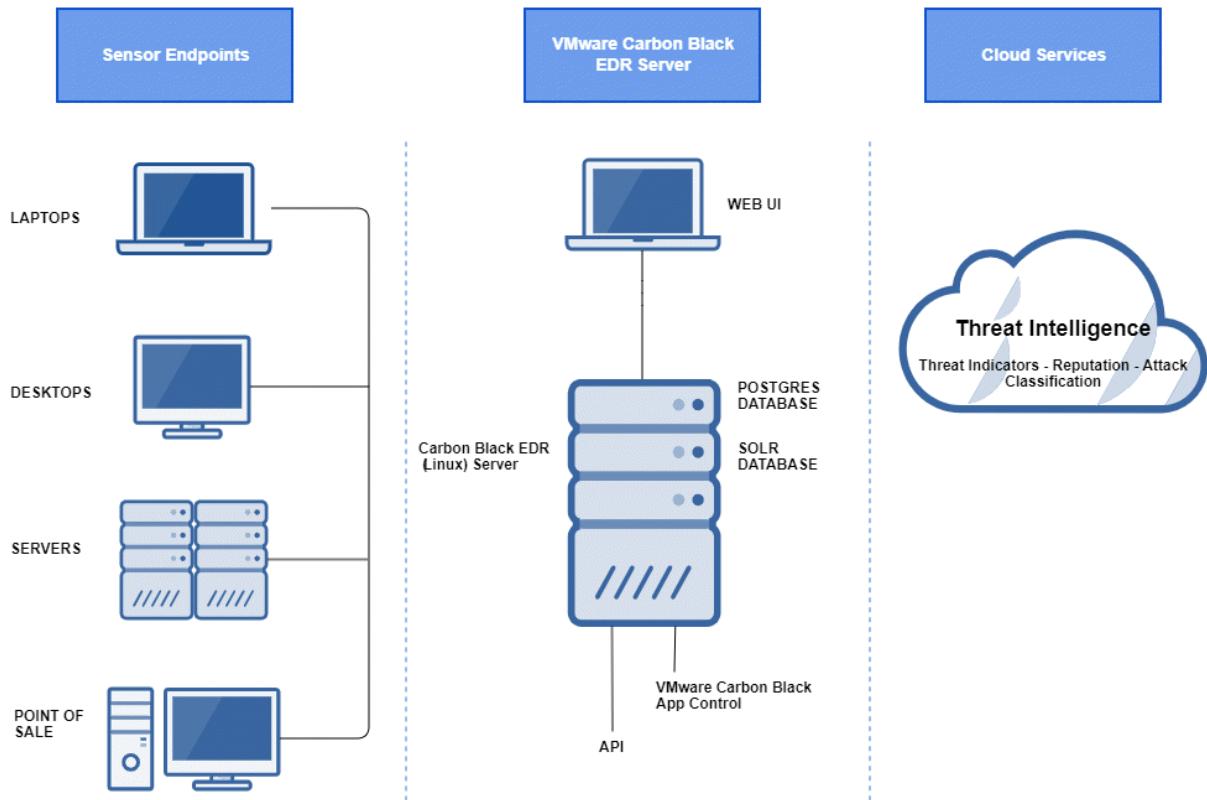


If your company is also using App Control, you can integrate it with Carbon Black EDR. With App Control, you can contain advanced threats by globally blocking or banning them through App Control's customizable prevention techniques in the midst of a response.

Data Flow Diagrams

The following diagram illustrates the Carbon Black Hosted EDR data flow:

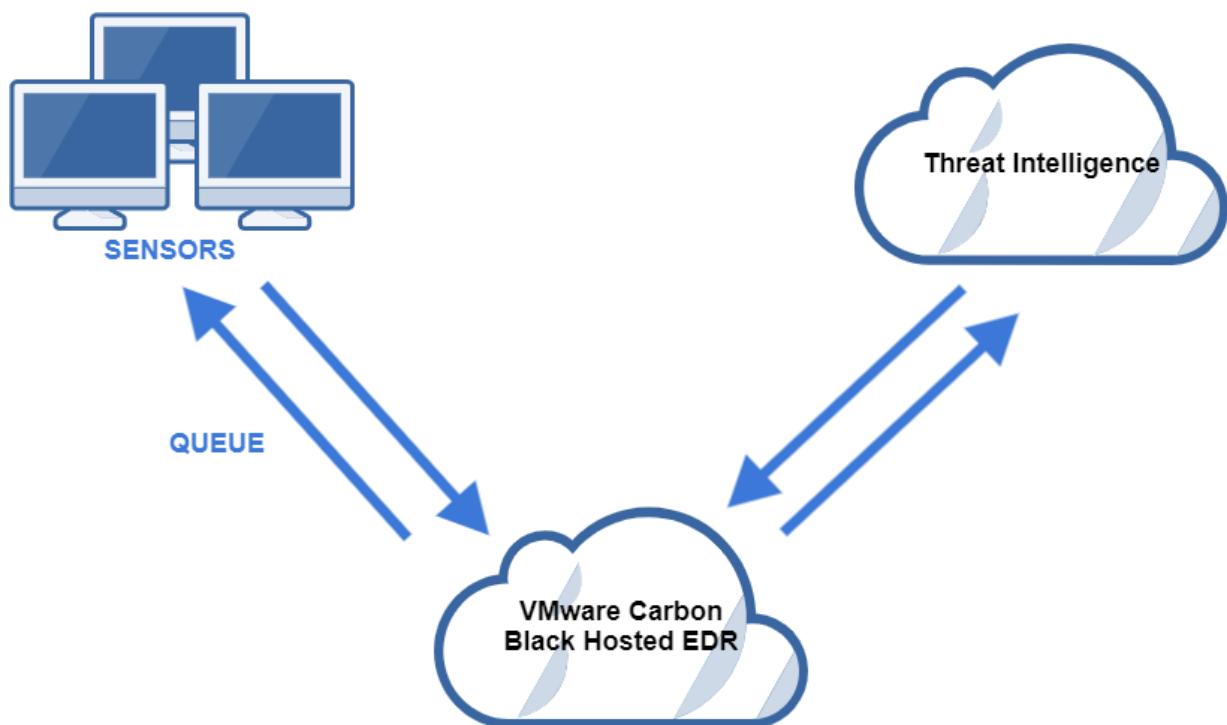

The following diagram illustrates the Carbon Black EDR data flow:

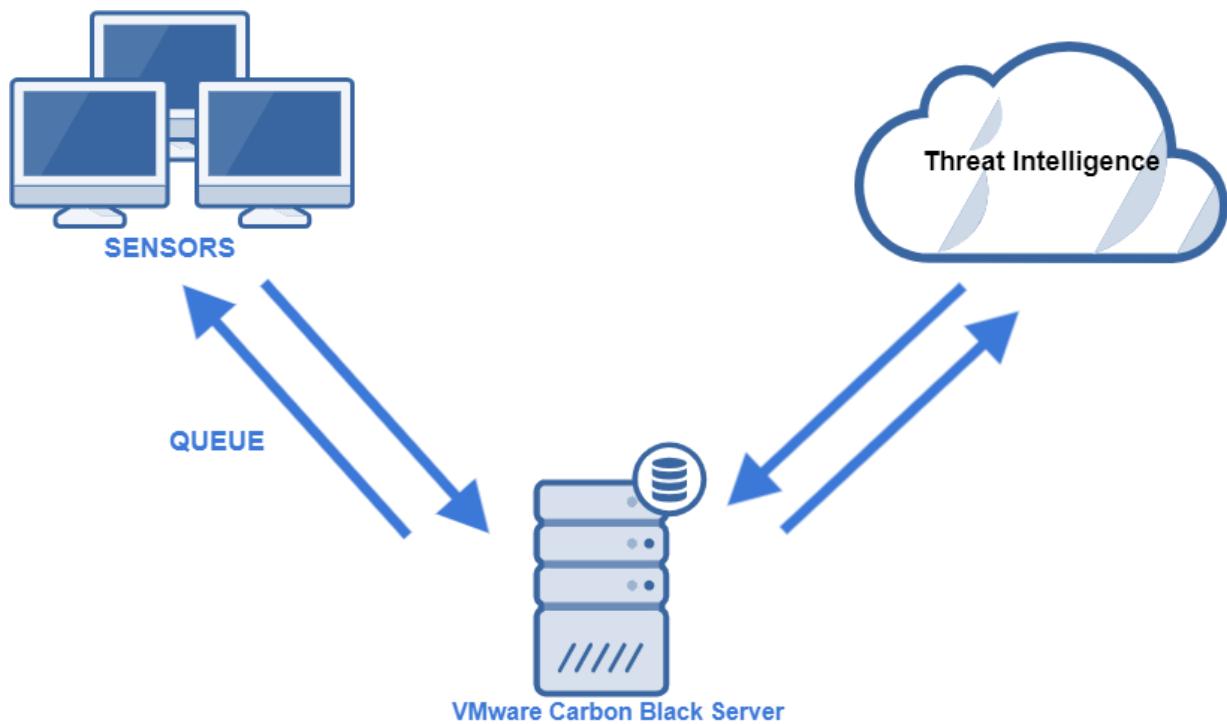

As soon as a sensor is installed, it begins buffering activity to report to the cloud service. This includes:

- Currently running processes that create events
- Binary executions
- File executions and modifications
- Network connections
- Registry modifications
- Cross-process events (events that cross the security boundaries of other processes)

Every few minutes, sensors check in with the cloud service, reporting what they have buffered, even if they are reporting that they have nothing buffered. When a sensor checks in, the cloud service responds, letting the sensor know when to send the data and how much data to send.

As the cloud service records data from sensors, the data is compared with the latest synchronization from any enabled CB Threat Intel feed partner. In most cases, incremental synchronizations occur hourly. Full synchronizations occur once every 24 hours by default.

Some CB Threat Intel feeds provide a list of all of the IOCs they track. Some feeds only include reports on files (identified through their MD5 or SHA-256 hashes) that are observed in your enterprise.

If you enable data sharing with the CB Threat Intel partners, Carbon Black EDR pushes MD5 hashes that are observed by sensors and binaries originating from your enterprise to their cloud services. If there is a corresponding report or record, the feed is updated to include that information. If there is no corresponding third party-report, one is requested and when available, included in the feed.

When information about a specific binary is included in these feeds, the information remains there, even if the binary it is associated with is deleted from your endpoints and is no longer present in your environment.

The following table provides key additional information about data flows:

Data Flow	Description
Sensor to Server	<ul style="list-style-type: none"> ■ All communications are through HTTPS. ■ The TCP port is 443 by default, but is configurable. ■ Communications are always initiated from sensor to server (never from server to sensor). ■ By default, communications are mutually authenticated by statically pinned TLS certificates, both client and server. There is also an option to substitute user-provided certificates and use stricter validation. Sensors have the server's certificate embedded, and the server has all client certificates embedded. See Chapter 9 Managing Certificates for more information. ■ All communications require a minimum of TLSv1+; only allow FIPS-compliant ciphers and use a 2048-bit Diffie Hellman key. ■ Sensor communication through a proxy is unsupported, unless the proxy is deployed in a transparent, in-line configuration. ■ Sensor communication is supported through transparent proxies. Due to certificate pinning, communication is not supported through traffic inspection proxies, or any other device that would affect SSL certificates. ■ The Windows sensor honors settings that are configured via a <code>proxy.pac</code> file. (This does not change the requirement that any proxy that is used must not modify SSL certificates or otherwise attempt to bypass the secure communications between sensor and server.) ■ Sensor communication through an TLS intercept/decryption device is not currently supported, even for in-line proxy configurations. ■ The server's sensor-facing interface can be configured in a DMZ to support endpoints outside the corporate LAN
Server to Alliance	<ul style="list-style-type: none"> ■ All communications are explicitly opt-in.
Server and CB	<ul style="list-style-type: none"> ■ All communications are HTTPS.
Threat Intel	<ul style="list-style-type: none"> ■ This connection is required for threat intelligence that is provided by Carbon Black EDR. ■ TCP is 443 to <code>api.alliance.carbonblack.com</code> and <code>threatintel.bit9.com</code>. ■ Proxies are supported.
Server to yum Repository	<ul style="list-style-type: none"> ■ TCP is 443 for HTTPS to <code>yum.distro.carbonblack.io</code>. ■ TCP is 80 to a CentOS or RHEL.


Workflow Overview

Once sensors are installed and configured, your IT and security teams can perform basic tasks on a regular basis to ensure that there are no threats on any computer in your enterprise. Access to the Carbon Black EDR user interface is via browser, although you can perform some functions through an API.

Note Google Chrome is the only supported browser for this release. Although Firefox can be used, it will cause rendering issues on some pages and is not recommended. Other browsers should not be used for console access.

The basic workflow is continuous: you search for threats, analyze them, resolve them, and using the tools of your choice, prevent them from happening again. As you search, you can tag any items that seem unusual or that merit further investigation and then drill down further to find out more details about those items.

Carbon Black EDR provides you with tools to help you detect and fix threats to your system. The following diagram shows the basic Carbon Black EDR workflow:

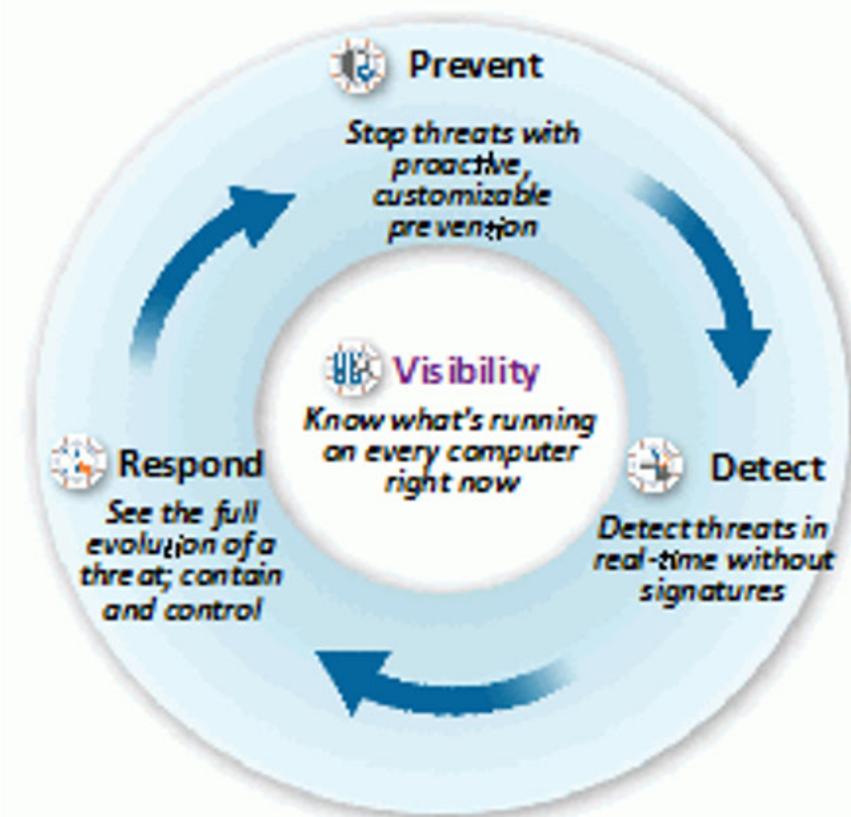

The following table shows how Carbon Black EDR provides solutions to the problems you face.

Problem	Solution
What is the entry point of the threat?	Find out how the attacker got into your systems. Get oriented with visibility into everything that is running on every computer in your enterprise using the Process Search feature.
What did the attacker do?	Look deeper into suspicious processes and events to detect evidence of damage. Select processes that look suspicious and drill deeper using the Process Analysis feature.
How many machines were compromised?	Find out the scope of the damage by digging deeper into details about detected threats by using the Process Details and Binary Details pages. Set up CB Threat Intel Feeds and Watchlists by defining characteristics of interesting activity that you want to be notified about and receiving notifications as you need them. Create Investigations of suspicious processes to keep track of key events during a given response.
How do we respond to threats?	Find out how bad the threat is, and then determine how to respond to it by seeing its full evolution, containing the threat, and then controlling it.

Problem	Solution
How do we stop the threat from happening again?	Use the Go Live feature allows you to directly access content on endpoints that are running sensors which provide information. Set up Watchlists and CB Threat Intel Feeds that identify specific issues, and use the feeds and watchlists to perform continuous searches on your systems for immediate detection to help you stop the threat from happening again, and to ensure that you know of any new related activity.
How do we isolate threats?	You can isolate one or more Windows endpoints from the rest of your network and the Internet through the Carbon Black EDR console. For more information, see Isolating an Endpoint .

Note Access to Carbon Black EDR features is determined by the permissions a logged-in user has. See [Chapter 4 Managing User Accounts \(on premise\)](#) and [Chapter 5 Managing User Accounts \(Hosted\)](#) for a description of how to create users with different permission levels.

Carbon Black Hosted EDR APIs

Carbon Black Hosted EDR includes extensive support for programmatic access to the underlying data and configuration through APIs. Documentation, example scripts, and a helper library for each of these libraries is available at <https://developer.carbonblack.com> .

Getting Started

3

This chapter explains how to log in and out of Carbon Black EDR, and includes instructions for using two-factor authentication for Carbon Black Hosted EDR accounts. It also introduces the Carbon Black EDR console controls that are available through the navigation bar and top menu, and summarizes the features that are accessible from those locations.

This chapter includes the following topics:

- [Logging In to Carbon Black EDR](#)
- [Logging In and Configuring Two-Factor Authentication](#)
- [Logging Out](#)
- [Console Controls](#)

Logging In to Carbon Black EDR

The Carbon Black EDR console is a browser-based user interface for accessing the Carbon Black EDR server and the information it collects from sensors and CB Threat Intel feeds. You log into the Carbon Black EDR console from a supported web browser on any computer that has access to your server

Note Google Chrome is the only supported browser for this release. Although Firefox can be used, it causes rendering issues on some pages and is not recommended. Other browsers should not be used for Carbon Black EDR console access.

To log into the Carbon Black EDR console:

- 1 From a supported web browser, enter the path to the Carbon Black EDR server.
- 2 If your browser displays a warning about the certificate, you can safely ignore the warning and click through the remaining confirmation windows.

Note To avoid future certificate warnings, accept the certificate permanently.

- 3 In the Login dialog box, enter your user name and password.
- 4 Click the **Login** button to display the **HUD** (Head Up Display) page.

Logging In and Configuring Two-Factor Authentication

This section explains how to:

- Log in to Carbon Black Hosted EDR for the first time from an email invitation. See [Logging In for the First Time from an Email Invitation \(Carbon Black Hosted EDR\)](#).
- Configure two-factor authentication. See [Chapter 3 Getting Started](#)
- Log in with or without two-factor authentication. See [Logging in After Initial Login \(Carbon Black Hosted EDR\)](#).

For information about using the Carbon Black EDR User Management Console, see [Chapter 5 Managing User Accounts \(Hosted\)](#)

Logging In for the First Time from an Email Invitation (Carbon Black Hosted EDR)

If you have received an email inviting you to access Carbon Black Hosted EDR, use the link in the email to either sign in with an existing account, or create a new account.

Note The email link expires seven days after receipt.


To log in from an email invitation:

- 1 Click the link in your invitation email to open the **Login** dialog box.
- 2 Do one of the following:
 - If you already have an account, click **Sign In** and follow the procedures detailed in [Logging in After Initial Login \(Carbon Black Hosted EDR\)](#).
 - To create a new account, enter values in the **Username** , **First** , **Last** , **Password** , and **Confirm Password** fields, and click **Sign up**.
- 3 If you are creating a new account, read the terms and conditions, and click **Accept** .

Note This page only appears the first time you access the Carbon Black Hosted EDR or when the terms and conditions are updated.

The **Two Factor Authentication** wizard opens where you can optionally configure two-factor authentication, which does the following:

- Adds a second authentication factor to your server
- Facilitates authentication management and security monitoring

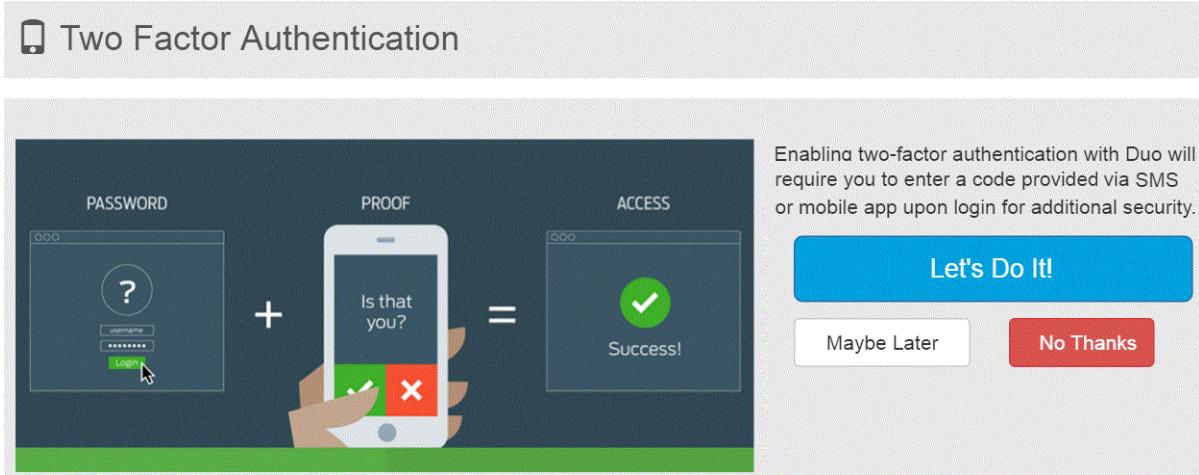

Two-factor authentication is available through Duo and requires that you download the Duo Mobile application on a device. (For more information, see <https://duo.com>).

If you change your mind later about using two-factor authentication, you can enable or disable it. (See [Enabling/Disabling Two-Factor Authentication](#).)

Configuring Two-Factor Authentication (Carbon Black Hosted EDR)

To configure two-factor authentication:

- 1 Log into the console.

If you are logging in for the first time, or if you logged in previously and temporarily bypassed enrollment, the Two-Factor Authentication wizard appears.

- 2 On the first page of the Two Factor Authentication wizard, the following options are available:

- **Maybe Later** – Bypass enrollment for now and proceed with logging in. You will have the option to configure two-factor authentication at your next login.
- **No Thanks** – Do not enable two-factor authentication.
- **Let's Do It!** – Enable two-factor authentication.

If you decline to set up two-factor authentication, you are logged into the Carbon Black Hosted EDR.

- 3 To set up two-factor authentication, select Let's Do It! and then click **Start setup** .

The **What type of device are you adding?** screen appears. You can add any of several device types for two-factor authentication, including mobile phone devices, tablets, and landlines.

- 4 Select the type of device you are adding and click **Continue** .
- 5 Provide your phone number information and click Continue.

- 6 Select the type of phone device you are using and click Continue.

Note This procedure uses an iPhone as an example, but you can add other types of devices.

- 7 Follow the instructions to install the Duo Mobile application on your device, and then click **I have Duo Mobile installed**.
- 8 With your phone, scan the bar code presented in the **Activate Duo Mobile** page.
- 9 When the check mark appears on the bar code indicating success, click Continue.
- 10 On the **My Settings & Device** page, make the following selections:
 - From the **My default device is** drop-down list, select your default device. This is useful when you use multiple devices for two-factor authentication.
 - Select the **Automatically send me a** check box and select either **Duo Push** or **Phone Call** as your preferred communication mode with Duo Mobile.
 - Click **Save**.
 - When your device is successfully added, click **Done** (you might need to scroll down to see the **Done** button).
- 11 On the **Choose an authentication method** page, select an authentication method:
 - **Send me a Push** – Select this recommended option to receive a Duo push notification to authenticate. Tap **Approve** on the Duo login request that is received on your phone.
 - **Call Me** – Select this option to receive a phone call to authenticate.
 - **Enter a Passcode** – Select this option to enter a Duo Mobile passcode to authenticate. Open the Duo Mobile application on your phone and click the key icon to generate a new passcode.
- 12 When authentication is successful, you are logged into Carbon Black Hosted EDR. The **HUD** page appears.

Logging in After Initial Login (Carbon Black Hosted EDR)

To log into the console after initial login:

- 1 In a supported web browser on a computer with access to your server, enter the path to the Carbon Black Hosted EDR service and in the initial dialog, click **Login with CB Cloud**.
The **Login dialog box** appears.
- 2 Do one of the following:
 - If Username and Password fields are pre-populated, click **Sign in**.
 - If the fields are not pre-populated, enter your **Username** and **Password** and click **Login**.

The system responds in one of the following ways, depending on your two-factor authentication selection:

- If you selected No Thanks, the **HUD** page appears.
- If you selected **Maybe Later**, the **Two Factor Authentication** wizard opens, prompting you to enroll. You can either decline, or decide to configure two-factor authentication as described in the previous procedure.
- If you enabled two-factor authentication, the system contacts your configured device. Follow the prompts to authenticate.

After you authenticate successfully, you are logged in to the Configure Server page.

The screenshot shows the 'Configure Server' page for the domain 'abcd.carbonblack.io'. The main section is titled 'Users' and contains a table with eight user entries. Each entry includes the user's name, a small profile icon, and a 'ADMIN' badge. The table also displays whether two-factor login is enabled or disabled and the last login date.

User	Two-factor login status	Last logged in	Role
abrown	Two-factor login enabled	Last logged in Apr 16, 2018	ADMIN
ajansen	Two-factor login enabled	Last logged in Mar 29, 2018	ADMIN
bmorales	Two-factor login enabled	Last logged in Jan 18, 2018	ADMIN
bsmith	Two-factor login enabled	Last logged in Apr 4, 2018	ADMIN
cminsky	Two-factor login enabled	Last logged in Feb 27, 2018	ADMIN
dpatel	Two-factor login enabled	Last logged in Jul 13, 2017	ADMIN
ele	Two-factor login disabled	Last logged in Apr 16, 2018	ADMIN
emayer	Two-factor login enabled	Last logged in Jan 10, 2018	ADMIN
fcurtain	Two-factor login enabled	Last logged in Mar 30, 2018	ADMIN

On the Configure Server page, you can do the following:

- Go to the **My Servers** page, where you view a list of all servers to which you have authorized access. Click a server link to access the HUD page for that server.
- Click your user name to manage account details, such as changing your password, and enabling or disabling two-factor authentication.
- Click **Invite user** to invite new or existing users.
- Click an existing user to manage their account and permissions. For more information, see [Chapter 5 Managing User Accounts \(Hosted\)](#)

Enabling/Disabling Two-Factor Authentication

You can enable/disable two-factor authentication for your Carbon Black Hosted EDR account at any time.

To enable or disable two-factor authentication:

- 1 From the menu bar, select *Your Username* > Account.

- 2 In the **Security** panel of the Account page, do one of the following:
 - If enabled, disable two-factor authentication by clicking Disable Duo 2FA.
 - If disabled, enable two-factor authentication by clicking Enroll with Duo 2FA.
- 3 Follow the prompts to complete the procedure to either enable or disable Duo 2FA.

The **Security** panel of the Account page updates to display the changed status for **Two-Factor Authentication**.



Logging Out

The top-right corner of the Carbon Black EDR console displays your user name. Click it to display a drop-down list from which you can:

- View your profile information
- Logout of Carbon Black EDR
- For administrators only, view and modify Settings and Shared Settings.

To log out of the Carbon Black EDR console:

- 1 Click your user name.
The user drop-down list appears.
- 2 Select **Logout** to log out of the console.

Console Controls

Navigation Bar

You use the Carbon Black EDR navigation bar to access console pages. The following table describes the options that are available for users with full Administrator/Global Administrator privileges – other users will see options that are appropriate to their privilege level. The Teams option appears only for cloud instances.

Link	Description
CB Logo	Opens the HUD page, which is a customizable page that provides a summary of alerts on hosts that report to your Carbon Black EDR server. See Chapter 22 Using the Head-Up Display Page .
Threat Intelligence	Provides intelligence feeds. You can set up watchlists, incremental synchronizations, and full synchronizations with these feeds. You can also access information about process and binary matches found by each feed. See Chapter 17 Threat Intelligence Feeds
Triage Alerts	Shows events that match queries that are defined by watchlists and indicators of compromise (IOCs) that are defined by feeds. The information provides criteria that is available to search for specific events. See Managing Alerts on the Triage Alerts Page .
Watchlists	Saved queries that are performed on process events and binary data stores. The queries contain lists you can use to track specific IOCs. See Chapter 20 Watchlists
Process Search	Provides an overview of the sensor process data collection that is received from currently installed sensors. See Chapter 13 Process Search and Analysis
Binary Search	Shows the metadata of binary files that have been executed. Binary file data is tracked at the moment of execution, and is identified by MD5 hash name. See Chapter 14 Binary Search and Analysis
Go Live	This icon appears if you have enabled Go Live in Username > Settings > Advanced Settings. It opens a command line page that provides direct access to sensors. You can directly access content on endpoints that are running the sensors that are providing information. See Chapter 11 Responding to Endpoint Incidents
Live Query (beta)	This icon appears if you have enabled Live Query in Username > Settings > Advanced Settings. It allows you to run direct SQL queries against targeted endpoints. See Chapter 12 Live Query (beta) .
Investigations	A collection of tagged process events that are products of search results from searching your networks and endpoints for threats. See Chapter 19 Creating and Using Investigations
Sensors	Shows data for sensors and sensor groups. Sensor groups categorize sensors that share the same configuration. You can view, define and update sensors and sensor groups on this page. See Chapter 7 Managing Sensors .
Users	<ul style="list-style-type: none"> ■ (Carbon Black EDR) Displays the User Management page. Administrators can add and configure new users who can view user activity, and create and manage teams of users. Non-administrator users can use this menu item to view their user profile details. See Chapter 4 Managing User Accounts (on premise). ■ (Carbon Black Hosted EDR) Displays user accounts that are authorized to access the server. See Chapter 5 Managing User Accounts (Hosted).
Teams	Carbon Black Hosted EDR only. This link goes to the Team Management page for your instance. Administrators can configure users, view user activity, and create and manage teams of users. See Chapter 5 Managing User Accounts (Hosted) .
Event Forwarder	Displays only if enabled. This link opens the Event Forwarder Settings page, which lets you configure the Event Forwarder from within the Carbon Black EDR console. See Chapter 18 Configuring the Event Forwarder .
Server Dashboard	Shows server statistics such as sensor statistics and server communication status. See Monitoring Sensor and Server Information .
Banned Hashes	Opens the Manage Banned Hashes page, which shows process hashes for which a ban has been created. Banned processes are blocked from running on hosts that are managed by a Carbon Black EDR sensor. See Chapter 11 Responding to Endpoint Incidents

Username Menu


The top right corner of the console shows the name of the currently logged in user. A dropdown menu includes the following options:

Menu Choice	Description
My Profile	Shows and allows editing of the current user's first and last name and email address. Shows teams of which the user is a member. Provides access to dialogs for changing the user's password and API token. For Carbon Black Hosted EDR users, the My Profile page includes a link to the user's profile (Account) page.
Sharing Settings	For administrators only, shows a page that allows administrators to determine whether to share different types of information with Carbon Black and its partners. See Data Sharing Settings .
Settings	For administrators only, this page allows administrators to view and change settings that affect the operation of Carbon Black EDR: <ul style="list-style-type: none"> ■ Sites – Provides a menu of sites and the ability to throttle sites by time and day of the week. ■ E-Mail – Lets you configure your own alert email server (recommended), use Carbon Black's email server, or not receive alert emails. ■ License – Shows the Carbon Black EDR server's license and allows you to apply a new license. ■ Server Nodes – Shows all of the server nodes in your cluster, their Node ID, Name, Hostname (with domain) and full URL with port. ■ Server Certificates – Shows all of the sensor-server certificates that are available on the current server. It also shows the validation method that is being used for these certificates. See Adding Certificates through the Console. ■ Ingress Filters – Lets you define and view ingress filters. ■ VMware Carbon Black App Control Server – Shows configuration information if this server is integrated with Carbon Black App Control. See the VMware Carbon Black EDR <i>Integration Guide</i>. ■ Advanced Settings – <ul style="list-style-type: none"> ■ Process Search Settings – Allows administrators to block certain process searches that could cause significant performance problems. See Process Search Settings in the Console for details. ■ EU Data Sharing Banner – Allows administrators to enable and disable the display of a red banner at the top of console pages that warns users to be cautious when sharing screenshots or other data. Note that this capability can be overridden in the cb.conf file by the ShowGdprBanner setting. See EU Data Sharing Banner for details. ■ Live Response – Allows administrators to enable or disable Live Response, which opens a command interface for direct access to any connected host running the Carbon Black EDR sensor. Note that this can be overridden in the cb.conf file by the CbLREnabled setting. This section also includes configuration settings that can be adjusted to help improve Live Response performance. See Using Live Response for details of this feature.
Logout	Logs the current user out of the Carbon Black EDR console.

EU Data Sharing Banner

Carbon Black EDR displays information from all endpoints that report to a server through the sensor. Because some of this information can be sensitive, you might need to take extra steps to avoid exposing it in the wrong places.


As an extra precaution, Carbon Black EDR provides administrators with the ability to display a red banner at the top of console pages that warns users to be cautious. This banner is enabled and disabled on the Advanced Settings tab of the Settings page.

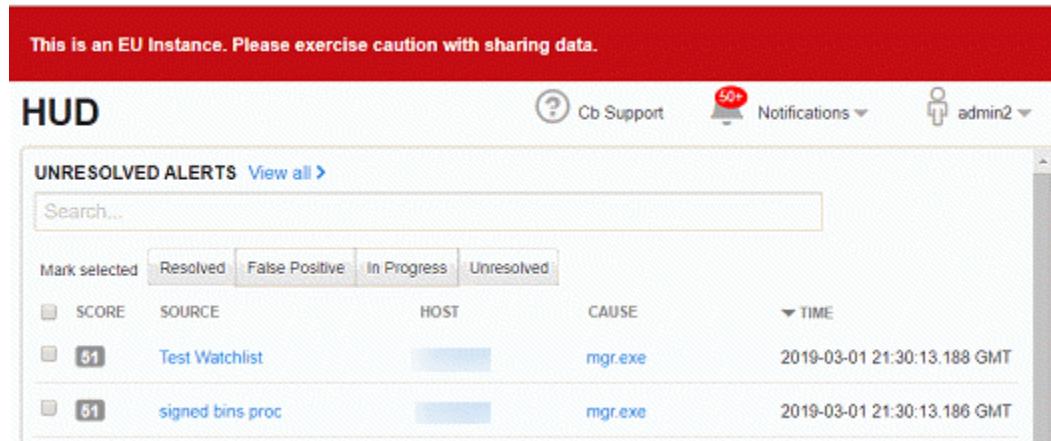

The screenshot shows the Carbon Black EDR User Interface (HUD). At the top, a red banner displays the message: "This is an EU Instance. Please exercise caution with sharing data." Below the banner, the title "HUD" is visible. In the top right corner, there are three icons: "Cb Support" (a question mark), "Notifications" (a bell icon with a red badge showing "50+"), and a user profile for "admin2". The main content area is titled "UNRESOLVED ALERTS" with a "View all >" link. Below this is a search bar labeled "Search...". A table lists two unresolved alerts. The columns are: "Mark selected", "SCORE" (with values 51 and 51), "SOURCE" (Test Watchlist and signed bins proc), "HOST" (represented by blue bars), "CAUSE" (mgr.exe), and "TIME" (2019-03-01 21:30:13.188 GMT and 2019-03-01 21:30:13.186 GMT).

Notifications

The Notifications menu includes a count of new notifications and a dropdown menu that shows the number of each type of notification. Clicking any item on the menu takes you to the page that provides details for the item.

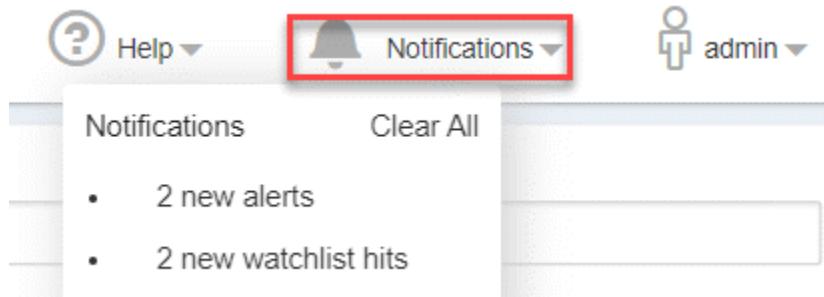


The screenshot shows the Notifications menu. At the top, there are three items: "Help" (with a question mark icon), "Notifications" (with a bell icon and a red box around it), and "admin" (with a user icon). Below this, a sidebar on the left lists "Notifications" and "Clear All". The main content area shows a list of notifications: "2 new alerts" and "2 new watchlist hits".

For example, if you click 2 new watchlist hits, you go to the Watchlists page. When you click into details for all of the new notifications, the counter resets to zero and the menu then displays No new notifications. You can click **Clear All** to clear the menu.

Help: User Guide and Customer Support

The Help menu in the top right area of the console provides access to two sources of assistance for answering questions about Carbon Black EDR.

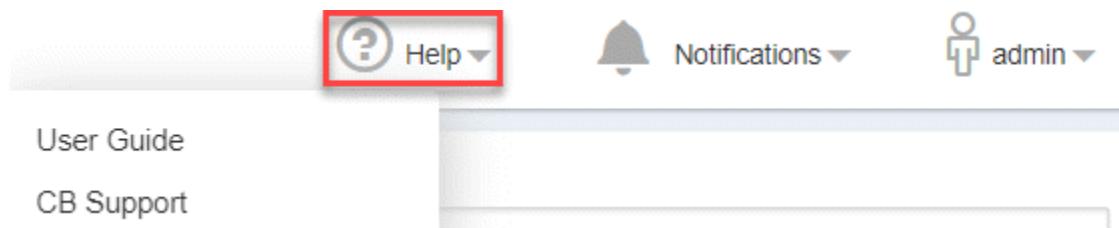

- Click **User Guide** to open a new browser window or tab showing the HTML version of the VMware Carbon Black EDR User Guide (this document). If it displays as a tab, you can drag the tab off the current browser to display the User Guide in its own window. The online version of the User Guide is compatible with Chrome browsers, preferably the latest release. You might be able to display help in other browsers but these are not supported and they might have issues that interfere with display or performance.
- The **CB Support** choice opens a new browser window or tab showing the Carbon Black technical support page.

To display online documentation from the console:

- 1 In the top console menu, click the question mark button and choose **User Guide** from the menu. This opens the home page and table of contents for Carbon Black EDR Help in a new window or tab. The controls on the help page vary depending on the size of the window, but all pages provide access to the table of contents and search features.
- 2 To view the table of contents if it is not visible, either expand the browser window to display the contents on the left, or click the Table of Contents button.
- 3 In the table of contents, click a right arrow icon or the name next to it in the table of contents to expand the table to show subtopics. Click the down arrow icon to collapse the items below it.
- 4 To search for topics using key words, enter the words in the Search box if it is visible, or if not, click the Search button to display the field.

Managing User Accounts (on premise)

4

This chapter explains how to manage user access to the Carbon Black EDR console for servers that are installed on your premises. This includes managing teams to determine user roles and manage user accounts. For information on managing users for Carbon Black Hosted EDR, see [Chapter 5 Managing User Accounts \(Hosted\)](#).

This chapter includes the following topics:

- [Overview of User Management](#)
- [Managing User Access with Teams](#)
- [Managing User Accounts](#)

Overview of User Management

The Carbon Black EDR console is the user interface for access to Carbon Black EDR features. Each console user logs in to the system with a user name and password. Login accounts provide administrators, analysts, and others to access the features that are appropriate to their role, and allows administrators to limit unnecessary access to features or sensors.

During the Carbon Black EDR installation process, a default user account is created and assigned Global Administrator status. This user has full access to all sensors and all features. After you log in by using the default account, you can set up additional users, including other Global Administrators and users with other roles that can vary by sensor group.

The capabilities of a user are determined by the following factors:

- **Is the user a Global Administrator?** – A checkbox on the User Details page determines whether a user has **administrator privileges** (for all sensor groups and features). If a user is a Global Administrator, the following factors are not relevant.
- **What teams does the user belong to?** – The privileges of users who are *not global administrators* depend upon the **teams** they belong to. Global administrators can also be assigned to teams, although team membership doesn't affect them unless their administrator status is disabled.

- **What roles do team members have for each Sensor Group?** – Teams specify a **role**, which determines the level of privileges that their members have for each **sensor group**. There are three roles: **Analyst**, **Viewer**, and **No Access**. Teams can (and usually will) have different roles for different sensor groups. See [Role-based Privileges for Teams](#).
- **What is the highest role for any team this user belongs to?** – Access to some features is not restricted by sensor group, but is still controlled by the roles that are assigned to a team. These features become available to a user if the user is on *at least one* team that has a high enough role for *at least one sensor group*.
This helps control access to features that are not specific to sensor groups, but to which you might want to restrict access. For example, threat feeds, which are not specific to any sensor group, are an important tool for Carbon Black EDR threat monitoring. If a user is an Analyst on any team, that user can take actions that are available on the Threat Intelligence Feeds page.
- **Is the user an Analyst with enhanced permissions?** – For Analysts, access to especially sensitive features (such as Live Response, sensor isolation, uninstalling sensors, file banning, and tamper protection levels) is controlled by enhanced permissions. These are added on a per-user basis. See [Adding Enhanced Permissions for Analysts](#).

A table with more specific details about team privileges is displayed in the [Managing User Access with Teams](#).

Important Creation and management of user accounts and teams is available only to Global Administrators in Carbon Black EDR installations and by Administrators in Carbon Black Hosted EDR installations.

Managing User Access with Teams

If a Carbon Black EDR user is a Global Administrator or Carbon Black Hosted EDR Administrator, that user has access to all functionality for all computers in all sensor groups.

For all other users, access to features is granted through membership on **teams**. Endpoints running the Carbon Black EDR sensor are members of **groups**. Each team has a defined **role** in each sensor group, and this role defines what it can see and do with sensors and their information. Team specifications also control access to some features that are not group-specific.

During Carbon Black EDR installation, a default sensor group (called **Default Group**) is created. You can put all sensors in the Default Group, but to use teams to limit access to certain sensors, we recommend that you create additional sensor groups. See [Chapter 8 Sensor Groups](#).

You might want one team to manage endpoints in one region and another team to manage endpoints in another region. Or, you might let all teams manage most endpoints but create a special team to manage the endpoints of your executive staff. You can also create teams that can view but not modify information and settings.

If a user is assigned to multiple teams with permission to access the same sensor group and these teams have different rules, the user has the privileges of the highest role that is available from any of the teams.

Although you can assign a user to teams at any time, it is helpful to have teams set up before you create non-global-administrator users because the capabilities of most users are determined by their teams.

Role-based Privileges for Teams

The roles you can assign to a team for each sensor group are as follows:

- **Analyst** – This role allows the user to monitor and respond to suspicious or malicious activity on endpoints in sensor groups for which it has the role.

Analysts can be given additional, enhanced privileges on a per-user basis so that they can use special features. See [Adding Enhanced Permissions for Analysts](#).

Unless they are Global Administrators, Analysts do not have access to data or functions for managing the server itself, such as managing users and teams, viewing and changing server settings (including sharing settings), and viewing the server dashboard.

- **Viewer** – This role allows the user to access information, including suspicious or malicious activity, on endpoints in sensor groups for which it has the role.

Unless they are Global Administrators, Viewers cannot access Live Response (Go Live), investigations, sensor isolation or file banning. They also cannot access server management functions.

- **No Access** – This role gives the user no access to information or management functions for the specified sensor groups. If the user does not have any higher role for any team, the only page available to them is My profile.

Some access control is applied on the page level – for example, certain pages are only visible to Global administrators or Administrators. In other cases, access control determines the data that appears on a page and the actions that can be taken there. If users enter a URL for a page they do not have permission to view, they are redirected to the HUD page.

The following table provides more detail about privileges and access types that are available for each role.

Analyst & Viewer Access by Feature

Feature or Page	Permissions by Role
Server Dashboard	Only available to Carbon Black EDR Global Administrator or Carbon Black Hosted EDR Administrator.
Sensors	<p>Viewers: Can view tables and details of sensors in sensor groups for which the user has Viewer access.</p> <p>Analyst: Can perform actions on a sensors in sensor groups for which the user has Analyst access. Additional enhanced user permissions are necessary for isolating and uninstalling sensors and using Live Response.</p> <p>Analysts can also move sensors between sensor groups if they are Analysts for both the source and destination sensor groups.</p>
Sensor Groups	<p>Viewers: Can view tables and details of sensor groups for which the user has Viewer access.</p> <p>Analyst: Can perform certain actions involving sensor groups for which the user has Analyst access:</p> <ul style="list-style-type: none"> ■ Can toggle tamper detection if the user also has enhanced permissions for tamper levels. ■ Can toggle process banning if the user also has enhanced permissions for process banning. ■ Can edit other General, Sharing, Advanced, Event Collection, Upgrade Policy settings for the group. <p>An Analyst cannot add or delete a sensor group.</p>
Uninstall Sensors	<p>Viewers: No Access</p> <p>Analyst: Can uninstall sensors from the console in sensor groups for which the user is an Analyst <i>if the user also has the enhanced permission for uninstalling sensors</i>.</p>
Users, Teams and Activity Audit	Only available to Carbon Black EDR Global Administrator or Carbon Black Hosted EDR Administrator.
Tamper Level	<p>Viewer: No Access</p> <p>Analyst: Can configure tamper settings for sensor groups for which the user is an Analyst <i>if the user also has the enhanced permission for tamper levels</i>.</p>
HUD page	<p>Viewer: Can view the page that is filtered to show alerts and sensors in sensor groups for which the user is a Viewer.</p> <p>Analyst: Can take action on alerts.</p>
Threat Intel Feeds	<p>Viewer: No Access</p> <p>Analyst: Can view and modify the page, including enabling and disabling actions on hit (Email Me, Create Alert, or Log to Syslog).</p>
Triage Alerts	<p>Viewer: Can view all binary alerts, and can view other alerts in sensor groups for which the user is a Viewer.</p> <p>Analyst: Can view and take action on all binary alerts; can view and take action on other alerts in sensor groups for which the user is an Analyst.</p>
Watchlists	<p>Viewer: Can view watchlist results for binary searches and other searches that involve sensor groups for which the user is a Viewer.</p> <p>Analyst: In addition to view access, can add, modify, and delete watchlists, and take actions including enabling and disabling email notification, log to Syslog, and alerts.</p>
Process Search	Viewer and Analyst: Can view process search results for sensor groups for which the user has at least Viewer access.

Feature or Page	Permissions by Role
Process Analysis	Viewer: Can view process analysis results for sensor groups for which the user has at least Viewer access. Analyst: Can take actions for processes in sensor groups for which the user is an Analyst <i>if the user also has the enhanced permission for that action</i> . Actions include Isolate host, Go Live, and Ban Hash.
Binary Search (results) & Analysis (details)	Viewer: Can view all binary search results on the Search Binaries page and also details about one binary (Binary Analysis), regardless of the sensor group of the binary instance. Analyst: Can ban hashes in the search results <i>if the user also has the enhanced permission to ban hashes</i> .
Live Response	Viewer: No Access. Analyst: Can use Live Response to access and take actions on the endpoints in sensor groups for which the user is an Analyst <i>if the user also has the enhanced permission for Live Response</i> .
Investigations	Viewer: Can view the Investigations page. Actions are limited to Export events to CSV and Export timeline to PNG. Analyst: Can create, delete, and modify investigations.
Isolation	Viewer: No Access. Analyst: Can isolate endpoints and restore them from isolation in sensor groups for which the user is an Analyst <i>if the user also has the enhanced permission for isolating sensors</i> .
Banned Hashes	Viewer: No Access. Analyst: Can ban hashes and remove bans if the user has the enhanced permission for banning hashes. Not restricted by sensor group.
Notifications	Viewer and Analyst: All users can view notifications on the Notifications menu and receive notification emails.
User Name Menu	
Sharing Settings	Only available to Carbon Black EDR Global Administrator or Carbon Black Hosted EDR Administrator.
Settings	Only available to Carbon Black EDR Global Administrator or Carbon Black Hosted EDR Administrator.
Profile info	All users can view and edit their own profile.

Adding Enhanced Permissions for Analysts

The Analyst role allows access to features for monitoring and investigation of suspicious or malicious activity on endpoints. You might allow some Analysts to take certain actions to remediate threats or vulnerabilities. Carbon Black EDR provides an interface for adding special permissions to Analysts on a per-user basis.

When enabled, these enhanced features allow a user to take action in sensor groups where the user is on a team with Analyst privileges:

Enhanced Permission	Description
Ban hashes	Can ban files by hash and remove bans. These bans are applied to all sensors.
Isolate sensor	Can isolate a sensor <i>in that group</i> from the network and restore the sensor from isolation. See Isolating an Endpoint .

Enhanced Permission	Description
Live Response	Can connect to and act on a sensor <i>in that group</i> using Live Response. See Using Live Response .
Tamper	<i>Can set tamper level for sensor groups for which the user is an Analyst if the user also has the enhanced permission for tamper.</i>
Uninstall sensors	Can use the console to uninstall a Carbon Black EDR sensor in the group. See Chapter 6 Installing, Upgrading, and Uninstalling Sensors .
Execute Live Queries	Can run queries against endpoints. See Chapter 12 Live Query (beta) .

Note You can add enhanced Analyst permissions to any user, but these permissions are unnecessary for a Carbon Black EDR Global Administrator or Carbon Black Hosted EDR Administrator. They have no effect on users who are not on a team with the Analyst role in at least one sensor group.

The following procedures instruct you to navigate to Users from the navigation bar; for Carbon Black Hosted EDR administrators, navigate to Teams instead.

To provide enhanced Analyst permissions to a user:

- 1 On the navigation bar:
 - For an on-premises server, click Users.
 - For a cloud instance, click Teams and then click the Users tab.
- 2 Locate the user to whom to give enhanced permissions and click the Edit user button.
If you are providing enhanced Analyst permissions for an on-premises user you have not created yet, use the **Add User** button and provide all of the necessary information.

- 3 In the Enhance Analyst permissions panel, check the box next to each permission to give this user.

The information you provide below will be used by Carbon Black to support your use of the services. The information you provide may contain personal data which will be retained by Carbon Black until you delete it.

First Name	Assign to teams:	Select All / Deselect All
Jane	<input checked="" type="checkbox"/> Analysts	
Last Name		
Doe		
Email Address		
someone@example.com		
Password		
Confirm Password		
Enhance Analyst permissions:		
<input checked="" type="checkbox"/> To give this user enhanced privileges in addition to generic Analyst capabilities, assign them to a team with Analyst privileges on any sensor group.		
<input type="checkbox"/> Ban hashes		
<input type="checkbox"/> Isolate sensors		
<input type="checkbox"/> Live Response		
<input type="checkbox"/> Tamper detection		
<input type="checkbox"/> Uninstall sensors		
<input type="checkbox"/> Execute Live Queries		
<input checked="" type="checkbox"/> Global administrator		
<i>Overrides all permissions to full access</i>		

If the user is not a member of an Analyst team, a gray triangle icon appears in the upper left of the Enhance Analyst permission panel. If the user is already a member of a team with Analyst permission for a Sensor Group, the icon is a green checkmark.

- 4 If necessary, add the user to a team with Analyst permission.
- 5 Click **Save changes**.

User/Team Permissions Example

The following example shows how you can set up user accounts and teams. This is an simplified example — not a recommendation.

Suppose that a division of your company is based in Europe, with sites in France, Germany, and Italy. Also assume that all endpoints in these countries have sensors that are managed by one Carbon Black EDR cluster.

- **Create Administrators** : You can make two Global Administrators in each country — they can set up their users and user teams. These Global Administrators can also monitor system performance and change settings that control the server. Although in this example, their primary responsibility is for the sensors in their own country, each Global Administrator can perform any Carbon Black EDR activity on the any country's endpoints if necessary.
- **Create country-specific Analysts:** Create four additional users in each country that are assigned as Analysts to teams for the sensor groups that correspond to the endpoints in their own country. They can monitor data from the sensors in these groups.

- **Enhance permissions for some Analysts:** For two of the Analysts in each country, add enhanced permissions that allow them to take actions that affect sensors.
- **Let Analysts be Viewers for other sensor groups:** So that Analysts can be aware of activities or trends that could affect all countries, give them the Viewer role for the sensor groups in countries in which they are not Analysts.
- **Create Viewer (only) users:** There might be a third, larger group of users that you assign to teams that make them Viewers for the sensor groups in their own country so they can monitor but not alter the sensors in those groups.

Creating Teams

To create teams:

- 1 On the navigation bar:
 - For an on-premises server, click Users and then click Teams.
 - For a cloud instance, click Teams and then click Teams.

- 2 Click the **Create Team** button to display the **Add Team Settings** page:

- 3 In the **Name** field, enter a name for the team.

- 4 Drag and drop the sensor groups with the appropriate permissions. For example, for this team to have no access to the sensor group named **Default Group**, you would drag the **Default Group** box to the **No Access** list.

You could assign roles to users by adding them to teams that are set up with the type of privileges that are appropriate for the role (Analyst, Viewer, or No Access).

- 5 Click **Save Changes**.

Modifying Teams

To modify a team:

- 1 On the navigation bar:
 - For an on-premises server, click Users and then click Teams.
 - For a cloud instance, click Teams and then click Teams.
- 2 In the list of teams, click the **Edit** icon to the far right of the team name.
- 3 In the **Edit Team Settings** page, modify the team settings as needed and then click **Save Changes**.

Deleting Teams

When you delete a team, references to the team in user accounts are deleted, but the user accounts remain active.

To delete a team:

- 1 On the navigation bar:
 - For an on-premises server, click Users and then click Teams.
 - For a cloud instance, click Teams and then click Teams.
- 2 In the list of teams, click the **Delete (x)** icon to the far right of the team name.
- 3 Click **OK** to confirm the deletion.

Managing User Accounts

Although you can assign a user to teams later, it is helpful to have teams set up before you create non-global-administrator users because the capabilities of most users are determined by their teams. See [Managing User Access with Teams](#).

To create user accounts, log in to the Carbon Black EDR server console by using an account that has Global Administrator status. If no other users have been created yet, use the administrative account and password that were set up in the cbinit script during the server installation process.

To create an on-premises user account:

- 1 From a supported web browser, enter the path to your Carbon Black EDR server.

```
https://<your server address>/
```

- 2 Enter the username and password for a Global Administrator account.
- 3 On the navigation bar, click **Users**.
- 4 Click **Add User** in the top-right corner.
- 5 Enter the following information:

Field	Description
Username	Name that the user enters to login to the console. User names are case sensitive and restricted to standard Latin alphanumeric characters. Symbols and punctuation characters are not allowed. If you try to create a user account that contains an illegal character, the console displays a warning message.
First Name	First name of the user.
Last Name	Last name of the user.
Email address	Email address for the user.
Password	Password that authenticates this user. Enter any combination of letters, numbers, or special characters. Passwords are case sensitive. This field changes to New Password when you are editing existing accounts.
Confirm Password	Retype the password for confirmation.
Assign to teams	Select the teams to which the user will belong. The default team is Analysts. Users can belong to more than one team. See Managing User Access with Teams .
Enhance Analyst permissions	For a user that is an Analyst on any team, check one or more boxes to give the user permission to use additional features. See Adding Enhanced Permissions for Analysts .
Global Administrator	Check this box to give the user Global Administrator privileges. Important: A Global Administrator has full access to all Carbon Black EDR features and data, including server management and response tools. This includes access to every endpoint with an active sensor, without needing to be assigned to teams.

- 6 Click **Save changes**.

Changing Passwords

Carbon Black recommends that new users change their passwords after logging in for the first time.

To change your password:

- 1 Log in to the Carbon Black EDR console.
- 2 Click **Username > My Profile**.
- 3 Click **Change Password**. Enter the current password, the new password, and then confirm the new password.

- 4 Click **Save changes**.

Note Global Administrators can change the password of any user through the User Management page.

Resetting API Tokens

Carbon Black EDR has RESTful APIs to create custom scripts for interactions. These are described at <https://developer.carbonblack.com/reference/enterprise-response/> <https://developer.carbonblack.com/reference/enterprise-response/>

A unique API token is assigned to each Carbon Black EDR user. It serves as the key authentication mechanism when making calls to the APIs. Users can reset their API token at any time.

Note When a user's API token is reset, any affected custom scripts or integrations that use the API token must also be updated.

To reset the API token for a user account:

- 1 Log in to the Carbon Black EDR console with the account whose API token will be changed.
- 2 Click **Username > My Profile**.
- 3 Click **API Token**.
- 4 Click the **Reset API Token** button.

A notification briefly appears notifying you that the API token has been reset.

Deleting User Accounts

A user account can be removed from the system when that user no longer needs access to the Carbon Black EDR console or leaves the organization. Users who have Global Administrator privileges can delete any account except their own and the built-in administrator account. If the user with the deleted account belongs to a team, the user is automatically removed from the team when the account is deleted.

Note A Global Administrator can delete any account except the one you are logged in as, including the administration account that was created during the server installation.

To delete a user account:

- 1 On the navigation bar, click **Users**.
- 2 Locate the user's name and click the **Delete (x)** icon to the far right of the user name. (The delete icon next to the currently logged in user is grayed out, because a user cannot be deleted while logged in.)
- 3 Click **OK** to confirm the deletion.

A popup message reports the success or failure of this action. The Activity Audit for this user also shows the delete action.

Viewing User Activity

Carbon Black EDR keeps an audit trail of user activity.

To view user activity:

From the navigation bar, click **Users** and then click **Activity Audit**.

Users	Activity Audit 					 Export to CSV
Teams	Search for user activity					
Activity Audit	Username	Timestamp	Remote IP	Request Information	Result	Description
	admin	2020-01-27 10:48:50.889019-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 18:03:05.674028-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 16:07:15.435655-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 14:35:05.095497-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 11:49:41.331446-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 10:58:10.370737-05:00	ffff:.	POST /api/auth	200	OK
	admin	2020-01-24 10:12:31.209598-05:00	ffff:.	POST /api/auth	200	OK

The following information is displayed:

Field	Description
Username	The user name of the user who accessed the console.
Timestamp	The date and time that the user logged in.
Remote IP	The IP address of the computer on which the user logged in.
Request Information	The request (POST, GET, DELETE, etc.) being sent to the server.
Result	The HTTP response code when the user accesses a resource. For example, a successful authentication shows an HTTP 200 code response. A request to access a resource to which the user does not have permission usually results in redirection to the HUD page or displays an HTTP 403 code.
Description	The HTTP response description. For example, an HTTP 200 response shows OK, while an HTTP 403 response shows a Requires Authentication response.

- 1 Click **Export to CSV** to export the activity results in a CSV format with the filename `UserActivity.csv`.

Note If you have access to the Carbon Black EDR server, you can directly view the log for user activity in the following file:

User Activity API Audit Logging

You can enable API audit logging for a server by setting `EnableExtendedApiAuditLogging=True` in the `cb.conf` configuration file (see the VMware Carbon Black EDR Server Configuration Guide). In this case, Carbon Black EDR logs all REST API requests from either the console or other sources (such as scripts). API audit log information is stored in the `/var/log/cb/audit/useractivity.log` file, and also appears as follows:

- In the User Management section of the Carbon Black EDR console, under Request Information on the Activity Audit tab.
- In a CSV file downloaded from the Activity Audit tab, as in the following example:

```
2017-12-22 11:30:54: username='bill' userid='1' ip='::ffff:111.111.11.1'
status='200' method='GET' path='/api/v2/sensor'
2017-12-22 11:30:54: username='bill' userid='1' ip='::ffff:111.111.11.1'
status='200' method='GET' path='/api/v1/alert'
2017-12-22 11:30:55: username='bill' userid='1' ip='::ffff:111.111.11.1'
status='200' method='GET' path='/api/v1/detect/report/currentmonitoringstatus'
```

Managing User Accounts (Hosted)

5

This chapter describes how to manage Carbon Black Hosted EDR user accounts. In addition, users are also affected by the user and team configurations that are described in [Managing User Access with Teams](#).

To manage user accounts for Carbon Black EDR, see [Chapter 4 Managing User Accounts \(on-premise\)](#).

This chapter includes the following topics:

- [Overview of User Management](#)
- [Managing User Accounts](#)

Overview of User Management

Carbon Black Hosted EDR users access their server console using a Carbon Black Hosted EDR account. User accounts allow system management professionals, threat responders, and other console users to access and manage Carbon Black Hosted EDR features.

User accounts are initiated when an administrator sends an email invitation to a new user, who can then respond to the invitation and create the account. Users can access one or more servers for which they have been authorized. In Carbon Black Hosted EDR, separate accounts are not created for each authorized server.

The capabilities of a user are determined by the following factors:

- **For which servers is the user authorized?** – The administrator who sends out an account invitation is inviting the user to create an account (if they don't already have one) and authorize that account for a particular server.
- **Is the user an Administrator?** – The administrator who sends out an account invitation determines whether the new user will have **administrator privileges**. This can be changed later. If a user is an Administrator, the next three factors are not relevant.
- **What teams does the user belong to?** – The privileges of users who are *not* administrators depend upon the **teams** to which they belong. Administrators can also be assigned to teams, although team membership doesn't affect them unless their administrator status is disabled.

- **What roles do team members have for each sensor group?** – Teams specify a **role**, which determines the level of privileges their members have, for each **sensor group**. There are three roles: **Analyst**, **Viewer**, and **No Access**. Teams can (and usually will) have different roles for different sensor groups.
- **What is the highest role for any team this user belongs to?** – Access to some features is not restricted by sensor group, but is controlled by the roles that are assigned to a team. These features become available to a user if the user is on *at least one* team that has a high enough role for *at least one sensor group*.
This helps control access to features that are not specific to sensor groups, but to which you can restrict access. For example, threat feeds, which are not specific to any sensor group, are an important tool for threat monitoring. If a user is an Analyst on any team, that user can take any of the actions available on the Threat Intelligence Feeds page.
- **Is the user an Analyst with enhanced permissions?** – For Analysts, access to sensitive features (Live Response, sensor isolation, uninstalling sensors, file banning, etc.) is controlled by supplemental enhanced permissions.

See [Managing User Access with Teams](#).

Important Creation and management of user accounts and teams is available to Administrators only.

Managing User Accounts

Carbon Black Hosted EDR users are assigned to one of two classes when their account is created:

- **Administrator** – Administrators have full privileges on the Carbon Black Hosted EDR server, including adding and removing other users.
- **User** – Users can access non-administrative functions of the Carbon Black Hosted EDR server. Access is determined by their team membership.

An administrator can authorize user access to a server in one of two ways:

- By inviting a new user through email.
- By inviting an existing Carbon Black Hosted EDR user to become authorized on a new server

User invitations are created from the Users page.

Inviting a New or Existing User to Access a Cloud Server

This section explains how to invite a new user to create an account with access to a particular server, or authorize an existing Carbon Black Hosted EDR user to access a server they don't currently have access to.


To invite a user to open an account or extend it to a new server:

- 1 In a browser, enter the URL for the Carbon Black Hosted EDR server and log in as an Administrator.

If no other administrator accounts have been created, use the administrator account that Carbon Black provided when you initiated your use of Carbon Black Hosted EDR.
- 2 On the navigation bar, click Users.

The **Users** page shows the Carbon Black Hosted EDR Cloud user accounts that are authorized to access the server. This page also shows users whose invitation has expired without their account being activated.
- 3 If you find that the user you want to invite is listed on the page but the box for user account is grayed out, a previous email invitation to register for this server has expired. You have three options:
 - Re-invite the user by double-clicking the account and clicking the **Resend Invite** button.
 - Remove the invitation (making any links in the email sent to this user candidate unusable) by double-clicking the account box and clicking the **Revoke Invite** button.
 - Leave the user's invitation in the expired state.
- 4 If the user you want to invite does not appear on the page, click **Invite user**.

The **Invite user dialog box appears**.

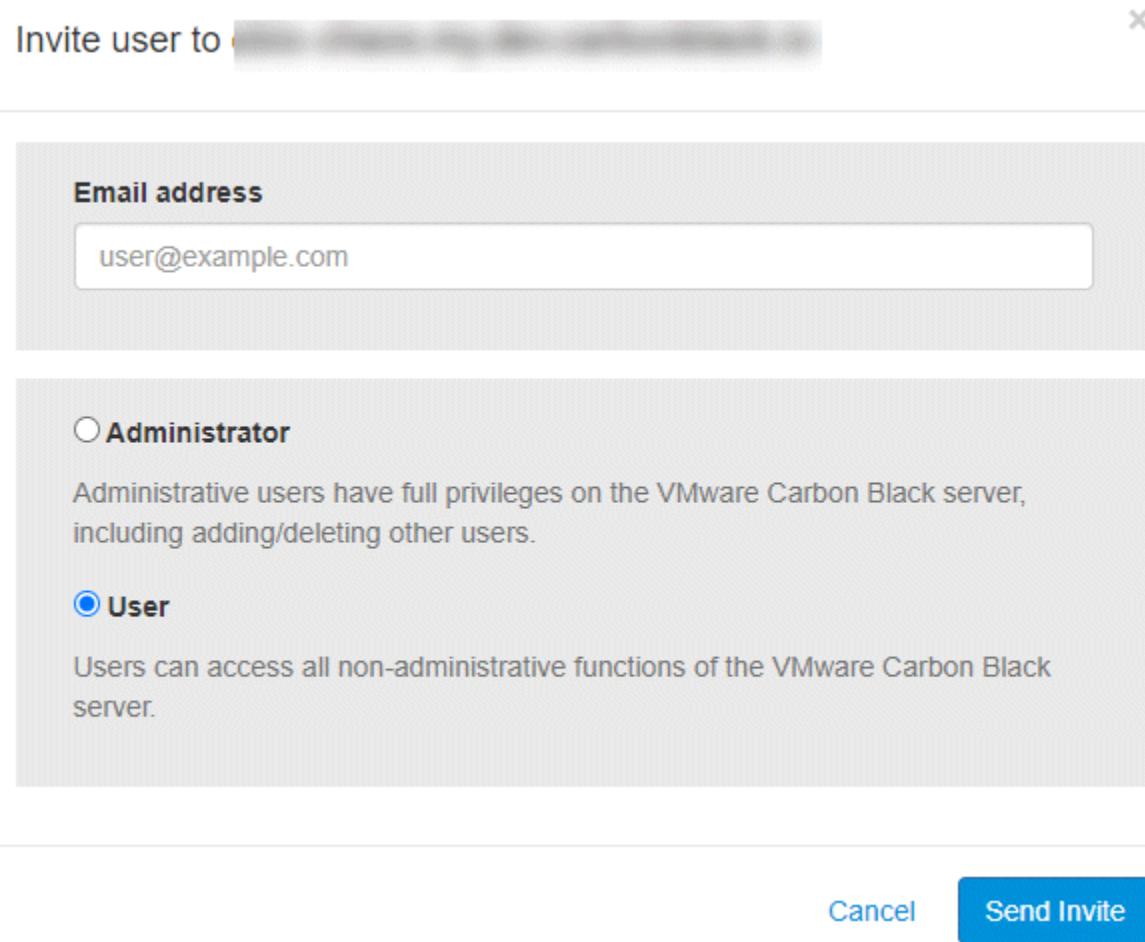

- 5 Type the email address to which to send the invitation.
- 6 Select **Administrator** or **User**.
Keep in mind that the Administrator role gives the user full privileges on this server. Administrators can add and delete other users.
- 7 Click **Send Invite**.

An email is sent to the user that contains a link to create a new account on the server. This link also authorizes an existing user who has access to a different server to log into this server by using the same account.

Note The email invitation link expires after seven days of no activity.

Activating an Account from an Invitation

The invitation to activate a Carbon Black Hosted EDR account arrives in an email that is sent to the address that is provided when an administrator creates the invitation.

To activate a new account from an invitation:

- 1 In the invitation email, click on the link to Carbon Black Hosted EDR.
- 2 In the **Create an account** section, choose a username for your account. User names are restricted to standard Latin alphanumeric characters without symbols and punctuation characters. Then enter your first and last names.
- 3 Click the **Sign up** button.

You are immediately logged in to the HUD page for the server you were invited to access. Confirmation that the account was created is sent to the same email address that received the initial invitation.

To activate access to a new server from an existing account:

- 1 In the invitation email, click the link to Carbon Black Hosted EDR.
- 2 Under the *Already have an account?* label, click the green **Sign In** button and log in with your existing account name and password.

You are immediately logged in to the HUD page for the new server.

Accessing Authorized Servers

Using the **Cloud** option (in the User Management console menu), you can view the servers to which your account has access.

To view the servers to which you have access:

- 1 After logging in with your cloud account, click **Users** in the navigation bar.
- 2 If you have servers in different regions, choose the region (for example, U.S.) for which you want to view servers.
- 3 In the header area of the Users page, click the **Cloud** link.
The **My Servers** page lists the servers to which you have access.
- 4 Click a servername link to access the HUD page for that server.
- 5 Click the **Configure** button to manage users on that server.

User Account Lockout

To protect against brute force login attacks, Carbon Black Hosted EDR locks a user account after seven consecutive, unsuccessful login tries in a period of 15 minutes.

An account can remain locked for up to 15 minutes. Attempts to log in during the lockout period, with or without the correct credentials, have no effect.

Unlocking an Account

An account unlocks automatically after 15 minutes. However, a user can unlock an account before the lockout expires by clicking **Forgot your password?** and following prompts to reset the account password.

Note While Carbon Black does not recommend using a group email address for a user account. For such an account:

Viewing and Modifying User Accounts

There are several places in the console where Carbon Black Hosted EDR user information can be viewed or changed:

- **Users page** – The Users page shows each account holder, their last login, whether they have two-factor authentication enabled, and their top-level account status (User or Administrator). You can access this page by clicking **Users** on the navigation bar.
 - Click the tile for any user to show the “User permissions for <servername>” page, which allows an administrator to change the user from an Administrator to User, or vice versa. See [Changing Administrator / User Status](#).
 - An Administrator can also remove a user account from this page. See [Removing a User Account](#).
- **Account page** – On the Account page, individual users can manage their own account details, including:
 - Resetting their passwords
 - Enabling or disabling two-factor authorization
 - Changing the email address associated with the account
 - Editing their first and last names

The Account page is accessible by clicking **View profile on carbonblack.io** from the My Profile page on the server, or by selecting Account from the User name menu. See [Changing Security Settings, Email Address or Full Name](#) for more details.

- **Team Management Users page** – The Users view on the Team Management page shows a table of all users on the current server and their teams. The View Details button next to a user name opens an Edit <user> page, where you can add or delete the user from teams. See [Managing User Access with Teams](#) for more details.
- **My profile page** – For the currently logged-in user, the My profile page shows the user’s teams, provides access to the API Token page where the API Token can be changed, and includes a **View profile on carbonblack.io** button that opens a new browser window that shows the Account page for this user.

You can access the My profile page through the User name menu in the top right of the console.


Changing Security Settings, Email Address or Full Name

Using the **Account** page, Carbon Black Hosted EDR users can manage their account details, including resetting their passwords and enabling or disabling two-factor authorization. Users can also change the email address associated with an account and edit their first and last names.

To change account details:

- 1 On the navigation bar, click **Users**.
- 2 In the top right of the My Servers page, click **Username > Account**.

Your **Account** page appears:

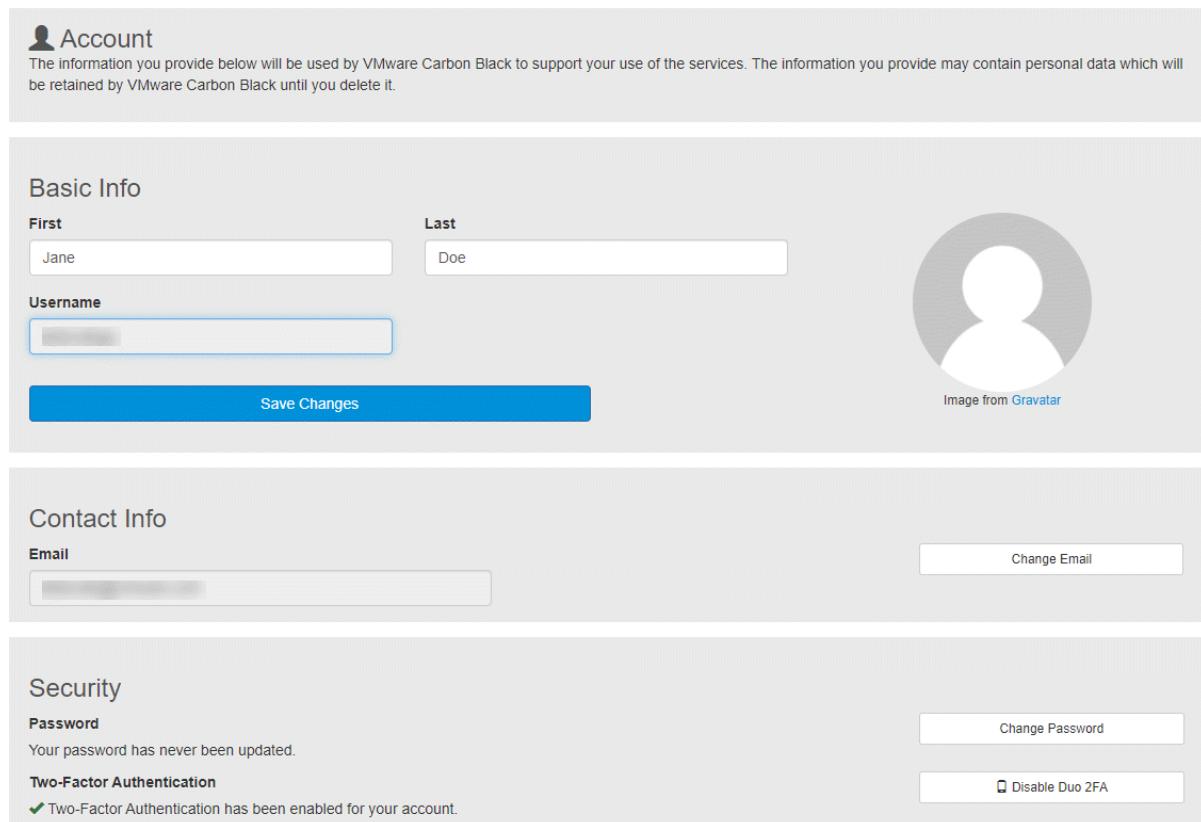

The screenshot shows the VMware Carbon Black EDR Account page with three main sections:

- Basic Info**: Fields for First (Jane), Last (Doe), and Username (redacted). A placeholder image from Gravatar is shown.
- Contact Info**: Email field (redacted) and Change Email button.
- Security**: Password section (Your password has never been updated) with Change Password button, Two-Factor Authentication section (Two-Factor Authentication has been enabled for your account) with Disable Duo 2FA button, and a note that the password has never been updated.

- 3 In the **Basic info** section, you can modify your first name, your last name, and you can upload an image. You cannot change your username.
- 4 Click Save Changes.
- 5 In the **Contact info** section, you can change the email address that is associated with your account by clicking **Change Email**.

In the **Change Email Address** dialog box, enter the new email address and click **Change email**. You will receive an email notification to verify the new email address.

- 6 In the **Security** section, you can:
 - **Change password** – Click to display the **Change Password** dialog box where you can change your password by entering it twice and clicking Change password.

- **Enroll/Disable Duo 2FA** – Click this to enable or disable two-factor authentication. For more information on enabling two-factor authentication, see [Logging In and Configuring Two-Factor Authentication](#).

Changing Administrator / User Status

You can change a user's status to either an administrator or a non-administrative user. Only administrators can perform this task.

To add or remove administrator status for a user:

1 Log into a Carbon Black Hosted EDR server as an administrator.

2 On the navigation bar, click **Users**.

The **Users** page appears and shows the user accounts that are authorized to access the server.

3 Click the user to modify.

The **User permissions for <server name>** page appears for that user.

4 To change the user's status, select an option:

- **Administrator** – Administrators are users with full privileges on the Carbon Black Hosted EDR server, including adding/removing other users.
- **User** – Users that are not administrators can access all non-administrative functions of the Carbon Black Hosted EDR server.

5 Click **Save Changes**. The system saves the change and returns you to the **Users** page.

Resetting API Tokens

Carbon Black Hosted EDR has RESTful APIs that can be used to create custom scripts for interactions with its features. These are described at <https://developer.carbonblack.com/reference/enterprise-response/> and <https://developer.carbonblack.com/reference/enterprise-response/>.

A unique API token is assigned to each Carbon Black Hosted EDR user. It serves as the key authentication mechanism for making calls to the APIs. A user can reset their API token at any time.

Note When a user's API token is reset, any affected custom scripts or integrations that use the API token must also be updated.

To reset the API token for a user account:

1 Login to the Carbon Black Hosted EDR console.

2 Click **Username > My Profile**.

3 In the **My Profile** window, select **API Token**.

- 4 Click the **Reset API Token** button.

A notification appears briefly in the top-right corner of the console, notifying you that the API token has been reset.

Viewing User Activity

Carbon Black Hosted EDR keeps an audit trail of user activity. See [Viewing User Activity](#).

Removing a User Account

You can remove a user account from accessing the Carbon Black Hosted EDR server, thereby terminating access for that account.

To remove a user account:

- 1 On the navigation bar, click Users.

The **Users** page displays the user accounts that are authorized to access the server.

- 2 Click the user to remove.

The **User permissions for <server name>** page appears for that user.

- 3 Click **Remove User**.

When the user account has been removed, you are returned to the **Users** page.

Installing, Upgrading, and Uninstalling Sensors

6

This chapter describes how to install, upgrade, and uninstall sensors on Windows, macOS, and Linux endpoints.

- See [Chapter 7 Managing Sensors](#) for information on managing sensors.
- See [Chapter 8 Sensor Groups](#) for information on managing sensor groups.
- See [Chapter 9 Managing Certificates](#) for information about certificate options.
- See [Chapter 10 Troubleshooting Sensors](#) for information on troubleshooting sensors.
- See [Chapter 24 Sensor Parity](#) for information about which Carbon Black EDR features are supported on sensors that are running in each operating system.

This chapter includes the following topics:

- [Overview of Sensor Installation](#)
- [Supported Operating Systems and Versions](#)
- [Installing Sensors on Windows](#)
- [HTTP Proxy Support in Windows Sensors](#)
- [Uninstalling Windows Sensors](#)
- [Installing Sensors on macOS Systems](#)
- [Upgrading Sensors on macOS](#)
- [Uninstalling Sensors on macOS](#)
- [Installing Sensors on Linux Systems](#)
- [Upgrading Sensors on Linux](#)
- [Uninstalling Sensors on Linux](#)
- [Upgrading Sensors](#)
- [Uninstalling Sensors through the Console](#)
- [Obtaining New Sensor Installation Packages](#)

Overview of Sensor Installation

Carbon Black EDR provides lightweight sensors for installation on endpoints such as laptops, desktops and servers. You install a sensor on each endpoint in your enterprise. After installation, sensors gather event data on the endpoints and securely deliver it to the Carbon Black EDR server for storage and indexing. You can use the default “legacy” certificate to secure communications or provide your own certificates, as described in [Chapter 9 Managing Certificates](#).

Sensor installers are accessible from the Carbon Black EDR **Sensor Group** pages. Between server releases, there are often installers for newer sensor releases that are available on the Carbon Black User Exchange.

Supported Operating Systems and Versions

Carbon Black EDR supports sensors for Windows, Mac, and Linux environments.

For the specific operating system versions supported for this release, see the following page on the Carbon Black User Exchange:

<https://community.carbonblack.com/t5/Documentation-Downloads/CB-Response-sensors-and-CB-Protection-agents/ta-p/33041>

Installing Sensors on Windows

This section describes how to install Carbon Black EDR Windows sensors.

Note To install sensors on Windows systems, you must belong to the Local Administrators permissions group or higher.

There are two ways to install Windows sensors:

- **Windows Standalone EXE** – Installs a sensor onto a single host. This option is useful for bringing a new host online in your network.
- **Windows MSI for GPO Installation** – Deploys sensors to multiple hosts over the network using Microsoft's Group Policy Object (GPO). This option is also appropriate for deploying sensors remotely with third-party software deployment applications using standard `Msiexec` commands.

For information about Windows MSI for GPO, see [https://technet.microsoft.com/en-us/library/hh147307\(v=ws.10\).aspx](https://technet.microsoft.com/en-us/library/hh147307(v=ws.10).aspx) .

To access the Download Sensor Installer controls for a sensor group, you must be **one** of the following:

- A user that is a member of a team that has either the Viewer or Analyst role for the sensor group.
- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

To install sensors on Windows endpoints:

- 1 On the navigation bar, click **Sensors** .
- 2 In the Groups panel, select the sensor group for the new sensor to join.
The Download Sensor Installer drop-down list appears.
- 3 On the navigation bar, click **Sensors** .
- 4 From the Download Sensor Installer list, select one of the following to download a ZIP file that contains the package installer:
 - To install a single sensor only, select either Windows Standalone EXE - Latest Version or Windows Standalone EXE - <specific version>.
 - To install one or more sensors, select **Windows MSI for GPO Installation - Latest Version** or **Windows MSI for GPO Installation - <specific version>** .
where <specific version> is the sensor version specified in the group's upgrade policy for automatic updates. This is useful for bringing on a new host and installing the same sensor version installed group-wide. See [Upgrade Policy Settings](#) for information about sensor group upgrade policies.
- 5 For a standalone installation do the following:
 - a Copy the downloaded <install package name>.zip file to the Windows endpoint (XP SP3 or higher, either 32- or 64-bit).
 - b Extract the contents of the <install package name>.zip file to a temporary folder. Do not skip this step.
 - c Double-click the file CarbonBlackClientSetup.exe , and then follow the installation prompts.
- 6 For the Windows MSI for GPO installation, follow the instructions in the GPO_README.txt file, which is included in the downloaded <install package name>.zip file.

After the installation is complete, the Windows sensor is installed and running. The **Sensors** page shows the sensor as registered and checking into the Carbon Black EDR server.

HTTP Proxy Support in Windows Sensors

For Windows sensors versions prior to 6.2.3, proxies are supported in the following way:

- In the Sensorsettings.ini file, set a configuration string “Proxy=server:port” . Server can be the host name or IP address of a proxy server, and port is an optional numerical port value.
- There is no server-side user interface to set this configuration option. The server cannot inform the sensor of this configuration via the Protobuf message.

For Windows sensor version 6.2.3 and above, proxies are supported in the following ways:

- Set the proxy configuration string in `Sensorsettings.ini` to the following values (case sensitive):
 - “Proxy=@wpad” : this instructs the sensor to use the WPAD protocol to autodetect the proxy settings. If autodetection fails, a direct connection is used. This is done for every request that the sensor needs to make.
 - “Proxy=@pacurl:URL” , where URL is the URL of a PAC file; for example, `https://server.example.com/example.pac` . This instructs the sensor to download the PAC file at this URL, and to use the proxy that it configures for the current networking conditions and request. If the PAC file cannot be found, a direct connection is used. This is done for every request that the sensor makes.
 - “Proxy=server:port” : This setting was supported in previous sensor versions; however, the behavior is enhanced. If communications fail with a DNS resolution failure, or fails to connect to the server, a direct connection is attempted. Note that an HTTP failure (status code other than 200 OK) does not trigger a direct connection.
- There is no server-side user interface to set this configuration option. You must edit the `Sensorsettings.ini` file before you install the sensor.
- Alternatively, for already installed sensors, you can set the registry value: “`HKLM\SOFTWARE\CarbonBlack\config\Proxy`” to the desired string (type `REG_SZ`). For example, run the following command as an admin from PowerShell or a command prompt window to set the proxy configuration to use WPAD: “`reg add HKLM\SOFTWARE\CarbonBlack\config /v Proxy /t REG_SZ /d @wpad`” It is recommended to use either “@wpad” or “@pacurl:URL” , depending on your configuration.

Uninstalling Windows Sensors

To uninstall Windows sensors, you can either use the Carbon Black EDR console and follow the instructions in [Uninstalling Sensors through the Console](#), or you can manually uninstall them by using the following procedure.

In Windows, you must be in the Local Administrators permissions group or higher to manually uninstall the sensor.

To manually uninstall Windows sensors:

- Either:
 - Launch the uninstall file in the `%windir%\CarbonBlack/` directory
 - Navigate to **Control Panel > Add/Remove Programs** and use the Windows application uninstall feature.

Installing Sensors on macOS Systems

This section describes how to install Carbon Black EDR macOS sensors.

Note To install a sensors on macOS systems, you must have access to an administrator account on that system.

To have access to the Download Sensor Installer controls for a sensor group, you must be **one** of the following:

- A user that is a member of a team that has either the Viewer or Analyst role for the sensor group.
- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

To install sensors on macOS endpoints:

- 1 On the navigation bar of the Carbon Black EDR console, click **Sensors**.
- 2 In the Groups panel, select the sensor group for installing the sensor package.
- 3 From the Download Sensor Installer list at the top of the Sensors page, select **OSX Standalone PKG**.

The sensor package file is downloaded to your system.

- 4 In the operating system, do the following:
 - a Copy the <install package name>.zip sensor installation package to the macOS endpoint.
 - b Extract the <install package name>.zip file to a temporary folder. Do not skip this step.
 - c From the extracted .zip file, double-click to run the .pkg file and follow the installation prompts. You can also launch the .pkg file by using a silent installer. For example:

```
installer -pkg <install package name>.pkg -target /
```

This installs the macOS sensor using the configuration that is provided in the `sensorsettings.ini` file.

After the installation is complete, the macOS sensor is installed and running. The **Sensors** page shows the sensor as registered and checking into the Carbon Black EDR server.

Upgrading Sensors on macOS

To upgrade sensors on macOS, see the instructions in [Upgrading Sensors](#). You must have access to an administrator account on the macOS system to perform the upgrade.

Uninstalling Sensors on macOS

To uninstall macOS sensors, you can either use the Carbon Black EDR console and follow the instructions in [Uninstalling Sensors through the Console](#), or you can manually uninstall them by using the following procedure.

To manually uninstall a macOS (or OS X) sensor, you must have access to an administrator account or be assigned to an Analyst team that has uninstall sensor privileges for the appropriate sensor group.

To manually uninstall macOS sensors:

- On the macOS endpoint where the sensor is installed, run the following command:

```
/Applications/CarbonBlack/sensoruninst.sh
```

After this process is complete, the endpoint stops reporting events and binaries to the Carbon Black EDR server and all the caching information for logs is deleted.

Installing Sensors on Linux Systems

This section describes the steps to install the Carbon Black EDR Linux sensor.

You must have the following requirements before installing the sensor:

- Carbon Black EDR server version 5.0 or higher
- OpenSSL version 1.0.1 or higher

Note To install sensors on Linux systems, you must be a root user or have “sudoer” permissions and run the installer with “sudo”.

To have access to the Download Sensor Installer controls for a sensor group, you must be **one** of the following:

- A user that is a member of a team that has either the Viewer or Analyst role for the sensor group.
- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

To install sensors on Linux endpoints:

- 1 In the navigation bar, click **Sensors**.
- 2 In the Groups panel, select the sensor group for which you want to install the sensor package.
- 3 From the Download Sensor Installer drop-down list, select **Linux Standalone RPM**.

The sensor package file is downloaded to your system.

4 In the operating system, do the following:

- a Copy the <install package name>.tar.gz sensor installation package to the Linux endpoint.
- b Untar the <install package name>.tar.gz file to a temporary folder. Do not skip this step.

For example, at a command prompt and from the directory where the file is installed, run this command:

```
tar -zxvf <install file name>.tar.gz
```

- c From the extracted .tar.gz file, run the .sh file and then follow the installation prompts.

This installs the Linux sensor using the configuration provided in the `sensorsettings.ini` file.

After this process is complete, the Linux sensor is installed and running. The **Sensors** page shows the sensor as registered and checking into the Carbon Black EDR server.

Upgrading Sensors on Linux

To upgrade sensors on Linux, follow the instructions in [Upgrading Sensors](#).

Note To upgrade sensors on Linux systems, you must be a root user or have “sudoer” permissions and run the installer with “sudo”.

Uninstalling Sensors on Linux

To uninstall Linux sensors, you can either use the Carbon Black EDR console and follow the instructions in [Uninstalling Sensors through the Console](#), or you can manually uninstall them by following the steps described here.

To manually uninstall a Linux sensor, you must be a root user or have “sudoer” permissions and run the installer with “sudo”.

To manually uninstall Linux sensors:

- On the Linux endpoint where the sensor is installed, run the following command:
`/opt/cbsensor/sensoruninstall.sh`
- If you are running Linux sensor 6.2 or higher, run the following command instead:
`/opt/carbonblack/response/bin/sensoruninstall.sh`

When this process is complete, the endpoint stops reporting events and binaries to the Carbon Black EDR server.

Upgrading Sensors

A new release of Carbon Black EDR server can include a new sensor version. Check the server release notes to confirm if a new sensor version is available. Decide if you want to deploy the updated sensor immediately to existing sensor installations, or only install it where there has not been a sensor before.

Note Carbon Black strongly recommends that you upgrade your sensors as soon as possible when a new version is available. However, you should not upgrade all sensors simultaneously if you have a large number of sensors, due to potential performance issues.

If you want to use automatic upgrades, consider gradually enabling automatic upgrades one sensor group at a time.

Sensor upgrades might require a reboot. Refer to the sensor release notes for the version to which you are upgrading.

Each sensor group has an upgrade policy that determines how and when the sensors in the group are updated, and to what version. You set the upgrade policy for a sensor group in the Create or Edit Group panel of the Sensors page.

Upgrade policy options are as follows:

- Manually update sensors at the time of your choice using the Download Sensor Installer menu.
- Automatically upgrade sensors to the latest version.
- Update sensors to a specific version.

See [Upgrade Policy Settings](#) for a description of the upgrade policy options for a sensor group.

For information on the latest sensors, visit the [VMware Carbon Black User Exchange](#).

To upgrade a sensor using the Carbon Black EDR console, you must be **one** of the following:

- A user that has the Analyst role for the sensor group for the endpoint.
- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

Uninstalling Sensors through the Console

For all OS platforms, you can uninstall sensors by using the Carbon Black EDR console. After you uninstall sensors, they will stop reporting events and binaries from the endpoints on which they are installed to the Carbon Black EDR server.

To uninstall a sensor using the Carbon Black EDR console, you must be **one** of the following:

- A user that has the enhanced Analyst permission for uninstalling sensors **and** is a member of a team that has the Analyst role for the sensor group for the endpoint.

- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

To uninstall sensors using the console (all platforms):

- 1 On the navigation bar, click **Sensors**.
- 2 In the Groups panel, select the sensor group that contains the sensor to uninstall.
- 3 In the sensors list, select the checkbox next to the sensor(s) to uninstall.
- 4 From the **Actions** drop-down list select **Uninstall**.
- 5 In the Uninstall Sensors **Confirmation** dialog box, click **Okay to confirm the uninstall action**.

The sensor(s) are uninstalled.

Note The sensor receives the uninstall request the next time it checks in with the server, which can be anytime between 30 seconds to several minutes, depending on the number of active sensors and the server load. Uninstalled sensors do not appear in sensor and host lists, unless the **Show Uninstalled Sensors** checkbox is selected.

Obtaining New Sensor Installation Packages

Periodically, Carbon Black releases new sensor versions either standalone or with a version of Carbon Black EDR server. When you install or upgrade the server, you can choose to load the latest sensor installers, or install or upgrade the server version only.

The sensor installers are downloaded to the sensor installation directory, either the default of `/usr/share/cb/coreservices/installers`, or a custom location specified by `SensorInstallerDir` Osx|Linux in the `cb.conf` file. (See the VMware Carbon Black EDR Server Configuration Guide for details.)

Apart from a server installation or upgrade, you can download any new sensor installers manually from the Carbon Black yum repo (as described in the release announcement on the Carbon Black User Exchange).

After the installation packages are in the sensor installation directory, they can be made available in the following places in the console:

- The Download Sensor Installer drop-down list on the Sensors page when a group is selected.
- The sensor versions available for upgrades (either automatically or manually) according to the upgrade policy for a sensor group. For information about Upgrade Policy settings, see [Upgrade Policy Settings](#).

The installer packages are made available in the following ways:

- At startup through coreservices
- By running the following command:

```
/usr/share/cb/cbcheck sensor-builds --update
```

Managing Sensors

7

This chapter describes how sensors work, the information they provide, and how to search for and monitor sensors.

- See [Managing User Access with Teams](#) for information about the roles and permissions that are required to view and modify sensors and their information.
- See [Chapter 6 Installing, Upgrading, and Uninstalling Sensors](#) for information on installing, upgrading, and uninstalling sensors.
- See [Chapter 8 Sensor Groups](#) for information on managing sensor groups.
- See [Chapter 9 Managing Certificates](#) for information about certificate options.
- See [Chapter 10 Troubleshooting Sensors](#) for information on troubleshooting sensors.
- See [Chapter 24 Sensor Parity](#) for information on features supported on the sensor operating systems.

This chapter includes the following topics:

- [Overview of Sensor Management](#)
- [Tamper Protection of Windows Sensors](#)
- [Monitoring Sensor Status and Activity](#)
- [Monitoring Sensor and Server Information](#)
- [Viewing Sensor Details](#)

Overview of Sensor Management

Installed sensors gather event data on host computers (endpoints) and securely deliver the data to the Carbon Black EDR server for storage and indexing. This enables your team to see and understand the history of an attack, even if the attacker deleted artifacts of its presence.

A sensor checks in with the Carbon Black EDR server every five minutes to report the activity it detects. The server responds and notifies the sensor about how much data to send. To aid in detecting IOCs, the server compares the data it records from sensors with the latest data synchronized from threat intelligence feed partners that you have enabled.

Each sensor belongs to a sensor group that defines the configuration and security characteristics for the sensor. For example, sensor groups define the upgrade policy and types of event information that sensors in the group collect. One sensor group can contain many sensors, but a single sensor can only belong to one sensor group. See [Chapter 8 Sensor Groups](#) for more information.

To secure communication between sensors and the server, Carbon Black EDR uses HTTPS and TLS. You can use the default server certificate or add your own server certificates and assign different certificates to different sensor groups. See [Chapter 9 Managing Certificates](#) for details.

Collected Data Types

Sensors collect information about the following data types:

- Currently running parent and child processes
- (OS X and Linux only) Fork and posix_exec processes
- Modules loaded by processes
- Processes blocked as the result of a Carbon Black EDR hash ban
- Binaries
- File executions
- File modifications
- Network connections
- (Windows only) Registry modifications
- (Windows only) Cross-processes (an occurrence of a process that crosses the security boundary of another process)
- (Windows only) Enhanced Mitigation Experience Toolkit (EMET) events and configuration

Incident-Response Features

To help you manage sensors and work with the information they capture, Carbon Black EDR provides incident-response features that provide the following capabilities:

- Directly respond to a threat detected on an endpoint through a command interface
- Isolate an endpoint with a suspicious process or threat
- Ban process hashes to prevent known malware from running in the future
- Set watchlists to monitor suspicious activity on endpoints

For information on these incident-response features, see [Chapter 11 Responding to Endpoint Incidents](#) and [Chapter 20 Watchlists](#)

Tamper Protection of Windows Sensors

The 7.2.0-win sensor release includes a Tamper Protection feature that protects the Windows EDR sensor against external attempts to stop EDR services, or to modify the sensor's binaries, disk artifacts, or configuration. While in a Tamper Protected state, the sensor only accepts actions that are requested through the Carbon Black EDR server console.


We encourage you to review the knowledge base article [EDR: Which Sensor directories need exclusion from third-party anti-virus scans](#) to make sure that the latest EDR Windows sensor exclusions are in place before enabling Tamper Protection.

Requirements:

- Minimum OS Versions of Windows 10 v1703 (Desktop) or Windows Server v1709 (Windows build 15163)
- Minimum Carbon Black EDR versions of v7.2.0 Windows EDR sensor and v7.4.0 Carbon Black EDR Server
- You must be one of the following: a Global Administrator (Carbon Black EDR), an Administrator (Carbon Black Hosted EDR), or a user who is an Analyst for the applicable sensor group and who also has permission for Tamper Level.

To apply Tamper Protection to a sensor group:

- 1 Log in to the Carbon Black EDR console.
- 2 On the left navigation bar, click Sensors.
- 3 Click the gear icon next to the sensor group for which to apply Tamper Protection.
- 4 In the Edit Group panel, click Advanced.
- 5 Change the Tamper Protection Level to Protected and create a Tamper Override Password

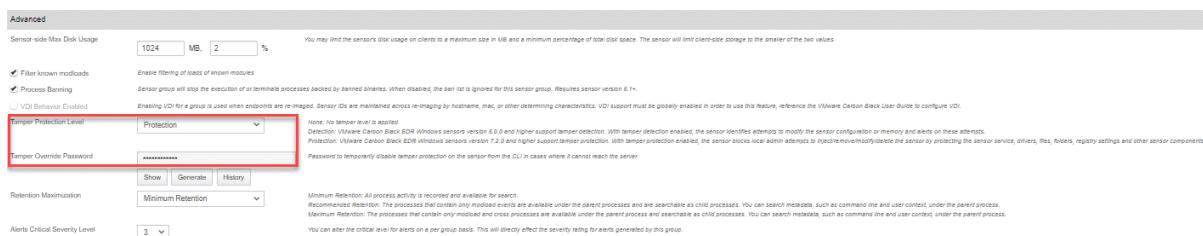

- 6 Click Save Group.

For more information about this setting in Sensor Groups, see [Advanced Settings](#).

Note

- Any Windows sensor in a sensor group that has Tamper Protection applied and that does not meet the minimum OS requirements will default to Tamper Detection. VMware Carbon Black App Control Tamper Protection is recommended in these cases. We recommend that you update the tamper rule settings for Carbon Black App Control to the latest Carbon Black EDR Tamper Protection Rapid Config.
- Enabling Tamper Protection on both App Control and Carbon Black EDR does not provide extra protection. We recommend that you disable App Control enforcement of Tamper Protection after Carbon Black Tamper Protection enforcement is in place.

In case of disrupted communication between the Carbon Black EDR server and the sensor, you can manage the sensor directly by using the CbEDRCLI tool.

To use the Tamper Protection CLI tool:

- 1 Run CbEDRCLI.exe as an admin on the Windows endpoint.
- 2 Enter the tamper override password that you created in the previous procedure. Note that three incorrect password attempts incur a lockout period of one minute.

The CbEDRCLI.exe tool will be effective for one hour.

Monitoring Sensor Status and Activity

The Carbon Black EDR console provides multiple views into sensor activity on your endpoints.

- On the HUD page, the Sensors panel gives a snapshot of sensor health, status, and activity.
- On the Sensors page, you can search for sensors and manage sensor groups.
- From anywhere in the console (Process Search or Watchlists pages, for example), you can click a hostname to get detailed information about a particular sensor.

The Sensors Page

The **Sensors** page in the Carbon Black EDR console provides information about sensors and their host computers.

To access the Sensors page:

- 1 On the navigation bar, click **Sensors**.

The Sensors page is organized as follows:

- Sensor groups in which the sensors are included appear in the Groups panel.
- Computers (endpoints or hosts) that have installed or uninstalled Carbon Black EDR sensors appear in the Sensors panel.

2 To change the list of displayed sensors:

- Check the Show uninstalled sensors box to display uninstalled sensors.
- Click the Sensor Display Settings button to specify the number of days by which sensors must communicate with the server.

Note The `SensorLookupInactiveFilterDays` setting determines whether sensors that have not checked in for a specified number of days are filtered out of the Sensors page.

This setting has no effect when set to the default value of zero. When set to any value greater than zero, the Sensors page filters out any sensors that have not been checked in during the specified past number of days. This setting filters the results of the API call `GET /api/v1/sensor`.

This setting interacts with the setting for `MaxEventStoreDays`, which controls how old warm (mounted) partitions can become before they are unmounted or deleted. If `SensorLookupInactiveFilterDays` is not zero but less than the value of `MaxEventStoreDays` (30 days by default), process data for inactive computers is included in search results.

- Click the name of the group in the Groups panel to view all sensors in a particular sensor group. The group name appears at the top of the Sensors panel.
- Click All Sensors at the top of the Groups panel to view all sensors in all groups.
- To search for one or more sensors, see [Searching for Sensors](#).

3 When the list of sensors cannot fit on a single page, use the controls at the bottom of the page to navigate multiple pages:

Showing 1-10 of 181 **10** Items per Page Jump to Page **#** of 19 < 1 2 3 4 5 ... 19 >

- Enter the number of Items per Page.
- Enter a number to Jump to a Page.
- Click the forward and back arrows to navigate pages sequentially.
- Click a number between the arrows to go to a specific page.

4 The following information appears for all sensors in the list:

Field	Description
Computer Name	The hostname corresponding to the computer on which the sensor is installed.
Domain Name	The registered DNS name for the IP address of the computer on which the sensor is installed.
IP Address	The IP address of the computer on which the sensor is installed.

Field	Description
Status	<p>Describes the status of sensor connectivity as follows:</p> <ul style="list-style-type: none"> ■ Online – Sensor communicated with the server within the previous expected check-in interval. ■ Offline – Sensor did not communicate with the server for more than a five-minute period after the expected check-in interval provided during the previous check-in. <p>If known, offline status might include one of the following reasons:</p> <ul style="list-style-type: none"> ■ Offline (Suspended) – Sensor detected that an OS-level suspend operation occurred before the sensor went offline. ■ Offline (Restarting) – Sensor detected that an OS-level restart operation occurred before the sensor went offline. ■ Offline (Isolate configured) – Sensor is offline and marked for isolation upon next check-in. ■ Offline Uninstalled – Appears when an uninstall was requested for an offline sensor. <p>If a sensor is being uninstalled, one of the following status descriptions might appear:</p> <ul style="list-style-type: none"> ■ Uninstall uninstalled – Requested uninstall operation has completed, and the sensor was successfully uninstalled. ■ Uninstall pending uninstalled – Uninstall operation was requested but has not yet completed.
Activity	The time that updated data is expected from the sensor; for example, “Was expected 2 seconds ago” or “Last seen about 3 months ago.”
OS Version	The operating system version of the endpoint on which the sensor is installed.
Server Certificate	The server certificate being used to secure communications with this sensor.
Node Id	<p>In a clustered environment, the server ID to which a sensor sends data.</p> <p>For a standalone instance, the value is 0 (zero).</p>
Sensor Version	Version of the currently installed Carbon Black EDR sensor.

Searching for Sensors

On the Sensors page, you can search for sensors using either the Search box, or a search based on filtered criteria.

To search for a sensor:

1 On the Sensors page, do one of the following:

- In the **Search** box, enter characters in the name of the endpoints to find. Searching commences incrementally as you type and is case-insensitive.

Search results include endpoints with sensors installed that have a name that matches the search string; if Show uninstalled sensors is selected, matching endpoints that have both installed and uninstalled sensors are included.

- Click Filter and select any of the following criteria:

Filter Criteria	Description
Sensor Version	Installed version of a sensor.
Last Checkin Time	Timespan in which a sensor last checked into the Carbon Black EDR server (last hour, last day, last week, and so on).
Node ID	In a clustered environment, the server ID to which a sensor sends data. For a standalone instance, the value is 0 (zero).
Feature Support	One of the following features a sensor reports as supporting: <ul style="list-style-type: none"> Live Response – CBLR Isolation – The sensor can be isolated. 2nd Gen Modloads – (macOS only) Binary modules the sensor reports as being loaded by a process.

The list of sensors updates dynamically according to the filters selected.

Search results include computers with installed, or with Show uninstalled sensors selected, uninstalled sensors that match the search criteria specified by one or more selected filters.

- To clear all filters and search-box criteria and reset the Sensors page to an unfiltered list of sensors, click Reset Filters.

Exporting Sensor Data

From the Sensors page, you can download detailed sensor data to a CSV file.

To export sensor data from the Sensors page:

- From the Export drop-down list, click one of the following options:
 - Export All – Downloads data either for all installed sensors, or with Show uninstalled sensors selected, for both installed and uninstalled sensors on endpoints in your environment.
 - Export Visible – Downloads data only for sensors that are visible on the current page. For example, if there are 40 sensors in a list, and the list displays 20 items per page, the CSV file only contains data for the 20 sensors that are currently visible.

Sensor Actions

On the Sensors page, you can select sensors by selecting the check boxes next to the sensor names. Use the Actions drop-down list to perform the following actions on one or more selected sensors:

- Sync** – Forces the sensor to send all the data that it has collected to the Carbon Black EDR server immediately, ignoring any bandwidth throttles that might be configured.
- Restart** – Restarts the sensor process.
- Move to group** – Moves the sensor to another sensor group.

- **Uninstall** – Uninstalls the sensor from the host computer.
- **Isolate** – Isolates a computer from the rest of the network, leaving only the connections necessary for the Carbon Black EDR server to access its sensor. The console UI provides the following cues for an isolated host:
 - On the Sensors page, the word Isolated appears in the Status column.
 - On the Sensor Details page, the message “This host has been isolated from the rest of the network” appears at the top; Remove isolation is the only option on the Actions list.

See [Isolating an Endpoint](#).

- Remove isolation – From an isolated state, rejoins an endpoint to the network so that it can resume sending data to the Carbon Black EDR server.

Monitoring Sensor and Server Information

The **Server Dashboard** provides an overview of the following sensor and server details:

- Sensor statistics
- Server communication status
- License information

This section describes how to view this information in the **Server Dashboard**, and descriptions of the details that display there.

Note The Server Dashboard is available only to Carbon Black EDR Global Administrators and Carbon Black Hosted EDR Administrators.

To view server and sensor information in the Server Dashboard:

- 1 On the navigation bar, click **Server Dashboard**.

Storage Statistics	
Server Node	localhost
Mount Point	/
Disk Used	4.11 GB
Disk Available	81.44 GB
Disk Total	90.13 GB
Sharding	11 shards
Process Documents Count	9001
Process Disk Size	119.18 MB
Binary Info Count	2100
Binary Info Disk Size	965.03 KB
Sql Disk Size	111.09 MB
Binaries Count	578
Binaries Size	189049164

Server Communication Status	
Cb Threat Intel is connected	Green
Cb Protection is not configured	Grey
Settings	Icon

License Information	
Current Sensor Count	2 sensor(s)
License End Date	2020-12-31 Expires in 12 months
Current Licensed Sensors	100 sensor(s)
Server Token	Redacted
License Usage Graph	
125	
100	
75	
50	
25	
0	
2019-12-18	2019-12-26
2020-01-02	2020-01-10

2 Review information in the **Storage Statistic** panel:

Field	Description
Mount Point	The mount point for the Carbon Black EDR server data directory.
Disk Used	The amount of the disk space used for storage.
Disk Available	The amount of the disk space still available for storage.
Disk Total	The total amount of disk space.
Sharding	The number of shards on the disk. Expand to see associated ID, size, document count, and max document count.
Process Documents Count	The number of process documents uploaded to the database on the server. This is the same number as the total number of processes on the Process Search page .
Process Disk Size	The disk space used by the process documents.
Binary Info Count	The number of binaries that are seen by the sensor. This is the same number as the total number of binaries on the Binary Search page .
Binary Info Disk Size	The total number of bytes of binary information that is uploaded to the server.
Sql Disk Size	The psql database disk utilization.
Binaries Count	The number of binaries stored on the server.
Binaries Size	The total number of bytes of binaries stored on the server.

3 Review information in the **Sensor Statistics** panel:

Field	Description
Online Sensor Count	The number of sensors that are detected as being online by the server.
Total Sensor Count	The total number of sensors installed and registered for this server.
Aggregate Sensor Event Queue	The total size of queued events needing to be pushed to the server for all online sensors.
Aggregate Sensor Binary Queue	The total size of queued binaries needing to be pushed to the server for all online sensors.

4 Review information in the **Server Communication Status** panel:

Field	Description
CB Threat Intel is connected	Shows whether or not communication between the Carbon Black EDR server and the CB Threat Intel has been established.
Carbon Black App Control is not configured	Shows whether or not communication between the Carbon Black EDR server and a App Control server has been established.

5 Review the information in the **License Information** panel:

Field	Description
Current Sensor Count	Total number of unique online sensors in the last 24 hours (active).
License End Date	The date when the license terminates.
Current Licensed Sensors	The total number of sensors on the current license.

Field	Description
Server Token	The token for the Carbon Black EDR server. This token is primarily used for support purposes.
License Usage Graph	A weekly depiction of how many sensors are active for the license.

Viewing Sensor Details

The Sensor Details page provides detailed information about each sensor.

To access the Sensor Details page:


- Do one of the following:
 - From a **Process Search** page, click the right arrow at the end of a row to open the **Analysis Preview** page.
 - From the Process Search page, HUD Sensors widget, or Sensors page, click the name of the endpoint.

Sensor Details Heading and Options

The heading in the **Sensor Details** panel displays the following information and options:

- An icon that represents the operating system of the host computer.
- The name of the host computer.
- Status of the sensor. This can be Online, Offline, Uninstalled, and whether the sensor is restarting, isolated, or syncing. If Carbon Black EDR is not running or if there is a communication problem, the status is **Offline**.
- **Click Go Live** to open an interactive live session on the host computer to execute commands in real time to help isolate or eradicate a threat. For more information about **Go Live**, see [Using Live Response](#).
- Isolate / Remove Isolation: Isolates a host computer from the rest of the network, leaving only the connections to access the Carbon Black EDR server. If the sensor is isolated, this button displays Remove isolation. For more information about this feature, see [Isolating an Endpoint](#).
- **The Actions** menu provides the following options:
 - **Sync** – Forces the sensor to immediately send all the data that it has collected to the Carbon Black EDR server, ignoring any configured bandwidth throttles.
 - **Restart** – Restarts the sensor process.
 - **Move to group** – Moves the sensor to another sensor group.
 - **Uninstall** – Uninstalls the sensor from the host computer.

Summary

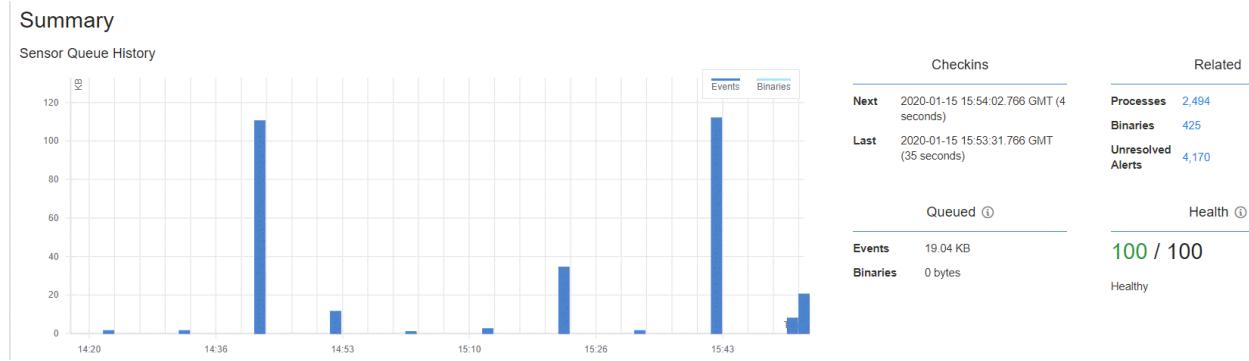

Vitals and Configuration

Vitals and Configuration

Sensor Vitals		Computer Vitals	
Sensor Id	2	Hostname	[REDACTED]
Node Id ⓘ	0	OS Version	Windows 10 Core, 64-bit
Node Address	[REDACTED]	IP Address/MAC Info	[REDACTED]
Node Hostname	[REDACTED]	Computer Domain Name	[REDACTED]
Shard Id ⓘ	0	Computer SID	[REDACTED]
Registration Time	2019-12-03 19:33:10.205 GMT (about 1 month)	Amount of RAM	8 GB
Sync-mode	No	Free Disk Space	2.26 GB
Restart Pending	No	Total Disk Space	78.87 GB
Uninstall Pending	No	Host Uptime	17 hours
Sensor Version	6.2.5.91118	Power State	Running
Sensor Uptime	1 month	Clock Delta	0 seconds
Network Isolation	Not isolated	Team Access	
Configuration			
Group	[REDACTED]	No access (1)	noaccess
Site	Default Site	Viewer (1)	viewer
Server Name	[REDACTED]	Analyst (1)	Analysts
Sensor Upgrade Policy	Manual		
EP Agent Installed	No		
EP Agent Host Id	Not Installed		

Sensor Vitals

The **Sensor Vitals** section of the Vitals and Configuration panel displays the following information:

Field	Description
Sensor Id	The internal Carbon Black EDR sensor GUID of the host computer.
Node Id	The server ID to which the sensor sends data in a clustered environment.
Node Address	The address of the server to which the sensor sends data in a clustered environment.
Node Hostname	The host name of the server to which the sensor sends data in a clustered environment.
Shard Id	The shard ID to which the sensor submits event and binary metadata.
Registration Time	The date and time that the sensor registered (the start time of the sensor) with the Carbon Black EDR server.
Sync-mode	Shows if the sensor is currently synchronizing with the server.
Restart Pending	Shows if the sensor host is restarting.
Uninstall Pending	Shows if the sensor is being uninstalled from the host.
Sensor Version	The current version of the sensor.
Sensor Uptime	The duration of time that the sensor has been actively running.
Network Isolation	Shows if the host is isolated from the rest of your network and the Internet. For information about isolating hosts, see Isolating an Endpoint .

Computer Vitals

The **Computer Vitals** section of the Vitals and Configuration panel shows the following details about the host:

Field	Description
Hostname	Hostname of the endpoint on which the sensor is installed.
OS Version	Version of the operating system on the host.
IP Address/MAC Info	IP and MAC address of the host.
Computer Domain Name	Name of the endpoint on which the sensor is installed. This can be the same name as the hostname.
Computer SID	Unique security identifier for the computer.
Amount of RAM	Amount of available RAM.
Free Disk Space	Amount of free disk space.
Total Disk Space	Amount of total disk space.
Host Uptime	Time that the host computer has been running since the last sensor boot. If the sensor has not rebooted since its installation, this value reflects the install time.
Power State	Indicates whether the host endpoint is running.
Clock Delta	The difference between the sensor clock and the server clock. If the delta is greater than 5 seconds, an alert is displayed.

Configuration

The **Configuration** section of the Vitals and Configuration panel shows the following sensor information:

Field	Description
Group	Sensor group to which this sensor belongs.
Site	Site to which the sensor group that contains this sensor belongs. For information about assigning sensor groups to sites, see General Settings .
Server Name	URL of the Carbon Black EDR server.
Sensor Upgrade Policy	Upgrade policy for this sensor. See Upgrade Policy Settings for details of sensor group upgrade policies.
EP Agent Installed	Indicates whether the App Control agent is installed.
EP Agent Host Id	If the App Control agent is installed, displays the App Control agent host Id.

Team Access

The **Team Access** section of the Vitals and Configuration panel shows the teams that have access to this sensor and the permissions that team members have. This information is defined in [Sensors > Edit Settings > Permissions](#).

See [Permissions Settings](#).

Recent Activity

Recent Activity		Resource Status			
Activity		Resource Status			
TIMESTAMP	TYPE	TIMESTAMP	PAGE FAULTS	COMMIT CHARGE	HANDLES
2020-01-15 15:54:02.820 GMT	Checkin	2020-01-15 15:40:01.649 GMT	821153	48.14 MB	371
2020-01-15 15:53:31.766 GMT	Checkin	2020-01-15 14:39:57.953 GMT	819715	48.17 MB	470
2020-01-15 15:53:01.769 GMT	Checkin	2020-01-15 13:39:35.487 GMT	818295	48.22 MB	477
2020-01-15 15:52:31.714 GMT	Checkin	2020-01-15 12:56:15.815 GMT	795093	46.64 MB	472
2020-01-15 15:52:02.647 GMT	Checkin				
2020-01-15 15:51:32.633 GMT	Checkin				
2020-01-15 15:51:02.575 GMT	Checkin				

Activity

The **Activity section of the Recent Activity** panel shows the activity types that the sensor has been engaged in, and the date and time of each activity. This data is applicable for the duration that the sensor has been up and running.

Resource Status

The Resource Status **section of the Recent Activity** panel shows information for tracking internal performance metrics for sensors. If the performance of a sensor is degrading, the values in this table can help diagnose the cause. The panel shows the following details:

Field	Description
Timestamp	The date and time in one-hour intervals for which the sensor resource status is tracked.
Page Faults	The number of page faults that occurred on the date and time in the Timestamp field.
Commit Charge	The total memory used by all applications on the host endpoint, including memory that has been temporarily paged to disk at the date and time that is displayed in the Timestamp field.
Handles	The number of handles in use at the date and time displayed in the Timestamp field.

Diagnostics

Diagnostics

Communication Failures		Driver Diagnostics				
TIME STAMP	FAILURE CODE	TIME STAMP	NAME	VERSION	IS LOADED	LOAD STATUS
2020-01-15 13:39:35.492 GMT	0x7FF8D119 (12007)	2020-01-15 13:39:35.4...	CarbonBlackK	6.2.5.91118	True	0x00000000 (0)
2020-01-15 12:56:15.840 GMT	0x7FF8D119 (12007)	2020-01-15 13:39:35.4...	cbstream	6.2.5.91118	True	0x00000000 (0)
		2020-01-15 12:56:15.8...	CarbonBlackK	6.2.5.91118	True	0x00000000 (0)
		2020-01-15 12:56:15.8...	cbstream	6.2.5.91118	True	0x00000000 (0)

Event Diagnostics							
TIME STAMP	MESSAGES GENERATED	MESSAGES LOGGED	RAW EVENTS OBSERVED	RAW EVENTS THROTTLED	RAW EVENTS IN PROCESS	RAW EVENTS FILTERED OUT	RAW EVENTS DISCARDED
2020-01-15 15:40:01.649 GMT	599800	602139	789450	275981	0	394	6
2020-01-15 14:39:57.953 GMT	598569	600834	777851	267593	0	392	6
2020-01-15 13:39:35.487 GMT	597259	599443	767430	259987	0	390	6
2020-01-15 12:56:15.815 GMT	585293	587306	743375	252036	0	376	6

Communication Failures

The **Communication Failures** section of the Diagnostics panel shows the timestamp and failure code of communication failures between the sensor and the server.

You can locate the correct failure code and cross reference it with the information provided at <https://curl.haxx.se/libcurl/c/libcurl-errors.html>. For example, if you see error code 0x80c80013, locate “13” on this page.

Driver Diagnostics

The **Driver Diagnostics** section of the Diagnostics panel shows diagnostic information about the sensor driver.

Carbon Black EDR OS X sensors have the following components:

- **CbSystemProxy** – A core kernel driver that improves interoperability with third-party products. When the OS X sensor is uninstalled, the next two kernel drivers are immediately removed and unloaded. The core kernel driver remains until the system reboots. Immediately unloading the core kernel driver can cause system instability if other products (typically security) are running in the system that integrate in the same way as Carbon Black EDR.
- **CbOsxSensorProcmon** – A kernel driver to capture all other events on macOS 10.15 and earlier.

- **CbOsxSensorNetmon** – A kernel driver to capture network events on macOS 10.15 and earlier.
- **CbOsxSensorService** – A user-mode service to communicate with the Carbon Black EDR server.
- **es-loader.es-extension** – A user-mode driver to capture all events on macOS 11.0 and later.

Carbon Black EDR Windows sensors have the following components:

- **CoreDriver**
 - For Windows XP/2003/Vista/2008 (Vista server version), the driver binary name is `carbonblackk.sys` .
 - For Windows 7 and later, the binary name is `cbk7.sys` .
 - In all cases, the core driver is a mini-filter driver with the service name `carbonblackk` .
 - The core driver captures all events except for network connection events and passes all events, except tamper detection events, to the user-mode service.
 - The core driver attempts to directly send Tamper detection events to the Carbon Black EDR server. If this fails, then the core driver attempts to send the Tamper detection events to the user-mode service.
- **Network Filter Driver**
 - For Windows XP/2003, the network filter driver is a Transport Driver Interface (TDI) filter driver with the binary name `cbtdiflft.sys` and service name `cbtdiflft` .
 - For Windows Vista and later, the network filter driver is a Windows Filter Platform (WFP) driver with the binary name `cbstream.sys` and service name `cbstream` .
 - The network filter driver is responsible for collecting network connection events and implementing the network isolation feature of the Windows sensor.
- **User-mode Service**
 - The sensor uses a user-mode service with the binary name `cb.exe` and service name `CarbonBlack` .
 - This service communicates with the core and network filter drivers to gather and process events from the kernel and send those to the server.

Carbon Black EDR Linux sensors have the following components:

- **Kernel Module** – This module does the following:
 - Uses a binary named `cbsensor.ko.<kernel version>` where the `<kernel version>` is a currently supported kernel.
 - Captures all system events and makes them available to the user mode daemon to process.
 - Exposes performance statistics in the `/proc/cb` directory.

- **User Mode Daemon** – This user-mode daemon uses a binary named `cbdaemon`. This service communicates with the kernel module to gather and process events to be sent to the server.

The sensor starts recording activity as soon as the core driver is loaded. It queues up the activity for the user mode service to receive as soon as it starts. This occurs early in the sensor boot process.

The network driver is loaded after the core driver, but it also starts recording as soon as it is loaded, and it also queues events for the user mode service.

These kernel driver components usually work in sync with each other, but it is possible for the sensor to be communicating with the server while one of the drivers is inoperable.

The Driver Diagnostics section of the Diagnostics panel shows the following information about the status of these drivers:

Field	Description
Timestamp	The date and time that the driver was loaded.
Name	The name of the driver.
Version	The version of the driver.
Is Loaded	Shows whether the driver is loaded (true or false).
Load Status	The load status of the driver.

Reducing the Impact of Netconn Data Collection (Windows)

On systems that have a large number of network connections (for example, DHCP/DNS servers, domain controllers, build servers, etc.), netconn data collection by the Carbon Black EDR sensor can cause significant CPU utilization by the Carbon Black service. If this is an issue but you want to continue collecting netconn data, Windows sensors beginning with v6.1.4 let you disable the DNS name resolution in data collection for network connections, thereby reducing the amount of netconn traffic on these systems. This is done by configuring the following Windows registry key:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\CarbonBlack\config]
"DisableNetConnNameResolution"=dword:00000001
```

Event Diagnostics

The **Event Diagnostics** panel shows the date and timestamp (in GMT) of sensor events, together with the number of each of the following event elements:

- Messages Generated
- Messages Logged
- Raw Events Observed
- Raw Events Throttled
- Raw Events in Process

- Raw Events Filtered Out
- Raw Events Discarded

Status History

Status History

Component Status

No results

Upgrade Results

No results

Uninstall Status

No results

Component Status

The **Component Status** section in the Status History panel shows information about threads and the sensor component.

Upgrade Status

The **Upgrade Status** section of the Status History panel shows details about the sensor upgrade process.

Uninstall Status

The Uninstall Status section of the Status History panel shows data if the sensor has been recently uninstalled.

Sensor Groups

8

This chapter describes creating, moving, editing, and deleting sensor groups.

This chapter includes the following topics:

- [Overview of Sensor Groups](#)
- [Create or Edit a Sensor Group](#)
- [Moving Sensors to Another Group](#)
- [Deleting Sensor Groups](#)

Overview of Sensor Groups

Carbon Black EDR sensors are lightweight data gatherers installed on network endpoints (such as laptops, desktops, and servers). They gather event data on the endpoints and securely deliver it to the Carbon Black EDR server for storage and indexing. Each sensor is associated with a sensor group that defines its configuration and security characteristics. One sensor group can contain many sensors, but a single sensor can only belong to one sensor group.

Sensor groups can be based on your security and organizational requirements. For example, you might base sensor groups on functional groups (such as marketing, customer service, or IT) or by location.

If you move sensors from one sensor group to another, the sensors will receive security settings from the new group the next time they check back into the server. In most cases, you do not have to re-install the sensors when you move them.

For more information:

- See [Chapter 6 Installing, Upgrading, and Uninstalling Sensors](#) for information on installing sensors.
- See [Chapter 7 Managing Sensors](#) for information on managing sensors.
- See [Chapter 9 Managing Certificates](#) for information about certificate options.
- See [Chapter 24 Sensor Parity](#) for information on supported operating systems. This appendix indicates whether or not a supported configuration is available on a sensor and configurable on a sensor group.

Create or Edit a Sensor Group

You can create sensor groups before or after you install sensors.

To create or edit a sensor group:

- 1 On the navigation bar, click **Sensors**.
- 2 In the Groups panel of the Sensors page, do one of the following:
 - a To create a new group, click **NEW** at the top of the Groups panel.
The Create Group panel appears to the right of the Groups panel.
 - b To edit an existing group, do one of the following:
 - 1 Select a group and at the top of the Sensors page click **Edit**.
 - 2 Next to a group name, click the gear icon ().
The Edit Group panel appears.
- 3 Complete the settings in the following categories:
 - **General** – See [General Settings](#).
 - **Sharing** – See [Sharing Settings](#).
 - **Advanced** – See [Advanced Settings](#).
 - **Permissions** – See [Permissions Settings](#). Note that if you do not specify otherwise, all teams are set up with the No Access role for the new sensor group.
 - **Event Collection** – See [Event Collection Settings](#).
 - **Isolation Exclusions** – See [Isolation Exclusions](#).
 - **Exclusions** – See [Exclusion Settings \(OS X/macOS only\)](#).
 - **Upgrade Policy** – See [Upgrade Policy Settings](#).
- 4 When you finish configuring the sensor group settings, do one of the following:
 - a Click **Create Group** to create a new group.
 - b Click **Save Group** to save edits to an existing group.

Sensor group changes take effect the next time the sensors report to the Carbon Black EDR server.

Note If any errors are introduced in the Carbon Black EDR server URL (in the General section of the Edit Group page), you will lose communication with deployed sensors.

General Settings

General	
Name *	<input type="text"/> <small>The name of the sensor group. Alphanumeric characters, spaces, underscores, and hyphens are allowed.</small>
Sensor Process Name	<input type="text"/> <small>If set, the process will run with this name instead of the default cb.exe.</small>
Server URL *	<input type="text"/> <small>The URL the sensors will connect to. Use of https is HIGHLY RECOMMENDED; http should only be used for troubleshooting.</small>
Site Assignment	Default Site <input type="button" value="▼"/>
Assign Server Certificate	Legacy <input type="button" value="▼"/> <small>Assign a server certificate to all sensors in the group. Only sensors that check in will receive this update. Manage certificates</small>

The General section includes the following settings:

Setting	Description
Name	The name of the sensor group; alphanumeric characters only.
Sensor Process Name	(Optional, Windows-only) An alternate name for the sensor group process. The default name of the process is cb.exe . For example, you can change the default name if Operations Security (OPSEC) policies require sensors to run with a non-standard or obfuscated executable name. If you change the name of the sensor process, the process will run with this name instead of the default cb.exe . This will not change the Windows service display name, but it will change the name of the actual executable that is run.
Server URL	The URL that the sensor group uses to communicate with the Carbon Black EDR server. This URL is the same one that is used to log into the Carbon Black EDR server, prefixed with sensors. Use HTTPS and specify the secure port in the URL.
Site Assignment	Select a site to assign to this sensor group. You can use site definitions to define throttle settings to manage bandwidth for groups of computers. These settings are applied per site, not per sensor group. If bandwidth is an issue for this group of sensors, create or configure a site with the appropriate bandwidth settings in <i>Username > Settings > Sites</i> , and then assign the site to this sensor group by selecting the site in this field. Note: Modifying bandwidth settings for sites requires Carbon Black EDR Global Administrator status or Carbon Black Hosted EDR Administrator status. Additional information about site throttling is available in the VMware Carbon Black EDR <i>Operating Environment Requirements</i> (OER) on the Carbon Black User Exchange.
Assign Server Certificate	Assign a server certificate to all sensors in the group. Only sensors that check in receive this update. This field includes a <i>Manage certificates</i> link that goes to the Server Certificates tab of the Settings page. See Chapter 9 Managing Certificates .

Sharing Settings

Sharing

Default settings can be modified in [Share Settings](#).

Share Binary hashes with Carbon Black *This optional feature allows you to send to Carbon Black data regarding binary hashes and associated metadata. Carbon Black will analyze this data to confirm the trust level by hash for the applicable binaries. By sharing binary hashes with Carbon Black, the hashes can be checked with Carbon Black's catalog of trusted files.*

Send events to Carbon Black *By opting in to this data sharing, you will share event data with Carbon Black, which allows Carbon Black to perform threat analysis of the events, and enables enhanced community detection capabilities. Additionally, opting in to this data sharing provides your enterprise with access to enhanced threat intelligence information only available to those participating in the community program.*

Allow Carbon Black to analyze unknown binaries

The Sharing section includes the following settings:

Setting	Description
Share Binary hashes with Carbon Black	Select this option to be notified of any binary that is flagged by Carbon Black Collective Defense Cloud.
Send events to Carbon Black	<p>For more information about this choice, do the following from the Sharing section of the Create or Edit Group page:</p> <ol style="list-style-type: none"> 1 Click Share Settings to open the Sharing page for the Carbon Black EDR server. 2 On the Sharing page, scroll to Endpoint Activity Sharing. 3 In the Carbon Black column next to Binary Hashes & Metadata, click the current setting (Enabled, Disabled, or Partial) for a description.
Allow Carbon Black to analyze unknown binaries	<p>Select this option to:</p> <ul style="list-style-type: none"> ■ Allow advanced analysis of your aggregated process execution events by the Carbon Black Threat Research Team. ■ Give your enterprise access to enhanced CB Threat Intel information that is only available to those who participate in the community program. <p>The Carbon Black Threat Research Team receives process events (as shown on the Process Analysis page) for more detailed analysis of the behavior of a process as it executes at the customer site.</p> <p>For more information on this page, see Chapter 13 Process Search and Analysis.</p>

Default settings for the sensor group sharing settings are defined on the global Sharing page, which you can access in the following ways:

- **Click the Share Settings link** in the sensor group Sharing section.
- **Click Username> Sharing Settings .**

For more information, see [Data Sharing Settings](#).

Advanced Settings

Advanced

Sensor-side Max Disk Usage

MB, % You may limit the sensor's disk usage on clients to a maximum size in MB and a minimum percentage of total disk space. The sensor will limit client-side storage to the smaller of the two values.

Filter known modloads Enable filtering of loads of known modules

Process Banning Sensor group will stop the execution or terminate processes backed by banned binaries. When disabled, the ban list is ignored for this sensor group. Requires sensor version 5.1+.

VDI Behavior Enabled Enabling VDI for a group is used when endpoints are re-imaged. Sensor IDs are maintained across re-imaging by hostname, mac, or other determining characteristics. VDI support must be globally enabled in order to use this feature, reference the VMware Carbon Black User Guide to configure VDI.

Tamper Protection Level

None: No tamper level is applied.

Detection: VMware Carbon Black EDR Windows sensors version 5.0.0 and higher support tamper detection. With tamper detection enabled, the sensor identifies attempts to modify the sensor configuration or memory and alerts on these attempts.
Protection: VMware Carbon Black EDR Windows sensors version 7.2.0 and higher support tamper protection. With tamper protection enabled, the sensor blocks local admin attempts to inject/remove/modify/delete the sensor by protecting the sensor service, drivers, files, folders, registry settings and other sensor components.

Tamper Override Password

Password to temporarily disable tamper protection on the sensor from the CLI in cases where it cannot reach the server.

Retention Maximization

Minimum Retention: All process activity is recorded and available for search. Recommended Retention: The processes that contain only modload events are available under the parent processes and are searchable as child processes. You can search metadata, such as command line and user context, under the parent process. Maximum Retention: The processes that contain only modload and cross processes are available under the parent process and searchable as child processes. You can search metadata, such as command line and user context, under the parent process.

Alerts Critical Severity Level

You can alter the critical level for alerts on a per group basis. This will directly effect the severity rating for alerts generated by this group.

The Advanced section includes the following settings:

Setting	Description
Sensor-side Max Disk Usage	Contains two options to limit sensor disk consumption on clients either by raw available space (in megabytes) or percentage of the total space available. The sensors will limit the amount of space they use on clients based on the smaller of these two values: <ul style="list-style-type: none"> ■ In the MB field, enter the maximum available space on the client (between 2 and 10240 megabytes). ■ In the % field, enter the maximum percentage (between 2% and 25%) of total disk space on the client.
Filter known modloads (Windows and OS X only)	When selected, Carbon Black EDR will not report the module load events of known good Windows and OS X modules that reside on the operating system. This helps reduce the number of known good events that are reported to the server.
Process Banning	When selected, this setting enables process hash bans in this group. By default, this setting is disabled and process hash bans prevent banned processes from running. For more information, see Banning Process Hashes .
Tamper Protection Level (Windows only)	This setting determines the tamper detection or protection level for the sensor on the endpoint. When set to None, no tamper detection or protection exists. This is the default setting. When set to Detection, the sensor identifies attempts to modify the sensor configuration or memory and alerts on these attempts. This setting is only applicable for Windows sensors version 5.0.0 and higher. With the 7.2.0 Windows sensor release, Tamper Detection protects against process injection attempts. When set to Protection, the sensor blocks local admin attempts to inject, remove, modify, or delete the sensor by protecting the sensor service, drivers, files, folders, registry settings and other sensor components. This setting is only applicable for Windows sensors version 7.2.0 and higher. To change this setting you must be one of the following: a Global Administrator (Carbon Black EDR), an Administrator (Carbon Black Hosted EDR), or a user who is an Analyst for this sensor group and who also has permission for Tamper Level. For more information about Tamper Protection, see Tamper Protection of Windows Sensors .
Tamper Override Password	This field contains a password to temporarily disable tamper protection on the sensor from the CLI, in case the sensor cannot reach the server.

Setting	Description
VDI Behavior Enabled	<p>When selected, this setting enables Virtual Desktop Infrastructure (VDI) for sensors on virtual machines. Use VDI when endpoints that are virtual machines are re-imaged. Sensor IDs are maintained across re-imaging by hostname, MAC, or other determining characteristics.</p> <p>Note: VDI support must be globally enabled to use this feature. See the VMware Carbon Black EDR Integration Guide.</p>
Retention Maximization	<p>These settings change how sensor process data that contains only modload processes or only modload and cross processes is recorded on the server.</p> <p>Minimum Retention makes this data more easily searchable but leaves a bigger footprint and can lead to a reduction in data retention time.</p> <p>Recommended and Maximum Retention consolidate data under parent processes, reducing the data footprint and helping increase the retention time. Data consolidated in this way is still searchable, as child processes.</p> <ul style="list-style-type: none"> ■ Minimum Retention – All process activity is recorded and available for search. ■ Recommended Retention – The processes that contain only modload events are available under the parent processes and are searchable as child processes. You can search metadata, such as command line and user context, under the parent process. ■ Maximum Retention – The processes that contain only modload and cross processes are available under the parent processes and are searchable as child processes. You can search metadata, such as command line and user context, under the parent process. <p>Note Recommended and Maximum Retention can result in false positives in the results of cmdline searches. See Retention Maximization and cmdline Searches.</p> <p>Note This setting was called Data Suppression Level in pre-6.5 versions of Carbon Black EDR.</p>
Alerts Critical Severity Level	<p>Select a value from the menu to alter the critical level for alerts on a per-sensor-group basis. This directly effects the severity rating for alerts generated by this sensor group.</p> <p>On the Triage Alerts page, the severity score of an alert (located in the Severity column of the results table) is determined by three components:</p> <ul style="list-style-type: none"> ■ Feed rating ■ Threat intelligence report score ■ Sensor criticality. For example, server sensors can have a higher criticality than engineering workstations. If two sensor groups have different alert criticalities, and they receive alerts from the same feed and for the same report, the sensor group that has the higher alert criticality will have a higher severity score on the Triage Alerts page, and servers in that group will appear at the top of the queue. <p>For more information about alerts, see Chapter 21 Console and Email Alerts.</p> <p>For more information about threat intelligence feed scores, see Chapter 17 Threat Intelligence Feeds.</p>

Permissions Settings

Permissions	
Analysts	No Access
viewer	No Access
noaccess	No Access

In the Permissions section, you can define user team permissions for sensors groups.

Available permission levels are as follows:

- **Analyst** – Users can configure the sensor host and group details.
- **Viewer** – Users can view the data collected from hosts in this sensor group. Users cannot make any configuration changes to this group or hosts that belong to it.
- **No Access** – When users in a team try to access or view details on a host in this sensor group, the system generates the following HTTP 405 response: “The method you are using to access the file is not allowed.”

For information about user teams and access levels, see [Managing User Access with Teams](#).

Event Collection Settings

Event Collection	
<i>Disabling event collection will impact visibility, but may improve sensor and server performance.</i>	
Process Events	Windows Events
<input checked="" type="checkbox"/> Process Information <i>Collect metadata including starts, stops, pid.</i>	<input checked="" type="checkbox"/> Cross process events <i>Collect events across process boundaries.</i>
<input checked="" type="checkbox"/> Process user context <i>Collect username associated with events.</i>	<input checked="" type="checkbox"/> Registry modifications <i>Collect write and delete events in the registry.</i>
<input checked="" type="checkbox"/> File modifications <i>Record modifications of binary files, eg. dll/exe.</i>	<input checked="" type="checkbox"/> EMET events <i>Collect EMET mitigation and protection events.</i>
<input checked="" type="checkbox"/> Non-binary file writes <i>Record filemod events for non-binary files.</i>	
<input checked="" type="checkbox"/> Binary module loads <i>Collect load events for .dll, .sys, .exe, .so, .dylib.</i>	Binary / Module / Storefile Events
<input checked="" type="checkbox"/> Network connections <i>Collect in/outgoing network events.</i>	<input checked="" type="checkbox"/> Binaries <i>Collect binary modules.</i>
<input checked="" type="checkbox"/> Fileless script loads <i>Collect Fileless script load events.</i>	<input checked="" type="checkbox"/> Binary info <i>Collect metadata that describes binaries.</i>

In the Event Collection section, you can define which types of events to record for the sensors in this group by selecting/deselecting event types. Disabling event collection impacts visibility, but can improve sensor and server performance. Disabling Process Events or Windows Events can cause an "Event Loss" message in the console.

The **Event Collection** options are explained here:

- **Process information** – Collects process metadata such as starts, stops, and process id (PID).
- **Process user context** – Enables the sensor to record the user name that is associated with each running process. This associates endpoint activity with the operating system user account.
- **File modifications (Filemods)** – Carbon Black EDR captures four types of file system activity:
 - File creation – the creation of a new file.
 - File Write – the first time a file is written to after being opened or created.
 - File Write Complete – the closing of a file that was written to. This event includes both the file path and also the MD5/SHA256 of the written file. The event is only captured for binaries (Windows PE such as EXE, DLL, and drivers), Adobe Docs (PDF), OfficeXML docs (docx, doc, xlsx, xls, pptx, ppt) and zip archives (zip) that are smaller than 10MB in size. This option can be enabled or disabled independently of filemod collection by deselecting Non-binary file writes. This option is not available with macOS or Linux sensors.
 - File deletion – the deletion of an existing file.
- **Binary module loads (Modloads)**
 - Reported as a result of LoadImageNotify kernel callback and triggered when a binary is mapped into memory.
 - This is the only place in the binary load/execution chain where Windows provides a supported interface to register for notifications.
 - There are conditions where a binary is mapped, but is not subsequently executed. For example: LoadLibraryEx() where the dwFlags parameter includes LOAD_LIBRARY_AS_IMAGE_RESOURCE or DONT_RESOLVE_DLL_REFERENCES. Windows does not distinguish between binaries that are loaded for execution and binaries that are loaded as a resource.
- **Network connections (Netconns)** – Carbon Black EDR captures network connections that have the following characteristics:
 - TCP over IPv4 or UDP over IPv4 connections.
 - Inbound and outbound connections:

Network connections record TCP or UDP protocol, the remote IPv4 address, port and the domain name associated with the remote IPAddress.

Inbound connections capture the local port. If the sensor is installed on a typically configured web server, the reported port is 80.

Outbound connections capture the remote port.

For outbound connections that are made after DNS resolution, the name that resolves to the captured IPV4 address is also reported.

The sensor utilizes a passive sensing approach to capturing the domain name, so no additional network traffic is generated.

For DNS/DHCP servers, high CPU and/or memory can be seen due to the high number of netconn events. Instead of disabling all netconn events, disable DNS capture on that machine.

- **Fileless script loads** – AMSI support is available as a beta feature in Carbon Black EDR 7.2 with the Windows 7.1 sensor. The fileless_scriptload event represents each occasion when the sensor detected PowerShell script content that was executed by any process on a supported endpoint. For more information about AMSI, see the VMware Carbon Black EDR Integration Guide.
- **Cross process events** – Enables the sensor to record instances when a process crosses the security boundary of another process. Although some of these events are benign, others might indicate an attempt to change the behavior of the target process by a malicious process.

Certain limitations exist on the cross process events that are reported by the sensor:

- Parent processes that create cross process events to their children are not reported.
- Cross process events that are part of the normal OS behaviors are ignored. For example, no cross process events are recorded for the Windows process `csrss.exe`.
- Cross process events are not reported for OS X or Linux sensors.
- Cross process, open process, and open thread events are not supported on Windows XP and Windows 2003.
- **Registry modifications** – Carbon Black EDR captures four types of registry activity from both the machine (HKEY_LOCAL_MACHINE or HKLM) and user (HKEY_USERS or HKU) registry hives:
 - Registry key creation
 - Registry key deletion
 - Registry value modification – the creation or modification of a registry value of any type
 - Registry value deletion
- **EMET events**
 - Used in conjunction with the EMET Protection feed to report EMET events on the endpoint.
 - EMET must be installed on the Windows endpoint. Recent operating systems replace EMET with Defender Exploit Protection; this is not currently supported.

- **Binaries (physical storefiles)** – Carbon Black EDR collects binary files, such as Windows PE files (EXEs, DLLs, SYS), OSX binaries, and Linux ELF binaries. For binaries that are larger than 25MB, the first 25MB of the binary is captured. Binaries are compressed before they are transmitted to the Carbon Black EDR Server. The server stores one copy of each unique binary.
- **Binary info (binary metadata)** – Carbon Black EDR captures metadata about binaries that are executed on the endpoint. This metadata includes:
 - Size in bytes
 - Internal version information (file version, product version, etc.)
 - Digital signature information (signature status, digital signer, revocation status, etc.)
 - Icon

Exclusion Settings (OS X/macOS only)

Through an addition to the `cb.conf` file, an Exclusions section can be added to the Create Group or Edit Group panel on the Sensors page. This Exclusions section lets you define paths on OS X/macOS systems and customize event collection at those paths to improve performance or eliminate unnecessary data. For example, you can specify that actions coming from one group of paths do not collect network connections or non-binary file writes. You can create another exclusion for a different set of paths that collects everything except cross-process events.

To add Exclusion settings to the sensor group panel on the Sensors page:

- 1 On the Carbon Black EDR server, open `/etc/cb/cb.conf` for editing.
- 2 Add the following setting and value to the `cb.conf` file; consider including a comment to remind you of the purpose of the setting (and its current limitation to macOS):


```
EventExclusionsEnabled=True
```
- 3 Save the `cb.conf` file.
- 4 You must stop and restart the server or cluster to make the new setting effective:

- For a standalone server:

```
sudo service cb-enterprise restart
```

- For clusters:

```
sudo cbcluster stop
```

(...wait for all the nodes to shut down, and then...)

```
sudo cbcluster start
```


Creating Exclusions

You can specify exclusions when you create a sensor group, or add them to an existing sensor group. The following procedure assumes that the group already exists.

To create an OS X/macOS event collection exclusion for a sensor group:

- 1 On the navigation bar, click **Sensors**.
- 2 In the Groups panel of the Sensors page, click the gear icon () next to the sensor group for which to create exclusions.
- 3 Click the **Exclusions** bar and click the **Add Exclusion** button.

The Exclusion configuration fields are exposed.

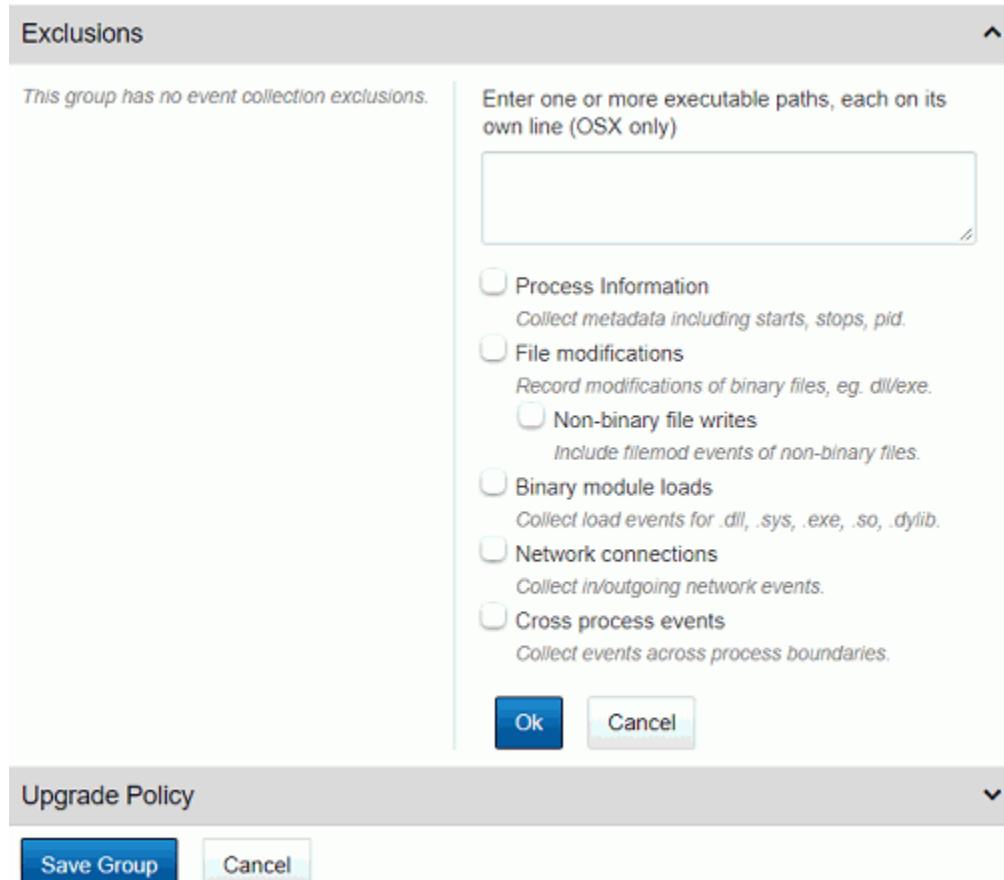

- 4 Enter the path(s) to affect with this exclusion in the textbox in the upper right corner of the panel. Put each path on a new line. You must use complete paths without wildcards.
- 5 Check the box next to each type of information to not collect for the specified paths. Click **Ok**.

The exclusions are saved and displayed in the panel. You can edit or delete any exclusion.

Exclusions

/usr/bin/abc/data
No netconn, crossproc.

/usr/bin/abc/error
/usr/sbin/newapp/logs
No process-info, filemod.

+ Add Exclusion

- When you have finished creating exclusions, click the **Save Group** button.

Upgrade Policy Settings

Upgrade Policy

Use these settings to choose how CB Response sensor software is upgraded on the endpoints in this group. The upgrade policy is set independently for each operating system.

Windows

- No automatic upgrades.
CB Response will not upgrade sensor software on your endpoints.
- Automatically upgrade to the latest version
Endpoints will install the newest sensor software available.
- Automatically upgrade to a specific version.
Endpoints will only install the version you choose here. You must select a version below before you can select this option.

OS X

- No automatic upgrades.
CB Response will not upgrade sensor software on your endpoints.
- Automatically upgrade to the latest version
Endpoints will install the newest sensor software available.
- Automatically upgrade to a specific version.
Endpoints will only install the version you choose here. You must select a version below before you can select this option.

Linux

- No automatic upgrades.
CB Response will not upgrade sensor software on your endpoints.
- Automatically upgrade to the latest version
Endpoints will install the newest sensor software available.
- Automatically upgrade to a specific version.
Endpoints will only install the version you choose here. You must select a version below before you can select this option.

In most circumstances, new software will be installed without requiring that the endpoint restart. For details see the User Guide.

The **Upgrade Policy** section lets you set a policy to upgrade installed sensors in the sensor group.

Upgrade policy options are as follows:

- No automatic updates** – Manually decide when to upgrade sensors.
- Automatically install the latest version** – Automatically upgrades the sensors to the latest version.
- Automatically install a specific version** – Installs a specific version for all sensors in a group. This maintains all sensors at the selected version. Select a version number using the dropdown list. Selecting the upgrade policy of a specific version is useful when sensor versions must be tested.

Moving Sensors to Another Group

After you create sensor groups, you can add sensors to them. By default, sensors are installed into the **Default Group**. On the **Sensors** page, you can select the group that contains the sensors to add, and then move those sensors from their original group to the new group.

To move sensors to a new sensor group:

- On the navigation bar, click **Sensors**.
- In the Groups panel, click the sensor group that contains the sensors to move.

- 3 In the Sensors panel, select the sensors to move.
- 4 Click **Actions > Move to group** .
- 5 From the drop-down list, select the sensor group to which to move the selected sensors and click Okay.

The selected sensors are removed from the former sensor group list and appear in the new sensor group list.

Note If you have set up custom server certificates and strict certificate validation, and you have assigned different certificates to different sensor groups, moving a sensor to another group could affect connectivity. See [Chapter 9 Managing Certificates](#).

Deleting Sensor Groups

You can delete sensor groups on the **Sensors** page. When you delete a sensor group, the teams for which you defined permissions no longer have access to sensors that belong to the deleted sensor group.

To delete sensor groups:

- 1 On the navigation bar, click **Sensors** .
- 2 In the Groups panel, click the **sensor group** to delete.
- 3 Click **Delete Group** at the top of the **Sensors** page.

A confirmation message appears indicating that any sensors remaining in this sensor group will be moved to the **Default Group** .

- 4 Click **OK** .

Managing Certificates

9

This chapter describes how Carbon Black EDR uses HTTPS and TLS to secure communication and two-way authorization between endpoints and the server. It also details certificate management features, including the ability to add your own server certificates, assign different certificates to different sensor groups, and opt for stricter certificate validation.

This chapter includes the following topics:

- [TLS Server Certificate Management Overview](#)
- [Server-Sensor Certificate Requirements](#)
- [Multiple Certificate Support](#)
- [Managing Certificates on the Server](#)
- [Sensor Support for Certificate Management](#)

TLS Server Certificate Management Overview

Carbon Black EDR uses the HTTPS and TLS (formerly SSL) protocols to secure communication and two-way authorization between endpoints and the server so that the endpoint communicates only with the Carbon Black EDR server that it trusts, and the server only communicates with trusted endpoints.

Prior to server version 6.4.0, Carbon Black EDR established the trust between endpoints and the server by using “certificate pinning,” which is an out-of-band, reliable and secure trust mechanism. The server built the endpoint installer packages, and those came pre-initialized with the server identity (the public portion of server’s TLS certificate). The Carbon Black EDR server acted as its own root certificate authority (CA), which allowed it to issue client-side certificates that the endpoints could use. This feature is still available and is the default option for securing server to sensor communications.

If you are satisfied with the security that is provided by the certificate generated by your Carbon Black EDR Server and do not have any special compliance requirements, you can continue to use the standard certificate and validation method, which relies on certificate pinning only. Past and current sensors continue to support this method.

Beginning with Carbon Black EDR Server 6.4.0, you can choose to provide certificates signed by your organization. In addition, you can use different server certificates to authenticate the connections between the Carbon Black EDR Server and different sensor groups, thereby reducing the exposure to a compromised server certificate. You can also add stricter validation methods to certificate pinning so that if a server certificate used by a sensor has expired or fails to meet other operating-system-specific criteria, server-sensor communication is disabled.

See [Sensor Support for Certificate Management](#) for information about the sensor versions that support certificate management on each operating system.

In a cluster environment, master and minion servers use the same certificates. If you add your own certificates to the master, they are automatically propagated to the minions within a few seconds (unless there are connection issues). No server restart is required. The required format for user-provided certificates allows them to be seamlessly used in a clustered environment.

In addition, Carbon Black EDR provides new certificate visibility features that can be useful for user-provided and Carbon Black EDR “legacy” certificates.

Note

- Currently, you can use certificates signed by your own certificate authority but use of a certificate that requires validation by a third-party CA is not supported.
- The certificate management features described here apply only to server-sensor communications. They are not used for managing other Carbon Black EDR interactions, such as the connection between the console user interface and the server.

Certificate Management Feature Summary

- **Add and delete certificates** – You can add new certificates and delete certificates from your server.
- **View certificate inventory** – A table lists all server certificates that are available on the current server, how many sensors are using each one, and additional certificate information.
- **Choose validation method** – You can use standard certificate “pinning” validation, which only requires that sensors have a certificate matching the server, or you can add stricter validation methods. A certificate that uses standard validation continues to allow sensor and server to communicate even after it expires. but strict validation disables communication after expiration.
- **Be notified of expiring certificates** – When a certificate is close to its expiration date, an alert banner can be displayed at the top of each console page. You can set the number of days in advance you want to be warned, or turn off warnings. Deleting the expired certificate eliminates the notification.

- **Assign and change certificates by sensor group or apply one to all sensor groups** – If you have more than one certificate available, you can choose the certificate that is assigned to secure server communications for each sensor group. You can also apply one certificate to all sensor groups. This can be done for both the initial certificate assignment and to assign a new certificates — for example if a certificate is ready to expire.
- **View the certificate for a sensor** – The Sensors page shows the server certificate that was used for the last successful check-in for each sensor.
- **Control access to certificate features** – Because of their security implications, certificate management features require Global Administrator privileges on the server.

Server-Sensor Certificate Requirements

Whether added during server installation or later through the console, server certificates that are used for sensor communications must meet the following requirements:

- The files you provide must be valid certificate and key files (that is, they must be recognized as a certificate/key pair by the OpenSSL library).
- Certificate files must be in unencrypted ASCII PEM format – this includes both the certificate file and the key file.
- The certificate must have valid dates when uploaded – that is, its "not valid before" date should be in the past and its "not valid after" date should be in the future.
- Certificates must have two distinct SAN DNS entries to address the Carbon Black EDR cluster scenario where sensors must resolve master and minion virtual addresses to different IP addresses or FQDNs. This is required for every server cert, even in standalone configurations, so that certificates remain valid if a standalone instance is upgraded to a cluster. The second SAN field is a single virtual address used for all minions, but it is mapped to a different IP address or FQDN hostname as needed by the sensor itself.
- SAN DNS entries must meet the standards for hostname formatting, but should not match any of the existing accessible DNS addresses. It should contain a unique element (for example, virtual_a prefix) that allows the server to support multiple different certificates behind the same DNS hostname. Allowed characters include the hyphen and alphanumeric characters (a to z and 0 to 9). Invalid SAN DNS entries can silently fail and might cause connectivity loss to the server.
- The CN field is not used for validation of new certificates because it has been deprecated. Sensors perform their own local resolution of virtual names to real Server addresses, so no additional DNS entries are required.
- No duplicate SAN entries are allowed in any active certificates – if a duplicate entry is found, the upload will not be allowed.

The following example shows how to set up the SAN portion of the certificate if you wanted to upload two certificates. The first SAN.DNS entry is used for the master and the second is used for the minions

Certificate A

CN=<something>
SAN.DNS.1=virtual-a.master
SAN.DNS.2=virtual-a.minion


Certificate B

CN=<something>
SAN.DNS.1=virtual-b.master
SAN.DNS.2=virtual-b.minion

Multiple Certificate Support

The Carbon Black EDR Server uses virtual server names to allow multiple active routes to the server using the same real address and port. Each virtual name and route uses a different certificate, as depicted in the schematics below. This implementation is done via runtime server blocks in NGINX configuration files.

Virtual server names are parsed from a SAN.DNS entry in the certificate so that each certificate can be validated from the sensor's perspective.

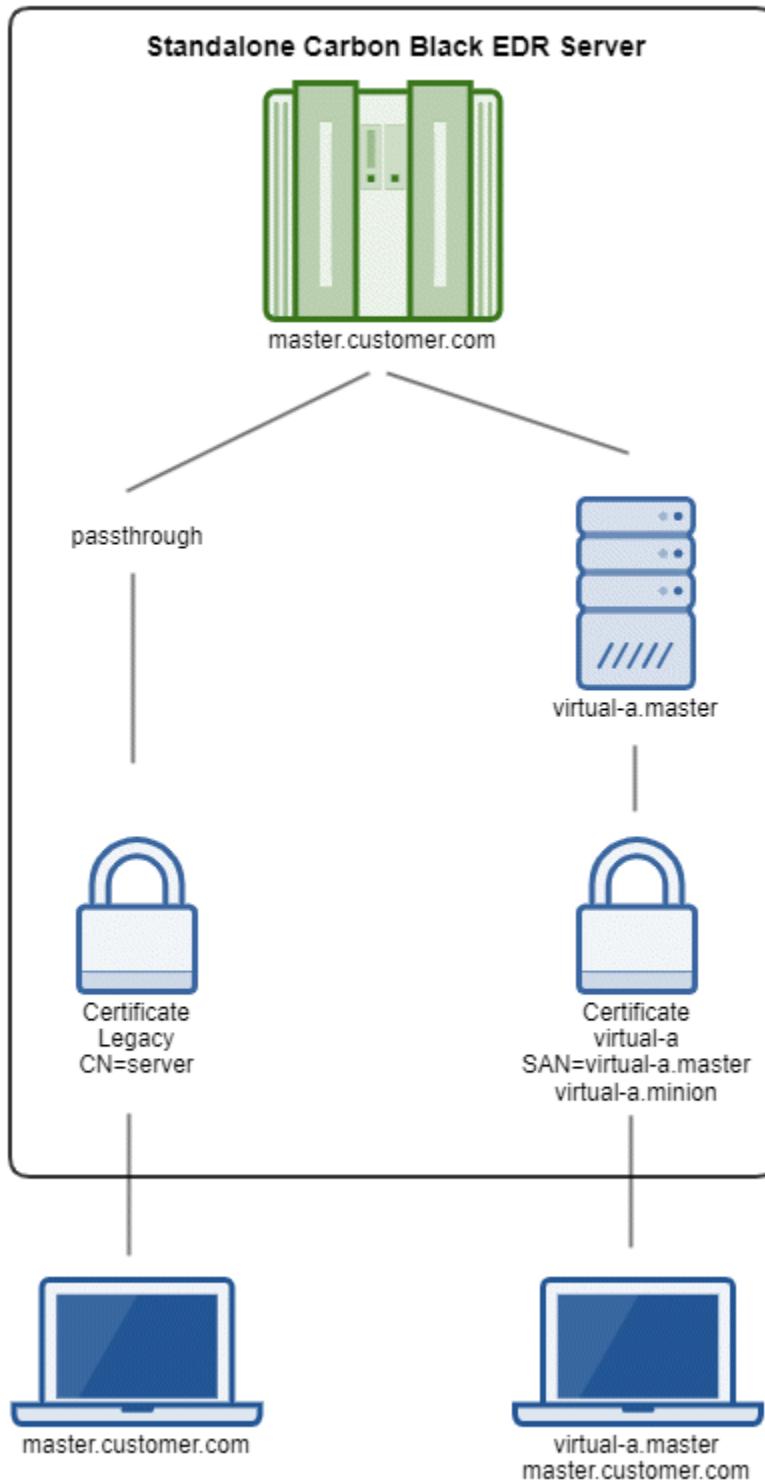

Sensors use the Server Name Indication (SNI) extension to the TLS protocol handshake to access a specific route and certificate. The Legacy certificate remains available without any SNI indications so that older sensor versions are able to use it to access the server.


Sensors confirm the resolution of virtual names to addresses internally; for example, resolution from "virtual-a.master" in the preceding certificate example to the actual "master.customer.com" server address. That means that virtual server addresses do not need to be added to external DNS servers.

On an upgrade to Carbon Black EDR 6.4.0, the previously used self-signed certificate is named "Legacy" and would be served via the default server access route (using no virtual servers), which is supported for all sensor versions and configurations. New server installations also include a "Legacy" certificate.

Note If you are using a Reverse Proxy, you must manually configure your Reverse Proxy to match the SNI configuration in your server environment. Contact Carbon Black Support for additional details.

Using Multiple Active Certificates in a Cluster

The following schematic describes some details of the clustered server set up with TLS certificate management. Although the legacy route is not depicted in this schematic for readability, it does exist and works in a cluster just as it does in a standalone scenario.

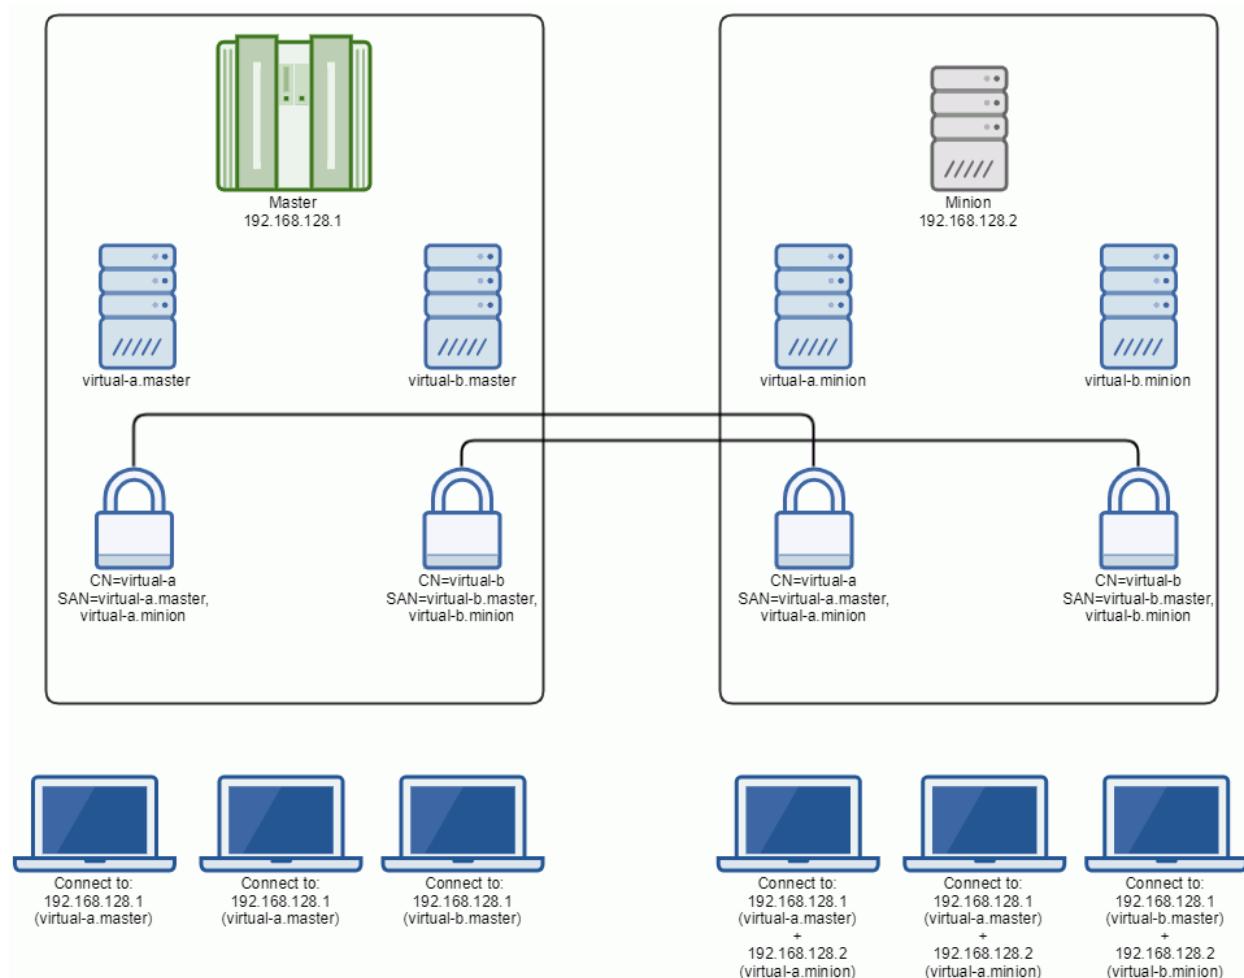

When TLS certificate management is used in a cluster environment:

- Added TLS certificates are automatically copied to minions.
- Virtual server names are replicated on minions.
- Sensors expect the same server certificate to be present on master and the minion.
- Server certificates support the switch from standalone to cluster or adding new nodes without having to re-issue certificates. This is the reason why the certificates must have two distinct SAN DNS entries.
- Sensors need to distinguish only **two** different virtual addresses to communicate to the servers (master and minion). Because resolution of those virtual names happens internally, and virtual minion addresses can get mapped to different real addresses, there is no need for SAN DNS entries for each individual minion in a cluster.

Managing Certificates on the Server

This section describes the tasks you perform to use the Carbon Black EDR certificate management features.

You have two opportunities to use server certificates other than the default legacy certificate:

- During server initial installation and configuration, you can substitute your own certificate for the one that would be created by default. See [Substituting a Legacy Certificate during Server Installation](#).
- After the server is installed and configured, you can add certificates through the console. You can do this whether or not you supplied a new legacy certificate during installation. See [Adding Certificates through the Console](#).

When you have the certificates you intend to use in place, you can:

- Choose the validation methods that sensors use for certificates. See [Choosing a Validation Option](#).
- Specify the certificate to use for each sensor group or specify the certificate to use for all sensor groups. See [Assigning Certificates to Sensor Groups](#).

You can add certificates, change validation method, and change certificates assigned to sensor groups later, but implementing an initial certificate configuration as soon as possible may be more efficient and prevent disruptions in server-sensor communication.

Viewing Certificate Information in the Console

Certificate information appears in several places in the Carbon Black EDR console:

- The Sensors page includes a column showing the certificate for each sensor.
- The Edit Group page for a sensor group shows the certificate assigned to that group.

- The Server Certificates page shows all of the sensor-server certificates that are available on the current server. It also shows the validation method that is being used for these certificates. See [Choosing a Validation Option](#).

To view the available certificates on a server:

- 1 Click Username > Settings.
- 2 Click Server Certificates.

NAME	SENSORS	THUMBPRINT	SAN	EXPIRY DATE	ADDED BY	DATE ADDED	ACTIONS
Legacy	2	C1C85B80CA6415C78...		2029-11-30	System	a month ago	Actions

Substituting a Legacy Certificate during Server Installation

When you install a new Carbon Black EDR Server, the `cbinit` configuration program you run after installation installs a legacy certificate for use with the standard pinning validation method. By default, this is a certificate that the server produces. As an alternative to the default legacy certificate, you can substitute your own certificate during the server installation process. In either case, the certificate will be named “Legacy” where certificates appear in the console, and it will be protected from deletion.

Important Certificates and key files added in this way must meet the requirements described in [Server-Sensor Certificate Requirements](#).

When you substitute your own certificate using `cbinit`, Carbon Black EDR runs tests to confirm that the certificate is valid for this use. If the certificate passes the test, it is used for this server. If it is not valid, the default legacy certificate is used, an error message will appear, and the certificate import failure will be logged to `/var/log/cb/cli`. The `cbinit` process still continues if the substitution fails by using the default certificate instead of the one you tried to substitute.

Note This procedure is for substituting your certificate for the single, legacy certificate only. If you intend to use more than just the legacy certificate, use the console interface for any additional certificates you need. See [Adding Certificates through the Console](#) for details.

To upload a custom “legacy” certificate during server installation:

- 1 Prepare the certificate you want to use and place it and its key file in an accessible location on the system hosting the Carbon Black EDR Server (the master in a clustered environment).

- 2 Enter the yum install command for installing the correct server version and wait for that process to complete. See the *VMware Carbon Black EDR Server / Cluster Management Guide* for additional installation instructions.
- 3 When the installation completes, run the following command, providing the arguments and file paths to the certificate file and the key file as shown here:

```
cd /usr/share/cb
sudo cbinit --server-cert-file=<certpath> --server-cert-key=<keypath>
```

- 4 If the certificate and key files pass all tests, they become the default server certificate and key, and are copied into the server as /etc/cb/certs/cb-server.crt and /etc/cb/certs/cb-server.key .


Adding Certificates through the Console

You can add certificates to the Carbon Black EDR Server through the console to secure server-sensor communications.

Important Certificates and key files added in this way must meet the requirements described in [Server-Sensor Certificate Requirements](#).

To add a new certificate to a server through the console:

- 1 Click *Username*> **Settings** .
- 2 Click **Server Certificates** and click the **Add certificate** button.
- 3 In the Add certificate dialog, provide a unique name for the certificate to identify its purpose (use 50 or fewer alphanumeric characters without spaces).

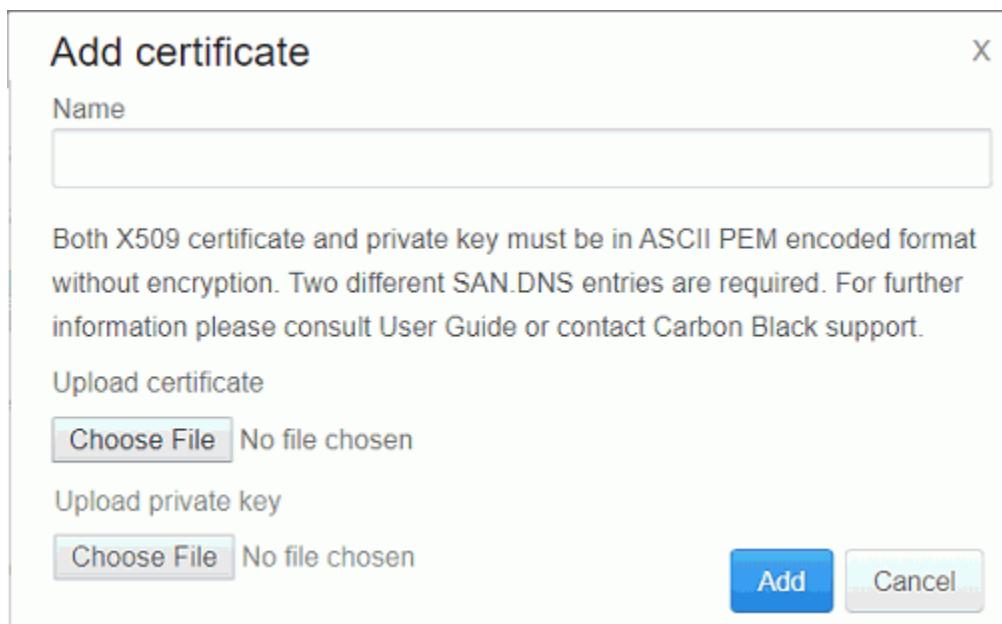

- 4 Click *Username*> **Settings** .

- 5 Under *Upload certificate* , click **Choose File** and provide the path to a certificate file that meets the requirements that are described in [Server-Sensor Certificate Requirements](#).
- 6 Under *Upload private key* , click **Choose File** and provide the path to the ASCII PEM-encoded, unencrypted key file for this certificate.
- 7 When you have entered all required information, click the **Add** button in the dialog.
If it passes all tests, the new certificate is listed in the table on the Server Certificates page and is available for use by sensors.

Choosing a Validation Option

You can choose one of two validation methods that sensors use for the server certificates that are used to secure server-sensor communication. The validation method can be set through the following console method or by providing a value in the cb.conf file for `CbServerSSLCertStrictCheck` , in which case it cannot be changed in the console.

If the standard validation method (certificate pinning only) is used, certificate expiration does not interrupt server-sensor communication, although an expiration warning will appear if this is configured. The only requirement is that the server and sensor certificates match.

If strict certificate validation is used, the requirements of standard validation must still be met, but additional checks are done on the sensor side. A certificate that has expired or fails any other validation requirements causes server-sensor communication to be disabled. See [Sensor Support for Certificate Management](#) for the validation requirements on different sensor platforms.

Caution Do not enable strict validation if you are using the legacy certificate created during Carbon Black EDR server installation. Using strict validation for this or any other certificate that cannot pass validation will disable communication between the sensor and server on some sensors that support the certificate management features, and may require uninstalling and reinstalling sensors.

To change the validation method for server certificates:

- 1 Click Username > Settings.
- 2 Click Server Certificates.
- 3 Two radio buttons/options appear under Server certificate validation mode:
 - a **Standard validation** – Sensors will only require that their certificate matches the server certificate when connecting.
 - b **Strict certificate validation** – Sensors will require that a matching certificate is valid on the host machine when connecting. This also includes checking if the certificate has expired.

If the button for the method you want to use is not selected, click it.

- 4 Click the **Save changes** button, and click **Confirm** .

Server Certificates

Server certificate validation mode

Standard validation Certificate pinning only. Requires matching sensor and server certificate.

Strict certificate validation Standard validation as well as additionally requiring validation against a trusted Certificate Authority on Sensors. This also includes checking if the certificate has expired.

Save Changes

The change will be propagated to all sensors that support TLS server certificate management during their next checkin.

Caution As the confirmation dialog states, changing validation method can disable communication between sensor and server. Make sure that you have configured certificates properly before changing this setting, especially if you are changing to strict validation.

Changing the Expiration Notification Period

You can configure the Carbon Black EDR server to display a warning banner when any of its server certificates is ready to expire. The values available for this are: 0, 15, 30, 60 or 90 days. If the value provided is 0 (zero), no warning appears.

This value can also be set through the console as described below or by providing a value in `CbServerCertWarnBeforeExpirationDays` in the `cb.conf` file, in which case it cannot be changed in the console.

If enabled, the warning displays for any expiring certificate listed on the Server Certificates page, even one not used by any sensor groups. If you see warnings for a certificate you are not using and will not use later, delete the certificate to prevent unneeded warnings.

To change the notification period for an expiring certificate:

- 1 Click **Username > Settings**.
- 2 Click **Server Certificates**.
- 3 In the *Notify me* menu above the table, select the number of days in advance to be warned about expiration of any certificates (whether or not they are being used by any sensors).

Deleting Certificates

You might want to remove a certificate so that it cannot be used (for example, if it has expired or has been compromised). You can remove any certificate except the following:

- You cannot delete a certificate that is currently in use by a sensor group.
- You cannot delete the legacy certificate that is created during server installation.

To delete a certificate from a server:

- 1 Click **Username > Settings**.
- 2 Click **Server Certificates**.

- 3 Check that the certificate to delete does not have any sensors using it. If the certificate is not in use, click Actions > Delete for that certificate.
- 4 In the confirmation dialog, click Delete.

Caution After you confirm the deletion of a server certificate, any sensors that were using the certificate can no longer communicate with the server. There is no Undo for this action. Although you cannot delete a certificate that is being used by a Sensor Group, it is possible that an offline sensor could miss a change of certificate for its group, and come back online configured to use a certificate that has been deleted.

Upgrades from Previous Server Releases

When you upgrade to Carbon Black EDR Server version 6.4.0, the previously used certificate appears in the server certificates table – that is, the certificate called “Legacy”. Unless you change it, standard validation (certificate pinning) remains in effect. This allows the server and sensors to communicate as before the upgrade.

After the upgrade is complete, you can implement a different certificate management strategy if you choose. Subsequent server upgrades maintain whatever certificates you have in place at the time of the upgrade.

Assigning Certificates to Sensor Groups

If new or different certificates are assigned to any sensor group, the change of certificates is made for each sensor the next time it checks in with the server. In addition to using the newly assigned certificate on all subsequent communications with the server, the sensor also stores certificate details locally for use on sensor restarts.

During a change of certificates, the server accepts connections from the sensors utilizing either of two server certificates: the certificate being replaced or the new certificate. Sensor-server communication is not interrupted by certificate replacement. After the connection is successfully established using the new certificate, the old certificate is overwritten and is no longer available for use by the sensor.

If the sensor cannot connect with the new certificate, it reverts to the previous sensor certificate.

For older sensor versions that do not support certificate swaps, the legacy certificate remains in place, regardless of a global or per-sensor-group certificate change. Consider reviewing which sensors support certificate management features before assigning certificates to a group. See [Sensor Support for Certificate Management](#).

In clustered environments, certificate changes are automatically propagated to all servers within a matter of seconds, without requiring a restart.


Assigning different certificates to different sensor groups

Your organization might consist of multiple sites or groups whose endpoints are mapped to different sensor groups. You can use different server certificates to authenticate the connections between the Carbon Black EDR Server and different sensor groups, thereby reducing the exposure to a compromised server certificate. This lets you manage certificate expiration on a per sensor group basis.

You can also use the per-sensor-group assignment of certificates to gradually change a certificate, even if you want to use the same certificate for all sensors. After you see successful server-sensor communications for one group, you can assign the certificate to all sensors or continue assigning the new certificate on a per sensor group basis.

To change the server certificate for one sensor group:

- 1 In the navigation bar, click **Sensors**.
- 2 In the left panel, click the name of the sensor group whose certificate you want to change. Click the **Edit** button.
- 3 In the General panel of the Edit Group page, click the *Assign Server Certificate* dropdown menu to choose the certificate to use for this group.

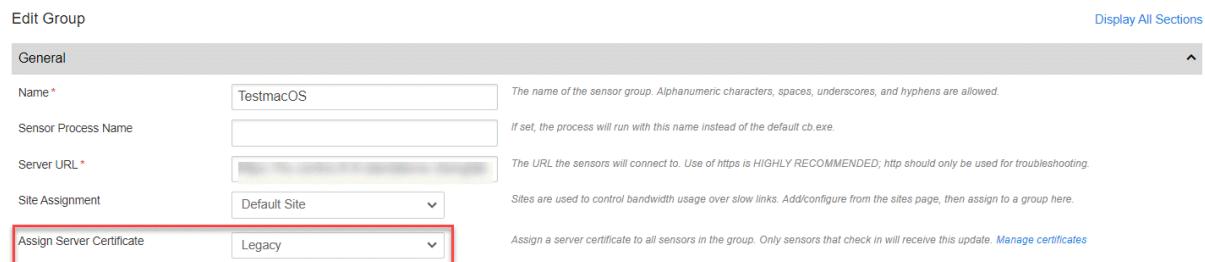

The screenshot shows the 'Edit Group' page with the 'General' tab selected. The 'Assign Server Certificate' dropdown menu is open, showing 'Legacy' and 'Modern' as options. The 'Legacy' option is highlighted with a red box.

- 4 Click the **Save Group** button at the bottom of the page.

Assigning a new certificate to all sensor groups

You might need to use your own custom certificate, capable of strict validation, for communication between the Carbon Black EDR Server and all sensors. If you do not need different certificates for different sensor groups, Carbon Black EDR provides a single-click method to assign one new certificate to all groups.

Note Before assigning to all sensor groups, the recommended best practice is to validate certificate connectivity on at least one active sensor group first.

To apply one certificate to all sensor groups:

- 1 Click *Username*> **Settings**.
- 2 Click **Server Certificates**.
- 3 Click the **Actions** dropdown menu and click **Assign to all sensor groups**.

4 Click **Confirm**.

Sensor Support for Certificate Management

Certificate management features are available on Carbon Black EDR Server versions 6.4.0 and later. How those features affect *sensors* depends on the sensor version and the OS platform of the sensor. Other than expiration warnings, sensors that don't support TLS certificate management are unaffected by any of the new certificate management settings.

Sensors that do not support certificate swaps continue using the legacy certificate provided by the server, regardless of the certificate assigned to their sensor group.

If you select Standard validation, the only requirement for a valid connection is that there is an exact hash match between the certificate on the sensor and the certificate on the server. If you select Strict validation, the exact hash match is still required, plus additional validation criteria that varies by platform. The following table shows the different validation criteria that are available for the sensor versions on each platform.

The following list shows the sensors that are included with Carbon Black EDR Server 6.4.0 and their support for certificate management:

- **Windows sensor 6.2.3** – This and later sensors **support** certificate management and handles strict validation. See [Special Requirement for Windows Sensors](#).

Windows XP and Windows Server 2003 **do not support** TLS certificate swap, regardless of the Carbon Black EDR sensor version.
- **OS X (macOS) sensor 6.2.5** – This and later sensors **support** the new certificate management features and handles strict validation as shown in the table below.
- **Linux sensor** – As of the version 7.0.0 server release, Linux sensors **do not support** certificate management but continue to use the default “Legacy” certificate. Monitor the Carbon Black User Exchange for any news about Linux sensors that support the new features.

Strict validation mode requirements by sensor platform		
Requirement	OS X Sensor 6.2.5+	Windows Sensor 6.2.3+
Exact certificate match (certificate pinning)	Yes	Yes
Expiration date	Yes	Yes
Certificate validation chain	-	Yes
Hostname matches (SAN=)	-	Yes
Writable host file	-	Yes
Revocation check	-	-
Key Usage is Server Auth (1.3.6.1.5.5.7.3.1)	-	Yes

Special Requirement for Windows Sensors

Certificate swapping on an endpoint running the Windows sensor requires that the sensor is able to update the system hosts file. This is a text file that maps IP addresses to hostnames. The file is located at: C:\Windows\System32\drivers\etc\hosts.

To be sure the host file can be updated successfully:

- **Check AV Exceptions** -- The Carbon Black EDR sensor service must be allowed to open and edit the hosts file. By default, it has that permission since it is running as administrator. However, other security products (typically anti-virus products or other monitoring tools) must not block the Carbon Black EDR sensor from accessing the file. If necessary, add exclusions to other security products to allow the Carbon Black EDR Windows sensor to access the hosts file. Failure to do so can result in loss of communications between sensors and server.
- **Save the File in ASCII (Windows Sensor 6.2.3 and 6.2.4)** -- For Windows sensor releases through version 6.2.4, the hosts file is assumed to be in ASCII encoding. If the sensor modifies an instance of the file that was saved with non-standard encoding, the file can become unreadable.

If it has been saved in a different format, resave the file in ASCII. For example, in the Windows Notepad application, choose Save As... and then select ANSI as the encoding.

See the release notes for post-6.2.4 sensors to determine whether this requirement still applies.

Upgrading to Sensors that Allow Certificate Management

To use the certificate management features of Carbon Black EDR and upgrade your sensors to a version that is compatible with certificate management, the best practice is to upgrade the sensors first and let the upgrades complete before applying a custom certificate to them. This reduces the possibility of communication issues due to a mismatch between the server certificate and the sensor during the upgrade. After the sensors are updated, you can apply the custom certificate.

Important If a sensor group is assigned a custom certificate, sensors in that group that support custom certificates cannot be downgraded to sensor versions that do not support custom certificates. Attempts at such a downgrade fail and log an error in the sensorservices debug log.

Troubleshooting Sensors

10

This chapter describes ways to troubleshoot sensors. Additional useful troubleshooting information appears in [Chapter 25 Sensor Health Score Messages](#).


This chapter includes the following topics:

- [Troubleshooting Windows Sensor Installations](#)
- [Troubleshooting Linux Sensor Installations](#)
- [Troubleshooting OSX Sensor Installations](#)
- [Diagnostic Uploads Utility](#)

Troubleshooting Windows Sensor Installations

This section describes places to check to troubleshoot errors that could have occurred during Windows sensor installation:

- Confirm that the `%WINDIR%\CarbonBlack\` directory exists. Carbon Black EDR should be installed in this directory.
- Confirm that the `%WINDIR%\CarbonBlack\InstallLogs\` directory contains installation logs. Review the latest log file for errors.
- Confirm that the current sensor log exists and review it for errors: `%WINDIR%\CarbonBlack\Sensor.log`
- Confirm the settings in the registry key at `HKLM\Software\CarbonBlack\Config`. A typical configuration looks like the following:

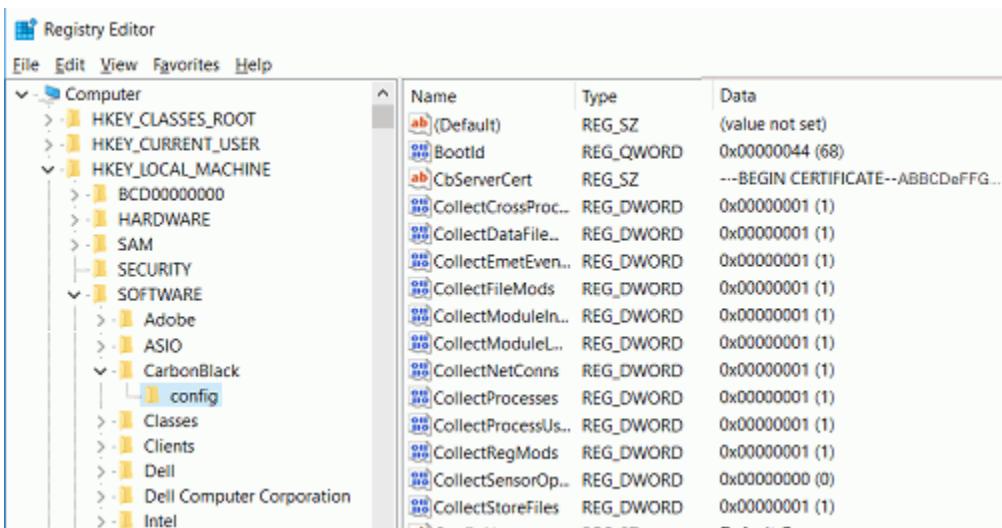

Using Control Codes to Generate Logs of Diagnostic Data

You can use sensor control codes to get diagnostic information.

To issue a sensor control request to the sensor:

- 1 At a command line prompt, run this command:

```
sc control carbonblack <CONTROLCODE>
```

- 2 Use one of the following codes:


- 200 – Initiates a connection attempt to the Carbon Black EDR server. In most cases, this is a near-immediate connection attempt. Exceptions are during sensor startup and shutdown, or if any outstanding connection or connection attempts to the server are in progress. For example, if an event log or other data is currently being uploaded to the server, or if an attempt to connect to the server is in progress, the attempt does not occur until after the current operation is complete.
- 201 – Initiates a dump of diagnostic data to the %WINDIR%\CarbonBlack\Diagonistics\\ directory. The 201 control code generates the following logs:

Log	Description
EventConverter.log	The internal memory state for event conversion.
EventLogger.log	Top-level event logging statistics.
MachineStatistics.log	General system, process, and kernel statistics.
ModuleInfo.log	Internal module statistics.
NetConnEvents.log	Network event logging statistics. Note: To reduce netconn traffic for systems that have a large number of network connections, see Reducing the Impact of Netconn Data Collection (Windows) .
RawEventStats.log	Internal statistics for the conversion of raw events (that were generated by the core sensor driver) to event messages that are stored on the Carbon Black EDR server.

Log	Description
SensorComms.log	The history of the last 100 network communication attempts between the sensor and the Carbon Black EDR server.
SensorComponents.log	The current state of the internal sensor components.

The following example demonstrates these conditions:

- Missing Diagnostics directory
- `sc control carbonblack 201` and expected `sc.exe` output
- Populated Diagnostics directory that contains the `SensorComms.log`

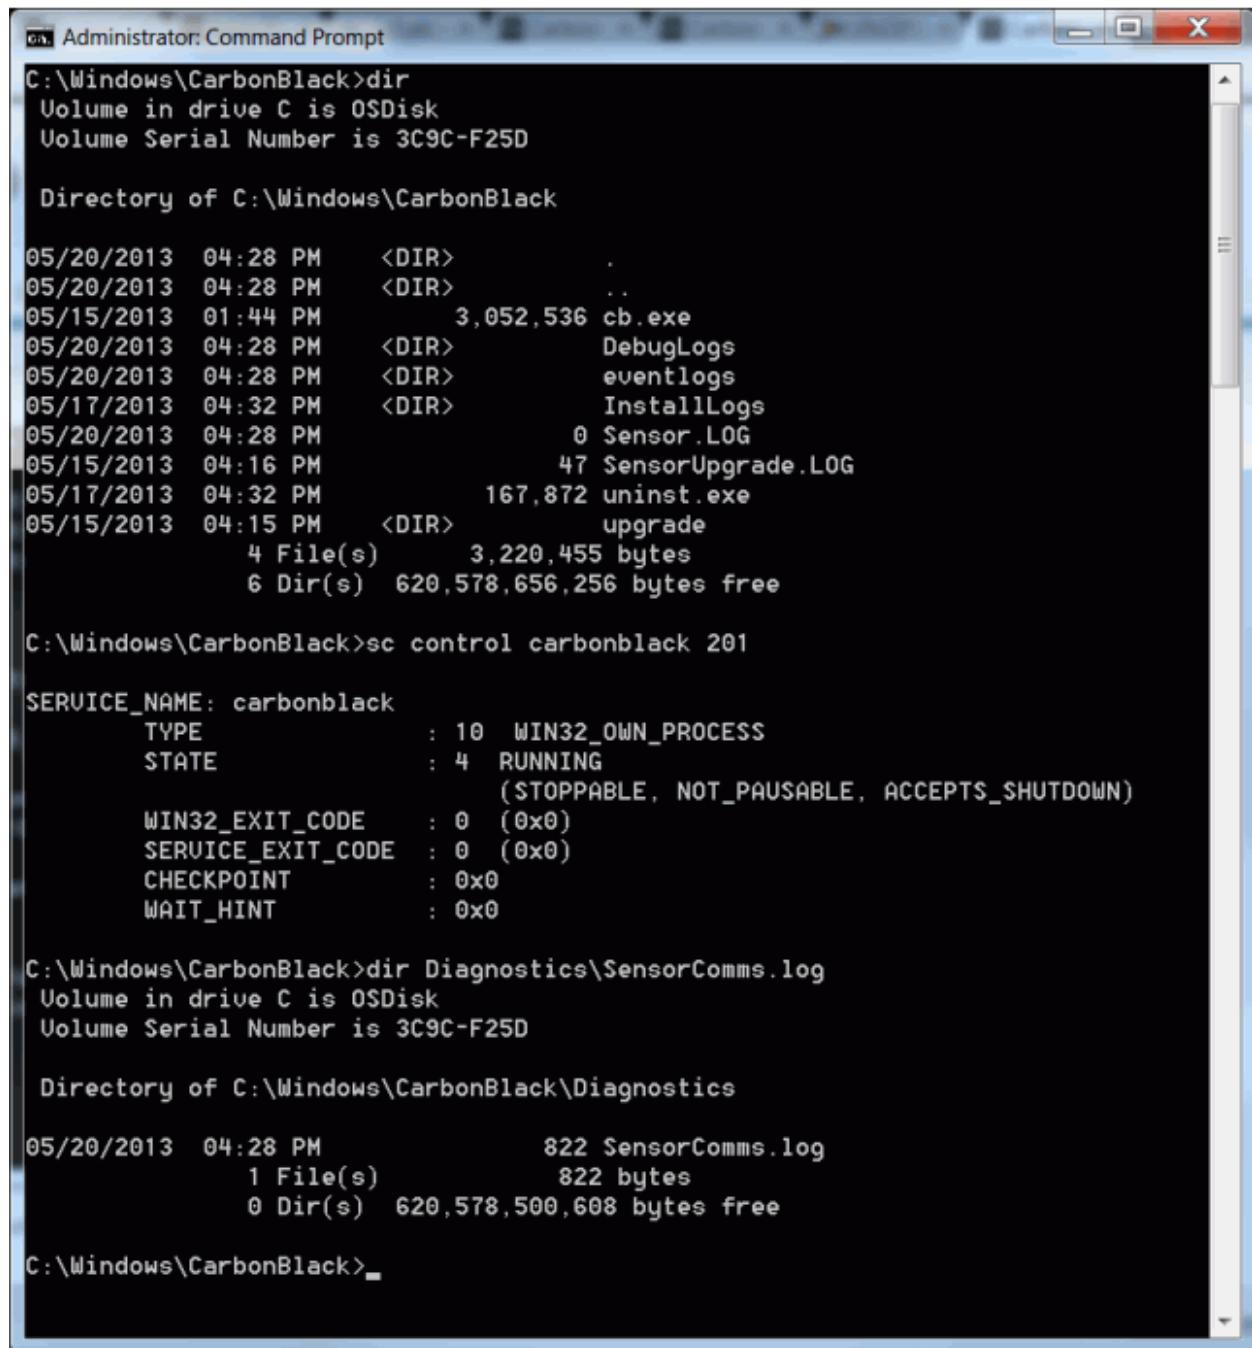

```

Administrator: Command Prompt
C:\Windows\CarbonBlack>dir
Volume in drive C is OSDisk
Volume Serial Number is 3C9C-F25D

Directory of C:\Windows\CarbonBlack

05/20/2013  04:28 PM    <DIR>    .
05/20/2013  04:28 PM    <DIR>    ..
05/15/2013  01:44 PM    3,052,536 cb.exe
05/20/2013  04:28 PM    <DIR>    DebugLogs
05/20/2013  04:28 PM    <DIR>    eventlogs
05/17/2013  04:32 PM    <DIR>    InstallLogs
05/20/2013  04:28 PM                0 Sensor.LOG
05/15/2013  04:16 PM                47 SensorUpgrade.LOG
05/17/2013  04:32 PM    167,872 uninst.exe
05/15/2013  04:15 PM    <DIR>    upgrade
        4 File(s)    3,220,455 bytes
       6 Dir(s)  620,578,656,256 bytes free

C:\Windows\CarbonBlack>sc control carbonblack 201

SERVICE_NAME: carbonblack
    TYPE               : 10  WIN32_OWN_PROCESS
    STATE              : 4   RUNNING
                        (STOPPABLE, NOT_PAUSABLE, ACCEPTS_SHUTDOWN)
    WIN32_EXIT_CODE    : 0   (0x0)
    SERVICE_EXIT_CODE : 0   (0x0)
    CHECKPOINT        : 0x0
    WAIT_HINT         : 0x0

C:\Windows\CarbonBlack>dir Diagnostics\SensorComms.log
Volume in drive C is OSDisk
Volume Serial Number is 3C9C-F25D

Directory of C:\Windows\CarbonBlack\Diagnostics

05/20/2013  04:28 PM           822 SensorComms.log
        1 File(s)           822 bytes
        0 Dir(s)  620,578,500,608 bytes free

C:\Windows\CarbonBlack>_

```

Debugging Sensor Communications

After you run the `sc control carbonblack 201` command, the `%WINDIR%\CarbonBlack\Diagonistics\` directory includes `SensorComms.log`.

This log file contains data in the following format:

Server URL: <https://x.x.x.x:443>

Time | URL | HRESULT ----- + ----- + -----

2013-05-20 21:28:38 | https://x.x.x.x:443/sensor/register | 0x00000000
 2013-05-20 21:28:38 | https://x.x.x.x:443/sensor/checkin | 0x00000000
 2013-05-20 21:28:38 | https://x.x.x.x:443/data/eventlog/submit | 0x00000000
 continuation of log:

Code	DurationMs	TxBytes	RxBytes	Throttle KB/s
0	577	300	10	100
0	312	402	104	100
0	249	4328	0	0

The information in the `sensorComms.log` file is described in the following table.

Column	Description
Time	The time (UTC) of the connection attempt.
URL	The URL that was used during the communication.
HRESULT	The result of the operation as a raw HRESULT (0x00000000 is success).
Code	The result processed code. This can vary, based on the HRESULT source, but it can be the HTTP code (404, 500), a Win32 error (net helpmsg code), or other codes.
DurationMS	The duration of the connection attempt in milliseconds.
TxBytes	The number of bytes transmitted, not including HTTP headers.
RxBytes	The number of bytes received, not including HTTP headers.
Throttle KB/s	The rate at which the connection was throttled in kilobytes; 0 indicates that it was not throttled.

Troubleshooting Linux Sensor Installations

This section describes places to check potential troubleshoot errors during a Linux sensor installation.

General Logging

The user mode portion of the sensor creates an execution log in the following locations:

- For a version 6.1.x Linux sensor:

`/var/log/cbsensor/cbdaemon.INFO`

This log file is a symbolic link that is recreated each time the daemon runs. The default log level is set to `WARNING`. This results in the generation of log files for `WARNING` and `ERROR` levels:

`/var/log/cbsensor/cbdaemon.WARNING`

`/var/log/cbsensor/cbdaemon.ERROR`

The kernel module logs messages to `/var/log/messages`.

Issue this command in a terminal to dump kernel messages in real time:

```
sudo tail -f /var/log/messages | grep CbSensor
```

- For a version 6.2.x or higher Linux sensor, the current log is:

```
/var/opt/carbonblack/response/log/cbdaemon.log
```

When the current log file reaches a size threshold (currently 100MB), it rolls over to cbdaemon1.log and a new cbdaemon.log is started. You might see log files named cbdaemon[1-5].log, with cbdaemon5.log being the oldest.

- The kernel module logs messages to /var/log/messages.

Issue this command in a terminal to dump kernel messages in real time:

```
sudo tail -f /var/log/messages | grep CbSensor
```

- For RHEL8.x/SUSE/Ubuntu an ebpfdaemon error log file exists that you can check:

```
/tmp/cbebpf_error.log.
```

Installation Verification

The following is a list of some key files to check for to confirm installation success:

Path	Description
/etc/init.d/cbdaemon	Sensor daemon script
/usr/sbin/cbdaemon	Sensor daemon executable
/lib/modules/\$(uname -r)/kernel/lib/cbsensor.ko	Sensor kernel module (6.1.x)
/opt/carbonblack/response/modules/cbsensor.ko	Sensor kernel module (6.2.x)
/etc/sysconfig/modules/cbsensor.modules	Kernel autostart file
/opt/cbsensor/sensordiag.sh	Sensor diagnostics file (6.1.x)
/opt/carbonblack/response/bin/sensordiag.sh	Sensor diagnostics file (6.2.x)
/opt/cbsensor/sensoruninstall.sh	Sensor uninstall file (6.1.x)
/opt/carbonblack/response/bin/sensoruninstall.sh	Sensor uninstall file (6.2.x)
/var/lib/cb/config.ini	Configuration file (6.1.x)
/var/opt/carbonblack/response/config.ini	Configuration file (6.2.x)
/var/lib/cb/sensorsettings.ini	Settings file (6.1.x)
/var/opt/carbonblack/response/sensorsettings.ini	Settings file (6.2.x)

- To verify that the sensor daemon is running, issue the following command:

```
pidof cbdaemon
```

There should be exactly one PID returned.

- To verify that the sensor kernel module is running, issue this command:

```
lsmod | grep cbsensor
```

The output should show one item, if the sensor kernel module is running.

Note **Verification Notes for RHEL8.x/SUSE/Ubuntu**

- A `/usr/sbin/cb_ebptool` directory contains pertinent files.
- No `/lib/modules/`uname -r`/kernel/lib/cbsensor.ko` file exists because there is no kernel module.
- No `/etc/init.d/cbdaemon` exists; instead, there are `/etc/systemd/system/{cbdaemon.service, cbebpfdaemon.service, cbkernelupdate.service}`
- No `cbsensor` module is loaded.

Installation Failures

To check if the sensor is installed correctly, issue this command:

```
rpm -qa cbsensor
```

If the sensor is installed, a single line displays the version and build numbers. The following is an example:

```
cbsensor-v6.2.0.60603-1.x86_64
```

Note The version number depends on the version installed.

For RHEL8.x/SUSE/Ubuntu the kernel header package matching the running kernel must also be installed. The install will attempt to install this package if it is not already installed; however this can fail if, for example, the repository is not set up.

On RHEL 8.x, search for this with (`rpm -qa | grep kernel-debug-devel`).

On SUSE, search for the kernel header package with (`rpm -qa | grep kernel-devel`).

Sensor Communication History

Running inside a terminal as root and sending the SIGUSR2 signal (via `su`), issue this command:

```
kill -s12 $(pidof cbdaemon)
```

The log is located at `/var/tmp/cb/sensor_comms.log`. Each transaction has a `HRESULT`, which can be one of the following:

Facility Number	Description	Error Code Value
204	OS level errors	Maps to <code>errno</code>
25	HTTP errors	HTTP error code

Facility Number	Description	Error Code Value
200	Curl errors	See http://curl.haxx.se/libcurl/c/libcurl-errors.html .
201	Curl form errors	

Note For sensor version 6.2+, the log location is changed to `/var/opt/carbonblack/response/diagnostics`. In some sensor versions you might need to run a `mkdir /var/opt/carbonblack/response/diagnostics` command first.

Manual Sensor Daemon Start and Stop

- To restart the service, open a terminal and issue this command:
`sudo service cbdaemon restart`
- To start the service, open a terminal and issue this command:
`sudo service cbdaemon start`
- To stop the service, open a terminal and issue this command:
`sudo service cbdaemon stop`

Note that if the sensor crashes, you may need to delete the following file to eliminate an error when trying to start the daemon: `/var/run/cbdaemon.pid`

For 6.1.x the file is `/var/lib/pid` and for 6.2.x, the file is `/var/run/cbdaemon.pid` .

Determine Server URL

To determine the server URL used by the sensor, follow the instructions in [Sensor Communication History](#) to create a communication log and dump the contents of the generated log file. The server URL appears at the top.

Initiate an Immediate Checkin to the Server

Running inside a terminal as root and sending the SIGUSR1 signal (via su), issue this command:

```
kill -n 10 $(pidof cbdaemon)
```

Driver Debug Parameters

Two arguments can be passed to the driver to control the debug behavior:

- `g_traceLevel` – Controls debug trace output flags (6.1. only).
- `g_eventFilter` – Controls which event types are generated.

These arguments can be passed in the `/etc/sysconfig/modules/cbsensor.modules` file or as described in the version-specific sections below.

Sensor Version 6.1.x Driver Debug Parameters

For version 6.1.x sensors, use the following command:

```
sudo insmod cbsensor.ko g_traceLevel=<value> g_eventFilter=<value> :insmod cbsensor.ko
g_traceLevel=0x00200000
```

or

```
modprobe cbsensor g_traceLevel=0x00200000
```

where 0x00200000 is hook tracing

The full list of levels is:

```
#define DL_INIT 0x00000001
#define DL_SHUTDOWN 0x00000002
#define DL_WARNING 0x00000004
#define DL_ERROR 0x00000008
#define DL_INFO 0x00000010
#define DL_REQUEST 0x00000100
#define DL_HOOK 0x00200000
#define DL_VERBOSE 0x08000000
#define DL_ENTRY 0x10000000#define DL_EXIT 0x20000000
```

To create the log level mask you want, OR the individual levels.

Sensor Version 6.2.x Driver Debug Parameters

For version 6.2.2 sensors and later, the preferred method for setting the debug logging subsystem level is by editing `/proc/debug-subsystems`. In this file, the debug subsystem value is reported in hexadecimal as an 'or' of the values shown below.

An alternative to editing `debug-subsystems` is to use the following command: `sudo insmod cbsensor.ko g_debug_subsystem=<value> g_eventFilter=<value>`

The subsystems are defined as:

```
#define DS_COMMs 0x0002
#define DS_FILE 0x0004
#define DS_HASH 0x0008
#define DS_BAN 0x0010
#define DS_HOOK 0x0020
#define DS_ISOLATE 0x0040
#define DS_LOG 0x0080
#define DS_LSM 0x0100
#define DS_MOD 0x0200
#define DS_NET 0x0400
#define DS_PROC 0x0800
#define DS_PROCFS 0x1000
#define DS_TEST 0x8000
```

If DS_TEST is specified, the enabled log levels and subsystems are logged to the system log (use `dmesg` to view). This is done at module load time when specified as a parameter.

Subsystem debug messages are reported at KERN_INFO level. The minimum kernel logging level must be at least KERN_INFO for these messages to be reported. It can be set at runtime via /proc/sys/kernel/printk or at boot time by setting the `loglevel` kernel command line parameter.

Daemon Debug Options

Debugging Parameters for 6.1.x Sensors

For 6.1.x version sensors, there are options for the Carbon Black EDR initialization file that you can use for daemon debugging. This file is located at:

```
/var/lib/cb/sensorsettings.ini
```

When you set one or both of these options, you can use SIGHUP to reread the sensorsettings.ini file and update the log settings.

```
$ sudo killall cbdaemon -SIGHUP
```

The two debugging options are:

- DaemonLogLevel -- You can set this to any of the following: Error, Warning, Info, Debug1, Debug2, Debug3, Debug4, Debug5. DaemonLogLevel is not set in the ini file, the default DaemonLogLevel is Warning.
- SensorLogLevel -- This option is a string value in the form

```
<base level>[/<extra level>[...]]
```

where the possible values of <base level> are Error, Warning, Info, and Debug, and the possible values of <extra level> are Hook, Request, Entry, Exit, Comms, and Trace.

In most cases only <base level> will need to be set. If SensorLogLevel is not set in the ini file, the default is Warning.

Note If you deployed sensor versions prior to 6.1, be aware of the following change:

- Due to the additional granularity now available in the daemon, many of the debugging messages have been decreased in priority.
- The Info level can provide a good overview of observed events without providing excessive output.
- Some of the log messages are more uniform. The most notable change is that "FILE EVENT" messages now display the type of file event as a string instead of an integer value. For example, "FILE_OPEN EVENT" and "FILE_CLOSE EVENT".

Debugging Parameters for 6.2.x Sensors and Later

For sensors at version 6.2.1 and later, use the preceding procedures described for daemon debugging, noting the following changes:

- The initialization file that you edit is in a different location than earlier sensors:

```
/var/opt/carbonblack/response/sensorsettings.ini
```

- The **DaemonLogLevel** values were changed for the 6.2.x sensor. The new levels are: None, Error, Warning, Info, Verbose
- As of version 6.2.2, **SensorLogLevel** is no longer a valid option and will be ignored.

Determine Sensor Version

To determine the version of cbdaemon running, from a terminal, issue this command:

```
cbdaemon -v
```

Trigger a Diagnostic Data Dump

Running the `sensordiag.sh` script dumps and collects network event logs, cbdaemon log files, and important sensor and system configurations that can help diagnose sensor issues. The script packages up these files into a single compressed file that you can deliver to Carbon Black for analysis.

Generate a `.tar.gz` file in the current directory for diagnostic purposes by issuing this command:

```
sudo /opt/carbonblack/response/bin/sensordiag.sh
```

Troubleshooting OSX Sensor Installations

This section describes places to troubleshoot potential errors during OSX sensor installation.

Installation Verification

The following is a list of key files that should be present if installation is successful:

Path	Description
6.2.7-osx and earlier: /Applications/CarbonBlack/Cb0sxSensorService	Sensor service
6.3.0-osx and later: /Applications/Vmware Carbon Black EDR/Contents/MacOS/Cb0sxSensorService	
6.2.7-osx and earlier: /Applications/CarbonBlack/sensoruninst.sh	Uninstall script
6.3.0-osx and later: /Applications/Vmware Carbon Black EDR/Contents/Resources/sensoruninst.sh	
All sensor versions on macOS 10.x /System/Library/Extensions/Cb0sxSensorNetmon.kext	Network monitor

Path	Description
All sensor versions on macOS 10.x	Process monitor
/System/Library/Extensions/Cb0sxSensorProcmn.kext	
7.0.1-mac and later sensor versions on macOS 11.x	User-mode monitor
Run systemextensionsctl list	
Output should contain com.carbonblack.es-loader.es-extension (1.0/1) es-extension [activated enabled]	
6.2.6-osx and earlier:	Settings file
/var/lib/cb/sensorsettings.ini	
6.2.7-osx and later:	
/var/root/Library/Preferences/com.carbonblack.sensor-service.plist	

Installation Failures

The installation process can fail if the `sensorsettings.ini` is not located in the same directory as `Installer.pkg`.

If the installation does not complete successfully, the installer reverts all the changes made to the system but leaves the `cblog.log` file intact. For troubleshooting, collect the installer log file created at `/var/log/cblog.log` and send it to <https://community.carbonblack.com/t5/Support-Zone/tkb-p/support-Community-Resources> for assistance.

Communications Logging

1 Determine the PID of the Carbon Black EDR sensor:

```
ps -ax | grep Cb0sxSensorService
```

2 Start the communications log dump by issuing this command:

```
sudo kill -s USR2 <pid of Cb0sxSensorService>
```

You can locate the log at `/var/lib/cb/sensor_comms.log`. Each transaction has a HRESULT (see description at https://docs.microsoft.com/en-us/openspecs/windows_protocols/ms-erref/0642cb2f-2075-4469-918c-4441e69c548a?redirectedfrom=MSDN) that can be one of the following:

Facility Number	Description	Error Code Value
203	OS level errors	Maps to errno
25	HTTP errors	HTTP error code
200	Curl errors	See http://curl.haxx.se/libcurl/c/libcurl-errors.html .
201	Curl form errors	

Manual Sensor Daemon Start and Stop

To manually start and stop the sensor daemon service, open a terminal and issue these commands:

```
sudo launchctl unload /Library/LaunchDaemons/com.carbonblack.daemon.plist
```

```
sudo launchctl load /Library/LaunchDaemons/com.carbonblack.daemon.plist
```

Determining Sensor Version

To determine the sensor's version, open a terminal and issue this command:

- Sensors v6.2.7-osx and earlier:

```
/Applications/CarbonBlack/Cb0sxSensorService -v
```

- Sensors v6.3.0-osx and later:

```
/Applications/VMware\ Carbon\ Black\ EDR.app/Contents/MacOS/Cb0sxSensorService -v
```

Determine Server URL

To determine the server URL that is used by the sensor, follow the instructions in [Installation Failures](#) to create a communication log and dump the contents of the generated log file. The server URL appears at the top.

Initiate an Immediate Checkin to the Server

To initiate an immediate checkin to the server, open a terminal and issue this command:

```
sudo kill -s USR1 <pid of Cb0sxSensorService>
```

Initiate a Diagnostic Data Dump

You can run a command to dump and collect network event logs, cbdaemon log files, and important sensor and system configurations that can help diagnose sensor issues. The files are packaged up into a single compressed file that you can deliver to <https://community.carbonblack.com/t5/Support-Zone/tkb-p/support-Community-Resources>.

To dump a communication and event tracking logs, open a terminal and issue this command:

```
sudo kill -s USR2 <pid of Cb0sxSensorService>
```

Diagnostic Uploads Utility

Beginning with Carbon Black EDR server version 6.2.2 and macOS (OS X) sensor version 6.2.0, a new sensor diagnostics tool can collect diagnostic data packages from the endpoint and upload them to a cloud location for analysis, using the Carbon Black EDR server as an intermediary. This data can help Carbon Black representatives troubleshoot crashes, performance problems, or other situations in which you believe there is an issue with a sensor. This feature is available on both on-premise and cloud servers. It is currently available only on the latest macOS (OS X) sensor.

There are three different categories of data that can be uploaded using this feature:

- Crash data (automatic or manual): This option returns crash reports for Carbon Black user-mode Service and Sensor Diags. You can choose to package and upload crash data manually or set it for automatic packaging and upload when there is a crash.
- Diagnostics data (manual): This option returns information about the sensor. The data includes a sample of the Carbon Black user-mode Service, Carbon Black user-mode service statistics, `cblog.log`(installer log), any diag files for Carbon Black user-mode service, system log messages containing "Carbon Black" and all daemon log files. This can be useful for situations in which, while there has not been a crash, other behavior suggests a problem in sensor operation. This option must be run manually.
- Environment data (manual): This option returns a list of all open files, a list of all running processes and the amount of CPU they are using, and computer information including Power-On Self Test, Memory, System Software Version, Boot Device, Computer Name, User Name, and a list of all kernel extensions. This option must be run manually.

Automatic Crash Data Upload

By default, a Carbon Black customer service representative must ask you to generate and manually upload (or provide ssh access to) diagnostic files. In a crash situation, this can lead to time-consuming back and forth when you need to get a system running and protected again as quickly as possible. Beginning with Carbon Black EDR server release 6.2.2, diagnostics from sensor crashes may be collected and uploaded automatically for storage in a cloud location. This provides rapid access to the data by Carbon Black sensor experts when an issue requires troubleshooting, without requiring additional steps.

- Automatic upload of sensor crash data is disabled by default. You must opt-in to enable it.
- This feature is currently available only on OS X sensors.

When a sensor checks-in with a Carbon Black EDR server, it receives the current setting for Allow Upload of Sensor Diagnostics Data. If the setting is Manual or Automatic, the sensor will allow manual uploads of diagnostic files. In the case of Automatic, if there is crash data available, the sensor will initiate upload of that data. The server will reject any uploads if Disabled is selected.

Manual Upload Option (Command Line Utility)

If you choose Manual for Allow Upload of Sensor Diagnostics Data on the Shared Settings page, you initiate data collection and uploads by executing a command line utility. The command line syntax for macOS/OS X is as follows:

```
sensordiag -type CDE [-startdate YYYY-MM-DD [THH:MM:SSZZZ] ]
[-enddate YYYY-MM-DD [THH:MM:SSZZZ] ] [-upload [<number of seconds>] ] [-remember ]
```

The “type” options determine which type(s) of data is uploaded:

- C: Crash reports for Carbon Black user-mode Service and Sensor Diags
- D: Diagnostics reports
- E: Environment reports

The other options are:

- **startdate/enddate**: For manually collected sensor diags, you can specify the range of diagnostic files to include in the zip file. This is based on their modified date (date created or dates inside files are *not considered* for this parameter).
- **upload** : When you run the sensor diagnostics command manually, this option must be specified if you want the resulting zip file uploaded to the Carbon Black EDR server – otherwise it just remains on the sensor. If a time argument is specified, the tool will only look for files that were **modified** within the start and end dates specified. If a time argument is not specified, the tool will capture logs from the beginning of the day until the current time.
- **remember** : This option uses the end date of the most recent sensor diagnostics zip file as the startdate for a new one.

Enabling Sensor Diagnostics Uploads

To use the sensor diagnostic uploads feature, you first enable it through the Shared Settings page (click Username > Sharing Settings). There are three options for crash data uploads, and two options for diagnostics and environment data:

- **Disabled** – The default setting for each diagnostics type. Neither automatic crash file uploads nor manual triggering of any uploads is available.
- **Manual** – You manually start the `sensordiag` utility tool via the command line. No data is automatically uploaded. Running the tool collects and uploads the data type that is specified by a command-line switch (Crash, Diagnostic, Environment, or any combination).
- **Automatic** – The sensor automatically collects and uploads crash data when a crash is detected on the sensor. Although diagnostic and environment data cannot be uploaded automatically, selecting Automatic also enables the `sensordiag` utility so that you can manually collect and upload these data types.

Allow Upload of Sensor Diagnostics Data

Selecting "Manual" or "Automatic" indicates that you are "opting in" and thereby electing to share data with Carbon Black.

DATA COLLECTION NOTICE: This functionality enables sensors to collect diagnostics data and upload that data to Carbon Black for troubleshooting. Collected data includes application logs, system hardware configuration and application configuration information from deployed sensors. Data collected is limited to technical information about the system software and hardware (System Data). Application data, binaries and user data from system is not included. This data may include personal data as it may appear within usernames, filenames, file paths, and machine names. By enabling this functionality you acknowledge the processing of this data is necessary and appropriate for your legitimate interest of network security. We have implemented appropriate security and operational methods designed to secure the data. We will also use and analyze the System Data for security analysis in order to make our services more effective for you and our customers. In the course of using the services, you shall have sole responsibility for the accuracy, quality, integrity, legality, reliability, appropriateness, and intellectual property ownership or right to use and transferability to Carbon Black of all such data. Licensee's privacy policy may be viewed at <http://www.carbonblack.com/privacy-policy> which may be modified by Carbon Black from time to time.

Disabled

Do not upload sensor diagnostics data to Carbon Black.

Manual

Upload diagnostics data manually by using a utility installed on the sensor.

Automatic

Upload diagnostics data automatically when fault conditions are detected on the sensor.

File Transfer and Security

Each collection of sensor diagnostic files is packaged as a zip file on the sensor before uploaded to the Carbon Black EDR server. From the Carbon Black EDR server, uploaded sensor diagnostic files are sent to the Carbon Black cloud, and are encrypted until and unless they are accessed by authorized Carbon Black representatives.

To avoid sending oversized files over an HTTP request, the uploaded file size is limited to 5MB. Files larger than that are split into multiple files during transit.

Files are uploaded to the Carbon Black EDR server on first-come-first-serve basis. Only one file can be uploaded to a server at a time. If additional sensors check in for an upload while an upload is already in progress, a "Try Again" message is sent to sensor so that it can try again at a later time. In a clustered environment, multiple simultaneous uploads are possible.

After the upload succeeds, the zip file is removed from the sensor.

Data Collected by Sensor Diagnostics

Your organization might have specific standards for what kind of information may be uploaded to a third party such as Carbon Black. To help you decide whether the sensor diagnostic upload features meet those standards, the following table shows the type of information each option will upload.

	Crash Logs	Diagnostic Reports	Environment Data
File name	No	Yes (1)	Yes (5)
File path	No	Yes (1)	Yes (5)
IP address	No	Yes (1)	No

	Crash Logs	Diagnostic Reports	Environment Data
Command line	No	Yes (2)	No
Network operations (device names)	No	Yes (3)	No
File writer name	No	No	No
Audit logs (user name)	No	No	No
Username associated with process	No	No	No
Hostname	Yes (4)	Yes (4)	Yes (4)
Full binary	No	No	No
File metadata	No	No	No
Email address	No	No	No

(1) - File names and file paths (which include the file name) and IP addresses appear in Cb0sxSensorService log files.
 (2) - Command lines appear in log files in certain error situations.
 (3) - Device names appear in the log together with IP addresses (1).
 (4) - The hostname is part of the name of the zip file that is sent to Carbon Black.
 (5) - System logs are collected which may contain path names logged from other processes.
 (6) - Hostname is shown in system profiler information.

Responding to Endpoint Incidents

11

This chapter describes how to respond to endpoint incidents by isolating endpoints by using Live Response and banning process hashes.

This chapter includes the following topics:

- [Overview of Incident Response](#)
- [Isolating an Endpoint](#)
- [Using Live Response](#)
- [Extending Live Response](#)
- [Live Response Activity Logging and Downloads](#)
- [Banning Process Hashes](#)

Overview of Incident Response

When you discover a malicious file or process on your endpoint(s) using Carbon Black EDR, you can address the issue in a variety of ways. Carbon Black EDR provides the following methods for responding to threats directly from the console:

- **Endpoint Isolation** – You can isolate an endpoint from the rest of the network, leaving only the connections that are needed for access to its sensor by the Carbon Black EDR server.
- **Live Response** – Live Response opens a command interface for direct access to any connected host running the Carbon Black EDR sensor. Responders can perform remote live investigations, intervene in ongoing attacks, and instantly remediate endpoint threats.
- **Process Hash Banning** – You can ban a process hash so that the process cannot be run again on hosts reporting to this Carbon Black EDR server, and any running version of it is terminated.

These features can be used together or separately. For example, you can isolate an endpoint immediately to prevent the spread of the problem and then use Live Response to end the process and perform any other file removal or needed repairs.

On the other hand, if the incident is not ongoing, isolation might not be necessary. In that case, you can use Live Response to remediate or further investigate the issue on affected endpoints, or simply ban the hash for the malicious process.

Carbon Black EDR does not present a message on the affected endpoint when any of these features is used on an affected sensor. With endpoint isolation, a user would likely become aware quickly that they had lost network access, but would not know why. With Live Response, actions you take on a computer might affect a user's access to files or programs, but there would be no indication that Carbon Black EDR tools are responsible, unless you have chosen to make the user aware of that. Also, when there is an attempt to run a process that is banned by hash, the operating system might display a dialog indicating a lack of access, or the process might silently fail to run.

If you also have the App Control agent on your endpoints, you can use App Control control features to investigate incidents and modify rules to prevent future occurrences. See the *VMware Carbon Black EDR Integration Guide* for details.

Note To use the features described in this chapter, a user must be one of the following:

- A user that has the enhanced Analyst permission for the feature and is a member of a team that has the Analyst role for the sensor group for the endpoint being acted upon (or for any sensor group to ban hashes).
- For Carbon Black EDR installations, a Global Administrator.
- For Carbon Black Hosted EDR installations, an Administrator.

See [Chapter 4 Managing User Accounts \(on premise\)](#) or [Chapter 5 Managing User Accounts \(Hosted\)](#) for more information about user roles and privileges.

Isolating an Endpoint

You can isolate one or more endpoints from the rest of your network and the Internet through the Carbon Black EDR console. When an endpoint is isolated, its connectivity is limited to the following (unless you have created network isolation exclusions as described in [Isolation Exclusions](#)):

- The Carbon Black EDR server can communicate with an isolated computer.
- To allow the sensor to communicate with the Carbon Black EDR server, ARP, DNS, and DHCP services remain operational on the sensor's host. (For Windows operating systems prior to Vista, ICMP (for example, ping) will remain operational.)
- DNS and DHCP are allowed through on all platforms. This is required for proper communications to the Carbon Black EDR server. Protocols are allowed by UDP/53, UDP/67, and UDP/68.
- ICMP is allowed on the following operating systems:
 - Windows (operating systems prior to Vista)

- OSX
- Linux
- UDP is blocked on all platforms.

To isolate endpoints:

- 1 On the navigation bar, click **Sensors** .
- 2 Check the box next to each endpoint to isolate.
- 3 From the **Actions** drop-down list, select **Isolate** .
- 4 Click **OK** to confirm that you want to isolate these endpoints.

The endpoint is isolated from all but the Carbon Black EDR server and the network services that are required to connect the two, in addition to any addresses that are allowed due to network isolation exclusions.

When you designate an endpoint for isolation, its status on the server first moves into an “isolation configured” state waiting for its next check-in. Because of this, several minutes can pass before the endpoint is actually isolated. When it checks in, the server tells the sensor to isolate the endpoint, and when the sensor responds, its state changes to “isolated”.

After it is isolated, endpoints normally remain isolated until the isolation is ended through the Carbon Black EDR console. However, if an isolated system is rebooted, it is not isolated again until it checks in with the Carbon Black EDR server, which could take several minutes.

Having isolated endpoints, you can proceed with remediation steps. For example, you might use Live Response to investigate or modify an endpoint. When you are finished, restore connectivity to the endpoints that you isolated.

To end network isolation for endpoints:

- 1 On the navigation bar, click **Sensors** .
- 2 Check the box next to the endpoints for which to restore network connectivity.
- 3 From the **Actions** drop-down list, select **Remove isolation** .
- 4 Click **OK to confirm the restoration** .

The computers return to the network with the same access they had before they were isolated (unless you made access changes through Live Response).


Isolation Exclusions

Starting with Carbon Black EDR version 6.5.0, Windows sensors version 6.2.4 and higher and OSX sensor versions 6.2.7 and higher support isolation exclusions. You can add one or more IPv4 addresses or domain URLs that isolated sensors can access in isolation mode, in addition to the Carbon Black EDR server. This setting is applied on a per-sensor-group basis.

This feature is disabled by default; to enable it, you must edit the `cb.conf` file. See the VMware Carbon Black EDR Server Configuration Guide for instructions.

To create an isolation exclusion:

- 1 On the navigation bar, click **Sensors**.
- 2 Click the gear icon next to the sensor group for which you want to add isolation exclusions.
- 3 Click **Isolation Exclusions** and then click **Add Exclusion**.
- 4 Enter a description that identifies the exclusion (50 character maximum), and the IPv4 address or domain URL that specifies the exclusion (253 character maximum).

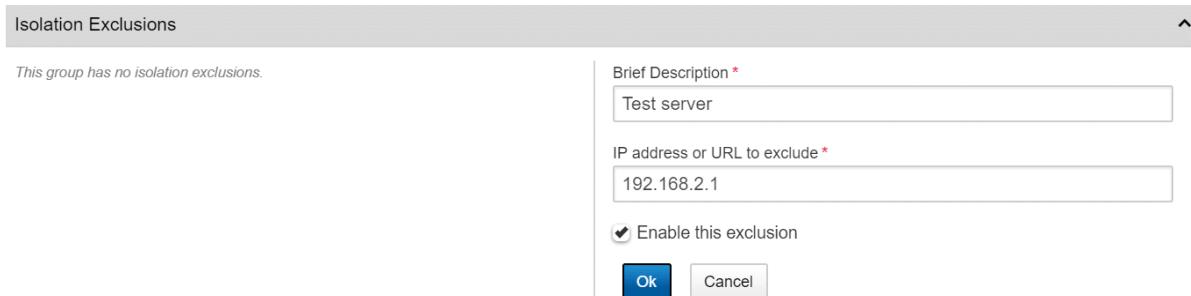

- 5 Select **Enable this exclusion** and click **OK**.
- 6 Click **Save Group**.

After you have created an exclusion, you can edit it by clicking the pencil icon, or you can remove the exclusion by clicking the trash can icon.

Note Duplicate exclusions are not allowed. If you enter the same IP address or URL for more than one exclusion, the last entry that was submitted is retained, but the duplicated entry is removed.

Using Live Response

Live Response opens a command line interface for direct access to any connected host that is running the Carbon Black EDR sensor. Responders can perform remote live investigations, intervene in ongoing attacks, and instantly remediate endpoint threats. For example, Live Response allows a responder to view directory contents, kill processes, modify the registry, and get files from sensor-managed computers.

Live Response is disabled by default on newly installed Carbon Black EDR systems. [Enabling and Configuring Live Response](#) describes ways to enable the feature and adjust its data settings.

Important Live Response feature should be used in full compliance with your organization's policy on accessing other user's computers and files. Consider the capabilities described here before giving users access to the feature and choosing the Sensor Group in which you will place computers.

If you do not want console administrators for Carbon Black EDR installations to activate Live Response, make sure `CbLREnabled=False` is set in your `cb.conf` file and is not commented out.

There are two Live Response modes:

- **Attached Mode** – When you activate Live Response for a specific endpoint, you create and attach to a *session*. The interface for a session includes information about the endpoint and a command window for interacting with the endpoint. See [Live Response Endpoint Sessions](#).
- **Detached Mode** – You can enter Live Response without being attached to a particular session through the **Go Live** command on the console menu. This interface includes commands to manage and access existing sessions as well as commands that are useful outside of a session. See [Detached Session Management Mode](#).


Enabling and Configuring Live Response

There are two ways to enable and disable Live Response: through the `cb.conf` file or (if not set in `cb.conf`), through the Carbon Black EDR console.

If `CbLREnabled` has no value (or is commented out) in the `cb.conf` file, an administrator can enable or disable Live Response in the console using a switch on the Advanced Settings page. *This is the on-premises default in version 6.3.0 and later.*

To enable or disable Live Response via the console:

- 1 Log in as a Global Administrator (on premises) or Administrator (cloud).
- 2 Click Username > **Settings**.
- 3 Click Advanced Settings and scroll to the *CB Live Response* section.
- 4 Check or uncheck **Enable CbLR** and click the **Save changes** button.

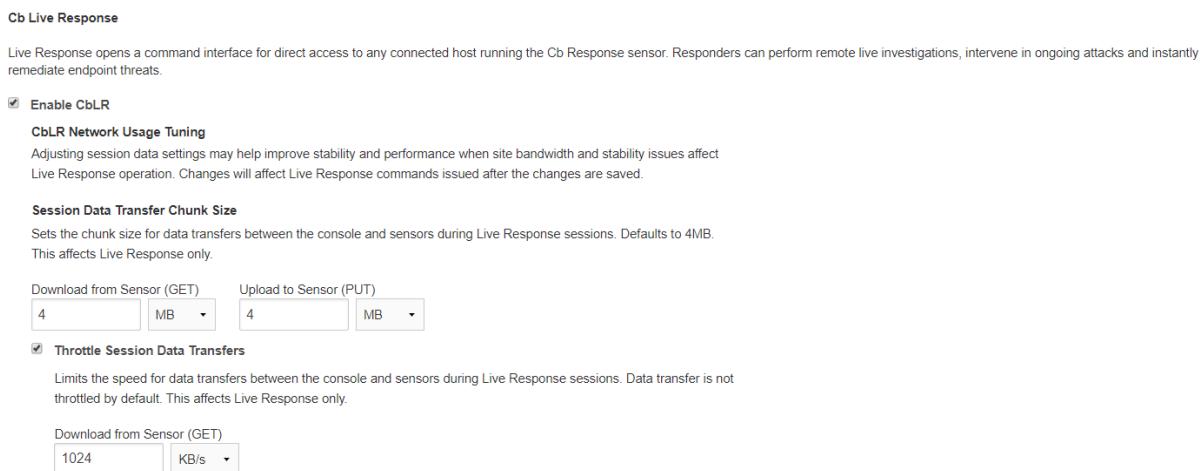

Note If the **Enable CbLR** box is grayed out and unresponsive, the value is set in `cb.conf` and cannot be changed via the console.

For on-premise servers, you can edit the `cb.conf` file to fix the state of Live Response so that it cannot be enabled or disabled through the console.

To enable or disable Live Response via cb.conf (Carbon Black EDR only):

- 1 On the Carbon Black EDR server, open /etc/cb/cb.conf for editing.
- 2 Add or uncomment the following setting in the cb.conf file and set its value:


```
CbLREnabled=True
```

 -or-


```
CbLREnabled=False
```
- 3 Save the cb.conf file.
- 4 You must stop and restart the standalone server or cluster to make the new setting effective:
 - For standalone server:


```
sudo service cb-enterprise restart
```
 - For clusters:


```
sudo cbcluster stop
```

 (...wait for all the nodes to shut down, and then...)


```
sudo cbcluster start
```

Tuning Live Response Network Usage

Sites that have bandwidth or stability issues might experience performance problems or failures with Live Response. To help mitigate these issues, you can adjust the data transfer chunk size and also enable throttling of data transfers between the Carbon Black EDR console and sensors during a Live Response session.

Changes to these settings affect only Live Response, and are effective only on commands that you issue after the changes are saved. The settings apply to all users.

To modify Live Response network usage:

- 1 Log in as a Global Administrator (on premises) or Administrator (cloud).
- 2 Click **Username** > **Settings**.
- 3 Click Advanced Settings and scroll to the *CB Live Response* section.
- 4 Enable Live Response if it is not already enabled (you cannot modify settings when it is disabled).
- 5 In the *CbLR Network Usage Tuning* section, under *Data Transfer Chunk Size*, set new **Download from Sensor (GET)** and/or **Upload to Sensor (PUT)** values. **The default value for both settings is 4MB.**
- 6 **In the same section, check the box for Throttle Session Data Transfers if you want to activate throttling. Throttling is turned off by default, and it must be turned on before you can edit its value.**

- 7 Set the throttling speed in **Download from Sensor (GET)** to a new value. The default setting when throttling is first activated is 512KB.
- 8 Click the **Save changes** button.

Live Response Endpoint Sessions

To access an endpoint using Live Response, a user must either have Global Administrator (or cloud Administrator) privileges, or be on a team with the Analyst role for that endpoint. A session must first be created with the sensor. A session indicates that the sensor is connected to the Carbon Black EDR server to receive real-time commands.

Sessions are created and attached automatically when you click the **Go Live** button on the **Sensor Details** or **Process Analysis** pages. If you enter the Live Response console using the **Go Live** command from the console menu, access to an endpoint requires that you first create and attach a session:

```
[Live Response]# session new [sensor_id]
```

```
[Live Response]# attach [provided_session_id]
```

You can have sessions with multiple sensors active at the same time. Use the `detach` command to detach from a session but leave it active.

Use the `session close` command to end a session with the sensor. Sessions will timeout when they are not attached and active for five minutes.

Each session has a unique numeric ID. Up to 10 sessions can be running at one time, and multiple users can be attached to the same session.

Note More than one Carbon Black EDR console user can attach to the same session with an endpoint at the same time. If more than one user submits a command through the session at approximately the same time, each command must finish executing before the next one can begin. Also, one user can undo or otherwise modify what another user is doing. Consider this if more than one user has Live Response access to an endpoint.

To create and attach to a Live Response sensor session:

- 1 On the navigation bar, click Sensors and then click the name of the endpoint.
- 2 Click Go Live.

The **Live Response** page appears with a command window on the left and an information panel on the right. The command window prompt shows the name of the host and the current directory in which Live Response is active. The information panel includes:

- **Host Details**
- **Alerts** related to the host
- **Running Processes** on the host

A status indicator (dot) and a message appear immediately above the command window. The dot has the following color code:

- **Green** – The sensor is connected and a session has been established. The host name is shown.
- **Orange** – The Carbon Black EDR server is waiting for the sensor to check in, or no host is connected because no session is attached.
- **Gray** – A session cannot be established with the sensor because the host is offline, the sensor is disabled, or the sensor is not a version that supports Live Response.

3 To view a list of the available commands, click in the command window area and enter the `help` command. You can get information about a specific command by entering:

help commandname

The following table shows the complete set of Live Response commands. In the descriptions, **remote host** refers to the host that is being accessed through Live Response, and **local host** refers to the host on which the user is running the Carbon Black EDR console. These commands are all run in the SYSTEM context.

Command	Description
archive	Obtain an archive (gzip tarball) of all the session data for this session, including commands run and files downloaded. The archive is downloaded to the computer on which you are running the Carbon Black EDR console by using the browser's download method.
argparse	Test how Live Response parses CLI arguments. This command helps determine if there are any interpretation issues. For example, it can reveal whether spaces or other special characters are properly escaped.
cd [dir]	Change the current working directory. Options include absolute, relative, drive-specific, and network share paths.
clear	Clear the console screen; the <code>cls</code> command can also be used for this purpose.
delete [path]	Delete the file specified in the path argument. The file is permanently deleted, not sent to the Recycle Bin.
detach	Detach from the current Live Response session. If a session has no attachments, it remains live until it times out (five minutes by default).
dir	Return a list of files in the current directory or the specified directory if it is added to the command, (for example, <code>dir c:\temp</code> or <code>dir /tmp</code>)
drives	List the drives on the remote host. This is for Windows only.

Command	Description
exec[processpath]	<p>Execute a background process specified in the processpath argument on the current remote host. By default, process execution returns immediately and output is to stdout and stderr.</p> <p>Options may be combined:</p> <ul style="list-style-type: none"> ■ exec -o outputfile processpath – Redirect the process output to the specified remote file, which you can download. ■ exec -w processpath – Wait for the process to exit before returning. <p>You could combine the options as shown in the example below to execute and capture the output from a script:</p> <pre>exec -o c:\output.txt -w c:\scripts\some_script.cmd</pre> <p>You must provide the full path to the process for the processpath argument. For example:</p> <pre>c:\windows\system32\notepad.exe</pre>
execfg [processpath]	<p>Execute a process on the remote host and return stdout/stderr.</p> <p>For example, this command prints the output of ipconfig to the screen:</p> <pre>execfg c:\windows\system32\ipconfig /all</pre>
files [-s session] [action] [option]	<p>Perform actions over cache-stored session files.</p> <p>All files transferred to/from an endpoint with every Live Response session are cached on the server for a period of time after a session is closed. If there is an interruption in the connection between a user's browser and the Carbon Black EDR server, files can be retrieved directly from the cache instead of connecting to the sensor again.</p> <p>This command is valid in both the global and session scopes when attached to a sensor. In the global scope, the session ID must be defined with <code>-s</code>.</p> <p>A list of sessions is available through the <code>sessions</code> command. If attached to a sensor, the current session is assumed unless otherwise specified.</p> <p>There are three available actions:</p> <ul style="list-style-type: none"> ■ list – List all the cached files that are available in the specified session by file ID. ■ get [id] – Get the file [id] from the cache. ■ delete [id] – Remove the file [id] from the cache.
get [path]	<p>Obtain the file specified in the path argument from remote host and download it to the host running the Carbon Black EDR console for this session. Progress of the download is indicated in the Live Response window as described in Status, Error and Progress Messages.</p>
help	<p>Show the Live Response session commands with a brief description of each. If a command name is added, show the description of the specified command, with additional details (such as options) if available. For example:</p> <pre>help dir</pre>
hexdump	<p>Output the first 50 bytes of the file in a hexdump format.</p>
kill	<p>Terminate the specified process.</p>
memdump [filepath]	<p>Take a full system memory dump and store it to the given file path, which must include a file name. When the memory dump is completed, it is automatically compressed and uploaded to the server. If you name the file with a .zip extension, it will be uploaded using the file name you provided. Otherwise, Live Response will append .zip to the name you provide. Once uploaded, the .zip file can be downloaded through the Carbon Black EDR console.</p> <p>Memory dumps can take several minutes. Progress is indicated in the Live Response window as described in Status, Error and Progress Messages.</p> <p>The memdump command is for Windows hosts only.</p>
mkdir	<p>Make a directory on the remote host.</p>

Command	Description
ps	<p>Obtain a list of processes from the remote host.</p> <p>In the output from this command, the listing for each process includes an Analyze link. Clicking the link opens the Process Analysis page for the process.</p> <p>Note that analysis information for a newly discovered process might not yet be fully committed to the Carbon Black EDR database and therefore not viewable.</p> <p>Clicking the link navigates away from the Live Response console and loses whatever context you had there.</p>
put[remotepath]	<p>Put a file from the host on which the console is being run onto the remote host at the specified path. You specify the file in the Open dialog of the browser, after the command is entered in Live Response. Progress of the upload is indicated in the CBLR console as described in Status, Error and Progress Messages.</p>
pwd	<p>Print the current working directory.</p>
reg	<p>View or modify Windows registry settings. The syntax of this command is:</p> <p>reg [action] [key] [options]</p> <p>See Registry Access in Live Response or use <code>help reg</code> in the Live Response command window for details.</p> <p>This is for Windows only.</p>

As shown in the preceding table, some commands provide information and others allow you to modify an endpoint.

Note Be sure to use the commands and options as documented here. Although some of the Live Response commands are the same as commands in the DOS command interface, the available options are specific to Live Response.

Status, Error and Progress Messages


Status and error messages should inform you of any connection or command error issues, but you can also use the `dir` or `pwd` commands to confirm your connection.

For commands that involve file transfers (get, put, and memdump), Live Response reports on the progress of the transfer. As soon as you begin a session, Live Response monitors for file transfer activity.

When one of the file transfer commands is executed, a rotating asterisk character appears in the Live Response window indicating that the transfer is happening, and a series of progress messages appear.


The messages depend upon the size of the transfer and whether you initiated the transfer in the current session or have attached to an existing session:

- For file transfers that take more than a few seconds, the Live Response window shows the number of bytes and the percentage of the total already transferred, updated every five seconds. This information is displayed to both the user who initiated the command and to any user who is attached to the same session.

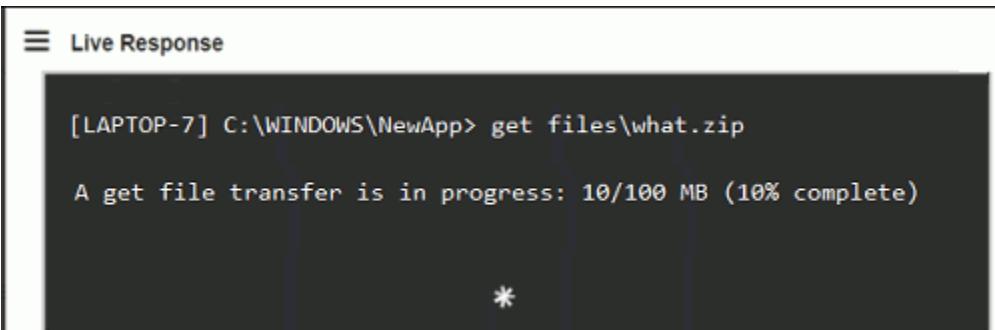

The screenshot shows a terminal window titled "Live Response". The command entered is "[LAPTOP-7] C:\WINDOWS\NewApp> get files\what.zip". The response shows a file transfer in progress: "A get file transfer is in progress: 10/100 MB (10% complete)". A small asterisk (*) is displayed at the bottom center of the window.

- There are other status messages, such as "Preparing file for transfer." If a transfer is small and completed almost immediately, this might be all you see, without byte or percentage numbers.

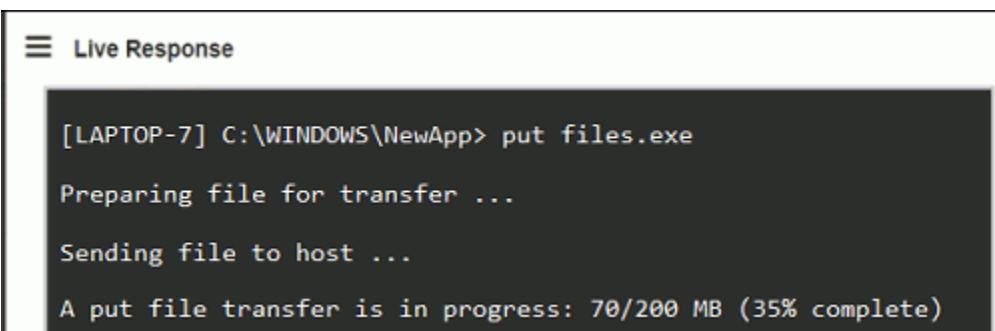

The screenshot shows a terminal window titled "Live Response". The command entered is "[LAPTOP-7] C:\WINDOWS\NewApp> put files.exe". The response shows a file transfer in progress: "Preparing file for transfer ...", "Sending file to host ...", and "A put file transfer is in progress: 70/200 MB (35% complete)".

- During the time that the transfer is in progress, users attaching to a session that has a transfer in progress will see only numerical progress indicators.
- A successful transfer results in a "File transfer complete" message for all users who are attached to the session, and a command prompt returns.

Note While a file transfer is in progress, no other commands can be entered in the Live Response window.

Ending Live Response Sessions

To end a Live Response session:

- In the Live Response command window, enter the `detach` command.

The session with that computer ends and the general [Live Response]# prompt replaces the computer-specific prompt.

Sessions also timeout after a lack of activity. The default timeout value is five minutes. You can change this value in the `CbLRSessionTimeout` setting in the `cb.conf` file. For more information, see the *VMware Carbon Black EDR Server Configuration Guide*.

Registry Access in Live Response

In a Live Response session for a Windows sensor, the `reg` command provides direct access to the remote computer's Windows Registry.

The syntax of the Live Response `reg` command is:

```
[Live Response]# reg [action] [key or value] [options]
```

The following table shows the `reg` command actions and their options. These options are intended to mirror the Windows default `reg.exe` command syntax. For all `reg` command actions, key paths can take hive references in either short or long form: `HKLM` or `HKEY_LOCAL_MACHINE`.

Action	Description
<code>query</code>	<p>Format: <code>reg query[key or value] [options]</code></p> <p>Options:</p> <p>(none) – If no option switch is specified, query for the specified key</p> <p><code>-v</code> – Query for the specified value</p> <p>For example:</p> <pre>reg query HKLM\Software\Microsoft\Windows\CurrentVersion\Run</pre>
<code>add</code>	<p>Format: <code>reg add[key] [options]</code></p> <p>Options:</p> <p><code>-v</code> – Value for the key to be added</p> <p><code>-d</code> – Data for the key to be added</p> <p><code>-t</code> – Type of the key to be added; accepted types are:</p> <ul style="list-style-type: none"> ■ <code>REG_NONE</code> ■ <code>REG_BINARY</code> ■ <code>REG_SZ</code> ■ <code>REG_EXPAND_SZ</code> ■ <code>REG_MULTI_SZ</code> ■ <code>REG_DWORD</code> ■ <code>REG_DWORD_BIG_ENDIAN</code> ■ <code>REG_QWORD</code> <p>For example:</p> <pre>reg add HKLM\Software\Microsoft\Windows\CurrentVersion\Run -v calc -t REG_SZ -d c:\windows\SYSTEM32\calc.exe</pre>
<code>delete</code>	<p>Format: <code>reg delete[key or value] [options]</code></p> <p>Options:</p> <p>(none) – If no option switch is specified, delete the specified key</p> <p><code>-v</code> – Delete the specified value</p> <p>For example:</p> <pre>reg delete HKLM\Software\Microsoft\Windows\CurrentVersion\Run -v calc</pre>

Detached Session Management Mode

You can enter Live Response without a specific session. In this mode, you can take certain actions that do not require access to an endpoint, such as viewing the sessions that are active or examining files uploaded to the server as a result of a session. You can attach to (join) an existing session or create a new one.

Some commands in detached mode are accessible by users who do not have Global Administrator privileges, but most are not, and attempting to use them returns an error message in the command window.

To open a Live Response command window without a session:

- On the navigation bar, click **Go Live**.

The **Live Response** page appears. In this mode, the prompt in the command window shows **[Live Response]#** without the name of an endpoint.

The following table shows the available commands in Live Response Management Mode.

Command	Description
archive [id]	Obtain an archive (gzip tarball) of all the session data for the session whose ID is provided.
argparse	Test how Live Response parses CLI arguments. This command helps determine whether there are any interpretation issues.
attach [id]	Attach to the session whose ID is provided. The session command can be used to find the ID of an existing session or create a new one. A session must be in active or pending state to be attached.
clear	Clear the console screen. You can also use the cls command for this purpose.
files -s [id]	Perform actions over cache-stored files for the session whose ID is provided.
help	Show the commands available in this mode with a brief description of each.
help command	Show the description of the specified command with additional details (such as options) if available.
	For example:
	help dir
sensor [options]	<p>List sensors managed by this Carbon Black EDR server.</p> <p>Options:</p> <ul style="list-style-type: none"> -i [1.2.3.4] – Return all sensors with specified IP address -n [host_str] – Return all sensors with matching host name -a – Return all sensors <p>Searches are case-sensitive substring searches for both host name and IP address.</p> <p>You must use an option with this command. If both -n and -i are specified, only -i is used.</p>
session	<p>Manage Live Response sessions. With no argument, lists all open sessions and their ID numbers, which can be used with the attach command.</p> <p>Options:</p> <ul style="list-style-type: none"> session new [id] – Create a new session for the sensor whose ID number is provided. You must provide a <i>sensor ID</i>, not a <i>session ID</i>. session list [-v] – List existing sessions. If the -v option is included, closed sessions are included. This option (without -v) is the default when no additional arguments are used. close [id] – Close the session whose ID is provided.

Extending Live Response

Because the built-in commands in Live Response include **put** to put a file on the remote system and **exec** and **execfg** to execute processes on the system, responders can arbitrarily extend the capabilities of Live Response beyond the built-ins commands.

For example, an investigator could take the following series of actions:

- Upload `yara.exe` and search memory for your custom `yara` signatures.
- Upload `winpmem.exe` and dump a memory image.
- Upload `sbag.exe` and parse the registry for Shellbags artifacts.
- Upload a custom PowerShell script and execute it with `powershell.exe`.

Although the library of built-in commands in Live Response will grow, it will never include every command for every situation. The ability to use `put file` and `create process` together assures that you have the freedom to add utilities you need for forensics and incident response. Additional capabilities are provided by a Live Response API, described at:

https://github.com/carbonblack/cbapi/tree/5.0.0/sensor_apis#carbon-black-live-response-sensor-api

Live Response Activity Logging and Downloads

Live Response activity is logged on both the Carbon Black EDR *server* running Live Response and the *sensors* it accesses.

For any sensor that is accessed by Live Response, commands executed during the session are logged in the `sensor.log` file, which is in the Carbon Black EDR sensor installation folder on the endpoint.

On the Carbon Black EDR server, Live Response activity can be reviewed in the following files:

- `/var/log/cb/liveresponse/debug.log` – Begin troubleshooting a Live Response issue here. This log contains debug information that is related to the functional operation of the Live Response components and communication between sensor and server.
- `/etc/cb/liveresponse-logger.conf` – You can change the level of information in the `debug.log`.
- `/var/log/cb/audit/live-response.log` – This file audits Live Response activity. It keeps a log of all commands that are executed on an endpoint, the sensor ID, IP address, and hostname of the endpoint, and the username and account of the user who executed each command.
- `/var/cb/data/liveresponse` – This directory stores “get” and “put” files. It also contains the output of all executed commands. For example, if you perform a process listing, the list goes into this directory in JSON format. If you download a file (for example, using the archive command), it appears in this directory (under `/tmp`) and on the host that is running the Carbon Black EDR browser.

You can change the length of time Live Response data is retained by editing the `CbLrDefaultSessionTTLDays` parameter in the `cb.conf` file. By default this is 7 days. For more information, see the *VMware Carbon Black EDR Server Configuration Guide*.

Banning Process Hashes

A Carbon Black EDR investigation might reveal that known malware has been allowed to run on endpoints without being blocked. This could be because of a gap in updating your endpoint protection software or a more general gap in protection capabilities. Another possibility is that you receive notification of a threat not yet encountered on your endpoints, and you are not certain that you are fully protected against it.

While not intended to replace endpoint protection products, Carbon Black EDR provides a hash banning feature to prevent malware processes from running in the future. This feature will also terminate the process for a newly banned hash if it is running when the ban is created. You can use this feature to prevent further actions from a threat until your endpoint protection is able to do so.

Note The Carbon Black EDR banning feature identifies and bans processes based on their **MD5** hash.

- Hash banning does not ban shared libraries, such as DLLs, SYSS, CPLs, and OCXs. You can follow the steps to ban these files, but it will have no effect.
- Banning does not use SHA-256 hashes, even if they are available.
- If an endpoint is restarted, any banned process that runs on restart will terminate as soon as the Carbon Black EDR sensor begins to run.

Creating Process Hash Bans

You can ban a process MD5 hash from several locations in the console:

- The **Binary Details** page has a **Ban this hash** button if the binary is an EXE.
- The **Process Analysis** page has a **Ban this hash** command on the **Actions** menu.
- The **Manage Banned Hashes** page includes the **Ban More Hashes** button. You can click this button to specify one or more MD5 hashes to be banned.
- The **Manage Banned Hashes** page has checkboxes that allow previously configured bans to be disabled and re-enabled.
- **Note** Banning a process hash without knowing the purpose of the process can have serious consequences. While Carbon Black EDR sensors prevent you from banning most critical processes, a user can ban a process that is required for proper operation of your computers or your business applications. Make sure that all Carbon Black EDR console users understand this before they use the banning feature.

The following procedure describes how to ban an MD5 hash.

To ban a process MD5 hash from the Process Analysis page:

- 1 On the navigation bar, click Process Search and search for the process. See [Chapter 13 Process Search and Analysis](#) for details on searching.

- 2 Click the name of the process to ban.
- 3 On the **Process Analysis** page, click **Ban this hash**.

Note This button only appears if the binary is an EXE. DLLs cannot be banned.

- 4 The **Confirm Banned Hashes** page appears and lists this hash, indicates whether it is known, and the number of endpoints at this site on which the hash for this process has been seen.

Please carefully review the lists of hashes below. Remove items if you do not want to ban them.

Known Hashes

The following hashes are recognized by Response. After you press the Ban button below, Carbon Black will prevent them from executing.

Hash	Actions
12345678901234567890123456789012	<input checked="" type="checkbox"/> <input type="button" value="Ban"/>

1 computers in 4029 processes

Notes

Banning the hashes listed above will prevent them from executing.


- 5 Clicking the **Trashcan** icon deletes the hash from the list. For single-hash-ban operations, click **Cancel** at the bottom of the page.
- 6 Add information in the **Notes** textbox, to explain why you banned the hash. This can include a file name, threat report identification, or anything else that is helpful to examine the ban.
- 7 Click **Ban** to ban the hash. The ban is added to the list on the **Manage Banned Hashes** page, and is enabled. By default, the list is arranged in alphanumeric order by MD5 hash.

Banning a List of Hashes

You might have a list of process hashes from Carbon Black EDR or another source that you want to ban. For example, a warning from a threat intelligence source might provide a list of malware hashes. You can ban these processes in bulk on the **Manage Banned Hashes** page, including processes that are not yet observed by sensors reporting to your Carbon Black EDR server.

To ban a list of process hashes:

- 1 On the navigation bar, click **Banned Hashes**.
- 2 Click the **Ban More Hashes** button.

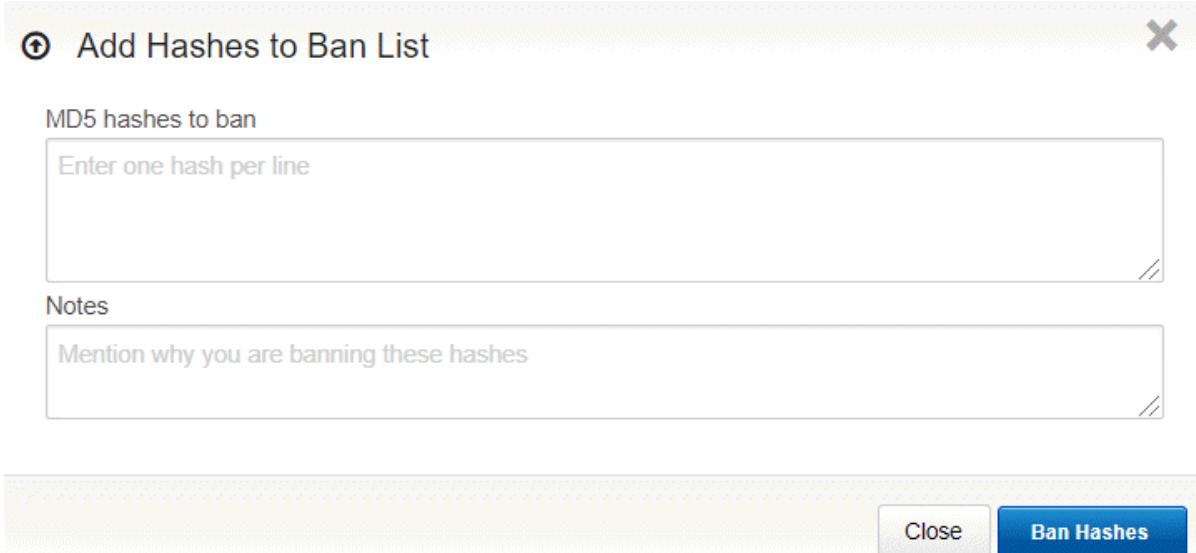

- 3 In the **MD5 hashes to ban** field, enter the MD5 hashes for the processes to ban. Each hash must be on its own line.
- 4 In the **Notes** field, provide information about why these hashes are being banned. You might also want to add names for each of the hashes, if available.
- 5 When you have entered the hashes and notes, click **Ban Hashes** to display the **Confirm Banned Hashes** page.

Confirm Banned Hashes

Please carefully review the lists of hashes below. Remove items if you do not want to ban them.

Known Hashes

The following hashes are recognized by Response. After you press the Ban button below, Carbon Black will prevent them from executing.

<input checked="" type="checkbox"/>		1 computers in 4029 processes	
-------------------------------------	---	-------------------------------	---

Notes

Banning the hashes listed above will prevent them from executing.

[Cancel](#)

[Ban](#)

Note The page indicates whether the hash is already known to this Carbon Black EDR server, and if so, how many instances of the process have been seen and on how many endpoints. This page also allows you to modify the Notes before finalizing this ban.

- 6 For more information about a known hash, click the down-arrow to the right of it.
- 7 If you decide *not* to ban a hash, click the **Trash** can icon next to it.
- 8 Click **Ban** to ban all listed hashes.

The bans are added to the list on the **Manage Banned Hashes** page and are enabled.

The **Notes** you entered appear next to each hash you included in this ban. By default, the list is arranged in alphanumeric order by MD5 hash.

Managing and Monitoring Hash Bans

After you begin banning process hashes, several options are available for managing and making use of bans. You can:

- View data about bans on the **Manage Banned Hashes** page. See [The Manage Banned Hashes Page](#).
- View block events on the **Process Analysis** page. See [Chapter 11 Responding to Endpoint Incidents](#).
- Enable alerts and syslog event recording for process blocks caused by bans, using the Banning Events feed on the **Threat Intelligence Feeds** page. See [Enabling Alerts and Syslog Output for Banning Events](#).

- Monitor banning alerts on the **Triage Alerts** page. See [Chapter 11 Responding to Endpoint Incidents](#).
- Enable and disable bans on the **Manage Banned Hashes** page. See [Disabling a Hash Ban](#).

The Manage Banned Hashes Page

The **Manage Banned Hashes** page lets you add, manage, and get information about process hash bans created on your Carbon Black EDR server:

- **Table of Bans** – Any hash bans that have been created on your Carbon Black EDR server are listed in a table, including bans that are enabled and bans that are not currently enabled. There is also an indicator at the top-right corner of the page that shows the total number of bans (both enabled and disabled) that have been created.
- **Access to Additional Ban Information** – Some information about each ban is shown in the table rows, and additional information is available through drill-down features for each ban.
- **Toggling of Ban Status** – The status of each ban is displayed in the Banned column. You can enable or disable any ban.
- **Ban More Hashes** – This button opens the **Add Hashes to Ban List** dialog, where you can enter one or more hash values on the page to create new bans.

The table of hashes lists each hash that has been created on this server. You can also search for hash bans by the MD5 hash of the process, and you can control the display of the entire table using the following controls:

- **View** – You can click different buttons in the **View** field to display **All** bans (the default), currently **Banned** hashes, and **Previously Banned** hashes (ban disabled).
- **Sort By** – You can sort the table by **MD5** hash (the default sort), **Date Added**, or **User**. Radio buttons change the sort order from ascending to descending.

The following table describes fields on this page. Note that the table data that reports on blocks caused by bans requires that the Banning Events feed on the **Threat Intelligence Feeds** page is enabled. (See [Chapter 17 Threat Intelligence Feeds](#).)

Column	Description
Hash	The MD5 hash of the process that is or was banned. Clicking on the hash opens the Binary Details page for the hash.
Notes	Any user-created notes about the ban or hash.
Latest Block	The length of time since the process identified by the MD5 hash was blocked on a system reporting to the Carbon Black EDR server.
Total Blocks	The total number of times this process has been blocked by the ban.
Hosts w/ Blocks	The number of systems on which this process was blocked at least once. If a host name appears, clicking on it opens the Sensor Details page for that host.

Column	Description
Banned	This checkbox controls the status of the ban. When the box is checked, the ban is enabled. When the checkbox is not checked, the ban is disabled.
 (more details)	Clicking the blue down arrow icon expands the row for a hash ban to provide additional details.

When you expand the row for a ban using the blue down arrow, information about the ban and its process appears in the panel. You also can use navigation links to go to other pages for more information.

The table data requires that the Banning Events feed on the **Threat Intelligence Feeds** page is enabled. (See [Chapter 17 Threat Intelligence Feeds](#).)

The following table describes the process hash ban details:

Column	Description
Hosts / Processes	Shows how many hosts have run the process identified by this MD5 hash and how many times the process ran before it was banned.
Meta data	The name of the Carbon Black EDR console user who created the ban, when the ban was added, and the date and time of the most recent block caused by the ban. Clicking the user name navigates to the table of users on the User Management page.
Hosts	The endpoints on which the process controlled by this ban has been blocked.
Notes	Any user-created notes about the ban or the hash. Notes can be edited.
View ban history	Opens a separate Ban History window that shows status changes (enabled, disabled) for the ban, who made them, and when they were made.
 (process search)	Clicking the blue magnifying glass icon navigates to the Process Search page with the search results for this process.

Monitoring Banning Events

When a process is blocked because of a Carbon Black EDR hash ban, that is an indication that some user or process attempted an unwanted activity. Even though the activity was blocked, you might want to investigate the attempt.

Carbon Black EDR reports an event each time a hash ban attempts to block a process, even if the block fails (for example because of an attempt to block a critical system or Carbon Black EDR process). The event appears on the **Process Analysis** page of the parent process. If a process was running at the time a ban was created and then terminated by the ban, a banner reports that fact on the **Process Analysis** page.

Blocking events can also trigger alerts and be included in the syslog output from Carbon Black EDR. See [Enabling Alerts and Syslog Output for Banning Events](#).

To view all block events for a parent process:

- On the Process Analysis page for the parent process, search for **blocked** in the **Type** filter. (See [Chapter 13 Process Search and Analysis](#).)

Type Dir Invest Threat Terms Feeds Sig Pub Filemod Action Filemod File Type Domain IP Reg Action

Type *fork*

fork (22)
childproc (20)
modload (12)

Directories */lib64* (5)
/bin (5)
/sbin (2)

Investigation *Untagged* (54)

Searching for Blocked Processes

The **Process Search** page lets you search for processes that have been affected by a process hash ban. This includes processes that were successfully blocked as well as those that could not be blocked for various reasons.

To search for processes that have block events:

- On the navigation bar, click **Process Search** .
- Click **Add Search Terms** and then click **Choose Criteria** .

New Search Terms

AND | OR Choose Criteria

+ ADD SEARCH CATEGORY AVAILABLE CRITERIA


Primary > Blocked process status

Banning >

Time >
File Path >
Counts >
Hash >
Binary >
Threat Intel >
Bulk IOC >
Registry >
Watchlist >
EMET >
Network >

Close Add Terms

- Click Banning and then click Blocked process status.
- You can select block conditions to search for.

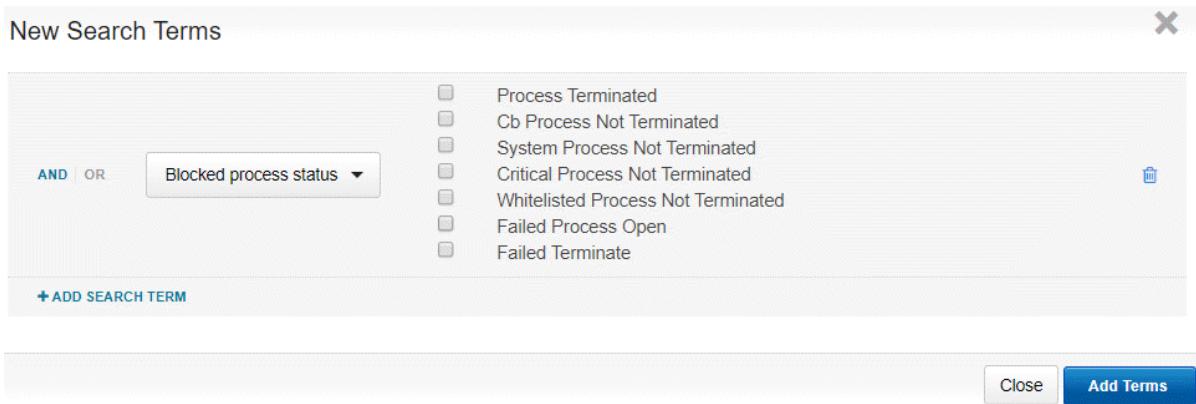

- To search for successful blocks only, select **Process Terminated**. To search for other block events, check the boxes for those events. When you have selected all relevant boxes, click **Add Terms** and run the search. The search results are updated to match your criteria.

Note You can manually enter one of the following queries for blocked processes:
processes:block_status:processterminated

processblock_count:[1 TO *]

Enabling Alerts and Syslog Output for Banning Events

Unless banning is disabled entirely, process block events are sent to the Carbon Black EDR server and viewable on the **Process Analysis** page. (See [Chapter 13 Process Search and Analysis](#).)

To configure alerts and syslog output for process blocks, a special **Banning Events** panel is available on the **Threat Intelligence Feeds** page. (See [Chapter 17 Threat Intelligence Feeds](#).) This is not a feed in the normal sense, because the events for blocks are sent to the server regardless of whether the feed is enabled. However, the feed must be enabled if you want to configure notifications for banning events.

The **Banning Events** feed is available by default and does not require enabling communication with Carbon Black Threat Intel.

To enable alerts and syslog recording of blocking events due to hash bans:

- On the navigation bar, click **Threat Intelligence**.
- Locate the **Banning Events** feed.

ER Banning Events

This feed reports on Carbon Black process blocking events due to MD5 hash based banning rules on the endpoint.

There are no requirements to share any data to receive this feed.

[More Info »](#)



- Enabled
- Email Me On Hit
- [▶ Notifications](#)

[Process Matches »](#)
[Binary Matches »](#)
[Threat Reports »](#)

Actions ▾

- 3 Click **Notifications** and select the notification types to create: **Create Alert** and/or **Log to Syslog**.

- 4 To receive email when a block event occurs, select **Email Me On Hit**.

You will now receive alerts when there is an attempt to run a banned process, and the **Manage Banned Hashes** page will report on the number of blocks and the time of the most recent attempt and the system where it occurred.

To view banned hash alerts:

- 1 On the navigation bar, click **Triage Alerts**. For more information, see [Managing Alerts on the Triage Alerts Page](#).
- 2 In the search box for the **Feed** filter, enter cbbanning and press **Enter**, or if it already appears on the list, click cbbanning.

Banning Events alerts appear in the results table.

In addition to triggering alerts (if enabled), processes that are blocked due to a hash ban generate events that appear on the **Process Analysis** page.

For example, if you receive a Process Blocking alert for a process, the **Process Analysis** page for the parent process appears and includes a **blocked** event.

Time	Type	Description
2015-06-05 16:14:05.738 GMT	modload	Loaded c:\windows\system32\wdi.dll Signed (bf1fc3f79b863c914687a737c2f3d681)
2015-06-05 16:14:05.737 GMT	modload	Loaded c:\windows\system32\ndfapi.dll Signed (18d4729031314f8c217cdfcc599ef4e)
2015-06-05 16:14:05.00 GMT	blocked	Process c:\program files (x86)\pad\pad.exe (18365b3d9c3ade5ee8ecd36791ee57c8)

Disabling a Hash Ban

After a hash ban is created, it always appears on the **Manage Banned Hashes** page. You can turn bans on and off.

To disable a process hash ban:

- 1 On the navigation bar, click **Banned Hashes**.
- 2 Locate the row for the hash ban to remove, and deselect the check box in the Banned column.

Disabling or Restricting the Hash Ban Feature

The ability to ban process hashes is enabled by default. However, you can disable or restrict it in certain ways.

Disabling Bans in a Sensor Group

You can disable banning on all hosts in a specified sensor group. In this case, any process hash bans that are configured on the server are ignored by sensors in that group, and no processes are blocked by Carbon Black EDR on those sensors.

To disable process hash bans in a sensor group:

- 1 On the navigation bar, click Sensors.
- 2 In the Groups panel, click the sensor group to exempt from hash bans.
- 3 At the top of the <name> Group panel, click Edit, and then click **Advanced** to expand the advanced sensor group settings.
- 4 Deselect Process Banning.
- 5 Click **Save Group**.

Live Query (beta)

12

This chapter describes Carbon Black EDR Live Query beta, and how to create and run queries against your endpoints.

This chapter includes the following topics:

- [Overview of Live Query](#)
- [Enable or Disable Live Query](#)
- [Create and Run a Query](#)
- [Query Results](#)

Overview of Live Query

Live Query can expose an operating system as a high-performance relational database — you can write SQL-based queries that explore operating system data to analyze security vulnerabilities. Live Query is based on osquery, which is an open source project that uses a SQLite interface. Live Query beta is released with Carbon Black EDR 7.2, and requires the Carbon Black EDR Windows sensor 7.1.0 or higher.

Live Query is released as beta, and is not fully-featured at this time. VMware Carbon Black welcomes all customer feedback on this feature as we continue to develop it for general availability.

All users can view queries on the sensors for which they have View permissions. To execute a Live Query, an analyst must have the Execute Live Query enhanced permission. See [Adding Enhanced Permissions for Analysts](#).

Enable or Disable Live Query

Live Query is disabled by default. Carbon Black EDR Global Admins and Carbon Black Hosted EDR Admins can enable or disable Live Query.

To enable or disable Live Query:

- 1 Click *Username*, **Settings**, and **Advanced Settings**.

- 2 Check the **Enable Live Query** checkbox to enable Live Query, or uncheck the checkbox to disable it.

CB Live Query (beta)

This feature allows you to query your sensors like a database, using osquery. Queries may target individual sensors or multiple sensor groups. Results are updated as sensors respond with data.

Enable Live Query

- 3 Confirm your selection.

- 4 Click **Save Changes**.

Create and Run a Query

On the navigation bar, click Live Query. The Live Query page shows any currently running query, a completed query, or a blank page depending on the status of the most recently run query.

You can run only one query at a time. If you run a new query, previous query results are discarded.

The maximum number of sensors you can target for a single query is 200. If you select more than 200 sensors, only the first 200 sensors receive the query, based on the 200 sensors that have most recently checked in.

There are two ways to run a query – you can use a preformed recommended query that Carbon Black EDR provides, or you can write your own SQL query.

Recommended queries are organized into the following categories:

- Compliance – verify that hosts are in compliance with common security-related requirements
- IT hygiene – check the status of credentials, certificates, and accounts on your hosts
- Threat hunting – check for commonly used threat techniques on your hosts
- Vulnerability management – discover which patches, drivers, chrome extensions, etc. are active on your hosts

To run a recommended query:

- 1 On the navigation bar, click **Live Query (beta)**.
- 2 On the Live Query page, click **Run New Query**.
- 3 Click the **Recommended tab** if it is not already selected.

Run new query

X

Recommended SQL

Compliance	(13)	BitLocker Configuration Details	Use
IT hygiene	(16)	Bitlocker is a Windows feature that encrypts your volume drive.	View SQL
Threat hunting	(9)	List Users on Windows Systems	Use
Vulnerability management	(11)	Discover information about the users on the target system.	View SQL
		Local Administrator Permissions	Use
		The Least Privileged Model reduces risk by limiting the users who have admin permissions. Recommended best practice is to audit and limit access to administrative privileges.	View SQL
		Network Adapter DHCP/DNS Information	Use

Sensor scope

- Sensor groups
- Sensors

Add sensor group



This selection includes 0 sensor(s).

[Run](#) [Cancel](#)

- 4 To optionally view the query SQL code, click **View SQL**.
- 5 Click **Use** next to the recommended query name. The query appears in the SQL tab so that you can modify it, or run it as is.
- 6 Identify the endpoints to receive the query. You can select endpoints by sensor group, or you can select individual sensors by host name. A message displays the number of sensors that you have selected. Note that the number of sensors that are shown includes all sensors, not just the sensors that are Live Query-compatible.
- 7 Click **Run**. The selected sensors pick up the query the next time the sensors check in with the server.

To run your own SQL query:

- 1 On the navigation bar, click **Live Query (beta)**.
- 2 On the Live Query page, click **Run New Query**.
- 3 Click the **SQL** tab.

Run new query

X

Recommended SQL

```
SELECT * FROM...
```

osquery links:
[Tables »](#)
[Intro to SQL »](#)
[CB Query Exchange »](#)

Sensor scope
 Sensor groups
 Sensors

Add sensor group ▾

This selection includes 0 sensor(s).

Run **Cancel**

- 4 In the text box, type your SQL query. For help writing a query, click the provided links:
 - [Tables](#)
 - [Intro to SQL](#)
 - [CB Query Exchange](#)
- 5 Identify the endpoints to receive the query. You can select endpoints by sensor group, or you can select individual sensors by host name. A message displays the number of sensors that you have selected. Note that the number of sensors that are shown includes all sensors, not just the sensors that are Live Query-compatible.
- 6 Click **Run**. The selected sensors pick up the query the next time the sensors check in with the server.

Note Double quotation marks produce errors in your SQL query. Use single quotation marks instead. Chained queries (separated by ;) are not supported.

Query Results

Query results automatically fill the Results table on the Live Query page. Because the request is asynchronous, you do not have to stay on the page to see the results. You can leave the Live Query page and come back later to see the results.

Current query									Run new query
Results									Export
Computer name	Computer Name	Time Received	GID	UID_SIGNED	Directory	UID	Shell	Username	GID_S
[REDACTED]	[REDACTED]	an hour ago	513	500	C:\Users\Administrator	500	C:\Windows\System32\cmd.exe	Administrator	513
[REDACTED]	[REDACTED]	an hour ago	513	1001	C:\Users\[REDACTED]	1001	C:\Windows\System32\cmd.exe	[REDACTED]	513
[REDACTED]	[REDACTED]	an hour ago	513	503	--	503	C:\Windows\System32\cmd.exe	DefaultAccount	513
[REDACTED]	[REDACTED]	an hour ago	513	501	--	501	C:\Windows\System32\cmd.exe	Guest	513

If the current query is too long to be displayed on a single line, click the diagonal arrow next to the query to see the entire query.

Query results are returned in three states:

- Completed – the query completed successfully
- Truncated – returned data exceeds the acceptable length
- Error – incorrect SQL syntax, unavailable osquery table, etc.

You can only see results for sensors that you have permissions to view. If you run a query and the results contain sensors to which you have no access, you cannot see their results. However, the count of sensors that responded to the query (on the top right of the page) includes them.

You can filter the Results table by computer name. The Results table always displays the following two columns:

Column	Description
Computer Name	Name and query status of the endpoint on which the query ran.
Time Received	The time (day) that the query ran on the endpoint.

The remaining displayed columns depend on the query itself (see [Tables](#)). Query results reside in memory and are retained until a new query is run or services are restarted.

Export Live Query Results

You can export Live Query results into a CSV file.

To export Live Query results:

- 1 On the Live Query page, click Export and then click Export all.
- 2 A CSV file is downloaded into the C:\Users\username\Downloads folder.

Process Search and Analysis

13

This chapter describes how to perform detailed process searches and in-depth analyses of processes in search results.

This chapter includes the following topics:

- [Overview of Process Search](#)
- [Managing High-Impact Queries](#)
- [Results Table](#)
- [Process Analysis Page](#)
- [Analysis Preview Page](#)

Overview of Process Search

When you become aware of an incident that could be a threat, you can search all your systems and endpoints for processes that have Indicators of Compromise (IOCs). For example, you might receive a call reporting unusual software behavior or an alert from a threat intelligence report or watchlist. Carbon Black EDR sensors automatically collect data so that you can immediately start analyzing issues and finding solutions.

Use the **Process Search page** to begin investigating potential threats. This section describes how to perform basic process searches using search strings and predefined search criteria.

To Access the Process Search Page:

- On the navigation bar, click **Process Search**.

A screenshot of the VMware Carbon Black EDR Process Search interface. The top navigation bar includes 'Help', 'Notifications', and a user 'admin'. The main search area has a 'Query' field with placeholder 'contains text...', a 'Last 3 days' dropdown, and a 'Search' button. Below this is a 'Filters' section with checkboxes for 'Username (0)', 'Process Name (0)', 'Group (0)', 'Hostname (0)', 'Parent Process (0)', 'Process Path (0)', and 'Process MD5 (0)'. To the right is a 'Results' section which is currently empty.

Time Filter

You can specify that the results show only processes that appear in events that occurred within a specified time period. Select a time filter from the dropdown menu to the right of the Search field. If you select Custom, you are presented with a calendar by which you can set a custom time period.

Search Filters

Search filters provide ways to specify and narrow a search. Each filter represents terms that exist in various fields, such as Process Name or Hostname. The percentage next to each term shows the relative frequency with which the term appears in the field.

No content appears in the search filters until after you have initiated a search. The search filters populate according to their match to the search results.

Enable/Disable Filters

To display only certain search filters on the Process Search page:

- 1 Click the **Gear** icon to the right of **Filters** .
- 2 Select checkboxes to enable or disable the filters to display.

Choose Filters to Display

Username

This filter shows most common user context seen executing a given process. Use this filter with the Process Name filter to find processes with unexpected usernames.

Process Name

This filter indicates which processes reported the largest number of events. The most common processes appear at the top of the list. Less common processes appear at the bottom.

Group

Use this filter to identify which sensor groups reported the largest number of process events. This filter is only useful if you organize your sensors into multiple groups.

Hostname

This filter shows which endpoints reported the largest number of process events. Use it to identify the endpoints that are running the highest number of processes, or scroll down to find the endpoints that are running the fewest.

Parent Process

This filter names the processes that most frequently spawn other processes. Spawning processes include those created by childproc, fork, and crossproc.

Process Path

This filter shows the most commonly occurring executable paths for spawned processes. Use this in conjunction with the parent process filter to find unexpected behaviors on your endpoints.

Process MD5

This filter shows the MD5 hashes most frequently reported by your endpoints. Use this with the Process Name filter to find processes with unexpected hashes.

Disabling a filter removes it from view, and if it is part of the search query, those pieces of the query are removed. Enabling a filter places it back into view.

3 Click **Save**.

Select Multiple Filter Rows

You can select specific filter rows within a filter table by using your cursor. The search results are updated based on these selections.

- Selecting multiple rows within a single filter updates the query with a logical OR between those filters. For example, choosing “bash” and “nginx” in the **Process Name** filter shows events related to either bash or nginx.
- Selecting multiple rows across multiple filters updates the query with a logical AND between those filters. For example, choosing “bash” in the **Process Name** filter and “python” in the **Parent Process** filter shows instances of bash that were spawned by Python.

Selected filter rows are highlighted in yellow. Click a filter row to deselect it.

Process Search

Filters 

Username (4) 

Value	Percentage
SYSTEM (62.6%)	62.6%
LOCAL SERVICE (18.0%)	18.0%
NETWORK SERVICE (14.3%)	14.3%
Other (5.0%)	5.0%

Process Name (50+) 

Value	Percentage
svchost.exe (28.4%)	28.4%
bash (9.8%)	9.8%
ngen.exe (9.0%)	9.0%
services.exe (4.3%)	4.3%

Group (1) 

Value	Percentage
group (100.0%)	100.0%

Hostname (1) 

Value	Percentage
(100.0%)	100.0%

Parent Process (1) 

Value	Percentage
services.exe (100.0%)	100.0%

Process Path (1) 

Value	Percentage
c:\windows\system32\svchost.exe (100.0%)	100.0%

VMware Process MD5 (1) 

Value	Percentage
-------	------------

Filter Row Percentages

The top row in a filter has occurred more than any other process within that filter. Filter row percentages indicate the percentage of processes that have occurred in a particular filter. This is always equivalent to 100% when you add up all filter rows in a filter.

Filter Search Fields

Each filter contains a **Search** field into which you can enter search parameters to refine search results.

Search Field

You can manually enter keyword searches or predefined search criteria in the **Search** field. As you enter search criteria, the correct syntax appears. If you do not enter any search criteria, the system runs a search using `.*` This displays every process that has executed. The processes are ranked according to the process start time — the most frequently executed processes are at the top. You can sort the results according to the count of events or last update time.

Note The Search field is expandable: click and drag the bottom right corner to display long queries.

The **Search** field and criteria fields can be used independently or in combination. When used in combination, the system combines them using an AND operator.

Clicking the blue **Search** button executes a search using selected parameters. When viewing events on the **Process Search** page, the time displayed next to the process is the time that the sensor recorded the event — not the time that the server received the event.

Save Searches

You can save frequently executed searches by selecting the **Favorite** (star) icon to the right of the **Search** field. A confirmation appears in the top-right corner of the console indicating that the search has been saved.

To execute a saved search:

- Click the down arrow to the right of the **Favorite** (star) icon and select the saved search from the dropdown list.

Clear Saved Searches

You can clear saved searches by accessing the **My Profile** page and clicking **Clear Preferences**.

To clear saved searches:

- Click **Username > My Profile**.
- Click **Clear Preferences**.

Add Search Terms

Process searches explicitly support AND/OR operators. You can select from an array of filters to form your search using these AND/OR operators.

To add search terms:

- 1 Add search terms (in the form of AND/OR operators) by clicking **Add Search Terms**.
- 2 Select a search term type from the **Choose Criteria** dropdown menu.

Category	Available Criteria
Primary	Process name
Banning	Child process name
Time	Group
File Path	Hostname
Counts	Host Type
Hash	Parent Process
Binary	Terminated Process
Threat Intel	Username
Bulk IOC	Type of Cross Process
Registry	Tamper Events
Watchlist	Operating System
EMET	Logon Type
Network	

- 3 Click Add Search Term to add terms. When you are finished, click **Add Terms**. The search terms are validated, and you are notified if there is an error.

For example, the following search terms display processes on Windows endpoints that been received **in the last 30 minutes** .

Add search terms X

AND | OR **Operating System** Delete (trashcan)

Windows
 OS X
 Linux

AND | OR **Last event received** Delete (trashcan)

In the last minutes
 Select timeframe

+ Add search term Add terms Cancel

To remove a search term, click the **Delete (trashcan)** icon to the right of the search term.

Reset Search

To reset and remove all search terms, click **Reset Search** .

Query

Contains text...

+ Add search terms

C Reset search C Reset search

Group by process

Group by Process

To combine results with the same process into groups, select **Group by process** .

Query

Contains text...

+ Add search terms

C Reset search

Group by process

Combine results with the same process into groups

Search Result Messages

If no search results match your search criteria, the **Process Search page** displays a message that recommends you widen your search by deselecting filters.

If search results are too large, you can use filters to narrow your search, or you can view all results.

3,377 results

You can use filters to narrow your search, or [view all 3,377 results](#)

Get Comprehensive Results

A Get Comprehensive Results button appears on the Process Search page if a search query spans both current data and older data that was collected prior to version 6.1, and if the query has complex search terms that require special processing on the server.

- If you do not request comprehensive results, the server returns correct search results for old data, but results might be incomplete for data that was collected prior to 6.1.
- If you request comprehensive results, the server returns full search results for current data, but excludes data that was collected prior to 6.1.

Example Process Search

This section explains how to perform a process search.

To perform a process search:

- 1 On the navigation bar, click **Process Search**.

Enter search criteria by performing one (or combining both) of these tasks:

- 1 Enter keyword searches or predefined search criteria in the **Search** field.
- 2 Click **Choose Criteria** to display a list of searchable criteria. Select the search criteria, such as **Banning > Blocked Process Status > Process Terminated**. Then, click **Add Search Term** to add an additional set of search criteria, such as **Time > Process Start > In the last 90 minutes**. Repeat this process to add search criteria.
- 3 Click **Search**.

The search results appears in the **Results** table. See [Results Table](#).

Note To perform advanced queries, see [Chapter 15 Advanced Search Queries](#).

Managing High-Impact Queries

Certain process searches can cause significant performance issues in Carbon Black EDR. Two types of searches that can have a negative impact are:

- Searches with leading wildcards

- Searches with binary terms (which require a join between the process and module databases) if you have very large modules cores; see [Searching with Binary Joins](#).

Beginning with Carbon Black EDR 6.2.3, these searches are blocked by default when executed through the console. However, there are options in both the console interface and the server configuration file (`cb.conf`) for blocking and unblocking these types of process searches.

The blocking features, both from `cb.conf` and through the console, applies only to interactive searches in the console. Searches executed via the API, existing watchlists or feeds are not impacted by these settings.

Responding to Blocked Searches

Users attempting blocked search types will see a message describing why the search was blocked. If you determine that a setting is preventing searches that you expect to succeed, you can either modify the settings or modify your search. If you unblock one of the search types, monitor the performance impact to determine whether you can operate successfully in that mode.

You can also reconfigure the search to avoid the blocked condition. See [Chapter 15 Advanced Search Queries](#) for more information about creating complex process searches.

Process Search Settings in the Console

The settings for blocking searches with leading wildcards and searches with joins of large module cores are on the Advanced Settings tab on the Settings page. By default, both process search settings are checked, thereby blocking these searches.

You must have Global administrator privileges to change these settings. In addition, if the settings are controlled by a `cb.conf` file configuration, they will be grayed out and unavailable for editing. See [Process Search Settings in cb.conf](#).

To block or allow high-impact process searches:

- 1 Log in to Carbon Black EDR as a Global Administrator or Carbon Black Hosted EDR as an Administrator.
- 2 Click **Username** > **Settings** and click **Advanced Settings** .
- 3 Under Process Search Settings, check (or uncheck) the box for the search type to block or unblock.
- 4 Click the **Save changes** button.

Advanced Settings

Process Search Settings

Certain process searches could cause significant performance problems in Cb Response. The following settings may help you avoid these problems by blocking search types that are most likely to affect performance. Users attempting blocked search types will see a message describing why the search was blocked. If you determine that one of these settings is preventing searches that you expect to succeed, you may uncheck the setting and monitor the performance impact. Another alternative is to reconfigure the search to avoid the blocked condition.

See "Process Search and Analysis" and "Advanced Search Queries" in the Cb Response User Guide for more information about optimizing process searches.

- Block Searches with Leading Wildcards
- Block Searches that Include Binary Metadata with Large Binary Stores

Process Search Settings in cb.conf

Two settings in the cb.conf file affect whether process searches with possibly significant performance impact are blocked, allowed, or configurable through the console interface:

- ForceBlockLeadingWildcardsInSearchTo (interacts with Block Searches with Leading Wildcards in the console).
- ForceBlockCoreJoinsInSearchTo (interacts with Block Searches that included Binary Metadata with Large Binary Stores in the console).

By default, neither of these settings are present in the cb.conf file.

If a setting is `True`, process searches in the relevant category are **blocked**, and no user, including a Global Admin, can change this setting through the console.

If a setting is `False`, process searches in the relevant category are **allowed**, and no user, including a Global Admin, can change this setting through the console.

A third setting in cb.conf, `ModuleCoreDocumentCountWarningThreshold`, sets the number of module core documents that is considered large enough to be blocked when Block Searches that included Binary Metadata with Large Binary Stores is activated. By default, this setting has a value of ten million.

See the VMware Carbon Black EDR Server Configuration Guide about editing cb.conf.

Results Table

The **Results** table describes executed processes that match the search criteria.

Results												
Process	Endpoint	Updated	Start Time	PID	Username	Regmods	Filmods	Modloads	Netconns	Children	Tags	Hits
svchost.exe c:\windows\system32\svchost.exe	[REDACTED]	2021-02-01T16:22:04.297Z	2021-01-16T22:39:38.753Z	3000	NETWORK SERVICE	603	1,365	933	70			
svchost.exe c:\windows\system32\svchost.exe	[REDACTED]	2021-02-01T16:21:04.204Z	2021-01-27T09:31:49.407Z	9016	SYSTEM	160	299	385	39	18		
svchost.exe c:\windows\system32\svchost.exe	[REDACTED]	2021-02-01T16:20:50.872Z	2021-01-27T17:20:48.847Z	772	LOCAL SERVICE	2,913	32	762	2	18		
runtimebroker.exe c:\windows\system32\runruntimebroker.exe	[REDACTED]	2021-02-01T16:17:32.438Z	2021-01-25T19:27:17.421Z	6504	[REDACTED]	45	1	207				
services.exe c:\windows\system32\services.exe	[REDACTED]	2021-02-01T16:15:35.165Z	2021-01-16T22:39:32.982Z	624	SYSTEM	755	6	27		2,970		
svchost.exe c:\windows\system32\svchost.exe	[REDACTED]	2021-02-01T16:15:35.150Z	2021-01-16T22:39:33.237Z	788	NT AUTHORITY\SYSTEM	52,881	108	94		3,062		
trustedinstaller.exe c:\windows\servicing\trustedinstaller.exe	[REDACTED]	2021-02-01T16:15:35.150Z	2021-02-01T16:13:33.764Z	2420	SYSTEM	2	1	23				
svchost.exe c:\windows\system32\svchost.exe	[REDACTED]	2021-02-01T16:13:34.249Z	2021-01-16T22:39:36.602Z	1464	SYSTEM	6,425	479	58		4,695		
lsass.exe c:\windows\system32\lsass.exe	[REDACTED]	2021-02-01T16:13:34.234Z	2021-01-16T22:39:33.015Z	664	SYSTEM	1,924	21	88				
taskhostw.exe c:\windows\system32\taskhostw.exe	[REDACTED]	2021-02-01T16:13:34.234Z	2021-02-01T16:13:33.737Z	6816	[REDACTED]				25			

Results Table Options

The following options appear above the **Results** table:

- **Show** – Adjust the maximum number of search results that display on a page. The default setting is ten results per page.
- **Sort by** – Sort search criteria by the following options:
 - **None**
 - **Process last update time**
 - **Process start time**
 - **Process name**
 - **Network connections**
 - **Registry modifications**
 - **File modifications**
 - **Binary loads**
- **Edit Columns** – Select which columns are visible in the search results. You can also choose whether to show event counts or summary information.

Column	Event Counts	Summary
<input checked="" type="checkbox"/> Endpoint		
<input checked="" type="checkbox"/> Updated		
<input checked="" type="checkbox"/> Start Time		
<input checked="" type="checkbox"/> PID		
<input checked="" type="checkbox"/> Username		
<input checked="" type="checkbox"/> Regmods	<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="checkbox"/> Filemods	<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="checkbox"/> Modloads	<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="checkbox"/> Netconns	<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="checkbox"/> Children	<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="checkbox"/> Tags		
<input checked="" type="checkbox"/> Hits		

- **Create Watchlist** – Create a watchlist that is based on the current query string. A watchlist is a saved search that you can use to track specific IOCs. See [Chapter 20 Watchlists](#).

- **Export CSV** – Export the first 1000 process search results to a CSV file for reporting, retention, or compliance. Each row contains a URL to access the details of each result.

Note To export more than 1000 rows, you must configure API functionality to capture and save the data. See the VMware Carbon Black Developer Network at <https://developer.carbonblack.com/reference/enterprise-response/>.

Results Table Row Details

On each row within the **Results** table, the following information appears:

Title	Description
Process	The icon of the process or program that was executed and the name of the executable file that was run; for example, <code>notepad.exe</code> . The file system path from which the process was executed appears.
Endpoint	The endpoint that is associated with the result.
Updated	The timestamp when the process was last updated.
Start Time	The timestamp when the process started.
PID	The Process ID.
Username	The username that is associated with this process.
Regmods	The number of Windows registry modifications that were made by the execution of this process. Regmods are color-coded in blue.
Filemods	Contains a color-coded dot if the execution of the process resulted in file modifications. Filemods are color-coded in yellow.
Modloads	Contains a color-coded dot if the execution of the process resulted in loaded modules. Modloads are color-coded in green.
Netconns	Contains a color-coded dot if the execution of the process resulted in attempted or established network connections. Netconns are color-coded in purple.
Children	Contains a color-coded dot if the execution of the process resulted in generated child processes. Children are color-coded in orange.
Tags	Contains a color-coded dot if the execution of the process resulted in events that were tagged in a Carbon Black EDR investigation. Tags are color-coded in black.
Hits	Contains a color-coded dot if the execution of the process resulted in watchlist or feed hits. Hits are color-coded in red.
>	Opens the Process Analysis page.

Process Analysis Page

When you find a process that merits investigation, you can open the **Process Analysis** page.

To open the Process Analysis page:

- 1 Execute a query as discussed in [Overview of Process Search](#).
- 2 In the **Results** table, locate the process to analyze and click the arrow (>).

Process Analysis

Process: svchost.exe Command Line: Copy C:\Windows\system32\svchost.exe -k netsvcs Host: SYSTEM User: SYSTEM Logon Type: System State: Running Last Activity: 16 minutes ago Duration: 11 days

Isolate host Actions

Process: svchost.exe

PID: 940 OS Type: windows

Path: c:\windows\system32\svchost.exe

Username: SYSTEM

MD5: c78655bc0301d76ed4fef1c1ea40a7d

SHA-256: 93b2ed4004ed5f7f3039dd7ecbd22c7e4e24b6373b4

Start Time: 2021-01-14T21:14:00.070Z

Interface IP: [REDACTED]

Server: [REDACTED]

Comms IP: [REDACTED]

svchost.exe: unknown binary

Event Timeline

Number of Events

Legend: Netconns (Red), Regmods (Blue), Modloads (Green), Filmods (Yellow), Processes (Orange), Cross Processes (Red), Selected Segment (Blue)

09 PM 10 PM 11 PM Tue 26 01 AM 02 AM 03 AM 04 AM 05 AM

Fri 15 Jan 17 Tue 19 Thu 21 Sat 23 Mon 25

Filters

Publisher (7): General Mills (2,300), Google, Inc. (2,200), Microsoft Corporation (22), Maid of the Mist (20), Joja Corp. (5)

Filemod action, Filemod filetype, Domain, IP address, Regmod action, Regmod hide, Childproc filepath (2): c:\windows\system32\wbem... (4,177), c:\windows\yojo.exe (7)

Childproc MD5, Childproc SHA-256, JA3 fingerprint, JA3S fingerprint

Viewing 9 events which started between 2021-01-25 21:16:55.253 GMT and 2021-01-25 21:29:20.807 GMT.

Load earlier events ▲ Load later events ▼

TIME	TYPE	DESCRIPTION
2021-01-25 21:16:55.253 GMT	filmod	First wrote to c:\windows\softwaredistribution\datastore\logs\edb.log
2021-01-25 21:16:55.284 GMT	filmod	Created c:\windows\softwaredistribution\datastore\logs\tmp.edb
2021-01-25 21:16:55.284 GMT	filmod	First wrote to c:\windows\softwaredistribution\datastore\logs\tmp.edb
2021-01-25 21:16:55.284 GMT	filmod	First wrote to c:\windows\softwaredistribution\datastore\datastore.edb
2021-01-25 21:16:55.300 GMT	filmod	Deleted c:\windows\softwaredistribution\download\52da14a03f809d923c9700cd6dbc841e9c19108b
2021-01-25 21:21:55.320 GMT	filmod	First wrote to c:\windows\softwaredistribution\datastore\logs\edb.chk
2021-01-25 21:21:55.336 GMT	filmod	Deleted c:\windows\softwaredistribution\datastore\logs\tmp.edb
2021-01-25 21:29:20.782 GMT	crossproc	A handle to this process was opened with change rights by c:\windows\system32\lsm.exe (9662ee1826445114391c53745dc1c88)
2021-01-25 21:29:20.807 GMT	crossproc	Opened handle with change access rights to c:\windows\system32\lstheme.exe (2b3349dd9922cbe08cc84791ae4b96e8)

VMware Carbon Black 7.5.0 Copyright © 2013-2021 VMware, Inc. All rights reserved.

Process Summary

The process summary information is located in the top panel of the **Process Analysis** page. It displays the following general process execution details:

- **Process:** Identifies the main process for which the analysis is displayed.
- **Command Line:** Describes the command that initiated the process.
- **Host:** Identifies the host upon which the command was initiated.
- **User:** Identifies the user who was logged in at the endpoint when the command was initiated.

- **Logon Type:** Describes the logon type for the process; valid logon types are:
 - System (0)
 - Interactive (2)
 - Network (3)
 - Batch (4)
 - Service (5)
 - Proxy (6)
 - Unlock (7)
 - Network Cleartext (8)
 - New Credentials (9)
 - Remote Interactive (10)
 - Cached Interactive (11)
 - Cached Remote Interactive (12)
 - Cached Unlock (13)
- **State:** The state can be Running or Offline.
- **Last Activity:** The last time the process was run.
- **Duration:** The number of hours that the process has been running.
- **Isolate Host:** Click the **Isolate host** button to isolate an endpoint. For example, you might discover that suspicious files are executing from a particular endpoint and you want to prevent them from spreading to other endpoints in your network.
- When an endpoint is isolated, connections to the Carbon Black EDR server (such as DHCP and DNS) are maintained, but all other connections are blocked or terminated. The user is not notified by Carbon Black EDR, but the endpoint will not work as expected.

Note To isolate an endpoint, you must be a Carbon Black EDR Global Administrator, a Carbon Black Hosted EDR Administrator, or a user on a team that has Analyst privileges for the endpoint to isolate.


The computer remains isolated until this option is disabled or the computer reboots. See [Isolating an Endpoint](#).

- **Go Live:** The **Go Live** button is useful when you are investigating an IOC. After you have identified an endpoint that has suspicious activity, you can directly access the content on that endpoint. You can open an interactive live session to the endpoint host and execute commands in real time to help isolate or eradicate the threat. See [Using Live Response](#).

- **Actions:** The **Actions** dropdown menu includes the following options:
 - **Ban this hash** – Creates a ban of the process. If process hash banning is enabled for a sensor group, hosts attempting to run this process will find it blocked, and any running instances of the process are terminated. See [Banning Process Hashes](#).
 - **Export events to CSV** – Downloads a Report.zip archive to your local computer. The files contain the information in the **Description** fields for each **Type** filter that appears in the results table at the bottom of the **Process Analysis** window. See [Process Event Filters](#).
 - **Share** – Opens the Carbon Black EDR user's default email client, creates an email, and includes the details from the `summary.txt` file (path, MD5, start timestamp, last updated timestamp, hostname, and full command line), and a URL that accesses the same page in which **Share** was clicked.

Interactive Process Tree

By default, the interactive **process** tree displays the parent process of the selected process executable file in a search result together with the relevant child processes:

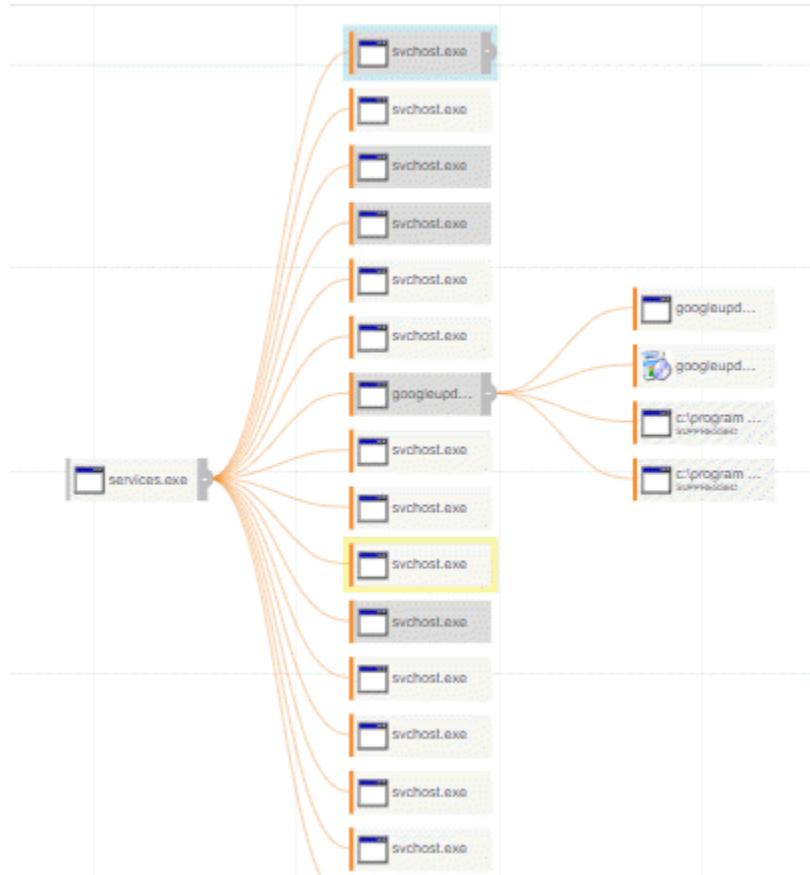

You can interact with the process tree by clicking child and parent processes to identify issues. This view shows the selected process event and includes its parent process and child processes. Siblings to the selected process also appear.

To expand or collapse nodes in the **process tree**, click a parent or child node.

To view additional nodes, left-click and hold any part of the tree while moving your cursor


Clicking other child or parent processes updates the Process Analysis page in context to show the newly selected process details, including the summary tables and graphs.

Note The process tree can display up to 15 child processes; either 15 unsuppressed, 15 suppressed, or 15 of both types.

For processes that have more than 15 unsuppressed and 15 suppressed child processes, the tree shows unsuppressed processes first, and then suppressed processes, until a total of 15 child processes appear.

Process Execution Details

Process execution details appear in the panel to the right of the **process tree**:

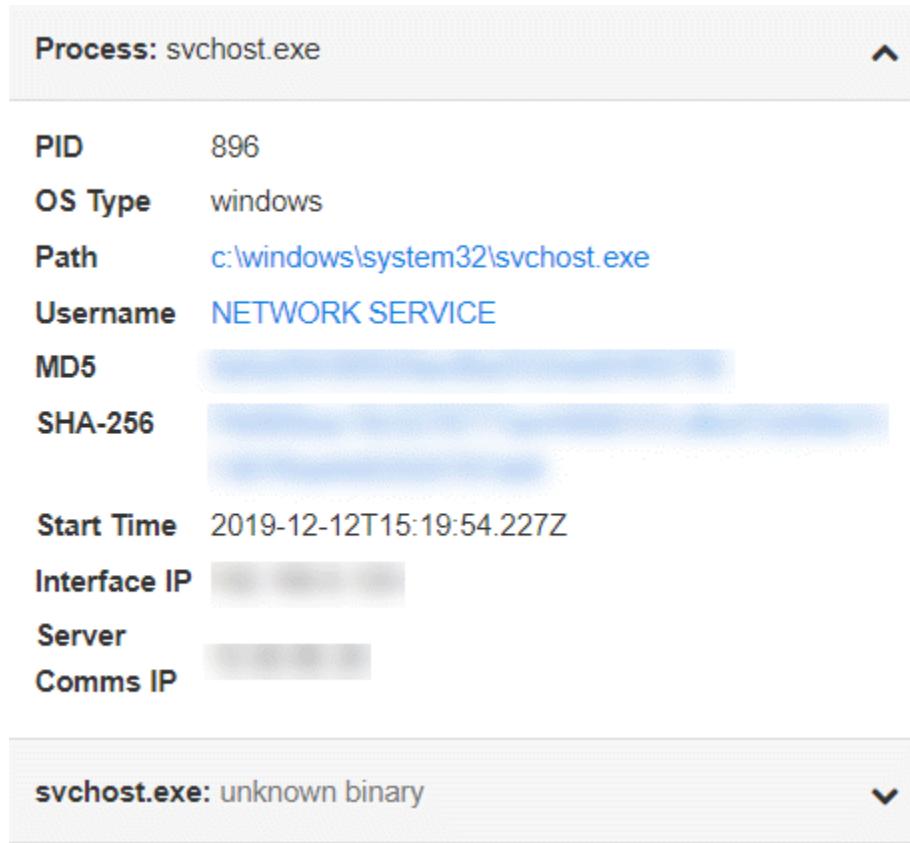

Process: svchost.exe

PID	896
OS Type	windows
Path	c:\windows\system32\svchost.exe
Username	NETWORK SERVICE
MD5	[REDACTED]
SHA-256	[REDACTED]
Start Time	2019-12-12T15:19:54.227Z
Interface IP	[REDACTED]
Server	[REDACTED]
Comms IP	[REDACTED]

svchost.exe: unknown binary

If the process is an executable, the following information is displayed:

Field	Description
Process	The name of the process executable file.
PID	The Process Identification (PID) number of the process.
OS Type	The operating system on which the process was executed.

Field	Description
Path	The physical path from which the process was executed.
Username	The name of the user who executed the process.
MD5	The MD5 hash value of the process.
SHA-256	<p>The SHA-256 hash value of the process.</p> <p>Note: Availability of SHA-256 hash data is dependent upon sensor capabilities. The macOS (OS X) sensor version 6.2.4, which is packaged with Carbon Black EDR server version 6.3, sends SHA-256 hashes to the server. Check the VMware Carbon Black User Exchange or VMware Carbon Black Support for information about other sensors that can generate SHA-256 hashes.</p> <p>For files that were originally discovered by a sensor that did not provide SHA-256 hashes, process information for new executions show SHA-256 hashes, but binary entries show SHA-256 as "(unknown)" until they appear as new files on a sensor that supports SHA-256.</p>
Start Time	The date and time of the process execution.
Interface IP	<p>The IP address of the network <i>adapter</i> on the sensor.</p> <p>Note: Pre-5.1 sensors do not report an Interface IP.</p>
Server Comms IP	<p>The IP address from which the server recognizes the sensor that is reporting data.</p> <p>If the sensor is communicating through a Proxy or NAT, the address is for the Proxy or NAT.</p>

Binary Metadata

To view digital signature information and metadata about the process executable file, click the down-arrow next to the process executable file name at the bottom of the Process Execution Details panel:

Process: svchost.exe	▼
svchost.exe: unknown binary	▲
Company	Unknown
Product	Unknown
Description	Unknown
Signed	
Publisher	Unknown
Alliance Feeds	0 hit(s) in 0 report(s) ▼
On Demand Feeds	0 hit(s) in 0 report(s) ▼

Alliance Feeds shows if the process event details had any hits from Carbon Black Threat Intel partner feeds.

If there are any hits, the results appear below the Carbon Black Threat Intel feeds in rows that are expanded by default. Each row shows:

- The source of the feed.
- A link to information about the threat that was detected.
- The date and score of the hit.
- The IOC (Indicator of Compromise) value of the process event that caused the hit.

Click the IOC hash value to go directly to the process event row for that event.

On Demand Feeds shows if the process event details had any hits from on-demand feeds.

On-demand feeds provide information from the Carbon Black Threat Intel “on demand” when a process that is part of the Carbon Black Threat Intel database is viewed on the **Process Analysis** page. This information includes domain classification and threat geolocation. There might not be any on-demand data available for a process that you are analyzing.

Click the **Sharing Settings** link to access the **Sharing** page to set this up. For more information, see [On-Demand Feeds from VMware CB Threat Intel](#).


EMET Protections Enabled (Windows Only)

The **EMET Protections Enabled** panel appears if Enhanced Mitigation Experience Toolkit (EMET) is installed on the host that reported the process and EMET Protection is enabled for the process on that host.

Event Timeline

The **Event Timeline** is useful for investigating IOCs for events that occurred at a specific time.

A legend of color-coded event types appears at the top of the timeline. These colors are carried over to the bottom two timeline graphs to represent particular event types.

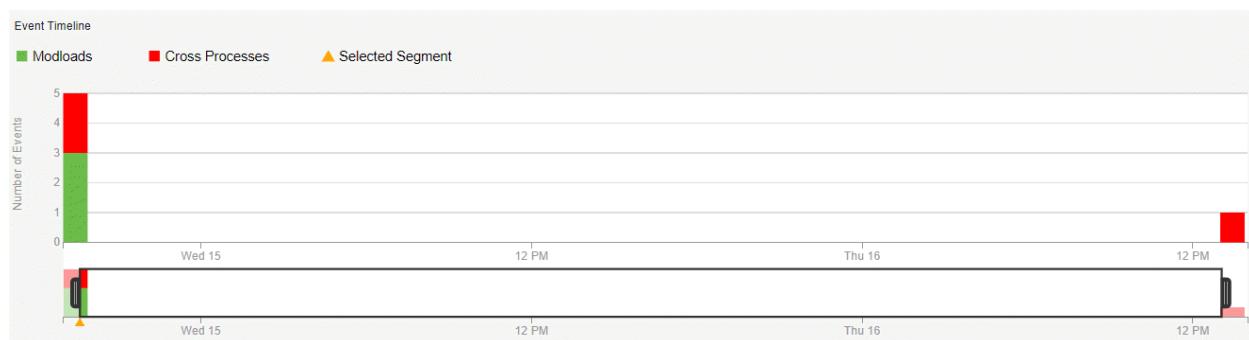

The top graph displays event counts, which are broken down into event segments. The top graph expands, collapses, and slides back and forth in conjunction with the time range that you select in the bottom graph.

The bottom graph contains an interactive time range selector widget that you can expand or collapse to zoom in, on, and out of the timeline. Place your cursor on the black handle in the graph and slide the range selector back and forth across the timeline to contract or expand it. Or, place your cursor inside the segment that is defined by the handles and move the range selector. As you move the range selector, the process event list is updated (see [Event List](#)). The bottom graph includes two indicators:

- An orange triangle, which represents the starting point of the segment.
- A purple triangle, which represents the current point of the segment.

Process Event Filters

Filters display in a scrollable list to the left of the Events List. To hide or show the filters list, click the expand button to the left of the list.

Process event filters provide a further refinement of the data that is already on the Process Analysis page – they do not perform a search for new results.

Filter rows show the number of events that were affected. Click the **Reset** button to reset all filters to their original state.

The following table describes each filter.

Filter	Description
Event type	Shows process event types. See Process Event Types for more details. <ul style="list-style-type: none"> ■ filemod – file modifications ■ modload – number of modules loaded ■ regmod – (Windows only) registry modifications ■ netconn – number of network connections enabled ■ childproc – child processes ■ fork – (OS X and Linux only) fork processes ■ posix_exec – (OS X and Linux only) posix_exec processes ■ crossproc – (Windows only - not supported on Windows XP/2003) cross processes ■ blocked – process blocked due to ban ■ emet – (Windows only) EMET mitigation
Directories	The directories that this process uses.
Investigation	The tagged status for events in this process for any investigations.
Threat level	Shows report scores for events associated with CB Threat Intel hits in this process. See Threat Intelligence Feed Scores .
Search terms	Shows matching query terms that are used in searching for processes.
Feeds	Shows CB Threat Intel feed hits found in this process.
Signature	The signature status types of all modules that were loaded by this process (for example, signed, unsigned, or expired).
Publisher	The publishers of all the modules that were loaded by this process.
FileMod action	The types of file modifications that occurred during the execution of this process (create, delete, first write, last write), and the number of times those actions occurred.

Filter	Description
FileMod file type	The types of files that were modified.
Domain	The domain (DNS) names that are associated with network connections that were made by this process.
IP address	The IP addresses that are associated with network connections that were made by this process.
RegMod action	(Windows only) The type of registry modification (created, deleted key, deleted value, first write, last write).
RegMod hive	The location of the registry that is associated with registry modification events.
Childproc filepaths	Paths to child processes that were created by this process.
Childproc md5s	MD5 files of child processes that were created by this process.
Childproc sha-256	SHA-256 of child processes that were created by this process.
JA3	JA3 fingerprint of the client TLS hello packet.
JA3S	JA3S fingerprint of the server TLS hello packet.

Event List

The Event List describes current events and the time range of events. When you first enter the Process Analysis page by choosing a Process Search result row, the selected row corresponds with a particular segment of the process. This selection affects the starting position of the Event List.

For example, a process shown in the Process Search result row might have three segments: 8:00, 9:00, and 10:00. If you choose the middle segment, the first row of the Event List displays the first event of the 9:00 segment.

Data shown in the Event List also relates to the selected segment in the Event Timeline (see [Event Timeline](#)).

If you expand, shrink, or move the timeline window, the window snaps to the nearest time segment boundary, and the Event List automatically scrolls to the first event of that time segment.

When you expand the timeline window, you increase the number of events to display in the Event List. A 10-second timeout is in effect; in other words, Carbon Black EDR will only search for and display the results that it finds within 10 seconds. If not all events for this timeline are retrieved, a message displays that the data is incomplete; to rectify this, reduce the size of the timeline window.

When you select a node in the Process Tree, the chosen segment becomes the first segment of the displayed process in the Event List.

Viewing 9 events which started between 2021-01-25 21:16:55.253 GMT and 2021-01-25 21:29:20.807 GMT.


TIME	TYPE	DESCRIPTION
2021-01-25 21:16:55.253 GMT	filemod	First wrote to c:\windows\softwaredistribution\datastore\logs\edb.log
2021-01-25 21:16:55.284 GMT	filemod	Created c:\windows\softwaredistribution\datastore\logs\lmp.edb
2021-01-25 21:16:55.284 GMT	filemod	First wrote to c:\windows\softwaredistribution\datastore\logs\lmp.edb
2021-01-25 21:16:55.284 GMT	filemod	First wrote to c:\windows\softwaredistribution\datastore\datastore.edb

The Event List shows the following details:

Heading	Description
Expand event >	Allows you to expand the event for additional data.
Tag 	Shows if an event is tagged for an investigation. You can click the tag icon to select this event for a future investigation. After you select the tag icon, it turns blue to indicate that it is now included in an investigation.
Trusted Events 	Shows if the event is trusted. When you click on the row, the trust information appears with a link to the source.
Threat Intelligence	Shows if this event has matched a threat intelligence feed.
Feed Hits 	
Time	The time that the event occurred in Greenwich Mean Time (GMT).
Type	<p>The process event type. For more details, see Process Event Types.</p> <ul style="list-style-type: none"> ■ crossproc (cross process) – appears with a red bar (Windows only - not supported on Windows XP/2003). ■ child process (child process) – appears with an orange bar. ■ fork (fork process) – appears with a yellow-orange bar (OS X and Linux only). ■ filemod (file modification) – appears with a yellow bar. ■ modload (number of modules loaded – appears with a green bar. ■ posix_exec (posix_exec process) – appears with a blue green bar (OS X and Linux only). ■ regmod (registry modification) – (Windows only) appears with a blue bar. ■ netconn (number of network connections enabled) – appears with a purple bar. ■ blocked (process blocked by hash ban) – appears with a brown bar. ■ emet (EMET mitigation) – appears with a gray bar (Windows only).


Heading	Description
Description	<p>The operation that the Type event performed. See Process Event Types.</p> <p>The Description column can contain:</p> <ul style="list-style-type: none"> ■ filemod – “Deleted” or “Created” and then provide the path to the file that was modified. ■ modload – The module that was loaded by the process. Modload descriptions can also include the path of the module that was loaded, if the module was signed or unsigned by the publisher, and the unique MD5 hash. ■ regmod – The Windows registry key that was created or modified. ■ netconn – The connection made, including the IP address (including hostname unless DNS resolution is excluded for the host), port, and protocol. ■ childproc – The child process start time, end time, and PID of the selected parent process. ■ fork – (OS X and Linux only) The instance’s parent process, forked with a different Process ID (PID). ■ posix_exec – (OS X and Linux only) The instance’s loaded process and the new binary image. ■ crossproc – (Windows only - not supported on Windows XP/2003) The action it performed; for example, opening a handle or starting or ending processes. ■ blocked – Blocked events. These are associated with the banning functionality. ■ emet – (Windows only) The EMET mitigation type reported when this process was invoked and the filename that was used in the attempt to run the process.
Search	Lets you reduce the number of events that display and focus the results based on terms entered into the Search box. For example, entering “Microsoft” into the Search box would display only Microsoft events.

You can expand an event by clicking the > on the left side of the row.

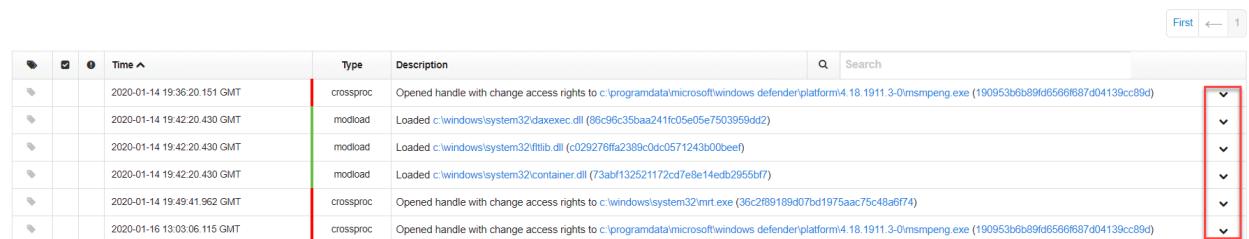

			Time ^	Type	Description	Search
...			2020-01-14 19:36:20.151 GMT	crossproc	Opened handle with change access rights to c:\programdata\microsoft\windows\defender\platform\4.18.1911.3-0\msmpeng.exe (190953b6b89fd6566f687d04139cc89d)	
...			2020-01-14 19:42:20.430 GMT	modload	Loaded c:\windows\system32\daxexec.dll (86e96c35baa241f05e05e057e503959dd2)	
...			2020-01-14 19:42:20.430 GMT	modload	Loaded c:\windows\system32\itlib.dll (c029276ffa2389e0d0571243b0bee9)	
...			2020-01-14 19:42:20.430 GMT	modload	Loaded c:\windows\system32\container.dll (73abf132521172cd7e8e14edb2955b7)	
...			2020-01-14 19:49:41.962 GMT	crossproc	Opened handle with change access rights to c:\windows\system32\inrt.exe (36c2f89189d07bd1975aac75c48a8f74)	
...			2020-01-16 13:03:06.115 GMT	crossproc	Opened handle with change access rights to c:\programdata\microsoft\windows\defender\platform\4.18.1911.3-0\msmpeng.exe (190953b6b89fd6566f687d04139cc89d)	

Details about the event appear. This example shows details for an event with the type modload:

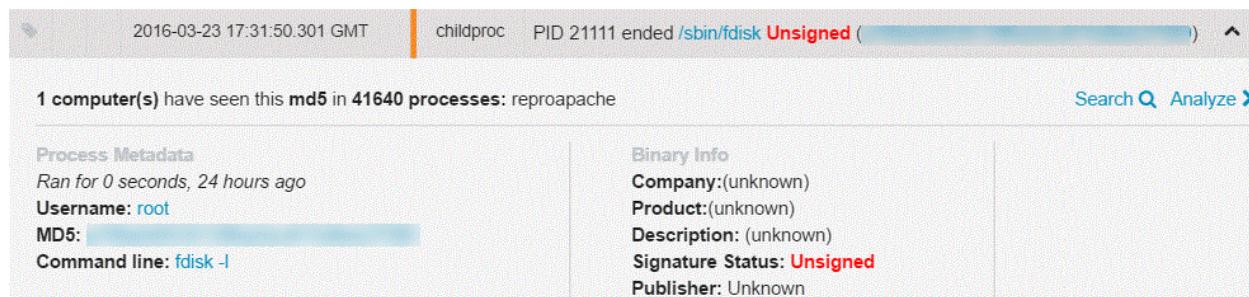

Process Event Types

The following table shows different types of details that display for each type of event:

Event Type	Details
filemod	The number of endpoints that have seen this file modification and the number of processes in which the file modification occurred on those endpoints.
modload	<ul style="list-style-type: none"> ■ The number of endpoints that have seen the MD5 hash for the module that was loaded and the number of processes in which the MD5 appears on those endpoints. ■ Binary information – SHA-256 hash (if available), company name, product name, a description of the binary, signature status, and publisher ■ CB Threat Intel information – the source of the threat intelligence feed, a link to the report for the MD5 hash, the MD5 score, and the MD5 trust status.
regmod	Windows sensors only. The number of endpoints that have seen a modification of a registry key, and the number of processes in which the registry modification occurred on those endpoints.
netconn	The number of network connections that the execution of this process either attempted or established.
childproc	<ul style="list-style-type: none"> ■ The number of endpoints that have observed the MD5 in the description and the number of processes in which the MD5 was observed. Lists the names of the processes. ■ Process metadata – The length of time for which the process was active, and when the process execution occurred, username of the user who is executing the process, MD5 hash, SHA-256 hash (if available), and the command line of the process executable file. ■ Binary information – SHA-256 hash (if available), company name, product name, product description, signature status, and publisher. ■ If the child process is suppressed due to Retention Maximization, then it also shows the username and command line. You choose maximization levels in the Edit Group Settings and Create Group pages. See Advanced Settings. This image shows suppressed vs. unsuppressed child processes. Suppressed child processes are labeled Suppressed in the process tree. ■ The process tree shows a maximum of 15 child processes: either 15 unsuppressed, 15 suppressed, or 15 of both types. ■ For processes that have more than 15 unsuppressed and 15 suppressed child processes, the tree shows unsuppressed processes first, and then suppressed processes, until a total of 15 child processes appear in the tree.
fork	<p>(OSX and Linux only) Indicates that this is a fork process and shows the instance's parent process, forked with a different Process ID (PID).</p> <p>When a process performs a fork() system call, all activity for that process continues to be associated with the parent. A new fork event type is displayed on the Process Analysis page of the parent, indicating that the parent process performed a fork. The PID of the forked process and the timestamp of when the fork occurred is recorded</p>
posix_exec	<p>(macOS and Linux only) Indicates this is a posix_exec process and shows the instance's process that is loaded and the new binary image.</p> <p>If a process performs an exec() system call, a new process document will not be created. This activity will be reported as a new posix_exec event type within the process, and the process metadata will be updated to reflect the new image and command line associated with the exec() system call.</p>

Event Type	Details
crossproc	Windows only (not supported on Windows XP/2003): Shows occurrences of processes that cross the security boundary of other processes: <ul style="list-style-type: none"> ■ Description of the OpenProcess API call for the cross process. Carbon Black EDR records all OpenProcess API calls that request <code>PROCESS_CREATE_PROCESS</code>, <code>PROCESS_CREATE_THREAD</code>, <code>PROCESS_DUP_HANDLE</code>, <code>PROCESS_SUSPEND_RESUME</code>, <code>PROCESS_VM_OPERATION</code>, or <code>PROCESS_VM_WRITE</code> access rights. These access rights allow this process to change the behavior of the target process. Windows sensors only. ■ Process metadata – the length of time the cross process was active, username of the user who executed the process, MD5 hash, SHA-256 hash (if available), and the command line of the process executable file. ■ Binary metadata – SHA-256 hash (if available), the company name, product name, product description, signature status, and publisher.
blocked	The path and hash of a process that is blocked by a Carbon Black EDR process hash ban. When expanded, metadata for the process and its binary appear: <ul style="list-style-type: none"> ■ Process metadata – when the process was terminated, username of the user attempting to run the process, process MD5, command line path for the process. ■ Binary metadata – SHA-256 hash (if available), company name, product name, product description, signature status, publisher.
emet	(Windows only) The EMET mitigation type reported when this process was invoked and the filename used in the attempt to run the process. Additional details include number of endpoints and processes that have seen the event, the time of the EMET mitigation, the EMET ID of the event, and any warnings. Output from EMET might provide additional details.

Analysis Preview Page

On the **Process Search page** (discussed in [Overview of Process Search](#)), scroll to the **Results** table (discussed in [Results Table](#)). Click anywhere in a query result row (except for a hyperlinked item or the > icon).

Results											Show 10 of 5,430 Sort by None	Edit Columns	Create Watchlist	Export CSV
Process	Endpoint	Updated	Start Time	PID	Username	Regmods	Filemods	Modloads	Netconns	Children	Tags	Hits		
 svchost.exe c:\windows\system32\svchost.exe		Jan 14, 2020 7:48 PM GMT	Dec 12, 2019 3:19 PM GMT	1844	SYSTEM	48	852	14		2				
 wuauclt.exe c:\windows\system32\wuauclt.exe		Jan 14, 2020 7:48 PM GMT	Jan 14, 2020 7:39 PM GMT	8176	SYSTEM	2	22	41	1					
 svchost.exe c:\windows\system32\svchost.exe		Jan 14, 2020 7:47 PM GMT	Dec 12, 2019 3:19 PM GMT	2224	LOCAL SERVICE	39		24		15				
 msexec.exe c:\windows\system32\msexec.exe		Jan 14, 2020 7:42 PM GMT	Jan 14, 2020 7:42 PM GMT	1676	SYSTEM	82	55	27						
 services.exe c:\windows\system32\services.exe		Jan 14, 2020 7:48 PM GMT	Dec 12, 2019 3:19 PM GMT	644	SYSTEM	241	6	14		605				
 searchindexer.exe c:\windows\system32\searchindexer.exe		Jan 14, 2020 7:47 PM GMT	Dec 12, 2019 3:20 PM GMT	4456	SYSTEM	65	15	35		181				

The **Analysis Preview** page appears and provides a brief overview of the process that you selected:

Preview X

 **services.exe**
Running for 1 month, last activity about 2 days ago

[Analyze »](#)
[View Binary »](#)

Signed status: Signed Company: Microsoft Corporation Product: Microsoft® Windows® Operating System Description: Services and Controller app Publisher: Microsoft Corporation	Hostname: [REDACTED] Start time: 2019-12-12T15:19:53.773Z Path: c:\windows\system32\services.exe Command line: C:\WINDOWS\system32\services.exe Username: SYSTEM
--	---

regmods: 241 **filemods:** 6 **modloads:** 14 **netconns:** 0

Close

Title	Description
Signed status	Shows if the process executable file is signed by the publisher.
Company	The company name of the process executable file.
Product	The product for which the process executable file was created.
Description	A text description of the process executable file.
Publisher	The official publisher of the process executable file.
Hostname	The name of the host (endpoint) on which the process was run.
Start time	The full timestamp for the time when the process was run.
Path	The physical path from which the process was run.
Command line	The full command line specific to the execution of this process.
Username	The user on the given host who executed the process. The format is <domain>\<username> .
Regmods	The number of Windows registry modifications that were made by the process execution.
Filemods	The number of files that were modified by the execution of this process.
Modloads	The status of modules that were loaded by this process execution.
Netconns	The number of network connections that this process execution either attempted or established.
Analyze	Click to open the Process Analysis page for a granular analysis of the process executable file.
View Binary	Click to view the detailed binary analysis page for the process executable file. See Chapter 14 Binary Search and Analysis .

Binary Search and Analysis

14

This chapter explains how to search for and analyze binary metadata.

This chapter includes the following topics:

- [Overview of Binary Search](#)
- [Entering Search Criteria](#)
- [High-level Result Summaries](#)
- [Related Metadata](#)
- [Binary Search Results Table](#)
- [Binary Preview](#)
- [Binary Analysis](#)

Overview of Binary Search

Carbon Black EDR sensors begin tracking binaries when they are executed by a process. You can perform a binary search to explore the metadata of a binary.

On the navigation bar, click **Binary Search** .


Entering Search Criteria

You can enter keyword searches or pre-defined search criteria in the **Search** box at the top of the page. While you enter search criteria, the correct syntax is displayed. However, the search not only auto-completes your criteria but estimates results as well.

If you do not enter any search criteria, the system runs a search with `.*`, which includes every binary that has executed in your environment. The results appear with a single instance of each binary and its metadata. Each binary is identified by its MD5 hash value.

To perform a binary search:


- 1 On the navigation bar, click **Binary Search**.
- 2 In the **Search** box, enter a search string (formatted with the correct syntax) or click **Add Criteria** to display predefined search criteria options:

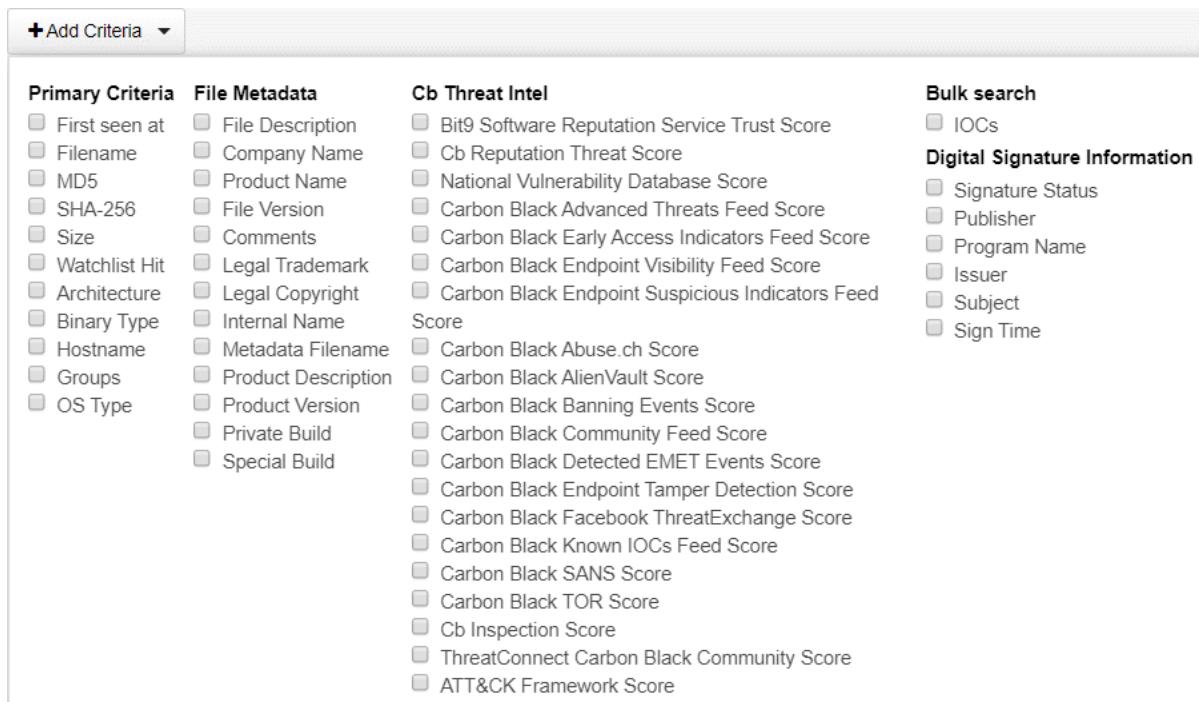

The screenshot shows a search interface with several sections of checkboxes:

- Primary Criteria**: Includes options like First seen at, Filename, MD5, SHA-256, Size, Watchlist Hit, Architecture, Binary Type, Hostname, Groups, and OS Type.
- File Metadata**: Includes options like File Description, Company Name, Product Name, File Version, Comments, Legal Trademark, Legal Copyright, Internal Name, Metadata Filename, Product Description, Product Version, Private Build, and Special Build.
- Cb Threat Intel**: Includes a large list of threat intelligence scores and feeds: Bit9 Software Reputation Service Trust Score, Cb Reputation Threat Score, National Vulnerability Database Score, Carbon Black Advanced Threats Feed Score, Carbon Black Early Access Indicators Feed Score, Carbon Black Endpoint Visibility Feed Score, Carbon Black Endpoint Suspicious Indicators Feed Score, Carbon Black Abuse.ch Score, Carbon Black AlienVault Score, Carbon Black Banning Events Score, Carbon Black Community Feed Score, Carbon Black Detected EMET Events Score, Carbon Black Endpoint Tamper Detection Score, Carbon Black Facebook ThreatExchange Score, Carbon Black Known IOCs Feed Score, Carbon Black SANS Score, Carbon Black TOR Score, Cb Inspection Score, ThreatConnect Carbon Black Community Score, and ATT&CK Framework Score.
- Bulk search**: Includes options for Bulk search, IOCs, Signature Status, Publisher, Program Name, Issuer, Subject, and Sign Time.
- Digital Signature Information**: Includes options for Signature Status, Publisher, Program Name, Issuer, Subject, and Sign Time.

3 If you select a search criteria option, you must specify details for that search criteria option. For example, if you select the **OS Type** search criteria option, you must select one or more OS types for this search and then click **Update**.

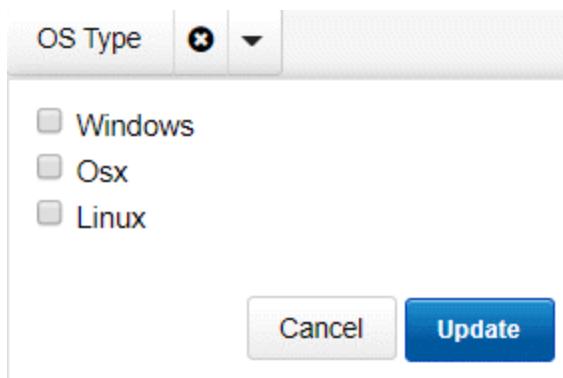

The dialog box for OS Type search criteria shows the following options:

- OS Type** (input field with a clear button)
- Windows
- Osx
- Linux
- Cancel** (button)
- Update** (button)

If you add multiple search criteria fields, they are combined using an AND operator.

4 When you finish entering search criteria, click **Search**.

Search results appear in a series of facets and graphs, along with a results table.

Note For detailed information about using queries, see [Chapter 15 Advanced Search Queries](#).

Additional Binary Search Page Features

In the top-right corner of the page, an **Actions** menu provides several options:

- **Share** – Share query strings. You can email the URL of the Carbon Black EDR server with a query string to another Carbon Black EDR user. That user can then use the string to view the same results in their own Carbon Black EDR console.
- **Add Watchlist** – Create a watchlist that is based on the current query string. A watchlist is a saved search that you can use to track specific IOCs. See [Chapter 20 Watchlists](#).
- **Export CSV** – Export the first 1000 process search results to a CSV file in a comma-separated value format for reporting, retention, or compliance. Each row contains a URL to access the result details.

Note To export more than 1000 rows of data, you must configure API functionality to capture and save the data. See the Carbon Black Developers Network at <https://developer.carbonblack.com/reference/enterprise-response/>.


The **Reset search terms** button at the top right of the Search Binaries page removes all search criteria and restores the default view using `*.*` as the search criteria.

High-level Result Summaries

When you click **Search**, the **Binary Search** page updates the results data with information that is specific to your search criteria. The results are displayed in a variety of formats that allow you to quickly find suspicious binaries.

A summary of the results appears in facets (small tables and graphs that provide high-level result data). Each process that matches your search criteria appears in a row below the facets.

The following figure shows two rows of facets:

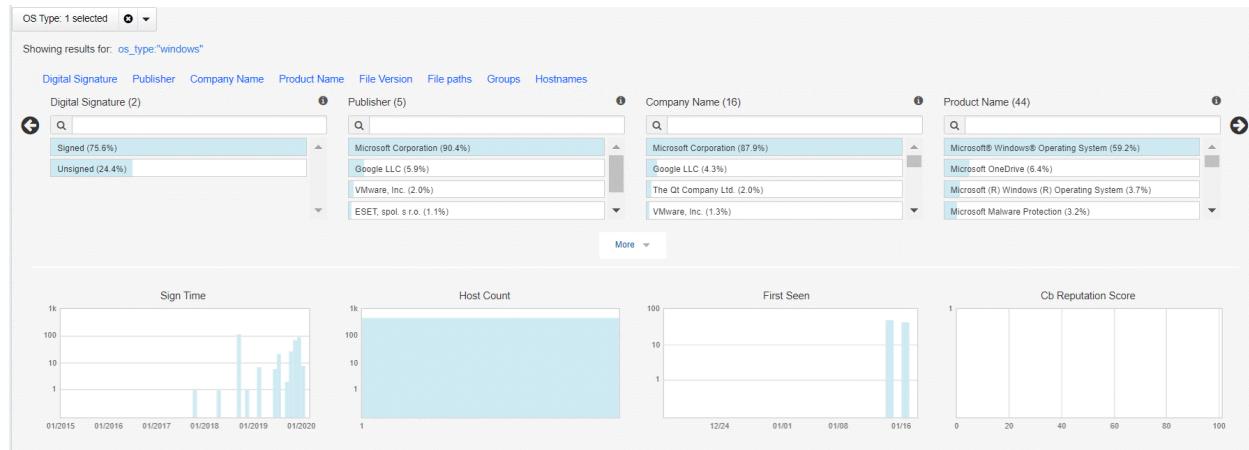

Facets provide a high-level summary of your current search results. Click the information icons to learn more about each facet.

The top row of facets contains information about the binary search results. Click the right-arrow to see all facets in this row.

- **Digital Signature** – The percentages of signed, unsigned, explicit distrust, and expired binaries.
- **Publisher** – A list of binary publishers and the percentage of binaries that have those publishers.
- **Company Name** – A list of binary publisher companies and the percentage of binaries with those company names.
- **Product Name** – The product name of the binary.
- **File Version** – The file version of the binary.
- **File Paths** – A list of file paths where files matching the current binary search have been seen.
- **Groups** – A list of the sensor groups that have identified binaries.
- **Hostnames** – A list of host names for computers on which binaries have been identified.

The second facet row contains graphs. Clicking on a facet within a graph filters the results to show the items that match that value. By default, these facets are sorted by the highest-to-lowest percentage.

Hovering over a facet within a graph displays binary counts.

The second facet row displays the following information about binaries in the results:

- **Sign Time** – The number of binaries that were signed on a particular date.
- **Host Count** – The number of binaries that were seen by Carbon Black EDR on a host or a number of hosts.
- **First Seen** – The number of binaries that were first detected on a particular date.
- **CB Reputation Score** – The number of binaries that match the current search listed by CB Reputation Score.

Related Metadata

Below the facets and to the left of the binary search results, the **Related Metadata** panel appears. If you hover over an item in Related Metadata, rows that correspond with the selected common elements are highlighted to the right.

Binary Search Results Table

At the bottom of the page (to the right of **Related Metadata**) the binary search results table appears. Each row provides details about binary metadata that matches the search criteria.

Results				
Binary	Time First Seen	Signature Status	Size	
 4CAD91247889D6D32F5A53D0BB075007 imagehlp.dll	a month ago	Signed Microsoft Corporation	93.25 KB	 >
 EA4DA54938BD58BF9BA6E457AA186AA4 dtgmodel.dll	a month ago	Signed Microsoft Corporation	656 KB	 >
 13D00EA4BA4884AF469B97180A8959D8 verifier.dll	a month ago	Signed Microsoft Corporation	374.2 KB	 >
 65CAA5C91F2C9239F3E008779FA98A48 dbgeng.dll	a month ago	Signed Microsoft Corporation	5.85 MB	 >


Above the search results, you can see how many binaries match the search criteria and selected filters. You can select sorting options for the list of binaries.

Search results provide the following information about the binaries in the list:

Title	Description
Icon	The icon of the file in which the binary was detected. For example:
	
	Click to display the Binary Preview page. See Binary Preview .
Binary MD5 Hash	The MD5 hash value of the binary.
Time First Seen	The first time that the binary was seen.
Signature	Shows whether the binary file is signed or unsigned.
Size	The size of the file that contains the binary.
	Indicates whether an existing watchlist identified the binary. Click the icon to open the watchlist. See Chapter 20 Watchlists
>	Click to display the Binary Analysis page. See Binary Analysis .

Binary Preview

Click the icon at the left of a row to view the **Binary Preview** page:

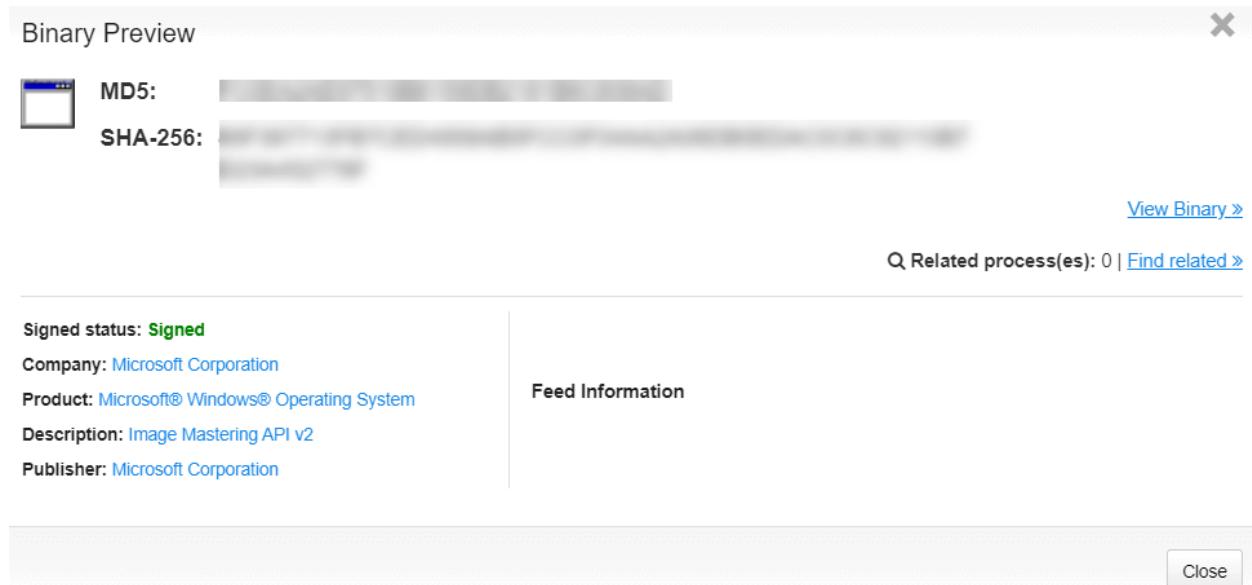

The screenshot shows the 'Binary Preview' page. At the top, there are fields for 'MD5:' and 'SHA-256:' with blurred hash values. To the right is a 'View Binary' link. Below this, a search bar shows 'Q Related process(es): 0' and a 'Find related' link. On the left, a sidebar lists metadata: 'Signed status: Signed', 'Company: Microsoft Corporation', 'Product: Microsoft® Windows® Operating System', 'Description: Image Mastering API v2', and 'Publisher: Microsoft Corporation'. To the right of the sidebar is a 'Feed Information' section with a 'Close' button.

At the top of the page, the hashes of the binary (MD5 and, if available, SHA-256) appear. The file name(s) that the binary has used are listed beneath the hash value (if available).

The **Binary Preview** page provides a quick overview of the following details:

- **Metadata :**
 - **Signed status** – The status of whether the binary file is signed by the publisher.
 - **Company** – The company name identified in the metadata of the binary file.
 - **Product** – The product name identified in the metadata of the binary file.
 - **Description** – A text description of the binary file.
 - **Publisher** – The official publisher of the binary file.
- **Feed Information** – A list of VMware CB Threat Intel feed scan results. You can click on the blue links to go to the source of the results.

At the top right of the page, the following options appear:

- **View Binary** – Click to view the detailed Binary Analysis page. See [Binary Analysis](#).
- **Find related** – Click to open the **Process Search page**, with a predefined query for the MD5 hash value of this binary. The number of related processes displays to the left of the **Find related** link. See [Chapter 13 Process Search and Analysis](#)

Binary Analysis

Use the **Binary Analysis** page to thoroughly investigate a binary. You can access the page in one of two ways:

- Click the **View Binary** link on the **Binary Preview** page.

- Click the > icon on the right end of a binary search results table row from the **Binary Search** page.

The **Binary Analysis** page appears:

General Info

OS Type: Windows
Architecture: 64 bit
Binary Type: Standalone Resource
Size: 350.42 KB [Download](#)

Frequency Data

1 computers have seen this md5 recently in 3 processes. [Download full list](#)

Digital Signature Metadata

Result	Signed
Publisher	Microsoft Corporation
Signed Time	2020-01-16T21:48:00Z
Program Name	Microsoft (R) Anti-Malware Signature Package
Issuer	Microsoft Code Signing PCA 2010
Subject	Microsoft Corporation
Result Code	0x0

File Version Metadata

File Description	Microsoft Antimalware WU Stub
File Version	1.307.2466.0
Original Filename	AM_Delta_Patch_1_307.2432.0.exe
Internal Name	AM_Delta_Patch_1_307.2432.0.exe
Company Name	Microsoft Corporation
Product Name	Microsoft Malware Protection
Product Version	1.307.2466.0
Legal Copyright	© Microsoft Corporation. All rights reserved.

Observed Paths (1)

c:\windows\softwaredistribution\download\install\am_delta_patch_1_307.2432.0.exe

Observed Hosts and Sensor IDs (1)

2

The **Binary Analysis** page contains data for investigating the binary. See the following sections for details:

- [Binary Overview](#)
- [General Info](#)
- [Frequency Data](#)
- [Observed Paths](#)
- [Observed Hosts and Sensor IDs](#)

Binary Overview

General Info

OS Type: Windows
Architecture: 64 bit
Binary Type: Standalone Resource
Size: 350.42 KB [Download](#)

Frequency Data

1 computers have seen this md5 recently in 3 processes. [Download full list](#)

Digital Signature Metadata

Result	Signed
Publisher	Microsoft Corporation
Signed Time	2020-01-17T14:17:43.049Z (2 hours)
Program Name	Microsoft (R) Anti-Malware Signature Package
Issuer	Microsoft Code Signing PCA 2010
Subject	Microsoft Corporation
Result Code	0x0

File Version Metadata

File Description	Microsoft Antimalware WU Stub
File Version	1.307.2466.0
Original Filename	AM_Delta_Patch_1_307.2432.0.exe
Internal Name	AM_Delta_Patch_1_307.2432.0.exe
Company Name	Microsoft Corporation
Product Name	Microsoft Malware Protection
Product Version	1.307.2466.0
Legal Copyright	© Microsoft Corporation. All rights reserved.

Observed Paths (1)

c:\windows\softwaredistribution\download\install\am_delta_patch_1_307.2432.0.exe

Observed Hosts and Sensor IDs (1)

2

The Binary Overview section includes the following information:

Heading	Description
MD5 Hash Value	MD5 hash value for the binary.
SHA-256 Hash Value	The SHA-256 hash value for the binary. Note: Availability of SHA-256 hash data is dependent upon sensor capabilities. The macOS (OS X) sensor version 6.2.4, which is packaged with Carbon Black EDR server version 6.3, sends SHA-256 hashes to the server. Check the VMware Carbon Black User Exchange or VMware Carbon Black Support for information about other sensors that can generate SHA-256 hashes. For files that were originally discovered by a sensor that did not provide SHA-256 hashes, process information for new executions show SHA-256 hashes, but binary entries show SHA-256 as "(unknown)" until they appear as new files on a sensor that supports SHA-256.
Ban this hash	Click this button to ban this hash. Banning a hash terminates a process, if running, and prevents it from running in the future. See Banning Process Hashes .
Seen as	Filenames that were seen for binaries that match this MD5 hash value.
First seen at	Full time stamp of the time that this binary was last observed by currently installed sensors.
Status	Signature status — either Signed or Unsigned .
Publisher Name	Name of the binary publisher.
File writer(s)	Number and names of files the binary has written to. Click the Find Writers link to view the files on the Process Search page.
Related Process(es)	Number of processes that have used this binary. Click the Find related link to find related process on the Process Search page.
Search the web	Performs a Google search for the MD5 hash value of the binary.
Feed Information	Shows scan results for this binary from CB Threat Intel feeds. Click the links to see the results.

General Info

General Info	
OS Type	Windows
Architecture	32 bit
Binary Type	Standalone Resource
Size	2.59 MB Download

General Info shows the following details about the binary file:

Heading	Description
OS Type	Binary operating system.
Architecture	Binary architecture — 32-bit or 64-bit.
Binary Type	Binary resource type — Standalone or Shared .

Heading	Description
Size	Size of the binary file. Also provides a link to download the physical binary.
Download	<p>Click the Download button to download a copy of this binary in a zip file with a name derived from the MD5 hash of the file (for example, A96E734A0E63B7F9B95317125DDEA2BC.zip).</p> <p>The zip file contains two files: metadata and filedata.</p> <p>The metadata file is a text file that contains a timestamp and original filename.</p> <p>For example:</p> <p>Timestamp: 01/17/2020 09:50:56</p> <p>OrigFilename: : \Device\HarddiskVolume1\ProgramData\Microsoft\Windows Defender\Definition Updates\{0B1E4D3A-9612-462F-8067-B0EDCE49CBF2}\mpengine.dll</p>

Frequency Data

Frequency Data

1 computers have seen this md5 recently in 2 processes.

[Download full list !\[\]\(6633cc246680a59d7f5692bfa1345e37_img.jpg\)](#)

Frequency Data shows how many hosts have observed the binary that has this MD5 hash value. Click the down-arrow or click Download full list to download the list of hosts into a CSV file.

Digital Signature Metadata

Digital Signature Metadata	
Result	Signed
Publisher	Microsoft Corporation
Signed Time	2019-12-19T04:33:00Z
Program Name	Microsoft
Issuer	Microsoft Code Signing PCA 2010
Subject	Microsoft Corporation
Result Code	0x0

Digital signature metadata about the binary is as follows:

Heading	Description
Result	The status of the binary signature — either Signed or Unsigned.
Publisher	The publisher of the binary.
Signed Time	The time that the binary was signed.
Program Name	The binary program name.
Issuer	The binary issuer.

Heading	Description
Subject	The binary subject.
Result Code	The result or exit code that followed the execution of the binary.

File Version Metadata

File Version Metadata	
File Description	Standalone Updater
File Version	19.222.1110.0006
Original Filename	OneDriveStandaloneUpdater.exe
Internal Name	OneDriveStandaloneUpdater.exe
Company Name	Microsoft Corporation
Product Name	Microsoft OneDrive
Product Version	19.222.1110.0006
Legal Copyright	© Microsoft Corporation. All rights reserved.
Special Build	b/build/6a769dce-a449-83c2-d924-560f733f0aec

File version metadata about the binary is as follows:

Heading	Description
File Description	Binary name (from the publisher).
File Version	Binary version
Original Filename	Binary filename.
Internal Name	Internal name of the binary
Company Name	Company name of the binary.
Product Name	Product name of the binary.
Product Version	Product version of the binary file.
Legal Copyright	Copyright details for the file, including its publisher.
Special Build	Any special build data for the binary.

Observed Paths

Observed Paths (1)	
c:\users\	\appdata\local\microsoft\onedrive\onedrivestandaloneupdater.exe

Observed paths are the full physical paths from which the binary was loaded.

Observed Hosts and Sensor IDs



Observed Hosts and Sensor Ids (1) ⓘ

2

Download full list ⓘ

Observed Hosts and Sensor IDs shows the names of hosts on which this binary was observed together with the ID number of the sensor. Click the down-arrow or click Download full list to download the list of hosts into a CSV file.

Advanced Search Queries

15

The Carbon Black EDR console provides a check box interface to choose criteria for searches of processes, binaries, alerts, and threat reports. This chapter describes how to construct complex queries. The fields, field types, and examples in this chapter focus on queries to search for processes and binaries, but most of the syntax descriptions also apply to alerts and threat reports.

This chapter includes the following topics:

- [Query Syntax Details](#)
- [Fields in Process and Binary Searches](#)
- [Fields in Alert and Threat Report Searches](#)
- [Field Types](#)
- [Searching with Multiple \(Bulk\) Criteria](#)
- [Searching with Binary Joins](#)
- [Example Searches](#)
- [Binary Search Examples](#)

Query Syntax Details

Carbon Black EDR supports multiple types of operators and syntax that can form complex queries in the **Search** boxes on the **Process Search**, **Binary Search**, **Threat Report Search**, and **Triage Alerts** pages.

Searches are generally case-insensitive.

Terms, Phrases, and Operators

A term is a single keyword (without whitespace) that is searched in the Carbon Black EDR process or binary data store, or in the alerts or threat reports on your server. For example, a keyword could be: `svchost.exe`.

Terms can be combined by logical operators and nested to form complex queries; for example:

- and, AND, or whitespace — Boolean AND operator: `svchost.exe cmd.exe`, `svchost.exe and cmd.exe`
- or, OR — Boolean OR operator: `svchost.exe or cmd.exe`
- - — Boolean NOT operator: `-svchost.exe`
- nesting using parenthesis: `(svchost.exe or cmd.exe) powershell.exe"`
- Wildcard searches with * ; for example, `process_name:win*.exe`

Terms can be limited to a single field with `<field>:<term>` syntax; for example:

`process_name:svchost.exe`

Multiple terms are connected with AND if not otherwise specified.

Terms that are not preceded by fields are expanded to search *all* default fields.

Because terms are whitespace-delimited, use double quotes, or escape whitespaces with a single backslash, when required.

For example:

`path:"microsoft office\office15\powerpnt.exe"`

or

`path:microsoft\ office\office15\powerpnt.exe`

Terms can be combined to form phrases. A phrase is a set of terms that are separated by whitespace and enclosed in quotes. Whitespace between the terms of a quoted phrase is not treated as a logical AND operator. Instead, a phrase is searched as a single term.

For example: "svchost.exe cmd.exe"

Phrases can be combined and nested with other phrases and terms using logical operators.

For example: "svchost.exe cmd.exe" or powershell.exe

Restrictions on Terms

Whitespace

Whitespace is the default delimiter. A query with whitespace is “tokenized” and parsed as multiple terms.

For example:

This input: `microsoft office\office15\powerpnt.exe`

is interpreted as two terms: `microsoft AND office\office15\powerpnt.exe`

Use quotation marks to avoid automatic parsing into individual terms.

For example:

This input: "microsoft office\office15\powerpnt.exe"

Is interpreted as: microsoft office\office15\powerpnt.exe

Alternatively, you can escape whitespaces by using the backslash (\).

For example:

This input: microsoft\ office\office15\powerpnt.exe

Is interpreted as: microsoft office\office15\powerpnt.exe

See [path](#) for more information about how whitespaces and slashes affect path tokenization.

Parentheses

Parentheses are used as a delimiter for nested queries. A query with parentheses is parsed as a nested query, and if a proper nesting cannot be found, a syntax error is returned.

For example:

This input: c:\program files (x86)\windows

is interpreted as: c:\program AND files AND x86 AND \windows

Use quotation marks around the whole phrase to avoid automatic nesting. Otherwise, escape the parentheses (and whitespaces) using the backslash (\).

For example:

This input: c:\program\ files\ \(\x86\)\windows

is interpreted as: c:\program files (x86)\windows

Negative Sign

The negative sign is used as logical NOT operator. Queries that begin with a negative sign are negated in the submitted query.

For example:

This input: -system.exe

is interpreted as: not system.exe

This input: -alliance_score_srstrust:*

is interpreted as: Return all results that are not trusted by the alliance.

You can use a phrase query to avoid automatic negation.

Double Quotes

Double quotes are used as a delimiter for phrase queries. A query in which double quotes should be taken literally must be escaped using backslash (\).

For example, the following query input:

`cmdline: "\"c:\program files \x86\google\update\googleupdate.exe\" /svc"`
is interpreted to match the following command line (with the command line including the quotes as shown):

```
"c:\program files (x86)\google\update\googleupdate.exe\" /svc
```

Leading Wildcards

The use of leading wildcards in a query is not recommended unless absolutely necessary, and is blocked by default. Leading wildcards carry a significant performance penalty for the search.

For example, the following query is **not** recommended:

```
filemod:*/system32/ntdll.dll
```

The same results would be returned by the following query, and the search would be much more efficient:

```
filemod:system32/ntdll.dll
```

Note While process searches with leading wildcards are blocked by default beginning in Carbon Black EDR 6.2.3, you can change this either through the Advanced Settings page or the `cb.conf` file. See [Managing High-Impact Queries](#) and the VMware Carbon Black EDR Server Configuration Guide.

Fields in Process and Binary Searches

This section contains a complete list of fields that are searchable in Carbon Black EDR process and binary searches. Some fields are valid in only one of the two, and some in both. Any binary-related field that the process search uses actually searches the executable file backing the process.

If a query specifies a term without specifying a field, the search is executed on all default fields. Default fields are indicated by (def) .

Note Availability of SHA-256 hash data is dependent upon sensor capabilities. The macOS (OS X) sensor version 6.2.4, which is packaged with Carbon Black EDR Server version 6.3, sends SHA-256 hashes to the server. Check the [VMware Carbon Black User Exchange](#) or [VMware Carbon Black Support](#) for information about other sensors that can generate SHA-256 hashes.

Field	Process Search	Binary Search	Field Type	Description
blocked_md5	x (def)	-	md5	MD5 of a process blocked due to a banning rule.
blocked_status	x	-	status	Status of a block attempt on a running process due to a banning rule, one of the following: a-ProcessTerminated b-NotTerminatedCBProcess c-NotTerminatedSystemProcess d-NotTerminatedCriticalSystemProcess e-NotTerminatedWhitelistedPath f-NotTerminatedOpenProcessError g-NotTerminatedTerminateError
childproc_count	x	-	count	Total count of child processes created by this process.
childproc_md5	x (def)	-	md5	MD5 of the executable backing the created child processes.
childproc_sha256	x (def)	-	sha256	SHA-256 of the executable backing the created child processes (if available).
childproc_name	x (def)	-	keyword	Filename of the child process executables.
cmdline	x (def)	-	cmdline	Full command line for this process.
comments	-	x (def)	text	Comment string from the class FileVersionInfo .
company_name	x	x (def)	text	Company name string from the class FileVersionInfo .
copied_mod_len	x	x	count	Number of bytes collected.
crossproc_count	x		count	Total count of cross process actions by an actor process.
crossproc_md5	x		md5	MD5 of an actor process that performed a cross process action on a target process.
crossproc_sha256	x		sha256	SHA-256 of an actor process that performed a cross process action on a target process (if available).
crossproc_name	x		keyword	Name of an actor process that performed a cross process action on a target process.

Field	Process Search	Binary Search	Field Type	Description
crossproc_type	x (def)		processopen remotethread processopentarget remotethreadtarget	<ul style="list-style-type: none"> ■ processopen (or process_open) finds processes which opened a handle into another process with a set of access rights. Sample results: OpenThread() API call requested THREAD_GET_CONTEXT, THREAD_SET_CONTEXT, THREAD_SUSPEND_RESUME access rights. ■ remotethread (or remote_thread) finds processes which injected a thread into another process. Sample results: CreateRemoteThread API used to inject code into target process. ■ processopentarget is similar to processopen above, but instead of finding the actor process returns the targeted process, i.e., the process which the handle is opened into. ■ remotethreadtarget is similar to remotethread above, but instead of finding the actor process returns the targeted process, i.e., the process which the thread was injected into.
digsig_issuer	x	x (def)	text	If digitally signed, the issuer.
digsig_prog_name	x	x (def)	text	If digitally signed, the program name.
digsig_publisher	x	x (def)	text	If digitally signed, the publisher.
digsig_result	x	x (def)	sign	If digitally signed, the result. Values are: <ul style="list-style-type: none"> ■ “Bad Signature” ■ “Invalid Signature” ■ “Expired” ■ “Invalid Chain” ■ “Untrusted Root” ■ “Signed” ■ “Unsigned” ■ “Explicit Distrust”
digsig_sign_time	x	x	datetime	If digitally signed, the time of signing.
digsig_subject	x	x (def)	text	If digitally signed, the subject.
domain	x (def)	-	domain	Network connection to this domain.
file_desc	x	x (def)	text	File description string from the class FileVersionInfo .
file_version	x	x (def)	text	File version string from the class FileVersionInfo .
filemod	x (def)	-	path	Path of a file modified by this process.
filemod_count	x	-	count	Total count of file modifications by this process.
filewrite_md5	x (def)	-	md5	MD5 of file written by this process.

Field	Process Search	Binary Search	Field Type	Description
filewrite_sha256	x (def)	-	md5	SHA-256 of file written by this process (if available).
group	x (def)	x (def)	keyword	Sensor group this sensor was assigned to at the time of process execution.
has_emet_config	x	-	bool	True or False - Indicates whether process has EMET mitigations configured/enabled.
has_emet_event	x	-	bool	True or False - Indicates whether process has EMET mitigation events.
host_count	-	x	integer	Count of hosts that have seen a binary.
host_type	x (def)	-	keyword	Type of the computer: workstation, server, or domain controller.
hostname	x (def)	x (def)	keyword	Hostname of the computer on which the process was executed.
internal_name	x	x (def)	text	Internal name string from the class FileVersionInfo .
ipaddr	x	-	ipaddr	Network connection to or from this IP address. Only a remote (destination) IP address is searchable regardless of incoming or outgoing.
ipv6addr	x	-	ipv6addr	Network connection to or from this IPv6 address. Only a remote (destination) IP address is searchable regardless of incoming or outgoing.
ipport	x	-	integer	Network connection to this destination port.
is_64bit	x	x	bool	True if architecture is x64.
is_executable_image	x	x	bool	True if the binary is an EXE (versus DLL or SYS).
ja3	x	-	keyword	JA3 fingerprint of the client TLS hello packet.
ja3s	x	-	keyword	JA3S fingerprint of the server TLS hello packet.
last_server_update	x	-	datetime	Last activity in this process in the server's local time.
last_update	x	-	datetime	Last activity in this process in the computer's local time.
legal_copyright	x	x (def)	text	Legal copyright string from the class FileVersionInfo .
legal_trademark	x	x (def)	text	Legal trademark string from the class FileVersionInfo .
md5	x (def)	x (def)	md5	MD5 of the process, parent, child process, loaded module, or a written file.
sha256	x (def)	x (def)	sha256	SHA-256 of the process, parent, child process, loaded module, or a written file (if available).
modload	x (def)	-	path	Path of module loaded into this process.
modload_count	x	-	count	Total count of module loads by this process.

Field	Process Search	Binary Search	Field Type	Description
netconn_count	x	-	count	Total count of network connections by this process.
observed_filename	x	x (def)	path	Full path of the binary at the time of collection.
orig_mod_len	x	x	count	Size in bytes of the binary at time of collection.
original_filename	x	x (def)	text	Original name string from the class FileVersionInfo .
os_type	x	x	keyword	Type of the operating system: Windows, OSX or Linux.
parent_id	x	-	long	The internal Carbon Black EDR process guid for the parent process.
parent_md5	x (def)	-	md5	MD5 of the executable backing the parent process.
parent_sha256	x (def)	-	sha256	SHA-256 of the executable backing the parent process (if available).
parent_name	x (def)	-	keyword	Filename of the parent process executable.
path	x (def)	-	path	Full path to the executable backing this process.
private_build	x	x (def)	text	Private build string from the class FileVersionInfo .
process_id	x	-	long	The internal Carbon Black EDR process guid for the process.
process_md5	x (def)	-	md5	MD5 of the executable backing this process.
process_sha256	x (def)	-	sha256	SHA-256 of the executable backing this process (if available).
process_name	x (def)	-	keyword	Filename of the executable backing this process.
product_desc	x	x (def)	text	Product description string from the class FileVersionInfo .
product_name	x	x (def)	text	Product name string from the class FileVersionInfo .
product_version	x	x (def)	text	Product version string from the class FileVersionInfo .
regmod	x (def)	-	path	Path of a registry key modified by this process.
regmod_count	x	-	count	Total count of registry modifications by this process.
sensor_id	x	-	long	The internal Carbon Black EDR sensor guid of the computer on which this process was executed.
server_added_timestamp	-	x	datetime	Time this binary was first seen by the server.
special_build	x	x (def)	text	Special build string from the class FileVersionInfo .
start	x	-	datetime	Start time of this process in the computer's local time.

Field	Process Search	Binary Search	Field Type	Description
tampered	x	x	bool	True if attempts were made to modify the sensor's binaries, disk artifacts, or configuration
username	x (def)	-	keyword	User context with which the process was executed.
watchlist_<id>	x	x	datetime	Time that this process or binary matched the watchlist query with <id>.

Fields in Alert and Threat Report Searches

Different sets of fields are searchable on the **Triage Alerts** and **Threat Report Search** pages. As with process and binary searches, if no field is specified for a term, the search is executed on all default fields. In the tables below, default fields are indicated by (def).

Field	Field Type	Description
alert_severity	float	Overall score of the alert (combines report score, feed rating, sensor criticality). For more information, see Threat Intelligence Feed Scores .
alert_type	keyword	Type of the alert: one of "watchlist.hit.ingress.binary", "watchlist.hit.ingress.process", "watchlist.hit.query.process", "watchlist.hit.query.binary", "watchlist.hit.ingress.host"
assigned_to	keyword (def)	Name of the Carbon Black EDR administrator who changed the alert status.
create_time	datetime	Date and time this feed report was created.
created_time	datetime	Creation time of the alert.
description	text (def)	Description of the feed report, whitespace tokenized so each term is individually searchable.
domain	domain (def)	A domain IOC value in the feed report.
feed_category	text (def)	Category of this report/feed, whitespace tokenized.
feed_id	int	Numeric value of the feed id (-1 for watchlists).
feed_name	keyword (def)	Name of the feed that triggered the alert. All user-created watchlists have the feed name "My Watchlists" as a special case.
group	keyword	Sensor group name of the endpoint on which the process/binary that triggered the alert was observed.
hostname	keyword (def)	Hostname of endpoint that the process/binary that triggered the alert was observed on.
ioc_value	keyword (def)	Value (IP address, MD5, or SHA-256) of the IOC that caused the alert to be triggered.
ipaddr	ipaddr	An IP address IOC value in the feed report.
ipv6addr	ipv6addr	An IPv6 address IOC value in the feed report.
is_ignored	bool	Indicates whether the report has been marked to be ignored on this server.

Field	Field Type	Description
md5	md5 (def)	MD5 of the process that triggered the alert, or an MD5 IOC value in the feed report.
observed_filename	keyword (def)	Full path name of the process triggered the alert (not tokenized).
process_name	keyword (def)	Filename of the process that triggered the alert.
process_path	path (def)	Full path to the executable backing the process.
report_id	keyword	Name or unique identifier of the threat report that is part of the field.
report_score	float	Report score of the feed that triggered the alert. For more information, see Threat Intelligence Feed Scores .
resolved_time	datetime	Time this alert was triaged by a resolution action.
sha256	sha256 (def)	SHA-256 of the process that triggered the alert (if available), or a SHA-256 IOC value in the feed report.
status	keyword	Status of the alert: one of "resolved", "unresolved", "in progress", "false positive".
tags	text (def)	Tags related to this report/feed, whitespace tokenized.
title	text	Text title of the feed report, whitespace tokenized.
update_time	datetime	Date and time this feed report was last updated.
username	keyword (def)	Username in whose context the process that triggered the alert event was executed.
watchlist_id	int (def)	Numeric value of the watchlist id (not applicable to feeds).
watchlist_name	keyword (def)	Name of the watchlist or the report (for feeds).

Field Types

domain

Domains are split into labels for query purposes. For example, “example.com” is split into “example” and “com”.

If provided in a query, “dot” separator characters (.) between labels are maintained to enable position-dependent domain searches.

This has the following results:

- *Leading dot after the label, no trailing dot* – Returns results for matching labels that are at the *end* of the domain name.
- *Trailing dot after the label, no leading dot* – Returns results for matching labels that are at the *beginning* of the domain name.
- *Leading and trailing dots surrounding the label* – Returns results for matching labels that are in the *middle* of the domain name (i.e., not the first or last label).

- *Two labels with a dot between them* – Treated as a search for the entire phrase, and so returns results for domains that include the entire string.
- *No dot separators* – Returns results for any domain that includes the query string anywhere in the domain name.

The following table provides examples of these different domain searches:

Search	If domain is <code>foo.com</code>	If domain is <code>foo.com.au</code>
<code>domain:com</code>	match	match
<code>domain:.com</code>	match	no match
<code>domain:.com.</code>	no match	match
<code>domain:com.</code>	no match	no match
<code>domain:example.</code>	match	match
<code>domain:example.com</code>	match	no match

ipaddr

IP addresses are searched with a CIDR notation:

`(ip)/(netmask)`

If the netmask is omitted, it is presumed to be 32.

For example:

`ipaddr:192.168.0.0/16` or `ipaddr:10.0.1.1`

ipv6addr

IPv6 addresses are searched with a CIDR notation:

`(ip)/(netmask)`

If the netmask is omitted, it is assumed to be 32.

For example:

`ipv6addr:fe00:b9:266:2011:28dc:43d4:3298:12e2` or `ipv6addr:fe00:b9:266:2011::0/50`

text

Text fields are tokenized on whitespace and punctuation. Searches are case-insensitive.

For example, the string from the `product_name` field:

`Microsoft Visual Studio 2010`

is interpreted as `microsoft AND visual AND studio AND 2010`.

Searches for any of these strings will match on the binary. Phrase queries for any two consecutive terms also match on the binary.

For example:

```
product_name: "visual studio"
```

count

An integer value. If it exists, the values are from 0 to MAXINT . It supports two types of search syntaxes:

- X: Matches all fields with precisely x . For example, `modload_count:34` for processes with exactly 34 modloads.
- [X TO Y]: Matches all fields with counts $\geq X$ and $\leq Y$. For example, `modload_count:[1 TO 10]` for processes with 1 to 10 modloads.

In both cases, either X or Y can be replaced by the wildcard *. For example:

```
netconn_count:*
```

```
netconn_count:[10 TO *]
```

datetime

Datetime fields have five types of search syntaxes:

- YYYY-MM-DD matches all entries on this day, for example, `start:2016-12-01` for all processes started on Dec 1, 2016.
- YYYY-MM-DDThh:mm:ss matches all entries within the next 24 hours from this date and time, for example, `start:2016-12-01T22:15:00` for all processes started between Dec 1, 2016 at 22:15:00 to Dec 2, 2016 at 22:14:59.
- [YYYY-MM-DD TO YYYY-MM-DD] matches all entries between, for example, `start:[2016-12-01 TO 2016-12-31]` for all processes started in Dec 2016.
- [YYYY-MM-DDThh:mm:ss TO YYYY-MM-DDThh:mm:ss] matches all entries between, for example, `start:[2016-12-01T22:15:00 TO 2016-12-01:23:14:59]` for all processes started in Dec 1, 2016 within the given time frame.
- -Xh relative time calculations matches all entries with a time between NOW-10h and NOW . Support units supported are h: hours, m: minutes, s: seconds as observed on the host, for example, `start:-24h` for all processes started in the last 24 hours.

As with counts, YYYYMMDD can be replaced the wildcard *, for example, `start:[2016-01-01 TO *]` for any process started after 1 Jan 2016.

keyword

Keywords are text fields with no tokenization. The term that is searched for must exactly match the value in the field, for example, `process_name:svchost.exe` .

Queries containing wildcards can be submitted with keyword queries.

For example:

```
process_name:ms*.exe .
```

md5

md5 fields are keyword fields with an md5 hash value.

The term searched for must exactly match the value in the field.

For example:

```
process_md5:6d7c8a951af6ad6835c029b3cb88d333 .
```

sha256

sha256 fields are keyword fields with a SHA-256 hash value.

The term searched for must exactly match the value in the field.

For example:

```
process_sha256:BCB8F25FE404CDBFCB0927048F668D7958E590357930CF620F74B59839AF2A9C .
```

ja3

ja3 fields are keyword fields with a ja3 hash value. You can search for the hash value. The term searched for must exactly match the value in the field.

For example:

```
ja3:669181128F1B9B03303D77C6F2EEFD128
```

ja3s

ja3s fields are keyword fields with a ja3s hash value. You can search for the hash value. The term searched for must exactly match the value in the field.

For example:

```
ja3s:679183361F1C6F13201C62F6F2CFED111
```

path

Path fields are special text fields. They are tokenized by path hierarchy as follows:

```
path:c:\windows .
```

For a given path, all subpaths are tokenized. For example:

```
c:\windows\system32\boot\winload.exe
```

is tokenized as:

```
c:\windows\system32\boot\winload.exe  
windows\system32\boot\winload.exe  
system32\boot\winload.exe  
boot\winload.exe  
winload.exe
```

Wildcard Searches

For queries involving path segments that are not tokenized, wildcard searches can be submitted.

For example, you can enter:

```
path:system*
```

for any path that has `system` as sub-path in it.

Modload Path Searches

When performing a loadable module filename (modload) search (as shown in [path](#)), leading forward and back slashes are tokenized. You do not have to remove the leading slash for modload path searches, although it is recommended.

For example:

```
\boot\winload.exe
```

should be entered as:

```
boot\winload.exe
```

Regmod Path Searches

When performing a Windows registry (regmod) search, a few important search caveats exist:

- If a regmod search term contains `controlset001` or `controlset002` , the search term is normalized and tokenized as `currentcontrolset` . As a result, you should search by replacing `controlsetXXX` with `currentcontrolset` .

For example:

```
registry\machine\system\controlset001\services\xkzc
```

should be entered as:

```
regmod:registry\machine\system\currentcontrolset\services\xkzc
```

- The leading backslash on regmod search terms are not tokenized. For regmod searches, be sure to omit this character when submitting search terms.

For example:

```
\registry\machine\system\controlset001\services\xkzc
```

should become:

```
regmod:registry\machine\system\currentcontrolset\services\xkzc
```

bool

Boolean fields have only two possible values: the string `true` or `false`. Searches are case-insensitive.

sign

Signature fields can be one of the eight possible values:

- `Signed`
- `Unsigned`
- `Bad Signature`
- `Invalid Signature`
- `Expired`
- `Invalid Chain`
- `Untrusted Root`
- `Explicit Distrust`

Values with whitespace must be enclosed in quotes.

For example:

```
digsig_result:Signed or digsig_result:"Invalid Chain"
```

cmdline

When a process launches on an endpoint, the command line for that process is sent to the Carbon Black EDR server. If the server stored the whole command line as one item and allowed open ended queries of it, query performance would be extremely poor to the point of making search unusable. Instead, the server breaks each command line up into smaller component “tokens” to be stored for use when you enter a command line query.

Tokenization requires that decisions be made about which components of a command become their own token and which components are treated as delimiters between tokens. These decisions involve trade-offs since the same character may be used in different ways in a command. The following section describes how tokenization is done for Carbon Black Hosted EDR instances and Carbon Black EDR 6.3.0 servers (and later). If you are upgrading, see also [Tokenization Changes on Server Upgrade](#).

Tokenization Rules

Characters Removed Before Tokenization

With enhanced tokenization, the following characters are converted to white spaces and removed before the command-line is tokenized:

```
\ “ ‘ ( ) [ ] { } , = < > & | ;
```

Several frequently used characters are intentionally **not removed** before tokenization. These include:

- Percent (%) and dollar (\$), often used for variables
- Dash (-), period (.), and underscore (_), often found as parts of file names
- These additional characters: ^ @ # ! ?

Parsing Forward Slashes

The forward slash (/) character is handled differently depending upon its position. If it is the start of the entire command line, it is assumed to be part of the path. If it is at the start of any other token in the command line, it is assumed to be a command line switch.

There is one situation in which this parsing rule may not produce the results you want. It is not efficient for the command line parser to distinguish between a command line switch and a Unix-style absolute path. Therefore, Linux and Mac absolute paths passed on the command line are tokenized as if the beginning of the path were a command line switch. So a command line of `/bin/ls /tmp/somefile` will produce the tokens `bin` , `ls` , `/tmp` and `somefile` , incorrectly considering `/tmp` a command line switch.

Parsing Colons

The colon (:) character is handled differently depending upon its position and whether it is repeated. If it is the end of a token, it is assumed to be something the user would want to search for like a drive letter, so it is included. If there are multiple colons at the end of a token or if the colons are not at the end of a token, they are converted to white space for tokenization purposes.

File Extension Tokens

File extension tokens allow searching for either just the file extension or the entire command or file name. In other words, “word.exe” in a command line becomes two tokens: “.exe” and “word.exe”.

Wildcards

There is support for the '?' and '*' characters as wildcards when used as a non-leading character in a query, allowing you to search for any single character or multiple variable characters within a token, respectively.

Note Wildcards **should not** be used as leading characters in a search.

Tokenization Changes on Server Upgrade

This section is relevant to on-premise users upgrading from a pre-6.3.0 version of Carbon Black EDR. If 6.3.0 is your first version of Carbon Black EDR or if you are using a Carbon Black Hosted EDR instance, you do not need to review this section.

Beginning with version 6.1.0, Carbon Black EDR included tokenization option that improved command-line searches. This is standard for Carbon Black Hosted EDR instances, and beginning with version 6.3.0, it is also standard for Carbon Black EDR installations. It adds the following specific improvements, which are described in more detail below:

- More special characters are removed before tokenization.
- Forward slash “/” is interpreted as a command line switch or a path character depending upon position.
- Colon “:” is interpreted as part of a drive letter token or converted to white space depending upon position and repetition.
- File extensions are stored as a separate token as well as part of a file or path name.
- Wildcards are supported in non-leading positions within a query.

These changes result in simpler queries, better and faster search results, and reduced storage requirements for tokenized command lines.

Note If you upgraded from a pre-6.3.0 release and configured Watchlists that use command line queries, these might require a re-write to take advantage of the new tokenization. Review your Watchlist entries to make sure they return the intended results.

Example: Enhanced vs. Legacy Tokenization

The following example shows how the enhanced tokenization in version 6.3.0 differs from the previous version. It can help you convert some older queries to the new standard:

```
"C:\Windows\system32\rundll32.exe" /d srrstr.dll,ExecuteScheduledSPPC
```

Using legacy tokenization, the command was broken into the following tokens:

```
c:  
windows  
system32  
rundll32.exe"  
d  
srrstr.dll,executescheduledsppc
```

The enhanced tokenization in version 6.3.0 breaks the same command into the following tokens:

```
c:  
windows  
system32
```

```
rundll32.exe
.exe
/d
srrstr.dll
.dll
executescheduledsppc
```

Examples of new search capabilities due to this tokenization include:

- You can search for .exe or .dll as part of the command line query.
- Because of more complex parsing of the forward slash, you can explicitly search for a '/d' command line argument and not worry about false positives from just searching for the letter 'd'.
- You can use a wildcard and search for "execute*" if you want to find a specific term passed to the command line.
- You do not have to include extraneous single or double quote marks to find a drive letter or command path.

Retention Maximization and cmdline Searches

On the Edit Group page for a sensor group, you can specify Retention Maximization options that help control the information that is recorded on the server to manage bandwidth and processing costs (see [Advanced Settings](#)). As part of this feature, the process cmdline field for parent processes store also store the cmdlines of their child processes (childprocs) that are affected by a retention setting. This is done because these childprocs do not have process documents of their own to store this information and so the expanded parent cmdline provides a way to search cmdlines for processes no longer recorded separately.

A side-effect of including the cmdlines of these childprocs in the parent's cmdline info is that a cmdline search intended to match only the parent process's cmdline will also match against the children. This can result in the parent process getting falsely tagged as a feed hit based on matching a childproc that was not judged to be interesting enough to justify the creation of a complete process doc. Keep this in mind when choosing Retention Maximization settings.

Searching with Multiple (Bulk) Criteria

You can search for multiple IOCs by using bulk search criteria in both the **Process Search** and **Binary Search** pages. While you could just enter a chain of "ORed" terms, Carbon Black EDR provides special interfaces for bulk searches that do this for you when given a list of terms. You can type or paste multiple terms into a bulk search text box, following these syntax requirements:

- Each term must be on its own line.


- No punctuation is required or allowed (for example, no comma-separated lists or parentheses).
- You must use the “ipaddr:” prefix to successfully use a list of IP addresses in a bulk search.
- For most other types of data, such as md5s, prefixes are optional but more efficient. See [Fields in Process and Binary Searches](#) for a table of search criteria types and their prefixes.

If a bulk search is initiated using terms without prefixes, the search is treated as a generic text search and will match the terms listed to any field. In the case of IP addresses without the “ipaddr” prefix, the search will fail because the terms are dealt with as individual numbers rather than four-part addresses.

Bulk IOC searches can be added to other search criteria or used as the only criteria for a search.

To do a bulk IOC search on the Process Search page:

- 1 On the Process Search page, unless you have already entered some terms to include in your search, click the **Reset Search** button under the search box to start with a fresh search.
- 2 Click **Add Search Terms**. Click the **Choose Criteria** dropdown menu and click **Bulk IOC > IOCs**.
- 3 In the text box, type or paste the list of IOCs to search for, making sure they meet the syntax requirements described in this section. For example:

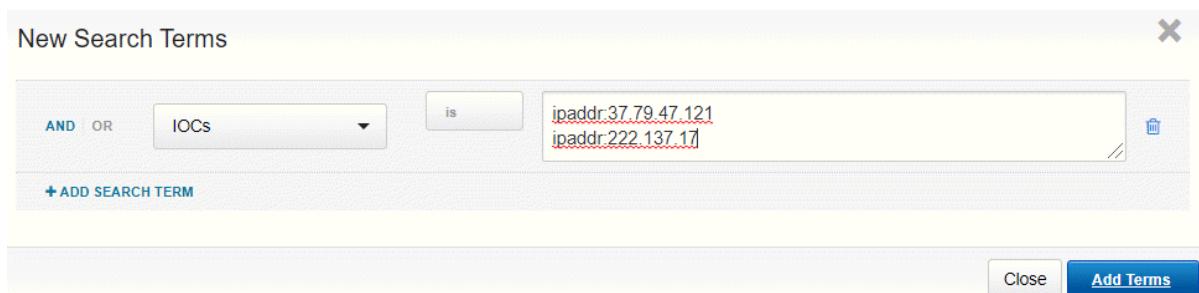


- 4 For most search criteria, you are probably interested in records that match one of the items on your list; however, you also can choose to get results that do not match your terms. Use the **is / is not** toggle in the dialog to make this choice.
- 5 To include additional search criteria, click the **Add Search Term** link.
- 6 When you have finished defining your search, click the **Add Terms** button.

Your search is initiated and the results (if any) are shown in the table on the Process Search page. If necessary, you can continue to refine your search by using the search facet tables or you can manually enter terms.

To do a bulk IOC search on the Binary Search page:

- 1 On the Binary Search page, unless you have already entered some terms to include in your search, click the **Reset Search Terms** button to start with a fresh search.
- 2 Click the **Add Criteria** dropdown menu and, under **Bulk search**, select **IOCs**.

3 In the text box, type or paste the list of IOCs to search for, making sure they meet the syntax requirements described in this section.

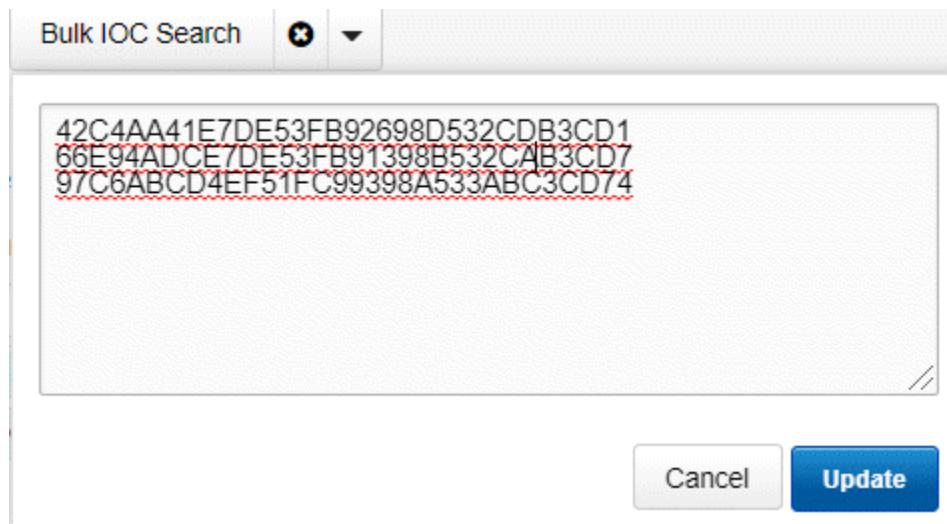

4 Click **Update** to apply the search terms.

Your search is initiated and any results are shown in the table on the Binary Search page. If necessary, you can continue to refine your search using the search facet tables or by manually entering terms.

Searching with Binary Joins

Some binary search fields can be used as part of a process search query. (For more information, see [Fields in Process and Binary Searches](#).)

In this case, the results returned are process instances that are backed by binaries that match the binary search criteria. This is called a joined search. For example, consider submitting the following query on the **Process Search** page:

```
digsig_result:Unsigned
```

This query returns all process instances that are backed by an unsigned MD5. By default, join searches are performed against the MD5 of the standalone process executable (process_md5). However, joined searches can also be performed against the MD5 of the following related events:

- filewrites = <binary field>_filewrite
- parent processes = <binary_field>_parent
- child processes = <binary_field>_child
- modloads = <binary_field>_modload

Specify the search by adding the following suffixes to the end of the binary search field:

- filewrite

- parent
- child
- modload

For example:

```
digsig_result_modload:Unsigned
```

This query returns all process instances that have loaded an unsigned module.

Note Process searches involving large binary joins are blocked by default beginning in Carbon Black EDR 6.2.3. See [Managing High-Impact Queries](#) to modify this behavior.

Example Searches

Process Search Examples

Example Query Strings	Result
domain:www.carbonblack.com	Returns all processes with network connections to or from domains matching the given FQDN.
domain:.com	Returns all processes with network connections to or from domains matching *.com
domain:.com.*	Returns all processes with network connections to or from domains matching the form *.com.*
domain:www.*	Returns all processes with network connections to or from domains matching the form www.*
domain:microsoft	Returns all processes with network connections to or from domains matching *.microsoft OR *.microsoft.* OR microsoft.*
ipaddr:127.0.0.1	Returns all processes with network connections to or from IP address 127.0.0.1
ipaddr:192.168.1.0/24	Returns all processes with network connections to or from IP addresses in the network subnet 192.168.1.0/24
ipv6addr:fe00:b9:266:2011:28dc:43d4:3298:12e2	Returns all processes with network connections to or from IPv6 address fe00:b9:266:2011:28dc:43d4:3298:12e2
ipv6addr:fe00:b9:266:2011::0/50	Returns all processes with network connections to or from IPv6 addresses in the range of network subnet fe00:b9:266:2011::0/50
modload:kernel32.dll	Returns all processes that loaded a module kernel32.dll (accepts path hierarchies).
modload:c:\windows\system32\sxs.dll	Returns all processes that loaded a module matching path and file sxs.dll (accepts path hierarchies).
path:c:\windows\system32\notepad.exe	Also returns all processes with the matching path (accepts path hierarchies).

Example Query Strings	Result
regmod:\registry\machine\system\ currentcontrolset \control\deviceclasses*	Returns all processes that modified a registry entry with the matching path (accepts path hierarchies).
<p>Note Substitute “controlset001” or “controlset002” with “currentcontrolset”, as shown in this example query string. The regmod event in the process document still uses the original string, but searches must always use “currentcontrolset”.</p> <p>regmod searches must include the complete path string or use wildcards.</p> <p>Searches for partial regmod paths without wildcards never yield results.</p>	
path:excel.exe	Returns all processes with the matching path (accepts path hierarchies).
cmdline:backup	Returns all processes with matching command line arguments.
hostname:win-5ikqdnf9go1	Returns all processes executed on the host with matching hostname.
group:"default group"	Returns all processes executed on hosts with matching group name (use of quotes are required when submitting two-word group names).
host_type:workstation	Returns all processes executed on hosts with matching type (use of quotes are required when submitting two-word host types).
username:system	Returns all processes executed with the matching user context.
process_name:java.exe	Returns all processes with matching names.
parent_name:explorer.exe	Returns all processes executed by a parent process with matching names.
childproc_name:cmd.exe	Returns all processes that executed a child process with matching names.
md5:5a18f00ab9330ac7539675f3f326cf11	Returns all processes, modified files, or loaded modules with matching MD5 hash values.
process_md5:5a18f00ab9330ac7539675f3f326cf11	Returns all processes with matching MD5 hash values.
parent_md5:5a18f00ab9330ac7539675f3f326cf11	Returns all processes that have a parent process with the given MD5 hash value.
filewrite_md5:5a18f00ab9330ac7539675f3f326cf11	Returns all processes that modified a file or module with matching MD5 hash values.
childproc_md5:5a18f00ab9330ac7539675f3f326cf11	Returns all processes that executed a child process with matching MD5 hash values.
<type>_count:*	Returns all processes that have xxx_count field > 0, where type is one of modload, filemod, regmod, netconn, or childproc.

Example Query Strings	Result
<type>_count:10	Returns all processes that have xxx_count field = 10, where type is one of modload, filemod, regmod, netconn, or childproc.
<type>_count:[10 TO 20]	Returns all processes that have xxx_count field \geq 10 and \leq 20, where type is one of modload, filemod, regmod, netconn, or childproc.
<type>_count:[10 TO *]	Returns all processes that have xxx_count field \geq 10, where type is one of modload, filemod, regmod, netconn, or childproc.
<type>_count:[* TO 10]	Returns all processes that have xxx_count field $<$ 10, where type is one of modload, filemod, regmod, netconn, or childproc.
start:2011-12-31	Returns all processes with a start date of 2011-12-31 (as observed on the host).
start:[* TO 2011-12-31]	Returns all processes with a start date earlier than or equal to 2011-12-31 (as observed on the host).
start:[* TO 2011-12-31T22:15:00]	Returns all processes with a start date earlier than or equal to 2011-12-31 at 22:15:00 (as observed on the host).
start:[2011-12-31 TO *]	Returns all processes with a start date later than or equal to 2011-12-31 (as observed on the host).
start:[2011-12-31T09:45:00 TO *]	Returns all processes with a start date later than or equal to 2011-12-31 at 09:45:00 (as observed on the host).
start:*	Returns processes with any start date (as observed on the host).
start:[* TO *]	Returns processes with any start date (as observed on the host).
start:-10h	Returns all processes with a start time between NOW-10h and NOW. Units supported are, h: hours, m: minutes, s: seconds (as observed on the host).
last_update:2011-12-31	Returns all processes last updated on date 2011-12-31 (as observed on the host).
last_update:[* TO 2011-12-31]	Returns all processes last updated on a date earlier than or equal to 2011-12-31 (as observed on the host).
last_update:[* TO 2011-12-31T22:15:00]	Returns all processes last updated on a date earlier than or equal to 2011-12-31 at 22:15:00 (as observed on the host).
last_update:[2011-12-31 TO *]	Returns all processes last updated on a date later than or equal to 2011-12-31 (as observed on the host).
last_server_update:[2011-12-31T09:45:00 TO *]	Returns all processes last updated on a date later than or equal to 2011-12-31 at 09:45:00 (as observed at the server).
last_server_update:*	Returns processes with any update date (as observed on the server).

Example Query Strings	Result
last_server_update:[* TO *]	Returns processes with any update date (as observed on the server) within the range provided.
last_server_update:-10h	Returns all processes last updated between NOW-10h and NOW. Units supported are h: hours, m: minutes, s: seconds (as observed on the server).
process_id:<guid>	Returns the process with the given process id, where <guid> is a signed 64-bit integer.
parent_id:<guid>	Returns the process with the given parent process id, where <guid> is a signed 64-bit integer.
sensor_id:<guid>	Returns processes executed on host with given sensor id, where <guid> is an unsigned 64-bit integer.

Binary Search Examples

Example Query Strings	Result
md5:5a18f00ab9330ac7539675f326cf11	Returns all binaries with matching MD5 hash values.
digsig_publisher:Oracle	Returns all binaries with a digital signature publisher field with a matching name.
digsig_issuer:VeriSign	Returns all binaries with a digital signature issuer field with a matching name.
digsig_subject:Oracle	Returns all binaries with a digital signature subject field with a matching name.
digsig_prog_name:Java	Returns all binaries with a digital signature program name field with a matching name.
digsig_result:Expired	Returns all binaries with a digital signature status of <status> .
digsig_sign_time:2011-12-31	Returns all binaries with a digital signature date of 2011-12-31.
digsig_sign_time:[* TO 2011-12-31]	Returns all binaries with a digital signature date earlier than or equal to 2011-12-31.
digsig_sign_time:[2011-12-31 TO *]	Returns all binaries with a digital signature date later than or equal to 2011-12-31.
digsig_sign_time:*	Returns binaries with any digital signature date.
digsig_sign_time:[* TO *]	Returns binaries with any digital signature date within the range provided.
digsig_sign_time:-10h	Returns all binaries with a start time between NOW-10h and NOW. Units supported are h: hours, m: minutes, s: seconds.
<type>_version:7.0.170.2	Returns all binaries with matching version, where <type> is product or file.
product_name:Java	Returns all binaries with matching product name.
company_name:Oracle	Returns all binaries with matching company name.
internal_name:java	Returns all binaries with matching internal name.

Example Query Strings	Result
original_filename:mtxoci.dll	Returns all binaries with matching filename.
observed_filename:c:\windows\system32\mtxoci.dll	Returns all binaries that have been observed to run on or were loaded with the given path.
<type>_mod_len:[* TO 10]	Returns all binaries that have <type>_mod_len (module length in bytes) field < 4096, where type is original or copied.
<type>_desc:"database support"	Returns all binaries that have <type>_desc field with matching text, where type is file or product.
legal_<type>:Microsoft	Returns all binaries with matching legal_<type> field text, where type is trademark or copyright.
<type>_build:"Public version"	Returns all binaries with matching <type>_build field text, where type is special or private.
is_executable_image:True or False	Boolean search (case insensitive) returning all binaries that are executable or not executable.
is_64bit_:True or False	Boolean search (case insensitive) returning all binaries that are 64-bit or not 64-bit.
watchlist_4:[2014-04-01 TO 2014-09-31]	Returns all binaries that matched watchlist 4 during the time period shown.

Threat Intelligence Search Examples

Any document matching a threat intelligence feed is tagged with an `alliance_score_<feed>` field, where the value is a score from -100 to 100.

For more information, see [Chapter 17 Threat Intelligence Feeds](#).

`<feed>` is the “short name” of the threat intelligence feed, such as `nvd` or `isight`.

For any threat intelligence feed, you can click the **View Hits** button to discover the feed’s short name. For more information, see [Chapter 17 Threat Intelligence Feeds](#).

Example Query Strings	Result
alliance_score_<feed> :*	Returns all binaries that have <feed> score > 0.
alliance_score__score_<feed> :10	Returns all binaries that have <feed> score = 10.
alliance_score__score_<feed> :[10 TO 20]	Returns all binaries that have <feed> score >= 10 and <= 20.
alliance_score__score_<feed> :[10 TO *]	Returns all binaries that have <feed> score >= 10.
alliance_score__score_<feed> :[* TO 10]	Returns all binaries that have <feed> score < 10.

Ingress Filtering

16

Ingress filtering is a technique to manage data retention. For general information about ingress filters and their use, read [CB Response Managing Retention and System Capacity](#) before you set up your ingress filters. This chapter describes how to perform common tasks related to ingress filters.

This chapter includes the following topics:

- [Overview of Ingress Filtering](#)
- [Viewing and Configuring Ingress Filters](#)
- [Regex Filters](#)

Overview of Ingress Filtering

In previous versions of Carbon Black EDR, ingress filters could only be set up by using an API. With the release of Carbon Black EDR 7.1.0, global administrators can view, create, modify, and delete ingress filters in the Carbon Black EDR console.

Note Not all features or fields are currently exposed in the console. Advanced usage might require using the API. See [Ingress Filter Details](#) for information about using the API.

Viewing and Configuring Ingress Filters

To access the Ingress Filters page:

- Click Username > Settings and then click Ingress Filters.

Ingress Filters						
Filter Name	Filters	Sensor Scope	OS Scope	Descendant Filtering Level	Added By	Actions
Example Command Line Filter	Command lines: • rxijpowershell.exe Noisy-Cmd	Sensor group(s) • Default Group		 0	admin	<button>Actions</button>
Example Path Filter	Paths: • /path/to/binary	Global		0	admin	<button>Actions</button>
Limit Noise from Child Procs	MD5s: • 54df9a5dcfe5b850d1e 752ddf4b7915e	Global		-1	admin	<button>Actions</button>

The Ingress Filters page shows the following fields:

- **Filter Name** – A unique name for this ingress filter.
- **Filters** – The ingress filter type and definition.
- **Sensor Scope** – Defines whether the ingress filter applies to specific sensor groups, individual sensors, or to all sensors.
- **OS Scope** – Defines the operating systems to which the ingress filter applies.
- Descendant Level – When a process is filtered, you can also filter its children, their children, etc., up to the set number of levels. For example, you can filter by:
 - -1: All descendants
 - 0: Matched process only
 - 1: Matched process and children
 - 2: Matched process, children, and next layer of descendants
 - ... and so on
- **Added by** – The user who added the ingress filter
- **Actions** – Provides a dropdown menu that lets you modify and delete ingress filters.

Adding an Ingress Filter

You can add an ingress filter on the Ingress Filters page or on the Process Search page.

Note Be aware that you cannot modify the name or filter type after you have added the ingress filter. Although you cannot change the filter type (for example, MD5), you can change the value of the filter (the MD5 hash).

To add an ingress filter on the Ingress Filters page:

- 1 Click the Add Ingress Filter button.
- 2 Fill out the following form and then click Add.

Add Ingress Filter

X

Name

Example Path Filter

Filter type

- MD5
- Path
- Command line

path/to/binary

Filter scope

- Global
- Sensor group(s)
- Sensor(s)

Limit filter to these OS types

- Windows
- OS X
- Linux

Descendant filtering level ⓘ

0

Add**Cancel****To add an ingress filter on the Process Search page:**

- 1 On the navigation bar, click Process Search.
- 2 Perform your search and select the process from which to create an ingress filter.

svchost.exe
Running for 3 days, last activity about 3 days ago

Analyze »
View binary »

Create an ingress filter based on this process » (highlighted with a red box)

Signed status: Signed	Hostname: [REDACTED]
Company: Microsoft Corporation	Start time: 2020-02-11T18:40:32.942Z
Product: Microsoft® Windows® Operating System	Path: c:\windows\system32\svchost.exe
Description: Host Process for Windows Services	Command line: C:\WINDOWS\System32\svchost.exe -k LocalSystemNetworkRestricted
Publisher: Microsoft Corporation	Username: SYSTEM
	Logon Type: System

regmods: 67 filemods: 232 modloads: 72 netconns: 0

Time	Type	Description
Wed Feb 12 2020 00:35:23 GMT-0500 (Eastern Standard Time)	filemod	First wrote to c:\windows\prefetch\spssvc.exe-cbe91656.pf
Wed Feb 12 2020 00:35:23 GMT-0500 (Eastern Standard Time)	filemod	Created c:\windows\prefetch\spssvc.exe-cbe91656.pf
Wed Feb 12 2020 00:35:23 GMT-0500 (Eastern Standard Time)	filemod	Deleted c:\windows\prefetch\spssvc.exe-cbe91656.pf
Wed Feb 12 2020 00:35:23 GMT-0500 (Eastern Standard Time)	filemod	First wrote to c:\windows\prefetch\svchost.exe-70bf8ffb.pf
Wed Feb 12 2020 00:35:23 GMT-0500 (Eastern Standard Time)	filemod	Created c:\windows\prefetch\svchost.exe-70bf8ffb.pf

more events can be found on the [analyze](#) page

Close

- 3 Select which filter type to use. It will be pre-filled from the selected process. You can edit the values. You must provide a unique filter name.

After you have added ingress filters, you can modify or delete them by using the Actions dropdown menu options on the Ingress Filters page.

Regex Filters

A filter can match a portion of a field. This is useful when you filter programs that are frequently executed with different command lines, such as powershell.exe or bash. To specify a regex pattern, prefix the path, command line, or MD5 value with `rx|` (or `rx|` to specify a case-insensitive match). Regex patterns must be compatible with the Java 8 Pattern class. See <https://docs.oracle.com/javase/8/docs/api/java/util/regex/Pattern.html>.

For example, the following ingress filter blocks processes where the command line contains "powershell.exe Noisy-Cmd". Other invocations of powershell.exe are not blocked.

Command lines:

```
rxi|powershell.exe Noisy-Cmd
```

Threat Intelligence Feeds

17

This chapter describes threat intelligence feeds that can be enabled on a Carbon Black EDR server to enhance the verification, detection, visibility, and analysis of threats on your endpoints.

This chapter includes the following topics:

- [Overview of Threat Intelligence Feeds](#)
- [Managing Threat Intelligence Feeds](#)
- [Enabling, Disabling, and Configuring a Feed](#)
- [On-Demand Feeds from VMware CB Threat Intel](#)
- [Creating and Adding New Feeds](#)
- [Searching for Threat Reports](#)

Overview of Threat Intelligence Feeds

Threat intelligence feeds are streams of reports about IOCs and patterns of behaviors found in the wild by a variety of services and products. One or more feeds can be integrated into the Carbon Black EDR server and console to enhance the verification, detection, visibility, and analysis of threats on your endpoints.

The source of a feed may be from:

- VMware CB Threat Intel and the Carbon Black Threat Research Team
- A third-party Carbon Black partner
- The information and analysis collected by:
 - VMware CB Threat Intel Reputation
 - App Control threat detection tools
- Shared data collected from Carbon Black EDR customer enterprises

You can also create new feeds if needed. Some feeds do not require data collection from your server, while others require that you share information from your enterprise back to the feed provider to improve community intelligence data.

Available feeds appear on the **Threat Intelligence Feeds** page. You can enable or disable any feed on that page. The Carbon Black EDR server supports the following types of IOCs:

- Binary MD5s
- Binary SHA-256s
- IPv4 addresses
- IPv6 addresses
- JA3 fingerprints
- JA3S fingerprints
- DNS names
- Query-based feeds using the Carbon Black EDR process/binary search syntax to define an IOC

When a feed is enabled and IOCs from it are received, the following information and capabilities are added in Carbon Black EDR:

- **Feed results added to process and binary records** – If an IOC from a feed report matches processes or binaries reported by sensors on your endpoints, the feed results are added to the records for those processes/binaries in Carbon Black EDR. You can search and filter for processes or binaries using a feed report or score. For example, you can create a table of all processes whose National Vulnerability Database score is greater than 4.
- **Feed-based watchlists** – You can create a Carbon Black EDR watchlist that tags a process or binary found on one of your endpoints when the score of a feed matches a specified score or falls within a specified score range.
- **Feed-based alerts** – You can configure console and email alerts when a process or binary, which is the subject of a specified feed report, is identified on an endpoint.
- **Links to feed sources** – You can link back to the source of a feed for more information, which can range from a general feed description to specific details about an IOC reported by that feed.
- **Threat Report Search** – You can search for individual threat reports from any feed that is or has been enabled.

Threat Intelligence Feed Scores

The threat intelligence feed score spectrum is as follows:

- A negative 100 (-100) score means a feed is extremely trustworthy (not in any way malicious). These scores are rare.
- A positive 100 (100) score means that a feed is extremely malicious.

Most scores will be within the 0-100 range.

Firewall Configuration for Feeds

To receive all of the threat intelligence available from VMware CB Threat Intel, you must allow SSL access (port 443) through your firewall to the following domains:

- api.alliance.carbonblack.com:443
- threatintel.bit9.com:443

Blocking either of these will prevent your Carbon Black EDR server from receiving intelligence from specific feeds as well as data, such as IP location and icon matching for files.

Managing Threat Intelligence Feeds

On the **Threat Intelligence Feeds** page, you can:

- View the available feeds and get more information about them
- Enable or disable feeds
- Configure alerts and logging for feeds
- Change the rating used to calculate the severity assigned to IOCs from a feed
- Sync one or all feeds
- Check for new feeds
- Add a new feed
- Delete user-defined feeds
- Search for threat reports

VMware CB Threat Intel feeds are feeds that Carbon Black EDR makes available from Carbon Black EDR sources and third-party partners. These feeds can be enabled and (in some cases) disabled, but they cannot be deleted from the page.

Certain reports come from VMware CB Threat Intel as on-demand feeds, and these do not provide their data until a process on the Process Analysis page matches their information. See [On-Demand Feeds from VMware CB Threat Intel](#) for more details.

The EMET Protection and Banning Events feeds send their respective events to the Carbon Black EDR server regardless of whether they are enabled, but they must be enabled if you want to configure alerts and logging.

To view the Threat Intelligence Feeds page:

- On the navigation bar, click **Threat Intelligence**.

The **Threat Intelligence Feeds** page appears:

Threat Intelligence Feeds

Help ▾ Notifications ▾

Bit9 + CARBON BLACK SOFTWARE REPUTATION TRUST	REPUTATION THREAT	National Vulnerability Database	ADVANCED THREAT	Cb EARLY ACCESS
The Cb Reputation Trust feed provides a level of software trustworthiness. It is necessary to share MD5s of observed binaries with the Carbon Black Alliance to use this feed. More Info	This feed is sourced by Carbon Black and provides an assessment of the risk associated with hashes in your environment. This feed is customer specific, and the customer must share Binary Hashes with the Carbon Black Alliance. More Info	NVD is the U.S. government repository of standards based vulnerability management data. This feed will flag executed applications vulnerable to one or more CVEs with CVSS scores higher than 7.0 from 2013+ for Java, Flash Player, and Adobe Reader applications. More Info	This feed is a list of high-confidence threat indicators, updated periodically. Generally, hits on this feed should be suitable for generating alerts. There are no requirements to share any data to receive this feed. More Info	This feed is a list of beta queries that have not been fully tested and validated. Queries in this feed may generate many false positives, but should also be useful in identifying malicious activity. As these queries are beta, this feed may generate a large volume of hits and it is not fully tested. More Info
<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications
Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾
Actions ▾	Actions ▾	Actions ▾	Actions ▾	Actions ▾
Cb ENDPOINT VISIBILITY	SUSPICIOUS FEED	abuse.ch The Swiss Security Blog	ER Banning Events	
This feed is a list of queries designed to give further visibility into endpoint behavior. Hits on this feed may or may not be indicative of malicious activity. As this feed may generate a large volume of hits, it is not recommended to be used for alert generation. More Info	This feed is a list of queries designed to identify suspicious activities on endpoints. Hits on this feed may or may not be indicative of malicious activity, but are generally more suspicious in nature. As this feed may generate a large volume of hits, it is not recommended to be used for alert generation. More Info	abuse.ch tracks C&C servers for Ransomware, ZeuS, and Fido malware. This feed combines information from the IP, Domain and Binary blacklists.	This feed contains intelligence provided by AlienVault's Open Threat Exchange (OTX). It leverages insights into attacks across the community and will show you hostile scanning hosts, malware hosts, and other targeting and security event information. More Info	
<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications
Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾
Actions ▾	Actions ▾	Actions ▾	Actions ▾	
Cb COMMUNITY	ER EMET Protection	ER Tamper Detection	ThreatExchange	Cb KNOWN IOC FEED
This is a feed containing Carbon Black community produced detection queries. These queries have been publicly posted to the Carbon Black User eXchange site in the Detection Exchange group. The are no sharing requirements to receive this feed. More Info	This feed reports on EMET events observed on the endpoint. There are no requirements to share any data to receive this feed. More Info	This feed reports on actions potentially indicative of sensor tampering. Alerts indicate changes to the Carbon Black configuration, attempted changes to the running sensor process or unloading Cb drivers. More Info	This is an exchange of maliciously labeled TLP White threat indicators including domain names, IPs and hashes. Facebook ThreatExchange provides this data, which is a subset of the data available to members. More Info	This feed is comprised of Indicators of Compromise that have been linked to known malware. There are no requirements to share any data to receive this feed. More Info
<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications
Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾
Actions ▾	Actions ▾	Actions ▾	Actions ▾	
SANS	Tor	Cb INSPECTION	ThreatConnect	ATT&CK Advanced Threat Analytics
Know Abnormal - Find Evil. It's often impossible to know malicious behavior before you see it, but we do know what common behaviors are normal or benign. Spotting the difference between normal and abnormal is often the difference between success and failure. Use More Info	This feed is a list of all Tor relay IP addresses, updated every 30 minutes. A subset of this feed are Tor exit relays. There are no requirements to share any data to receive this feed. More Info	This feed contains reports for files that have been analyzed using Carbon Black Inspection Services. These reports may contain scoring and links to results from various services that your Carbon Black installation has opted into, potentially including detonation and More Info	Threat intelligence data provided by ThreatConnect to the Carbon Black Community. There are no requirements to share any data to receive this feed. More Info	This feed is a list of ATT&CK Framework queries designed to aid practitioners with threat hunting. Hits on this feed may or may not be indicative of malicious activity. As this feed may generate a large volume of hits, it is not recommended to be used for alert generation. More Info
<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications	<input checked="" type="checkbox"/> Enabled <input type="checkbox"/> Email Me On Hit <input type="checkbox"/> Notifications
Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾	Process Matches ▾ Binary Matches ▾ Threat Reports ▾
Actions ▾	Actions ▾	Actions ▾	Actions ▾	Actions ▾

The **Tamper Detection** feed is enabled by default. It alerts on endpoint activity that indicates tampering with sensor activity:

You must enable other feeds. See [Enabling, Disabling, and Configuring a Feed](#). See [Creating and Adding New Feeds](#) for information about adding user-defined feeds.

Checking for New Threat Intelligence Feeds

Carbon Black EDR works with a variety of partners to provide threat intelligence feeds for the Carbon Black EDR server. You can add new partners and feeds to your server.

The **Check for new feeds** option on the **Threat Intelligence Feeds** page lets you check for the most recent feeds. It also removes feeds if they are no longer available. (However, existing reports and tagged processes/binaries will still identify these feeds.)

To check for new Threat Intelligence feeds:

- 1 On the **Threat Intelligence Feeds** page, click the Action menu (down-arrow at the top of the page) and click **Check for new feeds**.
- 2 If new feeds are available, they are added to the **Threat Intelligence Feeds** page.

Syncing Threat Intelligence Feeds

Threat intelligence feeds are updated periodically by the feed sources. To make certain that all feeds are up-to-date, use the **Sync All** command.

To sync all threat intelligence feeds on the page:

- 1 On the **Threat Intelligence Feeds** page, click the Action menu (down-arrow at the top of the page) and click **Sync All**.
- 2 All feeds are synced with the latest data on the **Threat Intelligence Feeds** page.

Note You can sync feeds individually. Sync commands for individual feeds are available on the Action menu in the feed panel. See [Syncing Threat Intelligence Feeds](#).

Data Sharing Settings

Most of Carbon Black's threat intelligence feed partners provide a list of all of the IOCs they track, and almost all feeds require that you enable communication on the Sharing Settings page. Also, some feeds require that you enable data sharing.

Important Management of Sharing Settings is only available to Carbon Black EDR Global Administrators and Carbon Black Hosted EDR Administrators.

To enable sharing communications:

- 1 Click *Username* > **Sharing Settings**.
- 2 Under General Sharing Settings, specify sharing settings for Alliance:
 - **Enable Alliance Communication** – Enables communication with Carbon Black. It also allows download of binaries from the Alliance and the ability to retrieve Alliance feeds.

- **Support the Alliance Threat Intelligence Community** – Enables your server to send threat intelligence statistics to Carbon Black, including alert resolutions, ignored reports, and feed ratings. These statistics improve the efficacy of Carbon Black-provided threat intelligence and give you a community consensus on the ratings of feeds and threat indicators.

3 Specify sharing settings for statistics and diagnostics data:

- **Enable Performance Statistics** – Enables sharing of usage, resource, and sensor statistics with Carbon Black.
- **Allow Unattended Background Upload of Diagnostics Data** – Enables the Carbon Black EDR server to do background collection of diagnostics data such as application logs and configuration files to facilitate troubleshooting with Carbon Black Customer Support. Requires Enable Performance Statistics to be enabled.
- **Allow Upload of Sensor Diagnostics Data** – This setting determines whether the Carbon Black EDR server can upload diagnostics data gathered from deployed endpoint sensors to Carbon Black for troubleshooting. Options are as follows:
 - **Disabled** – No sensor diagnostics data can be uploaded to Carbon Black.
 - **Manual** – You can manually upload sensor diagnostics data by using a utility that is installed on the sensor.
 - **Automatic** – Sensor diagnostics data is automatically uploaded when fault conditions are detected on the sensor.

Note **Manual** or **Automatic** upload of sensor diagnostics data requires the **Enable Performance Statistics** option to be selected.

To enable data sharing with Carbon Black threat intelligence feed partners:

- 1 On the **Sharing** page, scroll to **Endpoint Activity Sharing** :


Endpoint Activity Sharing

Some threat analysis requires additional information regarding endpoint activity. If you opt in to this additional functionality, the analysis will be performed by Carbon Black or the specified third parties. Details regarding the data collected and processed are set below.

	Carbon Black
Binary Hashes & Metadata	PARTIAL
Complete Binaries	PARTIAL
Response Event Data	PARTIAL

Note To enable data sharing with feed partners in the Carbon Black Alliance, **Enable Alliance Communication** must first be selected.

- 2 Decide whether to share the following types of data with Carbon Black or VMware CB Inspection (Complete Binaries only):
 - Binary Hashes & Metadata
 - Complete Binaries
 - Response Event Data
- 3 Click the current setting (Enabled, Disabled, or Partial) to specify the default sharing setting for sensor groups.
In the resulting Share dialog box, read the **Summary**, **Data Shared**, and **Privacy** sections carefully before making further selections.
- 4 The following options are available at the bottom of each Share dialog box:
 - a Select **Enable (Share from ALL Groups)** to share data from endpoints in all sensor groups.
 - b Select **Disable (Do Not Share from ANY Groups)** to disable data sharing from endpoints in all sensor groups.
 - c Select **Partial (Share from SOME Groups)** to share data from endpoints in some sensor groups. Use the arrows between the **SHARE FROM** and **DO NOT SHARE FROM** windows to choose the groups that are allowed to share data.

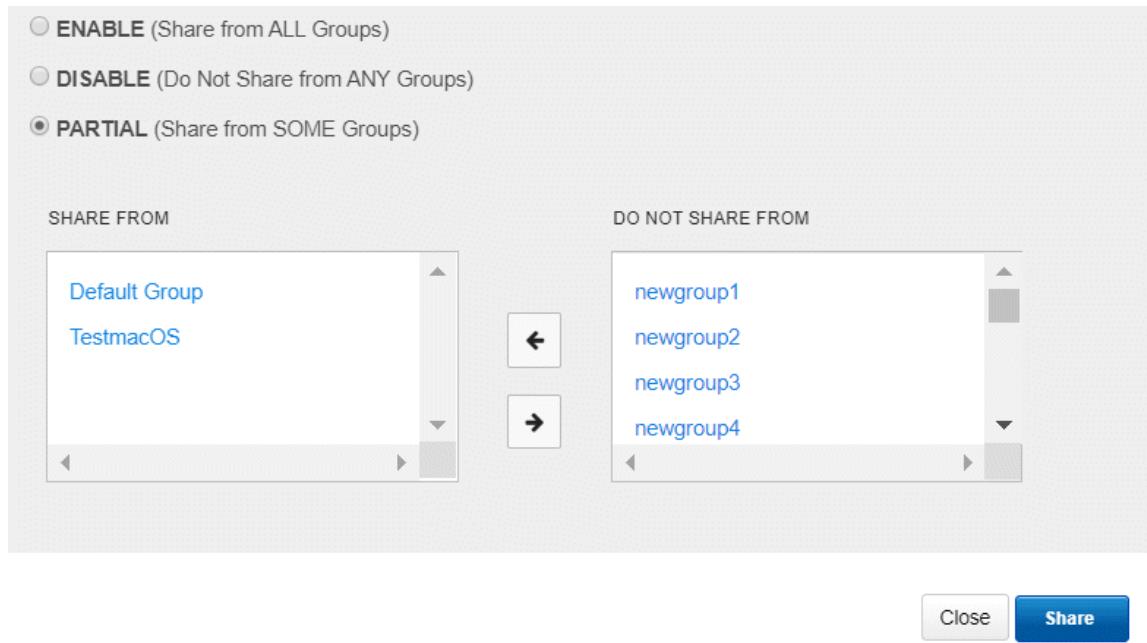

- Click **Share** to begin sharing the data.

Enabling, Disabling, and Configuring a Feed

Each feed that is available on a Carbon Black EDR server is represented by a panel on the **Threat Intelligence Feeds** page. The panel provides information about the feed and allows you to enable, disable, and configure it.

To enable and configure a threat intelligence feed:

- In the navigation bar, select **Threat Intelligence**.
- Locate the feed and click **Enabled**.
- Configure the feed using the following options and controls:

Field/Menu	Description
More info	Link to the feed provider's website for technical information about the feed and general information about the provider and its products.
(Rating)	Rating of this threat intelligence feed by the community of Carbon Black EDR users. The default rating is three stars. You can click a star to modify the rating of this feed on your server. The rating affects the severity assigned to alerts coming from this feed, which can affect the order of alerts if they are sorted by severity.
Enabled	If selected, the threat intelligence feed is enabled; otherwise it is disabled. Note Most feeds also require that you select Enable Alliance Communication on the Sharing page. Also, feeds that upload data from your server require that you opt into hash sharing with that feed. See Data Sharing Settings .

Field/Menu	Description
Email Me on Hit	<p>IOCs from this feed that reference a process or binary that is recorded on this Carbon Black EDR server cause an email alert to be sent to the logged-in console user. See Enabling Email Alerts.</p> <p>Only Carbon Black EDR Global Administrators or Carbon Black Hosted EDR Administrators can change this setting.</p>
Notifications menu	<ul style="list-style-type: none"> ■ Create Alert – Indicators from this feed that reference a process or binary that is recorded on this Carbon Black EDR server cause a console alert. See Enabling Console Alerts. ■ Log to Syslog – IOCs from this feed that reference a process or binary that is recorded on this Carbon Black EDR server are included in Syslog output from this Carbon Black EDR server. See the VMware Carbon Black EDR <i>Integration Guide</i> on the VMware Carbon Black User Exchange for details on configuring SYSLOG output. <p>Only Carbon Black EDR Global Administrators or Carbon Black Hosted EDR Administrators can change this setting.</p>
Process Matches	<p>Link to the Process Search page with the results of a search that shows each process that matches IOCs from this feed. See Chapter 13 Process Search and Analysis.</p>
Binary Matches	<p>Link to the Binary Search page with the search results showing each binary that matches IOCs from this feed. See Chapter 14 Binary Search and Analysis.</p>
Threat Reports	<p>Link to the Threat Reports search page filtered to show any Threat Reports from this feed. See Searching for Threat Reports.</p>
Actions menu	<p>The Actions menu includes the following commands:</p> <ul style="list-style-type: none"> ■ Create Watchlist – Creates a Watchlist, which is a saved search whose results are processes or binaries that match IOCs that this feed reports. ■ Incremental Sync – Adds report data from this feed that has been observed since the previous synchronization. ■ Full Sync – Rewrites all report data from this feed.

To disable a threat intelligence feed:

- 1 On the navigation bar, click **Threat Intelligence** and identify the feed to disable.
- 2 Deselect the **Enabled** check box within that feed panel.

If you disable a feed, its reports remain on the server and incoming data will be tagged against the locally existing IOCs that it reported. However, when you disable a feed:

- Reports from these feeds about IOCs will not be downloaded for scanning.
- For feeds that require data to be sent to them, new binary MD5s from your sensors will not be sent.

On-Demand Feeds from VMware CB Threat Intel

VMware CB Threat Intel provides a rich variety of intelligence and capabilities about files, domain names, IP addresses, and associated patterns of compromise, including IOCs, reputation, and attack classification.

Examples of these intelligence types include:

- Trust and threat ratings

- Domain/IP reputation and context
- Icon matching to help identify threats masquerading as files of another type
- Detection feeds of behavioral patterns of compromise

Some of this intelligence can be enabled or disabled through feeds listed on the **Threat Intelligence Feeds** page, and this information is added to process data as soon as the feed is received.

Other intelligence is made available to the Carbon Black EDR server when a process, pattern, or other IOC that is part of the VMware CB Threat Intel database is viewed on the **Process Analysis** page. The information in these on-demand feeds includes:

- **Damballa malware classification and context** – VMware CB Threat Intel provides an enhanced network-to-endpoint attack classification through its integration with Damballa's threat intelligence on malicious destinations, advanced threat actor groups, and command-and-control communications. This information is added to attack classifications when a **Process Analysis** page containing a relevant domain name is displayed.
- **Geolocation information for network connections** – The location of addresses identified in both inbound and outbound connections is provided.
- **Domain and IP reputation** – VMware CB Threat Intel computes a reputation score for domains using various inputs, information, and algorithms inside the cloud. This reputation score is displayed for domain names for which a score is available.

Note For on-demand feed information to become available and displayed for a process, the sensor group for which the process was reported must be configured to send relevant data to the VMware CB Threat Intel for analysis. This requires explicitly opting in to share Carbon Black EDR events with Carbon Black Threat Intel. This is not enabled by default; you can enable it in the Response Event Data row in the Endpoint Activity Sharing section of the Sharing page. See [Data Sharing Settings](#) .

Creating and Adding New Feeds

You can create and add new threat intelligence feeds to a Carbon Black EDR server. A feed can be created in any language that allows for building JSON, or you can build it by hand. One way to build a feed is to use the Carbon Black Feeds API (CBFAPI), found on github at:

<https://github.com/carbonblack/cbfeeds>

The CBFAPI is a collection of documentation, example scripts, and a helper library to help create and validate Carbon Black EDR feeds. Regardless of how a feed is created, the feed file must match the feed structure (or schema) that the "Feed Structure" section of the CBFAPI documentation defines.

You have several options about the specification you provide when adding a new feed to a Carbon Black EDR server. The minimum requirement is that you provide a URL to the feed.

To add a new threat intelligence feed to the server:

- 1 Confirm that the feed you have created follows the “Feed Structure” instructions in the CBF API documentation on github.
- 2 On the navigation bar, select **Threat Intelligence** .
- 3 On the **Threat Intelligence Feeds** page, click **Add New Feed** .
- 4 In the **Edit Alliance Feed** dialog box, do one of the following:
 - To add a feed from a URL, click the **Add from URL** tab and complete the following settings:

Field	Description
Feed URL	Enter the URL for the feed itself that will be providing IOC reports.
Use Proxy	Select this option to use a proxy for the feed URL. The configuration for this proxy must be configured in advance by Carbon Black Technical Support.
Validate Server Cert	Select this option to require a validation check on the feed server’s certificate.
Show/Hide Feed Server Authentication Options	If the server that is providing the feed requires authentication, click the Show ServerAuthentication Options link and provide the following authentication information: <ul style="list-style-type: none"> ■ Username ■ Password ■ Public Cert ■ Private Key

- To manually add a feed, click the **Add Manually** tab and complete the following settings:

Field	Description
Name	Enter the feed name to appear in the panel.
Feed URL	Enter the URL that the Carbon Black EDR server will use to sync the data in the feed.
Provider URL	Enter the URL to the page to open when the user clicks More Info on the feed panel.
Summary	Enter the text that will appear in the panel to describe this feed.
Use Proxy	If the Carbon Black EDR server must access the feed URL through a proxy, the proxy is added in the proxy field.
Validate Server Cert	Indicates if the Carbon Black EDR server should validate the Feed Server certificate.
Show/Hide Feed Server Authentication Options	If the server providing the feed requires authentication, click the Show ServerAuthentication Options link and provide the following authentication information: <ul style="list-style-type: none"> ■ Username ■ Password ■ Public Cert ■ Private Key

- 5 Click **Save** .

If the settings you entered provide access to a feed server, the new feed appears on the **Threat Intelligence Feeds** page.

Searching for Threat Reports

You might want to obtain more information on the report types that are provided by a particular feed, or you might want to explore specific reports.

Suppose you want to filter out a high volume of uninteresting reports from a feed that you otherwise you find useful. You can search for those reports on the Threat Intelligence Feeds page and mark them to be ignored in the future.

You can also search for all reports or perform a search on a page that is pre-filtered for one feed.

To open the Search Threat Reports page (unfiltered):

- 1 On the navigation bar, click **Threat Intelligence** and click **Threat Report Search**.

Description	Indicators	Report Score	Ignore
threatconnect Common Community 1882043773 🕒 Updated a year ago	MD5s: 0, SHA-256s: 0, IPs: 1, Domains: 0, Queries: 0	100	No <input checked="" type="checkbox"/>
threatconnect Common Community 1920668061 🕒 Updated a year ago	MD5s: 0, SHA-256s: 0, IPs: 1, Domains: 0, Queries: 0	100	No <input checked="" type="checkbox"/>

- 2 In the **Search Threat Reports** page, enter search criteria to search for the reports in which you are interested. See [Threat Report Searches and Results](#).

To display a table of reports from one threat intelligence feed:

- 1 On the **Threat Intelligence Feeds** page, click the **Threat Reports** link at the bottom of the panel for the feed that contains reports to view.

The **Search Threat Reports page** displays reports from the selected feed.

You can further refine the search by using the available search options.

Threat Report Searches and Results

The **Search Threat Reports** page is divided into three major sections:

- The top section includes the following:
 - **The Search** field and button.
 - The **Add Criteria** button, which opens a **Search Criteria** page.
 - The **Reset search terms** button, which resets the search and removes any search criteria you have added.
 - The **Actions** menu, which applies to the entire page.
- The middle section contains a series of filters that include the following:
 - **Feed Name** – A list of the short names (for example, “nvd” for National Vulnerability Database) of each feed that has produced a report, and the percentage of all reports that have been produced by each feed.
 - **Feed Category** – A list of feed categories and the percentage of all reports that each feed category produces. Categories can include:
 - **Open Source** – For example, Tor or Malware Domain List.
 - **Partner** – A member of the CB Threat Intel Partners.
 - Carbon Black EDR **first party** – Feeds supplied directly from App Control or Carbon Black EDR products or services.
 - **Report Score** – A graph of the number of reports at different score levels.
 - **Report Creation Time** – A graph of the number of reports by creation date.
- The **Reports** table shows details for reports that match the search criteria. You can sort the reports by severity, most recently updated, or most recently added.

The **Search Threat Reports** page presents the following report data:


Column	Description
Description	This column includes: <ul style="list-style-type: none"> ■ The name of the feed that provided the report ■ The name of the specific report ■ The time elapsed since the report was received
Indicators	The column includes the number of certain elements in the report that were identified as threats: <ul style="list-style-type: none"> ■ MD5s – the number of suspicious files matching the MD5 hash ■ SHA-256s – the number of suspicious files matching the SHA-256 hash ■ IPs – the number of suspicious IP addresses ■ Domains – the number of suspicious domains ■ Queries – the number of queries in the report; depending on the feed, this value might be empty.
Report Score	The threat score of this report. Report scores range from minus 100 to 100, with lower scores indicating a lower threat and higher scores indicating a higher threat. Threat scores are used in the calculation of alert severity.

Column	Description
Ignore	Ignore any future instances of this report, so that they do not trigger alerts. See Ignoring Future Reports .
Details link	Opens a Threat Report Details page for the report in this row. See Threat Report Details .

Threat Report Details

Click the **Details** link in the far right column of a report in the **Threat Report Search Reports** table to see details for that threat report, if available.

 Common Community 1882043773
ThreatConnect Carbon Black Community

Report Details	Feed Description	
ID	659081	Threat intelligence data provided by ThreatConnect to the Carbon Black Community
Link	https://app.threatconnect.com/auth/indicators/details/address.xhtml?address=188.32.8.185&owner=Common+Community	
Updated	Tue Dec 11 2018 11:47:04 GMT-0500 (Eastern Standard Time)	
MD5s	none	
SHA-256s	none	
IPs	1	
Domains	none	
Queries	none	
Report Tags	Report Description	
• threatconnect	Report Score	
	 100 HIGH THREAT -100 100	
	Ignore this Report? <input type="checkbox"/>	
Report Indicators	Indicator	
Type		
IP		

The information on the **Threat Report Details** page varies depending on the feed source and type of indicator. The following table describes the fields on this page.

Field	Description
Title	The feed name and the unique ID of the report.
Report Details	This section includes: <ul style="list-style-type: none"> ■ ID – the unique ID of the report ■ Link – if available, a link to the report on the website of the feed source ■ Updated – when the report was last updated ■ MD5s – the number of suspicious MD5s ■ SHA-256s – the number of suspicious SHA-256s ■ IPs – the number of suspicious IP addresses ■ Domains – the number of suspicious domains ■ Queries – the number of queries in the report.
Report Tags	One or more descriptive strings from the feed provider to help explain what the report is about. For example, tags can describe a specific threat, a threat category, a targeted industry, a known threat actor, or geographic information. Not all reports have tags.
Feed Description	The description of the feed given by the provider.
Report Description	The description of this report from the feed provider.
Report Score	The threat score of this report. Report scores range from minus 100 to 100, with lower scores meaning lower threat and higher scores meaning higher threat. Threat scores are one factor in the calculation of Alert severity.

Field	Description
Ignore this Report?	Ignore any future instances of this report so that they do not trigger alerts.
Report Indicators	A table of indicators that the report references (IPs, MD5s, SHA-256s, domains, queries). If the Type is MD5, clicking the indicator name links to the Binary Search page for that MD5.

Ignoring Future Reports

Feeds use a variety of criteria to decide whether a file or site is a threat, and you might not agree with the threat level that is indicated by all of the reports generated by certain feeds. When you review reports and determine that a report is not reporting an actual threat, you can ignore any future instances of reports by the same name.

To ignore reports, use one of the following options:

- On the **Search Threat Reports** page, on the Actions menu, click **Ignore all reports matching this search** .
- In the results table on the **Search Threat Reports** page, you can set the **Ignore** button for one report to **Yes** .
- On the **Threat Report Details** page, you can set the **Ignore this Report** button for one report to **Yes** .

You can also mark events to be ignored using the **Triage Alerts** page. See [Ignoring Future Events for False Positive Alerts](#).

Configuring the Event Forwarder

18

This chapter explains how to configure the Event Forwarder through the Carbon Black EDR console.

This chapter includes the following topics:

- [Overview of the Event Forwarder](#)
- [Configuring the Event Forwarder in the Console](#)

Overview of the Event Forwarder

The Carbon Black EDR Event Forwarder is a standalone service that can export events (both watchlist/feed hits and raw endpoint events, if configured) from the Carbon Black EDR enterprise bus in a normalized JSON or LEEF format. The events can be saved to a file, delivered to a network service, or automatically archived to an Amazon AWS S3 bucket. These events can be consumed by any external system that accepts JSON or LEEF, including Splunk and IBM QRadar.

The list of events to collect is configurable. By default, all feed and watchlist hits, alerts, binary notifications, and raw sensor events are exported into JSON. The configuration file for the connector is stored in `/etc/cb/integrations/event-forwarder/cb-event-forwarder.conf`.

For details on installing and manually configuring the Event Forwarder, see <https://github.com/carbonblack/cb-event-forwarder>.

With the release of Carbon Black EDR 7.1.0 server, admins can customize the Event Forwarder from directly within the Carbon Black EDR console. Carbon Black EDR customers must install Carbon Black EDR Event Forwarder 3.6.2 or higher (available [here](#)) to use this feature. This version of Event Forwarder is automatically available for Carbon Black Hosted EDR customers.

By default, this feature is enabled for Carbon Black Hosted EDR instances, and disabled for Carbon Black EDR deployments. You can enable the feature for Carbon Black EDR by adding `EventForwarderEnabled=true` in `cb.conf` and restarting services.

AMSI support is available as a beta feature in Carbon Black EDR 7.2 with the Windows 7.1 sensor. The `fileless_scriptload` event represents each occasion when the sensor detected PowerShell script content that was executed by any process on a supported endpoint. For more information about AMSI, see the VMware Carbon Black EDR Integration Guide.

Configuring the Event Forwarder in the Console

To view the Event Forwarder Settings page:

- On the navigation bar, click Event Forwarder.

The Event Forwarder Settings page consists of four sections:

- **Edit and status:** Allows you to edit and save or cancel changes to the configuration, displays the service status, and lets you stop/start the service.
- **Events:** Identifies the events that will be forwarded.
- **Output:** Configures the format and destination for the output.
- **Certificates:** Identifies certificates to use for validation.

Edit and Status

The Edit and Status panel lets you edit the Event Forward configuration, view the current status of the Event Forwarder (Service running or Service stopped), and stop or start the service.

You do not have to stop the service to configure the settings in the Event Forwarder; however, you must stop and restart the service for saved changes to take affect.

Note You must have set up the receiving service and credentials before you configure Event Forwarder for the first time. See <https://github.com/carbonblack/cb-event-forwarder> .

You cannot save the configuration until after you have established a valid configuration in the Output section.

Carbon Black validates the connection as soon as you click Save; therefore, it is important that the connection is viable before you set up forwarded events. If the connection is not viable, the configuration is not saved.

To configure the Event Forwarder (recommended sequence):

- 1 Click Edit at the top of the page and configure your output in the Output panel.
- 2 Click Save. If the connection is viable, the configuration is saved and you can proceed.
- 3 Click Edit and configure the events to be forwarded.
- 4 Click Save.
- 5 Stop and restart the service.

You can click Cancel to revert to the previous settings.

Events

Events

Sensor

Warning: Enabling these events can significantly increase bandwidth, processing, and storage requirements. Proceed with caution.		
<input checked="" type="checkbox"/> ingress.event.process	<input checked="" type="checkbox"/> ingress.event.moduleload	<input checked="" type="checkbox"/> ingress.event.crossprocopen
<input checked="" type="checkbox"/> ingress.event.procstart	<input checked="" type="checkbox"/> ingress.event.module	<input checked="" type="checkbox"/> ingress.event.remotethread
<input checked="" type="checkbox"/> ingress.event.netconn	<input checked="" type="checkbox"/> ingress.event.filmod	<input checked="" type="checkbox"/> ingress.event.procblock
<input checked="" type="checkbox"/> ingress.event.procend	<input checked="" type="checkbox"/> ingress.event.regmod	<input checked="" type="checkbox"/> ingress.event.netmitigation
<input checked="" type="checkbox"/> ingress.event.childproc	<input checked="" type="checkbox"/> ingress.event.tamper	<input checked="" type="checkbox"/> ingress.event.filelessscriptload

Feed

<input checked="" type="checkbox"/> feed.ingress.hit.process	<input checked="" type="checkbox"/> feed.storage.hit.process	<input checked="" type="checkbox"/> feed.query.hit.binary
<input checked="" type="checkbox"/> feed.ingress.hit.binary	<input checked="" type="checkbox"/> feed.storage.hit.binary	
<input checked="" type="checkbox"/> feed.ingress.hit.host	<input checked="" type="checkbox"/> feed.query.hit.process	

Binary information

<input checked="" type="checkbox"/> binaryinfo.observed	<input checked="" type="checkbox"/> binaryinfo.host.observed	<input checked="" type="checkbox"/> binaryinfo.group.observed
---	--	---

Audit logging

<input checked="" type="checkbox"/> audit.log.*

Watchlist

<input checked="" type="checkbox"/> watchlist.hit.process	<input checked="" type="checkbox"/> watchlist.storage.hit.process
<input checked="" type="checkbox"/> watchlist.hit.binary	<input checked="" type="checkbox"/> watchlist.storage.hit.binary

Alert

<input checked="" type="checkbox"/> alert.watchlist.hit.ingress.process	<input checked="" type="checkbox"/> alert.watchlist.hit.ingress.host
<input checked="" type="checkbox"/> alert.watchlist.hit.ingress.binary	<input checked="" type="checkbox"/> alert.watchlist.hit.query.process

Binary upload

<input checked="" type="checkbox"/> binarystore.file.added
--

In the Events panel, you can configure which events are forwarded.

To configure forwarded events:

- 1 Click Edit at the top of the page.
- 2 Select the items to be forwarded by checking the checkboxes next to each item. To deselect an item, uncheck the checkbox.
- 3 If you have configured the Output settings, click Save.

Output

Output

Destination

Type

S3 bucket

 S3-bucket

Required - Format: [<region>]<bucket-name>

Send timeout

The maximum duration allowed to an upload connection before timeout

Max bundle size

The maximum bundle size (in Bytes) to upload to the remote (before compression)

Use server-side encryption

Enables AES256 server-side encryption on uploaded files to the S3 bucket

ACL policy

Policy set on uploaded files

Credential profile

Profile name used to connect to S3

Enable dual stack networking

Necessary for ipv6 only networking

Object prefix

Identifier embedded in path, useful when using multiple Event Forwarders

Use compression

If enabled, compresses the payload before uploading

Format

Format

Certificates and Credentials

Upload CA certificate

Uploads a PEM encrypted CA certificate for use in all output types

Upload client certificate

Uploads a client certificate for use in all output types

Upload AWS credentials

Uploads an AWS credentials file in standard ini format

The output can be in either **LEEF** or **JSON** format, which you select in the Format dropdown menu. The default format is JSON.

You can select from the following types of destinations:

- **Splunk** (the default destination)
- **S3**
- **HTTP**
- **Syslog**

The required output parameters depend on the destination type.

Splunk

The Splunk destination type requires the following information:

Parameter	Description
Splunk HEC Endpoint	Required URL of the Splunk destination endpoint; for example, <code>http://www.example.com</code> .
HEC Token	Required token for HEC authorization.
Server Common Name	Optional. Common name (CN) of the destination server.
Send Timeout	Optional. Maximum duration of an upload connection. The default value is 60 seconds.
Upload Empty Files	Optional. Determines whether zero byte length files are uploaded. The default setting is false.
Max Bundle Size	Optional. The maximum bundle size (in bytes) to upload to the remote destination before compression is applied. The default value is 10MB.
Certificates and Credentials	Optional. Determines whether an uploaded certificate (identified by type) is required for the connection. Also allows you to specify AWS credentials.

S3

The S3 destination type requires the following information:

Parameter	Description
S3 Bucket	Required. The name of the S3 bucket to receive the output. The format must be <code>[<region>:]<bucket-name></code> .
Send Timeout	Optional. Maximum duration of an upload connection. The default value is 60 seconds.
Upload Empty Files	Optional. Determines whether zero byte length files are uploaded. The default setting is false.
Max Bundle Size	Optional. The maximum bundle size (in bytes) to upload to the remote destination before compression is applied. The default value is 10MB.
Server-Side Encryption	Optional. Identifies the type of encryption that is required on the server. The default type is AES256.
ACL Policy	Required. Settings can be READ, WRITE, READ_ACP, WRITE_ACP, or FULL_CONTROL. These are typical permissions: the _ACP permissions also allow read/write to the ACL of the bucket itself. See Access Control List (ACL) Overview . We recommend that you use the default policy, which is “bucket-owner-full-control”.

Parameter	Description
Credential Profile	Required. The profile name that is used to connect to S3 as defined in the Certificates and Credentials section of this page.
Dual Stack Networking	Optional. If unchecked, this setting indicates that this connection will consist of IPv4 addresses only. Enable this setting for IPv6 connections only.
Object Prefix	Optional. Embedded identifier that is useful for multiple Event Forwarders. The object prefix helps distinguish between output from multiple Event Forwarder instances, each of which has a distinct prefix.
Use Compression	Optional. If enabled, the payload is compressed.

HTTP

The HTTP destination type requires the following information:

Parameter	Description
Host Address	Required. URL of the HTTP destination endpoint.
Server Common Name	Optional. Common name (CN) of the destination server.
Send Timeout	Optional. Maximum duration of an upload connection. The default value is 60 seconds.
Upload Empty Files	Optional. Determines whether zero byte length files are uploaded. The default setting is false.
Max Bundle Size	Optional. The maximum bundle size (in bytes) to upload to the remote destination before compression is applied. The default value is 10MB.
Upload Template	Required. Template for formatting the output messages. The required template format to enter in this field is: <code>{"filename": "{{.FileName}}", "service": "carbonblack", "alerts": [{"range": .Events}{{.EventText}}]{{end}}}}</code> .
Content-type HTTP Header	Required. The HTTP header helps the HTTP client consume the output properly. For example: <code>application/json</code> , <code>application/text</code> , <code>application/xml</code> . We recommend that you use the default value for this setting.
HTTP Authorization Token	Optional. Token to communicate with the remote destination.
OAuth JWT - Client Email	Required if using OAuth authentication. OAuth client identifier for communicating with the configured OAuth provider.
OAuth JWT - Private Key	Required if using OAuth authentication. PEM-encoded private key to sign the JWT payloads.
OAuth JWT - Token URL	Required if using OAuth authentication. The endpoint that is required to complete the 2-legged JWT flow.
OAuth JWT - Private Key ID	Optional. A hint that indicates which key is being used.
OAuth JWT - Permission Scopes	Optional. A comma-delimited list of requested permission scopes.
Send Events as Binary	Optional. If enabled, event JSON is sent in a byte array field instead of plain text.
Use Compression	Optional. If enabled, compresses the HTTP payload before uploading.
Certificates	Optional. Determines whether an uploaded certificate is required for the connection.

Syslog

The Syslog destination type requires the following information:

Parameter	Description
Syslog Destination	Required. The Syslog destination. The format is: <protocol>://<fqdn>[:<port>]
Server Common Name	Optional. Common name (CN) of the destination server.
Certificates	Optional. Determines whether an uploaded certificate is required for the connection.

Certificates and Credentials

Certificates and Credentials

Upload CA certificate

Uploads a PEM encrypted CA certificate for use in all output types

Upload client certificate

Uploads a client certificate for use in all output types

Upload AWS credentials

Uploads an AWS credentials file in standard ini format

You can optionally upload certificates and AWS credentials to validate connections.

To upload a certificate:

- 1 Click the button for the certificate or credential to upload.
- 2 In the dialog box, specify the file to upload. Click Upload.

To use an uploaded certificate or credential, the corresponding option must be selected in the Output section (where it is applicable for the destination type).

After you have finished configuring the Event Forwarder, click Save at the top of the page. Saving the configuration immediately updates the configuration file on the server disk to reflect the changes. You must manually stop and restart the service.

Creating and Using Investigations

19

This chapter describes how to work with investigations. Investigations allow you to group data for reporting, compliance, or retention purposes.

This chapter includes the following topics:

- [Overview of Investigations](#)
- [Viewing Investigations](#)
- [Creating Investigations](#)
- [Adding Events to Investigations](#)
- [Removing Events from Investigations](#)
- [Adding Custom Events to Investigations](#)
- [Deleting Investigations](#)

Overview of Investigations

Investigations are collections of process events that share a common focus. They can include details and notes, and provide a way to group data for reporting, compliance, or retention purposes. Investigations are not particular to any user, so all investigations are available to each Carbon Black EDR administrator.

It is a best practice to start an investigation whenever you begin any type of search — for example, after you discover a suspicious indicator and start searching for related process activity on your hosts.

You can create an investigation to keep an ongoing record of the scope and effects of the threat, so that you can stop it before it causes damage. There is no cost involved in creating an investigation, and if you tag process events during your search, you have a built-in record of the steps that provided the end result.


A default investigation comes with the Carbon Black EDR server installation and is always available to collect any data that you tag. The default investigation cannot be deleted, so it is best used as a repository for data that interests you but does not warrant a dedicated investigation of its own.

The first time that you open the **Investigations** page, the default investigation appears.

Viewing Investigations

To view investigations:

- On the navigation bar, click **Investigations**.

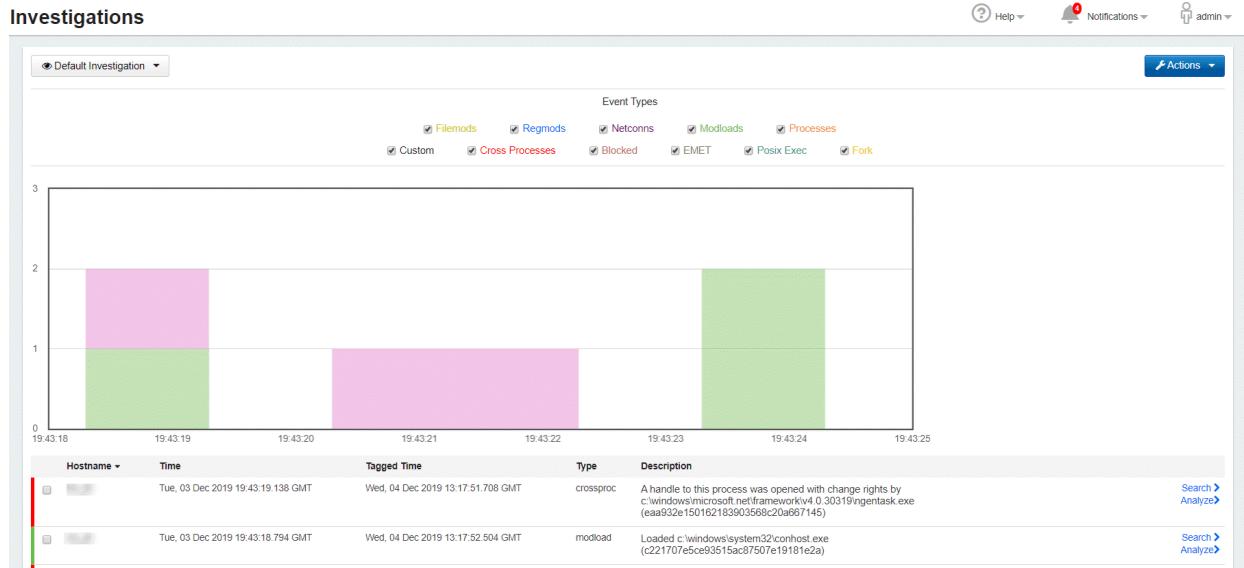

Investigations Menu Bar

The menu bar contains:

- A drop-down list of investigations. **Default Investigation** is the default.
- An **Actions** menu with the following options:
 - Remove Events** – See [Removing Events from Investigations](#).
 - Add Custom Event** – See [Adding Custom Events to Investigations](#).
 - Add Investigation** – See [Chapter 19 Creating and Using Investigations](#).
 - Delete Investigation** – See [Deleting Investigations](#).
 - Export timeline to PNG** – Exports data from the graph to a .png file and downloads it to your computer.
 - Export events to CSV** – Exports data to a .csv file and downloads it to your computer.

Event Types

Select and deselect checkboxes next to the event types to sort the events that display in the timeline and table. Only selected events will appear.

For detailed information on event types, see [Chapter 13 Process Search and Analysis](#).

The following event types appear:

- **Filemods** – The number of files that were modified by process executions. Color-coded as yellow.
- **Regmods** – The number of Windows registry modifications that were made by processes executions. Color-coded as blue.
- **Netconns** – The number of network connections that process executions either attempted or established. Color-coded as purple.
- **Modloads** – The number of modules that were loaded by process executions. Color-coded as green.
- **Processes/Child Processes** – The number of child processes that were generated from process executions. Color-coded as orange.
- **Custom** – A custom event that you can create using the **Add Custom Event** option in the **Actions** menu. Color-coded as black.
- **Cross Processes** – (Windows only) A process that crosses the security boundary of another process. Color-coded as red.
- **Blocked** – Represents events that are related to the Ban Hash functionality. If an admin bans a hash and the sensor sees that binary and tries to stop it (already running) or prohibits it from running (blocks it), then the sensor generates a Blocked event. Color-coded as brown.
- **EMET** – Represents a specific type of event that deals with Microsoft's Enhanced Mitigation Experience Toolkit (EMET) software. Color-coded as gray.
- **Posix_Exec** – (OS X and Linux only) The instance's process that is loaded and the new binary image. Color-coded as green.
- **Fork** – (OS X and Linux only) The instance's parent process, forked with a different Process ID (PID). Color-coded as yellow orange.

Bar Graph

The bar graph contains a timeline of the events that are tagged for the investigation. The events appear in color-coded bars (according to the event types). Events are stacked when they occur at the same time.

The color coding indicates which events happen at which times. Hovering over the color indicators on the timeline produces pop-up text, which explains what the block of color represents. For example:

	<p>Modloads: 2 events at Tue, 03 Dec 2019 19:43:23 GMT Loaded c:\windows\microsoft.net\framework64\v4.0.30319\clr. Unknown (7f64789e084ffd7ce541e231c98fdd43) Loaded c:\windows\microsoft.net\framework64\v4.0.30319\ms Unknown (224437eadb9734947dc16d70e4f4872b)</p>
--	---

Events Table

The Events table shows the events that are contained in the investigations. A colored bar on the left border of each row indicates the event type.

Column	Description
Hostname	The name of the host on which the event occurred.
Time	The date and time that the event occurred.
Tagged Time	The time that the event was tagged for this investigation.
Type	The event type (filemod, regmod, netconn, modload, child process, fork, posix_exec, custom, crossproc, blocked, EMET).
Description	Description of the event; for example, paths to files and registry elements that were modified, signature status, and hash values.
Search	Opens the event in the Process Search page.
Analyze	Opens the event in the Process Analysis page.

Edit Event Description

When you hover over the description in a row, an **Edit** icon appears. Click the **Edit** icon to open the **Edit Event** window:

Edit Event



Description

A handle to this process was opened with change rights by
c:\windows\microsoft.net\framework\v4.0.30319\ngentask.exe
(eaa932e150162183903568c20a667145)

[Close](#)

[Save](#)

Use the **Edit Event** window to add context to the technical description or insights to share with the rest of your investigative team. Edits are visible within the investigation, but do not appear in the process execution data when viewed outside the **Investigations** page.

Child Processes

Rows that represent child processes contain a **Search** (magnifying glass) icon. This option displays a preview of the **Process Analysis** page for the child process.

Creating Investigations

You can create customized investigations and then add events to these, as discussed in [Adding Events to Investigations](#).

To create an investigation:

- 1 On the navigation bar, click **Investigations** .
- 2 The **Default investigation** appears.
- 3 Click **Actions > Add Investigation** .
- 4 The **Add Investigation** window appears:
- 5 Enter a name for the investigation and click **Save** .


Note The name must be alpha-numeric. Special characters are not allowed.

- 6 The new investigation appears in the **Investigations** window, but is empty until you add events to it. See [Adding Events to Investigations](#).

Adding Events to Investigations

To add events to investigations:

- 1 On the navigation bar, click Process Search.
- 2 Select a process from the **Process Search** page (see [Overview of Process Search](#)) and open the **Process Analysis** page.
- 3 Scroll to the list of events. Click the **Tag** icon in an event row and select an investigation.

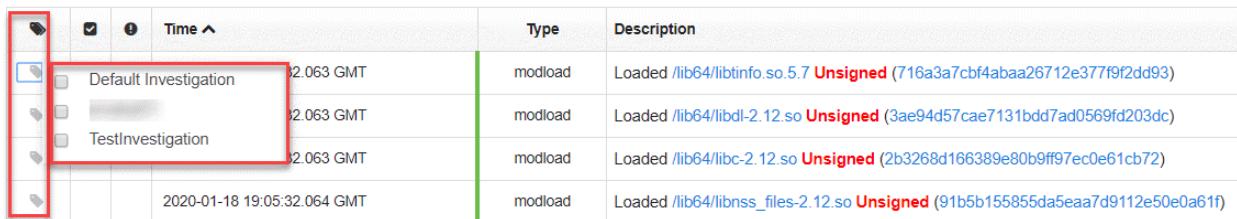

		Time	Type	Description
<input type="checkbox"/>	Default Investigation	12.063 GMT	modload	Loaded <code>/lib64/libtinfo.so.5.7 Unsigned</code> (716a3a7cbf4abaa26712e377f9f2dd93)
<input type="checkbox"/>		12.063 GMT	modload	Loaded <code>/lib64/libdl-2.12.so Unsigned</code> (3ae94d57cae7131bdd7ad0569fd203dc)
<input type="checkbox"/>	TestInvestigation	12.063 GMT	modload	Loaded <code>/lib64/libc-2.12.so Unsigned</code> (2b3268d166389e80b9ff97ec0e61cb72)
		2020-01-18 19:05:32.064 GMT		Loaded <code>/lib64/libnss_files-2.12.so Unsigned</code> (91b5b155855da5eaa7d9112e50e0a61f)

Removing Events from Investigations

When you remove an event from an investigation, it continues to exist in the system but is no longer included in the investigation.

To remove an event from an investigation:

- 1 On the navigation bar, click **Investigations** .
- 2 The **Default investigation** appears.
- 3 Use the **Investigation** drop-down menu in the top-left corner to open an investigation.
- 4 Click **Actions > Remove Events** .

Adding Custom Events to Investigations

You can create a custom event that you can use to:

- Add a new event type to the system.
- Add a note that displays on its own line in the rows at the bottom of the **Investigations** page.

You can also specify time parameters for the event, so that it appears in a designated space in the timeline.

To create a custom event:

- 1 On the navigation bar, click **Investigations** .
- 2 Click **Actions > Add Custom Event** .
- 3 In the **Description** field, type a description for the event.
- 4 In **Start Time** , enter the date and time for the event.
- 5 Click **Save** .

Deleting Investigations

When you delete an investigation, only the grouping, tagging, and edited descriptions are deleted. It has no other effect on the process executions that were a part of the investigation, or on how those processes appear in other pages.

To delete investigations:

- 1 On the navigation bar, click **Investigations** .
- 2 Select the investigation to delete.
- 3 Click **Actions > Delete Investigation** .
- 4 Click OK to confirm the removal.

Watchlists

20

This chapter describes creating, using and managing watchlists. Watchlists are saved searches that run periodically against the process or binary data in Carbon Black EDR. Watchlists are visible to all users.

This chapter includes the following topics:

- [Overview](#)
- [Viewing Watchlists and their Results](#)
- [Built-in and Community Watchlists](#)
- [Creating Watchlists](#)
- [Managing Watchlists](#)

Overview

Watchlists are named process or binary searches that the server runs periodically (approximately every 10 minutes) without user action. When those saved searches produce new results, the server notifies users about them in a configurable way.

First responders can use the Watchlists page to quickly see items that are potentially interesting. For example, the Newly Executed Applications watchlist gives you rapid access to a list of the latest applications that were executed. If known recent issues occur with any new applications, you can quickly scan the results of that watchlist to find potential problems.

For watchlists that are based on threat intelligence feeds, you can factor scoring into a saved search. These watchlists tag a process or binary that is found on one of your endpoints when the score from a specified feed matches a specified score or falls within a specified score range. The score is the rating that is used to calculate the severity that is assigned to IOCs from a feed.

Additional information about enabling and using watchlists in specific contexts appears in the following chapters:

- [Chapter 11 Responding to Endpoint Incidents](#)
- [Chapter 13 Process Search and Analysis](#)

- [Chapter 14 Binary Search and Analysis](#)
- [Chapter 17 Threat Intelligence Feeds](#)
- [Chapter 21 Console and Email Alerts](#)

Viewing Watchlists and their Results

On the navigation bar, click **Watchlists** to open the Watchlists page. On this page, names of existing watchlists appear in a table on the left. Details and results for one watchlist (by default, the first one in the table) appear on the right. You can display the details and results of a different watchlist by clicking its name.

The Watchlists Page

The screenshot shows the 'Watchlists' page in VMware Carbon Black EDR. The left panel lists 18 watchlists, each with a name, last run time, and type (Process, Binary, Enabled). The right panel displays details for the 'all processes' watchlist, including its description, a query field with the value 'cb_uriver=1&q=process_name.*', and a 'Hits over Time' chart showing activity from December 26 to January 20. The results table lists 10 entries with columns for Process, Path, Host, RegMods, FileMods, ModLoads, NetConnns, Children, and Updated.

PROCESS	PATH	HOST	REGMODS	FILEMODS	MODLOADS	NETCONNNS	CHILDREN	UPDATED
bash	/bin/bash	[REDACTED]	0	0	12	0	42	22 minutes ago
bash	/bin/bash	[REDACTED]	0	0	12	0	42	22 minutes ago
dhclient	/sbin/dhclient	[REDACTED]	0	23	330	2	1,502	23 minutes ago
master	/usr/libexec/postfix/m...	[REDACTED]	0	25	233	0	301	38 minutes ago
crond	/usr/sbin/crond	[REDACTED]	0	7	2,318	0	1,168	40 minutes ago
bash	/bin/bash	[REDACTED]	0	0	6	0	6	40 minutes ago
bash	/bin/bash	[REDACTED]	0	0	8	0	20	40 minutes ago
bash	/bin/bash	[REDACTED]	0	0	6	0	6	40 minutes ago
bash	/bin/bash	[REDACTED]	0	0	8	0	20	40 minutes ago
bash	/bin/bash	[REDACTED]	0	0	12	0	42	43 minutes ago

The left panel on the Watchlists page shows all available watchlists, their status and type, the number of hits, and either the time of their last run or another status message if they have not run recently. There are two tools for filtering these watchlists:

- At the top of the Watchlists page, use the **Search** box to search for watchlists by name.
- Immediately above the table of Watchlists on the left, filters and sorting controls can modify what is shown in the table. In the **Show** field, you can chose to show all watchlists, process

watchlists only, binary watchlists only, or enabled watchlists only. In the **Sort by** field, you can sort by name, by the time the watchlist was created, by duration (how long it took the query to run), or by when each watchlist was most recently triggered. See [Managing Watchlists](#) for how you can use these features to effectively manage watchlists.

The Watchlist Details Panel

The Watchlist Details panel on the right shows details for the currently selected watchlist. It includes the following information:

- Name and Description (if provided) of the watchlist
- If the most recent execution was successful, its time and duration; for unsuccessful executions, this line shows either timeout or error information. Typically watchlists are scheduled to run every 10 minutes, but if a previous watchlist session is still running, the next one will be delayed and try to start periodically (every 10 minutes).
- Query used to match events to the watchlist.
- The **On Hit** settings determine how (or if) you are notified when an event matches the query.
- A graph that shows the number of hits on this watchlist over time.
- Table of results showing details for each hit.

Note For each watchlist that is run, the number of matching events that are tagged is limited to 100, even if more events actually match the watchlist. This limit prevents performance issues and eliminates the potential for excessive numbers of notification emails that are unlikely to add useful information.

Click the **Search** link to show query results in the context of the Process Search page or the Binary Search page.

The Watchlist Details panel also provides buttons in the top right to disable or delete the watchlist. When you click the **Disable** button, the watchlist is disabled and no longer runs. New results that match the search query do not result in any notification or record that they triggered a hit for the watchlist.

When you click the **Delete** button and confirm the deletion, the watchlist is permanently removed.

Built-in and Community Watchlists

Although you can create your own watchlists, Carbon Black EDR provides access to two sources of pre-configured watchlists:

- The Watchlists page in the console includes a list of default watchlists.
- The [VMware Carbon Black User Exchange](#) provides a forum for sharing watchlists.

The default watchlists on the Watchlists page include the following:

- **Autoruns**
- **Filemods to Webroot**
- **Netconns to .cn or .ru**
- **Newly Executed Applications**
- **Newly Installed Applications**
- **Newly Loaded Modules**
- **Non-System Filemods to system**
- **USB drive usage**
- **CB Threat Reputation**

In addition to the built-in Watchlists, in the top-right corner of the **Watchlists** page, you can click the **Community Watchlists** button to access [Threat Research on the VMware Carbon Black User Exchange](#).

Threat Research <https://community.carbonblack.com/login.jspa?referer=%2Fgroups%2Fcommunity-watchlists> is a central portal where watchlist users can publish and discuss watchlists that might eventually be included as a feed from VMware CB Threat Intel.

Threat Research

Follow

Gain access to real-time threat intelligence data to help you combat threats. Share attacks you are seeing in your environment or read the latest threat intelligence notifications from the CB Threat Analysis Unit (TAU).

2.5B
Reputation requests
served per month

1B+
Files analyzed
and indexed

18.1M
Files added
per month

See an attack or have threat intel?

Share it with our community of experts

Share Here

Please include the following:

- Product
- Description of attack
- Mitigation steps
- Any additional information (screenshots, write-up, etc.)

Creating Watchlists

You can create your own customized watchlists from the **Watchlists** , **Process Search** , **Binary Search** , or **Threat Intelligence Feeds** pages. The information you must provide varies, depending on the location from where you start.

To create watchlists from Process Search or Binary Search pages:

- 1 On the navigation bar, select either **Process Search** or **Binary Search** .

- 2 Enter the query for the processes or binaries for which to create a watchlist. The syntax should match a search box query in the Process or Binary Search pages.

Caution As with searches outside of a watchlist, use of leading wildcards is discouraged because of performance issues.

You cannot edit several aspects of a watchlist search query, so examine the results carefully before proceeding. For more information on editing queries, see [Editing Watchlists](#).

For more information on performing searches, see:

- [Chapter 13 Process Search and Analysis](#)
- [Chapter 14 Binary Search and Analysis](#)
- [Chapter 15 Advanced Search Queries](#)

If you are using multiple MD5 or SHA-256 hash values for search criteria to create a watchlist, you must enclose the values in parentheses () .

For example:

```
(md5:45cc061d9581e52f008e90e81da2cf9  
md5:829e4805b0e12b383ee09abdc9e2dc3c  
md5:ac9fa2ba34225342a8897930503ae12f  
md5:5f7eaaf5d10e2a715d5e305ac992b2a7)
```

If you do not enclose the list in parentheses, the only value that is tagged for the watchlist is the last value in the list.

- 3 On the Process Search page, click **Create Watchlist** or, on the Binary Search page, click Create Watchlist from the Action menu. See [Chapter 20 Watchlists](#) for details on filling out the form.

To create watchlists from the Watchlists page:

- 1 On the navigation bar, click **Watchlists** .
- 2 Click the **Create Watchlist** button.

Create Watchlist

X

Watchlist Name *

|

Description

Query *

The query is stored URL-encoded, and displayed in decoded form for readability. Both forms are accepted here.

q=process_name:example

[Try it out >](#)

Query Existing Data

The first time this watchlist runs, query existing data in the following interval. This may impact performance.

Last day


 Email Me

Watchlist Type:

 Create Alert

 Process

 Log to Syslog

 Binary

- 3 **Watchlist Name:** Enter a meaningful name for the watchlist.
- 4 **Description (optional):** Provide the purpose of the watchlist.
- 5 **Query :** The query that is currently open, if any.
- 6 **Query Existing Data** dropdown menu: Define the time period for which existing data is queried on the first run of the watchlist. The longer the timeframe that is selected, the longer it will take the query to run directly after this watchlist is created. A longer time can also stress other product services, such as process search, while the watchlist is running. After the watchlist has run one time, it will run on new data in 10 minute intervals thereafter.

- 7 **Email Me:** Check the checkbox to receive email notifications for matching hits.
- 8 **Create Alert :** Check the checkbox to send an alert when conditions matching the watchlist occur. Triggered alerts are reported in the **Alert Dashboard** page and the **Triage Alerts** page. For more information on alerts, see [Chapter 21 Console and Email Alerts](#)
- 9 **Log to Syslog: Check the** checkbox to log all hits syslog . Syslogs are written to /var/log/cb/ notifications/ . In this case, the log filenames have the format cb-notifications-<watchlist ID>.log .
- 10 Watchlist Type: Identify the type as Process or Binary.
- 11 Click **Create** .

To create watchlists from the Threat Intelligence Feeds page:

- 1 On the navigation bar, click **Threat Intelligence** .
- 2 Select the feed for which to create a watchlist.
- 3 From the **Actions** menu, click **Create Watchlist** :



The Cb Reputation Trust feed provides a level of software trustworthiness

It is necessary to share MD5s of observed binaries with the Carbon Black Alliance to use this feed

[More Info »](#)



Enabled

Email Me On Hit

▶ Notifications

[Process Matches »](#)

Actions ▾

[Binary Matches »](#)

Create Watchlist

Incremental Sync

Full Sync

4 The **Add Watchlist** window opens.

Add Watchlist

Name

Description

Feed Score Criteria

Greater than or Equal

Less than or Equal

Between and

Equals

Type

Email Me

Create Alert

Log to Syslog

5 In the **Name** field, enter a meaningful name for the watchlist.

6 (Optional) Provide a description to give additional details about the watchlist, such as its purpose.

7 In the **Feed Score Criteria** section, use the various fields to enter the score criteria for the severity of IOCs to track.

8 On the **Type** dropdown menu, click **Process** or **Binary**.

9 Select the **Email Me** check box to receive email notifications when hits occur.

10 Select the **Create Alert** check box to send an alert when conditions matching the watchlist occur. Triggered alerts are reported in the **Alert Dashboard** page and the **Triage Alerts** page. For more information on alerts, see [Chapter 21 Console and Email Alerts](#).

- 11 Select the **Log to Syslog** check box to log all matching hits to syslog. Syslogs are written to `/var/log/cb/notifications/`. For watchlists, log filenames have the form `cb-notifications-<watchlist ID>.log`.
- 12 Click **Save changes**.

Managing Watchlists

Watchlists can provide you with valuable information about conditions that matter in your environment. You might need to fine-tune watchlists for your environment, based on their performance and the quality of the information they provide.

You can monitor the status of a watchlist to see whether and when it has executed, and whether there are any error conditions associated with the watchlist. If you find that the watchlist is not performing as expected, you can edit, disable, or delete it.

Watchlist Status

Watchlists show the following status in the table view:

- **Queued** – This appears when a watchlist was recently created and is waiting to be executed.
- **Timeout** – This appears when a watchlist does not execute successfully (or generate an error) after two minutes. A timed-out watchlist will be re-tried, but will only be run on events that appeared between its failed execution and the retry time. See [Slow or Error-producing Watchlists](#) for more information.
- **Expired** – This appears when the watchlist has not had any hits in the specified period. See [Watchlist Expiration](#) for more information.
- **Error** – This appears when an error happens during watchlist execution and indicates that the watchlist did not execute successfully. See [Slow or Error-producing Watchlists](#) for more information. If you are unable to resolve an error condition, consider contacting VMware Carbon Black Support.

In the **Watchlist Details** panel, descriptive messages appear if the last execution of the watchlist resulted in an error or a timeout. For successful executions, the details panel shows the following:

- **Last execution** – The time of the last successful execution.
- **Duration** – The duration required to complete execution. See [Slow or Error-producing Watchlists](#).


Watchlist Expiration

You can configure Carbon Black EDR to notify you when a watchlist has not received any hits over a specified period of time. This might be a sign that the watchlist is not useful and can be deleted, or perhaps that the query in the watchlist must be modified to be effective. Watchlist expiration is informational only. When a watchlist expires, you are prompted to take action on it, but it is still fully functional unless you delete or disable it.

A single watchlist expiration configuration applies to all watchlists.

To configure watchlist expiration:

- 1 On the navigation bar, click **Watchlists** .
- 2 Click **Configure Expiration** .

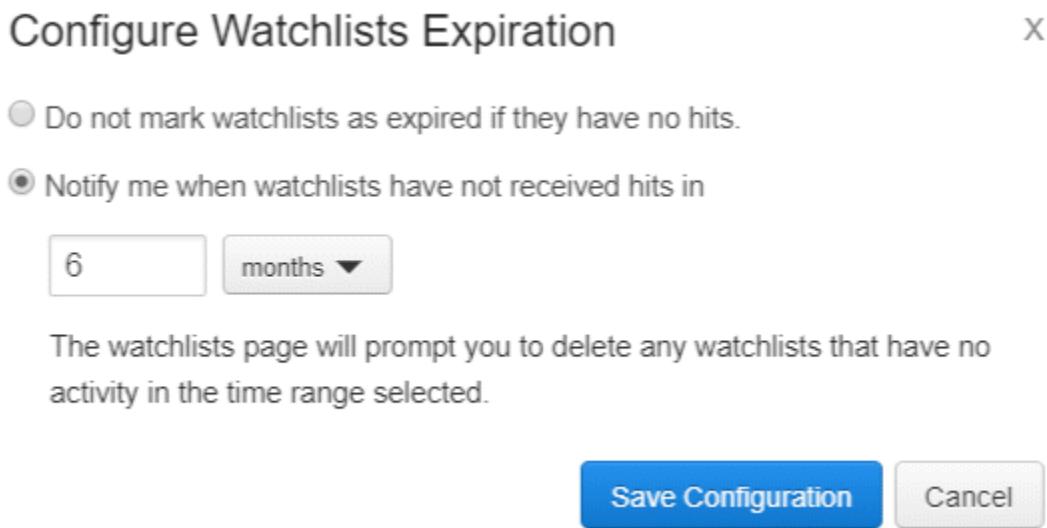


- 3 By default, watchlists are marked as “Expired” if they have received no hits over a six-month period. To use a different time period for expiration or to reconfigure a watchlist page that had expiration turned off:
 - a Make sure the **Notify me when watchlists have not received hits in** radio button is selected.
 - b Enter a number in the box and choose the units (days, months, or years) from the menu.
- 4 If you do not want any watchlists to be designated as expired, click the radio button that reads **Do not mark watchlists as expired if they have no hits** .
- 5 Click **Save Configuration** .

Slow or Error-producing Watchlists

Temporary conditions might cause a watchlist to timeout or fail with an error message. However, if a watchlist continues to fail, you might need to investigate it and consider modifying the query or deleting the watchlist.

You can identify slow or error-producing watchlists on the watchlist table by using the **Duration** choice on the **Sort by** menu.

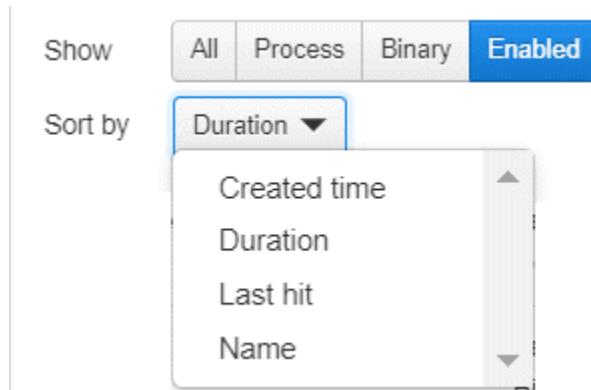

This produces the following results:

- Watchlists that have not executed successfully, including disabled, queued, errored out or timed out watchlists, appear first. Because you are not usually interested in disabled watchlists, consider clicking the Enabled tab to eliminate disabled watchlists from your results.
- After the non-executed watchlists, watchlists that have been executed successfully are listed, beginning with the slowest (longest duration) watchlist and then in descending order of duration.

Duration, timeout and error status is also displayed underneath the watchlist name in the Watchlist Details panel.

After you identify a problematic watchlist, you can examine its Query field or Feed Score Criteria to see whether there are any obvious issues, such as leading wildcards in the query. [Chapter 15 Advanced Search Queries](#) includes guidelines for creating queries, including query usage that could cause difficulties.

If you are unable to modify a watchlist in a way that produces efficient, successful performance, you can contact VMware Carbon Black Support for further troubleshooting.

Editing Watchlists

You can edit a watchlist in the Watchlist Details panel of the **Watchlists** page. For most changes, the underlying ID that uniquely identifies the watchlist remains the same. However, if you edit the watchlist search query, it effectively becomes a new watchlist.

To edit watchlists:

- 1 On the navigation bar, click **Watchlists** .
- 2 In the left panel, select the watchlist to edit. Its details appear in the right panel.

The screenshot shows the 'Cb Threat Reputation >= 50' watchlist details. At the top right are 'Disable' and 'Delete' buttons. Below the watchlist name is a note: 'Last successful watchlist execution was a minute ago, duration was 0.08 s.' The 'DESCRIPTION' section is empty. The 'ON HIT' section contains three checkboxes: 'Email Me', 'Create Alert', and 'Log to Syslog', all of which are unchecked. The 'QUERY' section shows the search query: 'cb_uriver=1&q=alliance_score_srsthreat[50 TO *]'. The 'HITS OVER TIME' section displays a line graph with the y-axis labeled 'Watchlist hits' ranging from 0.0 to 1.0 and the x-axis labeled 'Time' with a single data point for '12/23' at 0.0 hits. The 'RESULTS' section has a 'Search >' link and a table with columns: BINARY, PATH, SIGNATURE, and FIRST SEEN. The table shows 'No records'.

- 3 You can edit the following attributes of the watchlist:
 - a To change the name of the watchlist, click the pencil icon next to the name at the top of the page.
 - b To edit the watchlist query, click the pencil icon for the Query box. In the Edit Watchlist Query dialog box, modify the query and then click Save Changes.

Note Saving a modified watchlist query overwrites the watchlist ID even if the watchlist name is the same. Therefore, any references to the older version of the watchlist, such as in alerts or through the API, are no longer connected.

- c To disable the watchlist, click **Disable**. To enable it, click **Enable**.
- d To receive email notifications when there are hits that match your search, select **Email Me**. Deselect the checkbox to stop receiving email notifications.
- e To send an alert when conditions matching the watchlist occur, select **Create Alert**. Deselect the checkbox to stop sending alerts.
- f To log all hits that match the search to syslog, select **Log to Syslog**. Syslogs are written to `/var/log/cb/notifications/`. In this case, the log filenames have the form `cb-notifications-<watchlist ID>.log`.

Deleting Watchlists

You delete watchlists using controls on the details panel for that watchlist on the **Watchlists** page.

To delete a watchlist:

- 1 On the navigation bar, click **Watchlists**.

- 2 In the left panel, select the watchlist to delete. Its details appear in the right panel.
- 3 In the top-right corner, click **Delete** and click **OK** to confirm the deletion.

Console and Email Alerts

21

This chapter explains how to create and manage Carbon Black EDR alerts in the Carbon Black EDR console. Alerts can be triggered based on watchlist or VMware CB Threat Intel feed events. This chapter also explains how to enable email alerts to report these events.

This chapter includes the following topics:

- [Overview of Alerts](#)
- [Enabling Console Alerts](#)
- [Viewing Alert Activity on the HUD Page](#)
- [Managing Alerts on the Triage Alerts Page](#)
- [Enabling Email Alerts](#)

Overview of Alerts

You can create alerts to indicate in the Carbon Black EDR console when suspicious or malicious activity appears on your endpoints. Alerts are available for two types of events:

- **Watchlist hits** – Watchlists can be configured to send an alert when conditions matching the watchlist occur. See [Chapter 20 Watchlists](#).
- **Threat intelligence feed hits** – Threat intelligence feeds can be configured to send an alert when that feed reports an IOC. See [Chapter 17 Threat Intelligence Feeds](#).

Triggered alerts are reported in two locations in the Carbon Black EDR console:

- The **HUD** page contains a summary that shows the number of unresolved alerts, the number of hosts that have unresolved alerts, and other alert-related data, including the alerts for each host. See [Viewing Alert Activity on the HUD Page](#).
- The **Triage Alerts** page contains more details about triggered alerts and provides a filter and search interface to find alerts that match different criteria. It also allows you to manage the alert workflow, marking the status of each alert from its initial triggering to its resolution. See [Managing Alerts on the Triage Alerts Page](#).

You can configure watchlists and threat intelligence feeds to send email alerts when there is a “hit” on data from a Carbon Black EDR sensor that matches the watchlist or feed. You can enable email alerts in addition to or instead of the Carbon Black EDR console-based alerts. See [Enabling Email Alerts](#) for more information.

Enabling Console Alerts

You can enable alerts for any watchlist or threat intelligence feed. Consider how many hits you are likely to receive when you enable alerts. Some watchlists or feeds might generate too many hits to be useful, making it more difficult to identify significant alerts. Ideally, an alert should get your attention for issues that you need to follow up on. No alerts are enabled by default.

Watchlist Alerts

Watchlists are user-created, custom, saved searches that are based on process search, binary search, or feed results. You can use watchlists to monitor endpoints for detected IOCs. You can also select the most important watchlists to monitor and add console alerts. Then, you can then view and manage these key watchlist and feed hits in the **Triage Alerts** page.

To enable console alerts for a watchlist:

- 1 On the navigation bar, click **Watchlists**.
- 2 In the left panel of the **Watchlists** page, select the watchlist for which to create an alert. Use the **Search** box at the top of the panel to locate a watchlist that does not immediately display.
- 3 In the right panel, click the **Enable button if the watchlist is disabled**, and select the **Create Alert** check box.

The watchlist will begin generating alerts.

Threat Intelligence Feed Alerts

Threat intelligence feeds provide information that helps you identify malware and its sources. Carbon Black EDR integrates with third-party and internal feeds (such as the VMware CB Threat Intel Reputation and Carbon Black EDR Tamper Detection) that identify hosts on which tamper attempts have occurred.

Adding a Carbon Black EDR console alert to a feed allows you to highlight hits matching reported malware from a specific source. You can then view and manage high-importance feed and watchlist hits in one place, on the **Triage Alerts** page.

Make sure you understand the volume of reports that you will receive from any feed before enabling alerts for it. Among other things, read the description of a feed on the **Threat Intelligence Feeds** page. Some feeds include a specific recommendation *not* to enable alerts, because of the report volume or percentage of false positives that can occur.

To enable console alerts for a threat intelligence feed:

- 1 On the navigation bar, click **Threat Intelligence** .
- 2 Select the **Notifications** dropdown menu and select the **Create Alert** check box for each feed panel to enable console alerts.

To disable console alerts for a threat intelligence feed:

- 1 On the navigation bar, click **Threat Intelligence** .
- 2 Select the **Notifications** dropdown menu, and uncheck the **Create Alert** check box for each feed panel to disable console alerts.

Viewing Alert Activity on the HUD Page

The **HUD** page is a customizable page that provides a summary of alerts on hosts that report to your Carbon Black EDR server. See [Chapter 22 Using the Head-Up Display Page](#).

UNRESOLVED ALERTS [View all >](#)

Search...

Mark selected	Resolved	False Positive	In Progress	Unresolved
SCORE	SOURCE	HOST	CAUSE	TIME
51	all processes		bash	2020-01-24 16:10:41.328 GMT
51	all processes		bash	2020-01-24 16:10:41.326 GMT
51	all processes		bash	2020-01-24 16:10:41.322 GMT
51	all processes		bash	2020-01-24 15:50:45.971 GMT
51	all processes		bash	2020-01-24 15:30:45.853 GMT
51	all processes		bash	2020-01-24 15:10:42.252 GMT
51	all processes		bash	2020-01-24 15:10:42.250 GMT

By default, the **Unresolved Alerts** panel displays all unresolved alerts for a sensor. You can also display resolved, false positive, and in- progress alerts by clicking a button at the top of the **Unresolved Alerts** panel:

- **Resolved**
- **False Positive**
- **In Progress**

- **Unresolved**

Note You can enlarge the **Unresolved Alerts** panel to display more details by holding your left mouse button down on the bottom-right expansion icon and dragging the panel to the desired size.

The **Unresolved Alerts** panel contains these columns:

Note Some columns in this panel are sortable, such as the **Score** and **Time** columns. You can determine if columns are sortable by hovering your cursor over the column name; sortable column names will turn black and your cursor will change to a hand icon. An arrow appears, indicating the sort direction (ascending/descending).

Pane	Description
Score	Displays the alert severity, where 100 is a severe threat and 1 is not a threat.
Source	Displays the feed that is associated with the alert, such as threat intelligence and watchlist feeds. Clicking a link in this column opens the associated page.
Host	Displays the host that is associated with the alert. Clicking a link in this column opens the Sensors page.
Cause	When the alert is caused by a binary, this column displays the binary's MD5 hash. Clicking on this link takes you to the Search Binaries page. When the alert is caused by a process, this column displays the process name. Clicking on this link takes you to the Search Processes page.
Time	Displays the time when the alert occurred.

The **Unresolved Alerts** panel also contains a **View all** link in the top-right corner. Clicking this link displays the **Triage Alerts** page.

Managing Alerts on the Triage Alerts Page

When an alert is received that indicates suspicious or malicious activity, incident responders must:

- Determine the seriousness of the alert.
- Determine whether the alert indicates a sufficiently severe threat.
- Find a way to resolve a serious threat.

These tasks might involve using the following Carbon Black EDR features:

- Endpoint Isolation
- Live Response
- Banning


It might also require using other tools.

Given the high volume of threat reports, it is critical to prioritize, investigate, and keep track of alert statuses. After an alert is resolved, it should be removed from the list of threats requiring attention so that ongoing threats can be addressed.

The **Triage Alerts** page provides features for alert management. It includes search and filtering capabilities for locating specific alerts or alert types. It also allows you change alert status.

To open the Triage Alerts page:

On the navigation bar, click **Triage Alerts**.

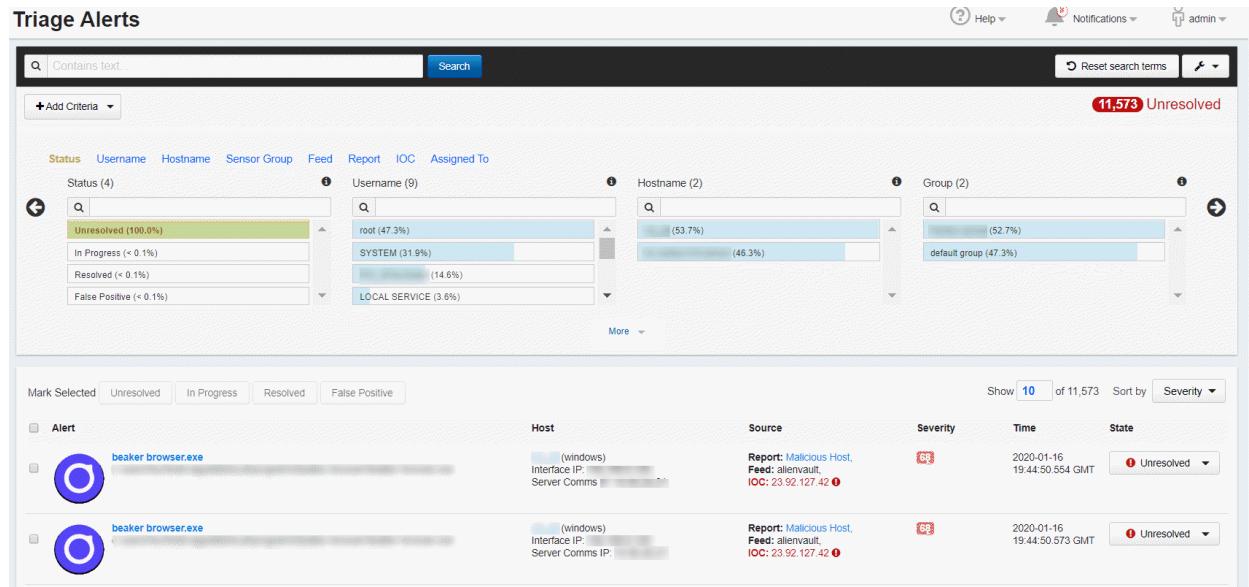

The screenshot shows the Triage Alerts page with the following interface elements:

- Search Bar:** Contains a "Contains text" input field, a "Search" button, and a "Reset search terms" button.
- Alert Status Filter:** Shows a dropdown menu with "Status (4)" selected, showing categories: Unresolved (100.0%), In Progress (< 0.1%), Resolved (< 0.1%), and False Positive (< 0.1%).
- Username Filter:** Shows a dropdown menu with "Username (9)" selected, showing categories: root (47.3%), SYSTEM (31.9%), and others.
- Hostname Filter:** Shows a dropdown menu with "Hostname (2)" selected, showing categories: (53.7%) and (46.3%).
- Group Filter:** Shows a dropdown menu with "Group (2)" selected, showing categories: (52.7%) and default group (47.3%).
- Alert List:** A table showing two alerts for "beaker browser.exe" on a host with IP (windows) and Server Comms. The alerts are categorized as "Malicious Host" with IOC: 23.92.127.42. Both alerts are marked as "Unresolved".
- Page Headers:** Shows "11,573 Unresolved" alerts, "Show 10 of 11,573", "Sort by Severity", and "Unresolved" status.

Note You also can navigate to the Triage Alerts page from the **HUD** page by clicking **View all** in the **Unresolved Alerts** panel. See [Viewing Alert Activity on the HUD Page](#).

The **Triage Alerts** page is divided into three major sections:

- The top section includes the **Search** field and button, **Add Criteria** button, **Reset search items** button, and **Actions** menu.
- The middle section contains filters that are category-specific lists (**Status** , **Username** , and so on). These filters show the percentage of alerts that match different values in each category, and allow you to filter the view to show alerts that match values.
- The bottom section contains the **Alerts** table, which contains details for alerts that match the search criteria that is entered in the first two sections.

Displaying the Report Name

The middle section of the Triage Alerts page lets you filter by various criteria, including Reports. By default, the Reports display shows the report ID (for example, dbe2eab5-3829-45df-b6c4-3dfb7a215d69). You can change the display to show the report name (for example, "PowerShell executed with encoded instructions").

To change the display, you must change a setting in the `cb.conf` file. The default value of this setting is `False` : use this feature with caution because additional memory will be used in proportion to the number of reports on your server.

To enable the display of report names:

- 1 On the Carbon Black EDR server, open `/etc/cb/cb.conf` for editing.
- 2 Set `FeedHitLoadReportTitles=True`.
- 3 Set the number of characters (from -1 to 80) for the report name in the `FeedHitMaxReportTitleLength` field. The default (and maximum) number of characters is 80. A value of -1 keeps the report name from being truncated in bus events, syslog, and email notifications.

```
FeedHitLoadReportTitles=True
FeedHitMaxReportTitleLength=80
```

- 4 Restart cb-enterprise services.

After you have changed the `cb.conf` setting and restarted cb-enterprise services, the report names are populated in the following places:

- In the Triage Alerts page Records facet.
- Bus events.
- Syslog notifications.
- Email notifications. Both report ID and report name are displayed in the email. If the feature is turned off, the report name is displayed as “Unknown”.

Reviewing Alerts

Each row in the **Alerts** table shows the description and data for an individual alert. The description and data that appears can vary depending on a variety of factors, including:

- The source and type of the alert.
- Whether the binary for a process has been signed.
- Whether a binary is “Trusted” by the Carbon Black EDR Alliance.

The **Alerts** table has several tools for adjusting the table display:

- **Sort order** – You can sort the **Alerts** table using the **Sort By** button in the top-right corner of the **Alerts** table. You can sort by:
 - **Severity** (default)
 - **Most Recent**
 - **Least Recent**
 - **Alert Name Ascending**

- **Alert Name Descending**
- **Page navigator** – You can use the page navigation bar in the bottom-right corner of the **Alerts** table to move between pages in tables views that do not fit on a single page.

Alerts Table Data

The row for each alert in the table shows the following columns:

Alert	Host	Source	Severity	Time	State
beaker browser.exe	(windows) Interface IP: [REDACTED] Server Comms IP: [REDACTED]	Report: Malicious Host, Feed: alienVault, IOC: 23.92.127.42	68	2020-01-16 19:44:50.554 GMT	Unresolved
beaker browser.exe	(windows) Interface IP: [REDACTED] Server Comms: [REDACTED]	Report: Malicious Host, Feed: alienVault, IOC: 23.92.127.42	68	2020-01-16 19:44:50.573 GMT	Unresolved

- **Alert** – Contains the following details:
 - An icon that represents the process or binary that caused the threat alert, if available. If there is no special icon for this binary, a generic file icon is used **Note:** Tamper alerts show what feed is triggered; the icon is of the host type.
 - The directory path where the process or binary is installed.
 - If this is a binary, the blue process link takes you to the **Binary Details** page. If this is a process, the blue process link takes you to the **Process Analysis** page.
- **Host** – Shows host details and a link to the **Sensor Details** page.
- **Source** – The watchlist or feed that triggered the alert with a link to that watchlist or feed.
- **Severity** – The severity score of the alert that Carbon Black EDR produces based on underlying alert data. Click the **Severity** number to show additional details by which the severity is calculated:
 - **Feed rating**
 - **Report scores**
 - **Confidence**
 - **Criticality**
- The **Severity** numbers are color-coded, with red being severe threats and green being low threats. A score of 100 represents the most severe alerts.
- **Time** – The time when the alert was triggered.
- **State** – The alert state, which includes:
 - **Mark as Resolved** – Select this when the alert is resolved.
 - **Mark as Unresolved** – By default, only unresolved alerts are displayed.
 - **Mark as In-Progress** – Select this for alerts that have resolutions in progress.

- **Mark as False Positive** – Select this for alerts that were not true threats.

See [Managing Alert Status](#).

Managing Alert Status

You can change the status of individual alerts or all alerts in the current view. Changing alert status is strictly for alert management purposes. It helps you organize alerts that need attention, are being investigated, have been resolved, or are false positives.

Change an alert status to indicate what you are doing or have done based on your review of an alert. An alert status has no effect on the actual issue that caused the alert.

In the **Alerts** table, the far-right column includes an icon representing the current alert status and a drop-down list for changing that status.

The following table describes the alert status options and shows their icons.

To change the status of all alerts matching a search and/or filter:

- 1 On the navigation bar, click **Triage Alerts**.
- 2 On the **Triage Alerts** page, enter the search string and/or filter criteria for the alerts that have a status to change.
- 3 From the **Actions** menu (located in the top-right corner of the **Triage Alerts** page), select the **Mark all** menu option for the status to assign.
- 4 Click **OK** in the confirmation window to change the status of all of the alerts on the page.

Note When using the **Mark all** commands, be sure that you want to change all of the alerts matching the current filter and search, including those on pages that are not displayed. After you change the status, there is no “undo” command. Be especially careful about changing alert statuses when the view is unfiltered (showing all alerts).

To change the status of a single alert:

- 1 On the navigation bar, click **Triage Alerts**.
- 2 In the **Alerts** table, select the check box to the left of the alert that has a status that you want to change.
- 3 From the **Actions** drop-down list (located in the top-right corner of the **Triage Alerts** page), select the appropriate option for the status you want to assign.
- 4 Click **OK** in the confirmation window to change the status of the selected alert.

Note Changed alerts will disappear from the current view if you have filtered the page for a different status.

Ignoring Future Events for False Positive Alerts

Feeds use a variety of criteria to determine if a file or event is a threat, and you might not agree with all of the alerts that are generated by certain feeds. When you review alerts and determine that an alert is not reporting an actual threat, you can mark that alert as a “false positive”, so you can eliminate it from the list of alerts that require your attention.

Carbon Black EDR also provides a feature that lets you ignore future instances of a false positive alert from a threat feed. You can choose to ignore an individual alert, or specify that all alerts matching your search criteria should be ignored in the future.

Note Only threat feed alerts can be designated as alerts to ignore. Alerts from watchlist matches are always triggered, since watchlists are assumed to use criteria that your Carbon Black EDR users choose.

To ignore the triggering event for an alert:

- 1 On the navigation bar, click **Triage Alerts**.
- 2 In the **Alerts** table, select the check box to the left of the alert.
- 3 In the Status column, select **Mark as False Positive** in the dropdown menu.

-  [Mark as Resolved](#)
-  [Mark as Unresolved](#)
-  [Mark as In-Progress](#)
-  [Mark as False Positive](#)

- 4 In the **Mark as Resolved False Positive** dialog, you can ignore future events from this report by moving the slider button to **Yes**. Click **Resolve**.

Mark as Resolved False Positive

 **CAUTION:**

This action will apply to all notifications from this report. The report will be completely removed from any future feed scanning.

Ignore future events from this report? No Yes

Cancel

Resolve

Marking events from multiple alerts to be ignored involves searching for the alerts you want to ignore, confirming that the results are what you expect, and then making a bulk resolution.

Enabling Email Alerts

You can enable email alerts to report events that trigger watchlist and threat intelligence feed alerts. This feature informs you of events of interest, even when you are not logged into the Carbon Black EDR console. You can then go to the console to investigate and resolve the alert. The email alerts feature is enabled on a per-console user basis.

Configuring an Email Server

Before enabling email alerts for specific watchlists or feeds, you should decide which email server to use. You can:

- Use your own email server.
- Use the Carbon Black EDR external email server.
- Opt out of email alerts.


If you use the Carbon Black EDR external email server, the following information is sent through the server and stored by Carbon Black EDR:

- Your server ID
- The time of the email
- The name of the watchlist or feed that triggered the hit

Important Carbon Black strongly recommends that you use your own email server, because email sent through the Carbon Black EDR external email server is sent over the Internet in clear text.

To configure an email server for alerts:

- 1 Log in to Carbon Black EDR as a Global Administrator or Carbon Black Hosted EDR Administrator.
- 2 Click *Username*> **Settings** .
- 3 On the **Settings** page, click **E-Mail** .

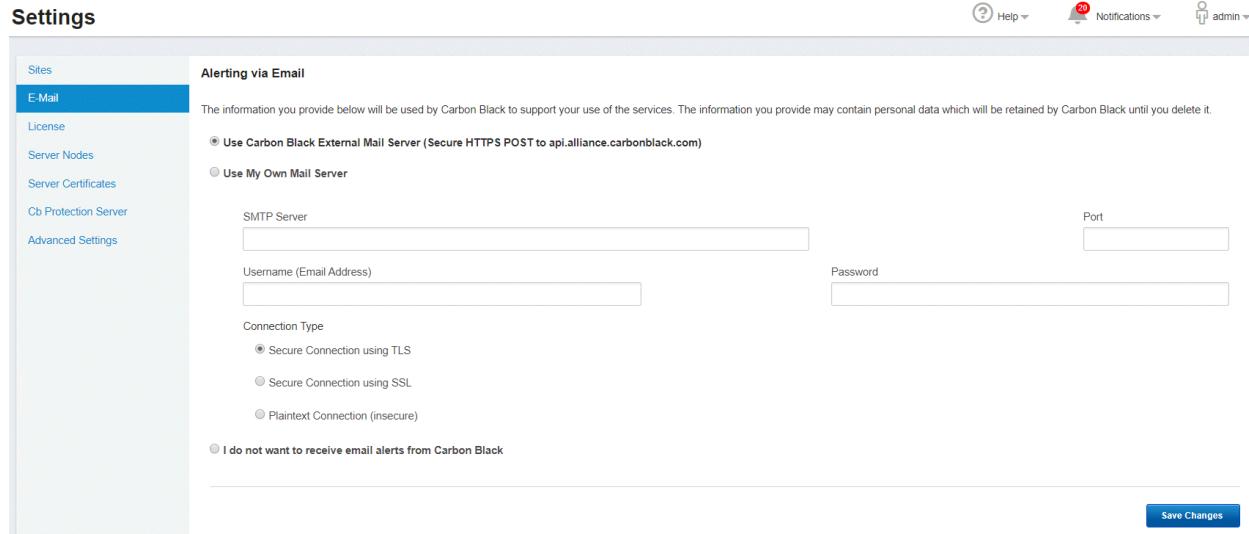

The screenshot shows the 'Settings' page with the 'E-Mail' tab selected. The 'Alerting via Email' section is displayed, containing fields for an external mail server (SMTP Server, Port), connection type (Secure Connection using TLS, Secure Connection using SSL, Plaintext Connection (insecure)), and a note about receiving email alerts from Carbon Black. A 'Save Changes' button is at the bottom right.

All email alerts for all console users will use these settings.

Enabling Specific Email Alerts

After you have configured an email server, any watchlist or feed can be configured to send email alerts when it gets a hit on a Carbon Black EDR sensor.

You can turn on/off email alerts for individual watchlists and feeds as needed (for example, if you find that a watchlist or feed is creating too much email traffic). Email alerts for any specific watchlist or feed are enabled on a per-user basis.

Note If you have upgraded from a previous release of Carbon Black EDR, any email alerts that you had enabled for watchlists and threat intelligence feeds remain enabled after the upgrade.

To enable email alerts for a watchlist:

- 1 On the navigation bar, click **Watchlists** .
- 2 Select the watchlist for which to enable email alerts. If the watchlist name is not visible or you are not sure what the name is, use the **Search** field.
- 3 Confirm that the watchlist is enabled.
- 4 Check the **Email Me** check box.

To enable email alerts for a threat intelligence feed:

- 1 On the navigation bar, click **Threat Intelligence** .
- 2 To activate email alerts for a feed, select the **Email Me on Hit** check box.

Using the Head-Up Display Page

22

This chapter explains how to use the Head-Up Display (HUD) page, which is a customizable dashboard in the Carbon Black EDR console.

This chapter includes the following topics:

- [Overview of HUD](#)
- [Dwell Time Panel](#)
- [Endpoint Hygiene Panel](#)
- [Event Monitor Panel](#)
- [Query Duration Panel](#)
- [Resolution Time Panel](#)
- [Saved Searches Panel](#)
- [Sensors Panel](#)
- [Task Errors Panel](#)
- [Unresolved Alerts Panel](#)

Overview of HUD

The **HUD** page provides a summary of alerts on hosts that report to your Carbon Black EDR server. It provides a quick reference view of the system.

Viewing the HUD Page

To view the HUD page:

- In the navigation bar, click the logo at the top left corner of the console.

Customizing the HUD Page

To reposition HUD panels:

- Hold down your left mouse button on a panel and drag the panel to the desired location.

To resize HUD panels:

- Hold down your left mouse button on the bottom-right resizing icon and drag the panel to the desired size. Note that larger panels display more details.

As you customize the **HUD** layout, the layout is automatically saved for future use per device.


Sortable Columns

Some columns are sortable. You can determine if a column is sortable by hovering your cursor over the column name. Sortable column names change colors and your cursor changes to a hand icon. An arrow appears that indicates the sort direction (ascending or descending).

The following sections describe **HUD** page panels. However, the **Unresolved Alerts** panel is described in [Viewing Alert Activity on the HUD Page](#).

Dwell Time Panel

The Dwell Time panel shows the daily average for how long malware dwells on hosts that are reporting to this server over a 30-day period. This is based on the duration between when an undesirable binary first appears on one of the hosts and it is longer reported on any hosts. The following image shows zero dwell time activity; this is desirable.

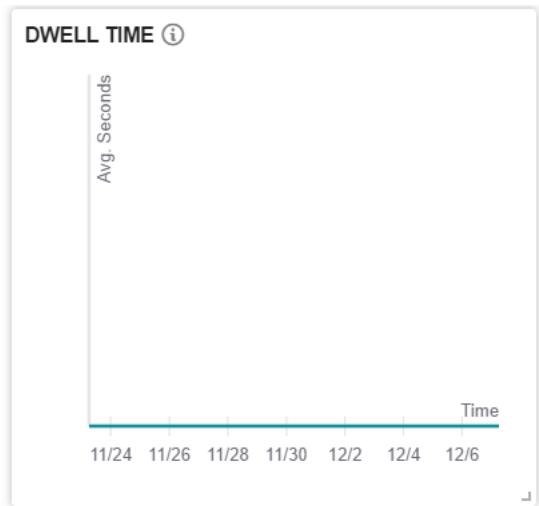


Endpoint Hygiene Panel

The **Endpoint Hygiene** panel shows the daily percentage of hosts that are reporting suspect processes over a 30-day period. This percentage is based on two values that Carbon Black EDR records:

- The total number of active hosts in the network.
- The number of hosts that have one or more bad processes.


The following image shows zero endpoint activity, which is desirable.

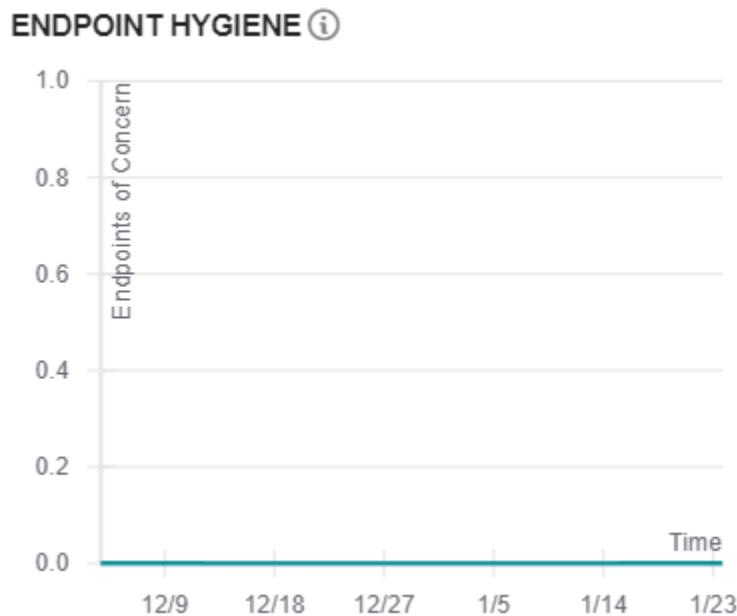

Event Monitor Panel

The **Event Monitor** panel provides a live feed of event activity. It updates every five seconds.

- Vertical bars indicate alert activity, such as resolving an alert or incoming alerts.
- Horizontal lines indicate watchlist activity.

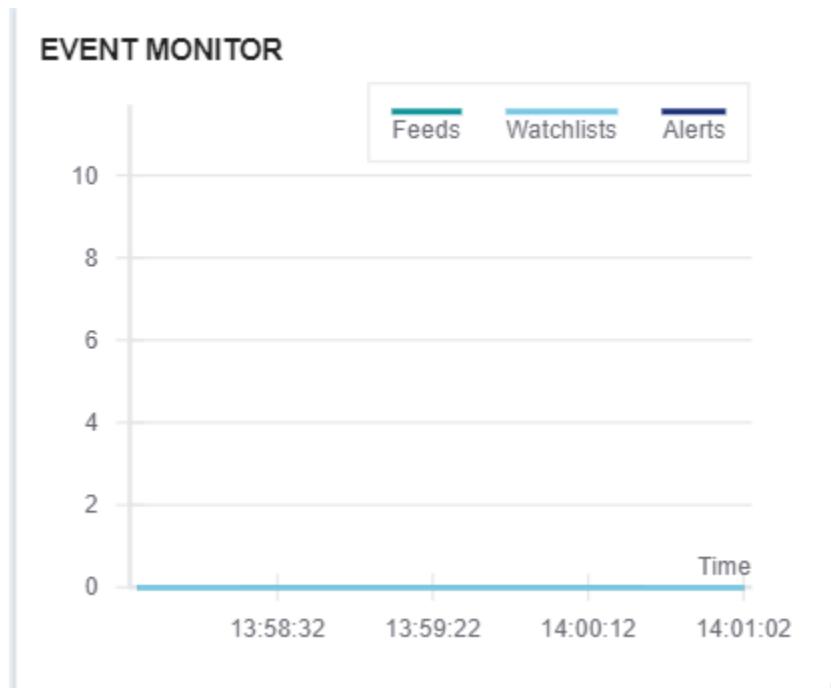

Query Duration Panel

Queries that take longer than a second to complete are presented in this panel. At a glance, you can see which queries are taking a long time to complete, and take action to improve query structures and efficiency.

QUERY DURATION

Filter by query source				
DURATION	SOURCE	USERNAME	QUERY	
35 s	Feed Report	system	((regmod:Software\Microsoft\Office\excel\AddIns*) and -(path:pro...)	Copy
35 s	Feed Report	system	((regmod:Software\Microsoft\Office\excel\AddIns*) and -(path:pro...)	Copy
24 s	Feed Report	system	(Library/LaunchAgents/*.plist)	Copy
23 s	Watchlist	system	svchost.exe	Copy
20 s	Feed Report	system	((regmod:Software\Microsoft\Office\excel\AddIns*) and -(path:pro...)	Copy

You can filter the displayed queries in the following ways:


- All – Displays all queries that take longer than a second to complete.
- UI – These slow queries are generated at the UI.
- Watchlist – Automated queries. Watchlist queries are created by Carbon Black EDR users and run every 10 minutes.
- Feed Report – Automated queries that the threat research team generates. You cannot edit the queries, but you can ignore them.
- API – These queries are run via an API.

A user or script can run UI- or API-generated queries many times. If any query takes long enough to appear in the Query Duration Panel, multiple executions of that query add to the overall effect.

For queries that are too long to display in the panel, you can hover over the query to cause the entire query to display in the hover text. You can also click **Copy** to copy a query. This is useful for closely examining a complex slow-running query, and for editing a query to improve performance.

Resolution Time Panel

The **Resolution Time** panel contains a graph that displays the average time (in hours) between reporting and resolution of alerts on each day over a 30-day period.

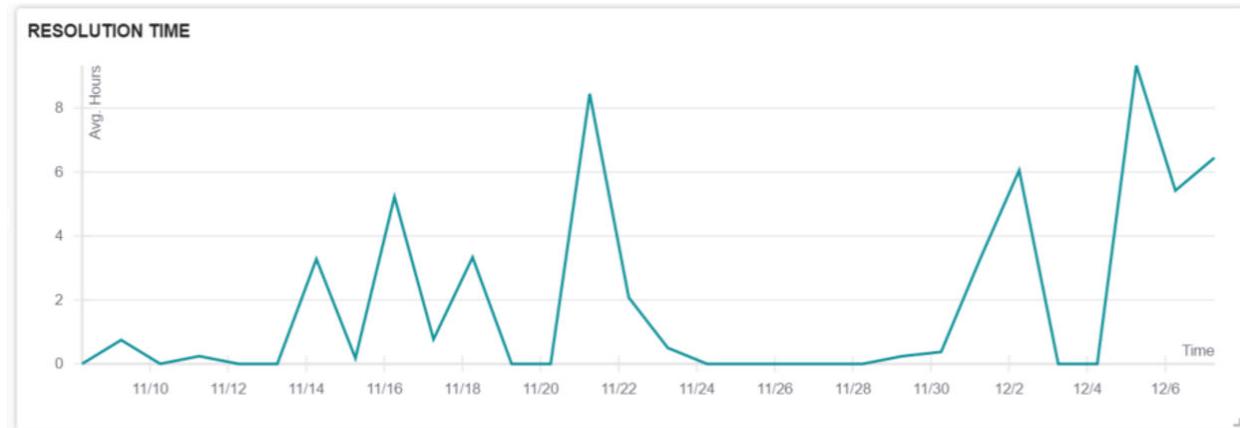

Saved Searches Panel

The **Saved Searches** panel provides a convenient list of your saved process searches. Click a saved search to go to the **Process Search** page. See [Save Searches](#).

SAVED SEARCHES

- [process_name:svchost.exe](#)

Sensors Panel

Use the **Sensors** panel to monitor and manage sensor hosts. See [Chapter 7 Managing Sensors](#).

SENSORS [View all >](#)

Select Group	Search by computer name or IP.....
<input type="checkbox"/>	Show Uninstalled Sensors
<input type="checkbox"/> HEALTH <input type="checkbox"/> HOST	
<input type="checkbox"/>	100  Online
<input type="checkbox"/>	100  Offline
<input type="checkbox"/>	100  Offline
Showing 1 to 3 of 34082	
1 2 3 4 5 ...	

By default, uninstalled sensors do not display in this panel. Select the checkbox to show uninstalled sensors.

By default, all sensor hosts in your organization display; in this case, you cannot perform any actions on the displayed sensor hosts. You can select a group for which you have permissions and then perform the following actions on the hosts in that group:

- Sync
- Restart
- Uninstall; see [Chapter 6 Installing, Upgrading, and Uninstalling Sensors](#).
- Isolate; see [Isolating an Endpoint](#).
- Remove isolation

You can also search for a specific host by computer name or IP address.

The **Sensors** panel contains the following columns:

Pane	Description
Activity	Displays the time related to the sensor activity.
Health	Displays the sensor health score, where 100 is healthy. Lower numbers indicate problems. See Chapter 25 Sensor Health Score Messages .
Health Message	Displays a health message that relates to the sensor health score. See Chapter 25 Sensor Health Score Messages .
Host	Displays the name of the host on which the sensor is installed. Click the host name to go to the Sensors page for that host. See Viewing Sensor Details .
Sensor Version	Displays the sensor version.
Status	Indicates whether the sensor is online or offline, and whether the sensor is undergoing any activity. For example, if a sensor is online and syncing, the status displays syncing-online.

Task Errors Panel

The Task Errors panel displays errors that are generated from backend processes (tasks or jobs). By default, all errors are displayed; however, you can filter to show only tasks or only jobs.

You must be an admin to view this data.

TASK ERRORS ⓘ			
Filter by task type All Task Job			
TYPE	NAME	TIMESTAMP	ERROR
Task	FeedSynchronizer	2021-01-19 07:59:20.112909-05:00	Error during synchronization of feed somename(24): bad query field: '#47' Copy
Task	FeedSynchronizer	2021-01-18 07:59:19.505605-05:00	Error during synchronization of feed somename(24): bad query field: '#47' Copy
Task	FeedSynchronizer	2021-01-17 07:59:20.462135-05:00	Error during synchronization of feed somename(24): bad query field: '#47' Copy
Task	FeedSynchronizer	2021-01-16 07:59:20.258041-05:00	Error during synchronization of feed somename(24): bad query field: '#47' Copy

Most errors are truncated; to view the entire error, click **Copy** underneath the item of interest. The full entry is copied into your clipboard.

Unresolved Alerts Panel

By default, this panel displays all unresolved alerts for a sensor. You can also display resolved, false positive, and in-progress alerts.

UNRESOLVED ALERTS [View all >](#)

Search...

<input type="checkbox"/> SCORE	SOURCE	HOST	CAUSE	TIME
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 19:10:54.752 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 19:10:54.750 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 19:10:54.738 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 18:50:44.910 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 18:30:48.639 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 18:10:44.562 GMT
<input type="checkbox"/>	51 all processes	[REDACTED]	bash	2020-01-24 18:10:44.554 GMT

Showing 1 to 7 of 11586 [1](#) [2](#) [3](#) [4](#) [5](#) ...

See [Viewing Alert Activity on the HUD Page](#).

This chapter describes additional or recently added netconn metadata in Carbon Black EDR. It specifically describes TLS fingerprinting.

This chapter includes the following topics:

- [Overview of TLS Fingerprinting](#)
- [How TLS Fingerprinting Works](#)
- [TLS Fingerprinting Implementation](#)

Overview of TLS Fingerprinting

Transport Layer Security (TLS) fingerprinting is a platform-independent method for creating TLS fingerprints that can easily be shared for improved threat intelligence. TLS fingerprints are properties of a netconn event for TCP connectivity only.

JA3 and JA3S are TLS fingerprinting methods. JA3 fingerprints how a client application communicates over TLS, and JA3S fingerprints the server response. Combined, they create a fingerprint of the cryptographic negotiation between client and server.

JA3, when used in combination with JA3S, is a useful method to fingerprint a TLS negotiation between client and server. When used in conjunction with a process hash, even greater fidelity can be achieved. For example, some Peer-to-Peer (P2P) client connections can be tracked via TLS fingerprinting. This can be used to correlate an application if the binary and/or process metadata has been changed to avoid more direct forms of identification. Additionally, commodity malware variants often re-use cryptographic information, resulting in a common JA3 hash across families.

How TLS Fingerprinting Works

To initiate a TLS session, a client sends a `TLS Client Hello` packet following the TCP handshake. This packet, and the way in which it is generated, is dependent on packages and methods that are used when building the client application. The server responds with a `TLS Server Hello` packet that is based on server-side supported ciphers and configurations as well as details in the `Client Hello`.

Because TLS negotiations are transmitted in the clear, it is possible to fingerprint and potentially identify client applications using the details in the `TLS Client Hello` packet.

The JA3 method gathers the decimal values of the bytes for the following fields in the `Client Hello` packet:

- Version
- Accepted cipher suites
- List of extensions
- Elliptic curves
- Elliptic curve formats

It then concatenates those values together to create an MD5 hash (or unique fingerprint) that can enhance traditional cybersecurity approaches such as allow lists, deny lists, and searching for IOCs.

The JA3S method then gathers the decimal values of the bytes for the following fields in the `Server Hello` packet:

- Version
- Accepted cipher
- List of extensions

It concatenates these values in the same way as the `Client Hello` packet, resulting in an MD5 hash known as a JA3S fingerprint.

TLS Fingerprinting Implementation

TLS fingerprinting is available with the 7.1.0 release of Carbon Black EDR (for Windows 7.0.0 and higher sensors only). It provides additional endpoint telemetry that can be delivered to the Carbon Black EDR server, and used for narrowing investigations of known malware by identifying known TLS fingerprints.

TLS fingerprints can be specified as IOCs in custom threat feeds. See [Chapter 17 Threat Intelligence Feeds](#).

TLS fingerprints can be used in the following ways:

Process Search

TLS fingerprints are searchable via Process Search. See [Overview of Process Search](#). For example:



Process Analysis

TLS fingerprints appear in the Process Analysis page (under netconn events), and as quick filters. See [Chapter 13 Process Search and Analysis](#) and [Process Event Filters](#). For example:



Watchlists

TLS fingerprints can be used in watchlists. See [Chapter 20 Watchlists](#). For example, to create a TLS fingerprint watchlist:

Create Watchlist



Watchlist Name *

Description

Query *

The query is stored URL-encoded, and displayed in decoded form for readability. Both forms are accepted here.

[Try it out >](#)

- Email Me
- Create Alert
- Log to Syslog

Watchlist Type:

- Process
- Binary

[Create](#)

[Cancel](#)

In addition, TLS fingerprints can trigger an alert, email or syslog event.

Sensor Parity

24

This appendix contains two tables that show which Carbon Black EDR features or configurations are available for sensors on each operating system platform.

- Sensors are discussed in [Chapter 7 Managing Sensors](#)
- Sensor groups are discussed in [Chapter 8 Sensor Groups](#)

This chapter includes the following topics:

- [Sensor Feature Support](#)
- [Sensor Group Feature Support](#)

Sensor Feature Support

The following table describes whether certain features are available on sensors:

Feature	Windows	Linux	OSX
Binaries (Collection)	Yes	Yes	Yes
Binary Info (Collection)	Yes	Yes	Yes
BinaryModule loads (Collection)	Yes	Yes	Yes
Carbon Black Live Response	Yes	Yes	Yes
Child Process events (Collection)	Yes	Yes	Yes
Compatibility Control	No	No	Yes
Cross Process events (Collection)	Yes	No	No
Retention Maximization	Yes	No	Yes
Diagnostics collection with SensorDiags	Yes	Yes	Yes
Disable sensor operation events	Yes	No	No
EMET events (Collection)	Yes	N/A	N/A
File modifications (Collection)	Yes	Yes	Yes ¹
Global VDI Support	Yes	Yes	Yes
Hash Banning	Yes	Yes ²	Yes
Hash Banning Allow List (restrictions)	Yes	No	No

Feature	Windows	Linux	OSX
Improved proxy support: WPAD & PAC files	Yes	No	No
Known DLLs (Dylib/Mac) Filtering	Yes	No	Yes
Network Connections (Collection)	Yes	Yes	Yes
Network Connections for IPv6 (Collection)	Yes	Yes	Yes
Network Isolation	Yes	Yes2	Yes
Non-Binary File Writes (Collection)	Yes	Yes	Yes
ODX Support	Yes	N/A	N/A
Process Information (Collection)	Yes	Yes	Yes
Process user context (Collection)	Yes	Yes	Yes
Proxy Support (unofficial support)	Yes	Yes	Yes
Registry modifications (Collection)	Yes	N/A	N/A
Server TLS certificate swapping	Yes3	No	Yes3
SHA256 hashes in events (Collection)	Yes4	No	Yes4
Support for FIPS	Yes	No	No
Tamper Detection	Yes	No	No
Tamper Protection	Yes	No	No
TLS JA3 and JA3S Fingerprinting	Yes	No	No

Note

- 1 The OS X sensor reports a file write event at the time a process opens the file. This event is based on the requested access mask. It is not based on actual writes. Even if the process does not write anything in the file, a file write event occurs.
- 2 At the time of this server release, currently available eBPF-based sensors (for RHEL/CentOS 8.0 and SUSE 12&15) do not support isolation or banning.
- 3 TLS cert swapping support is for sensor versions Windows 6.2.3-win and Mac 6.2.5-osx and above.
- 4 SHA-256 sensor support begins with 6.2.x sensors for both Windows and macOS. Check the VMware Carbon Black User Exchange or VMware Carbon Black Support for any updates about other sensors that can generate this hash type.
SHA-256 hashes are reported in addition to MD5 hashes. They can be used to report information to the Event Forwarder (v3.4.0 or later) and are also displayed on relevant pages in the console. See <https://github.com/carbonblack/cb-event-forwarder> for information on installing and configuring the event forwarder.

Sensor Group Feature Support

The following table describes whether certain features can be configured for sensor groups:

Feature	Windows	Linux	OSX
Alerts Critical Level	Yes	Yes	Yes
Banning Settings	Yes	Yes	Yes
Binaries (Enable/Disable)	Yes	Yes	Yes
Binary Info (Enable/Disable)	Yes	Yes	Yes
BinaryModule loads (Enable/Disable)	Yes	Yes	Yes
Child Process events (Enable/Disable)	Yes	Yes	Yes
Cross Process events (Enable/Disable)	Yes	N/A	N/A
Retention Maximization (Enable/Disable)	Yes	No	Yes
EMET events (Enable/Disable)	Yes	N/A	N/A
File Modifications (Enable/Disable)	Yes	Yes	Yes
Known DLLs (Dylib/Mac) Filtering (Enable/Disable)	Yes	No	Yes
Network Connections (Enable/Disable)	Yes	Yes	Yes
Non-Binary File Writes (Enable/Disable)	Yes	No	No
Process Information (Enable/Disable)	Yes	Yes	Yes
Process user context (Enable/Disable)	Yes	Yes	Yes
Registry modifications (Enable/Disable)	Yes	N/A	N/A
Sensor Name	Yes	No	No
Sensor Network Throttling	Yes	No	Yes
Sensor Upgrade Policy	Yes	Yes	Yes
Sensor-side Max Disk Usage (%)	Yes	Yes	Yes
Sensor-side Max Disk Usage (MB)	Yes	Yes	Yes
Server TLS certificate swapping (choose cert)	Yes	No	Yes
Server TLS strict certificate validation	Yes	No	Yes
Tamper Level Settings	Yes	N/A	N/A
VDI Behavior Enabled	Yes	Yes	Yes

Sensor Health Score Messages

25

This appendix describes sensor health score messages that display on the Sensor Details page in the Carbon Black EDR console. Sensors are discussed in [Chapter 7 Managing Sensors](#)

Sensor health scores are generated by using a variety of inputs. The default score for a sensor that is running without any issues is 100. Carbon Black subtracts points from this score for events that fall outside of the “healthy range”, based on severity. Sensor health score messages are provided in the Carbon Black EDR console when the sensor is in an unhealthy state.

Health events are presented in priority order. If two events occur at the same time, the message for the higher priority event is presented, regardless of the severity. The sensor can only report one message at a time even when multiple messages occur. The last message type that is processed by the sensor is the one that is reported to the server.

The priority order for each sensor type is listed in the following applicable sections.

This chapter includes the following topics:

- [Windows Health Events](#)
- [macOS Health Events](#)
- [Linux Health Events](#)

Windows Health Events

Priority List

- 1 Driver and component failures
- 2 NetMon Stream driver failure
- 3 Service component failure
- 4 Memory usage
- 5 GDI handle count
- 6 Handle count

- 7 Disk space
- 8 Event loss
- 9 Event load

Driver and Component Failures

Cause

This alert occurs if Netmon, Svc component, or core drivers fail to load.

Impact

The sensor does not collect netconn events if the Netmon driver fails. The sensor can stop collecting one or more event types if Svc component fails. The sensor does not collect any events if the core driver fails.

Severity Scale

Driver failure	Health score	Message
Svc component	-25	Svc component failure
Netmon driver	-25	NetMon stream driver failure
Core driver	-100	Core driver failure

Remediation

Restart the failed service. For Netmon issues, a system reboot and re-installation of the network driver might be necessary if issues persist. Contact VMware Carbon Black Technical Support if issues continue.

Memory Usage

Cause

Carbon Black EDR sensor service memory usage has risen above expected values.

Impact

Excessive memory consumption can impact system and application performance.

Severity Scale

Memory (MB)	Health score	Message
> 50	-5	Elevated memory usage
> 100	-10	Elevated memory usage
> 200	-20	High memory usage
> 512	-25	Very high memory usage
> 1024	-50	Excessive high memory usage

Remediation

Restart service. Contact VMware Carbon Black Technical Support if issues continue.

GDI Handle Count

This metric records GDI handles usage from the sensor service. GDI handles are used in module extraction only.

Cause

Carbon Black EDR sensor service GDI handle usage is above normal values.

Severity Scale

GDI handles	Health score	Message
> 100	-5	High GDI handle count
> 500	-10	Very high GDI handle count
> 1000	-20	Excessive GDI handle count

Remediation

Analyze event collection to see if a specific event type is generating an excessive count. If these are non-binary file writes, this collection type can be often be turned off; see [Turning off event-collection of Non-Binary file writes](#) .

Handle Count

This metric records kernel handles usage from the sensor service. This metric does not include GDI (Graphics Device Interface) or user handles. Sensors that are running on Windows XP x86 do not report this metric.

Cause

Carbon Black EDR sensor service kernel handle usage is above normal values.

Severity Scale

Handles	Health score	Message
> 500	-5	Elevated handle count
> 1000	-10	High handle count
> 2000	-25	Very high handle count
> 4000	-50	Excessive handle count

Remediation

Analyze event collection to see if a specific event type is generating an excessive count. If these are non-binary file writes, this collection type can be often be turned off; see [Turning off event-collection of Non-Binary file writes](#) .

Disk Space

Cause

The free disk space on the volume where the Carbon Black EDR sensor is installed has dropped below normal values. This metric does not consider available disk space on other system disks.

Impact

Data collection/usability impact.

Severity Scale

Disk space (MB)	Health score	Message
< 1024	-5	Low disk space
< 100	-25	Very low disk space
< 10	-50	Excessively low disk space

Remediation

Run utilities to clear disk space.

Event Loss

Cause

Events are dropped by the kernel driver due to high activity or component malfunction.

Note that this is calculated by the percentage of total kernel events that were dropped.

Impact

Potential impact to data collection.

Severity Scale

Event loss (%)	Health score	Message
1	-5	Elevated event loss
2	-10	High event loss
5	-20	Very high event loss
10	-50	Excessive event loss

Remediation

Restarting the service should resolve the issue.

Event Load

Cause

The number of outstanding raw kernel events to be processed has exceeded a threshold.

Note that Netconn events are handled in a separate driver.

Impact

Data collection/usability impact.

Severity Scale

Event queue depth	Health score	Message
> 512	-5	Elevated event load
>1024	-10	High event load
> 4096	-25	Excessive event load

Remediation

Analyze event collection to determine what is generating the event load. Consider disabling event collection on certain event types.

macOS Health Events

Priority List

- 1 Memory usage
- 2 Out of license
- 3 Upgrade issue
- 4 Proxy driver failure
- 5 Procmon driver
- 6 Netmon driver

Memory Usage

Cause

Carbon Black EDR sensor service memory usage is above normal values.

Impact

System stability and performance can be impacted if abnormal memory usage persists.

Severity Scale

Memory (MB)	Health score	Message
> 100	-10	Elevated memory usage
> 250	-20	High memory usage

Memory (MB)	Health score	Message
> 512	-25	Very high memory usage
> 1024	-50	Excessive memory usage

Remediation

Restart the service. Contact VMware Carbon Black Technical Support if issues continue.

Out of License

Cause

Server license is expired.

Impact

The sensor is currently unable to push data to the server. Event data is cached on the endpoint. Attempts to send data can cause elevated bandwidth consumption.

Severity Scale

Condition	Health score	Message
Expired license	-25	Out of License

Remediation

Apply updated license to the Carbon Black EDR server.

Upgrade Issue

Cause

Probably due to an unapproved kext or a required restart at the endpoint to complete the upgrade.

Impact

Inoperable until the condition is resolved.

Severity Scale

Condition	Health score	Message
Upgrade incomplete	-75	Endpoint must be restarted to complete upgrade
Upgrade failed	-75	Carbon Black EDR kernel extensions are not approved for load

Remediation

Check kext status and approve if necessary for upgrade failure condition. Contact VMware Carbon Black Technical Support if issues continue.

Proxy Driver Failure

Cause

Probable cause is an OS kernel major version mismatch with the proxy driver.

Impact

Sensor does not collect process events correctly because the proxy driver is not connected to OS sys tables.

Severity Scale

Condition	Health score	Message
Driver fails to load	-25	Proxy driver failure

Remediation

Validate that the kernel version is supported by the sensor. If the OS version is supported, restart the service. Contact VMware Carbon Black Technical Support if issues continue.

Procmon Driver

Cause

Issue with loading procmon (process monitoring) driver, or version mismatch from a failed upgrade.

Impact

The sensor might stop collecting one or more data collection types.

Severity Scale

Condition	Health score	Message
Version does not match sensor version	-37	Procmon driver version mismatch
Driver fails to load	-37	Procmon driver failure

Remediation

Restart the service. Contact VMware Carbon Black Technical Support if issues continue.

Netmon Driver

Cause

There is an issue with loading netmon (network monitoring) driver, or a version mismatch from a failed upgrade.

Impact

The sensor might stop collecting netconn events.

Severity Scale

Condition	Health score	Message
Version does not match sensor version	-37	Netmon driver version mismatch
Driver fails to load	-37	Netmon driver failure

Remediation

Restart the service. Contact VMware Carbon Black Technical Support if issues continue.

Linux Health Events

Priority List

- 1 Out of license
- 2 Failed to get event log stats
- 3 Driver failure
- 4 Memory usage

Out of License

Cause

Server license is expired.

Impact

The sensor is currently unable to push data to the server. Event data is cached on the endpoint. Attempts to send data can cause elevated bandwidth consumption.

Severity Scale

Condition	Health score	Message
Expired license	-25	Out of License

Remediation

Apply updated license to the Carbon Black EDR server.

Failed to get Event log Stats

Cause

There is an issue loading a procmon driver, or there is a version mismatch from a failed upgrade.

Impact

The sensor cannot track the current event log.

Severity Scale

Condition	Health score	Message
Cannot determine current event log stats	-50	Failed to get Event log stats

Remediation

Restart CB daemon. Contact VMware Carbon Black Technical Support if issues continue.

Driver Failure

Cause

An issue occurred when loading a driver.

Impact

The sensor might stop collecting one or more data collection types.

Severity Scale

Condition	Health score	Message
Driver failure	-50	Driver failure

Remediation

Restart CB daemon. Contact VMware Carbon Black Technical Support if issues continue.

Memory Usage

Cause

Carbon Black EDR sensor daemon memory usage is above normal values.

Impact

System stability and performance can be impacted if abnormal memory usage persists.

Severity Scale

Memory (MB)	Health score	Message
> 75	-5	Elevated memory usage
> 100	-10	Elevated memory usage
> 250	-20	High memory usage
> 300	-25	Very high memory usage
> 450	-50	Excessive memory usage

Remediation

Restart CB daemon. Contact VMware Carbon Black Technical Support if issues continue.