

RSTS PROFESSIONAL

Volume 4, Number 1

February 1982

\$10⁰⁰/issue, \$35⁰⁰/year



INSIDE:

- ☐ Telephone Costs Rival Data Processing Costs?
- ☐ Disk I/O From MACRO
- ☐ Getting the Most Out of Your DEC Field Service
- ☐ FILMAP.BAS
- ☐ QUERY.TEC
- ☐ LINK-TIME Initialization of BP2 MAPS
- ☐ RSTS/E's Small Buffers
- ☐ The Case for NFF
- ☐ Tips & Techniques
- ☐ How Do You Read A RSTS/E Disk Structure?
- ☐ The VAX-SCENE Writing Structured Program in VAX-11 BASIC
- ☐ BIO.BAS
- ☐ The Low Speed Spooling Package
- ☐ Proposed Standard EDT 2.0 Initializer
- ☐ SHOW
- ☐ "Input Loop" Programming Technique
- ☐ Program Notes
- ☐ More . . .

Financial Decision Support Canned For Easy Use!

Fast Flexible Information

MAPS™ IS FRESH! It's the ideal decision support software product for today's financial manager. With MAPS you get fast, fresh, flexible information handling the moment you want it. Plans, forecasts, models, reports can all be created and manipulated right in your own department. Changes that affect your company can be reflected and evaluated on the spot. And best of all, MAPS is canned for easy use! Call Ross Systems right now. Ask for a demonstration of MAPS. You'll be amazed what a little fresh decision support can do. Currently available on worldwide timesharing, or purchase for DEC's*, RSTS/E and VMS operating systems. Contact Ross Systems for more information today.

*DEC is a trademark of Digital Equipment Corporation.

ross systems

1800 Embarcadero Road
Palo Alto, CA 94303
(415) 856-1100

Regional offices: New York,
Dallas, San Francisco, Los Angeles

"Now that's fresh decision support."

MAPS meets your daily requirements:

Financial reports	100%
Financial planning	100%
Consolidations	100%
Financial modeling	100%
Performance forecasts	100%
Full color graphics	100%

Adding a printer? Add-on the printer company instead. Southern Systems.



You need maximum performance and minimum downtime from your printer. So, don't add-on just a machine. Add-on the unmatched printer expertise of Southern Systems, recognized by users as the leader in printer systems, from technological innovation through installation to the long-term service you need.

In more than 4,000 installations, Southern Systems has proven it's **the** best source for printer systems from 200 to 2,000 lpm. Printer systems that are guaranteed compatible with your computer. Printers that are serviced by SSI specialists nationwide. Printers that work for you at less cost than any other printer source can offer.

Add-on a Southern Systems printer system and you add-on Southern Systems. Just ask our customers.



Southern Systems

The Printer System Problem-Solvers.

2841 Cypress Creek Road, Fort Lauderdale, Florida 33309
(305) 979-1000; (800) 327-5602; Telex 522135

Tell me about your printers from:

☐ 200-300 lpm

☐ 600-900 lpm

☐ 1000 plus lpm

My computer system is _____

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Telephone _____ CW _____

SOFTWARE

SUBJECT: CALOUT

**NEED TO GET FILES
ONTO SOME OTHER
SYSTEM?**

OR BACK ONTO YOURS?

BY TELEPHONE?

FAST?

SOME THINGS TO CONSIDER.

Of the few utility packages available for this requirement there are some important differences.

CALL ANY RSTS SYSTEM YOU LIKE. Some designs require that a copy of the communication package reside on each correspondent system. This means you pay the license cost again and again for each system in a defined network. Many users wish to link up with any system. The CALOUT package is designed to support this requirement. Only your system requires the license.

MOVE ANY KIND OF FILE AND THE ATTRIBUTES. RSTS files are always associated with special file attributes that are not part of the data itself. This information is often essential to the use of the file. Some communication packages do not deal with it all. The CALOUT package automatically sets up the correct file attributes on the correspondent RSTS system. Virtually any file type can be transferred.

ABOUT ERROR CHECKING AND CORRECTION. Standard telephone lines can insert bad data into a link. Some communication packages have no way of overcoming this problem. The CALOUT package insures that each file is transferred correctly. This is done by automatic error detection and correction.

CONCERNING FILE TRANSFER SPEED. The speed for moving files is determined by three primary factors. Dominant is the baud rate of the communication link. Normally, a communication package will transfer files between systems as fast as the hardware link will permit. Synchronous or asynchronous links may be used with the CALOUT package. A wide range of standard communication hardware from a variety of vendors is found to be suitable. Transfer speed will be lost if the link is bad and a lot of error correction is required. Also, speed is lost if either system is heavily loaded and responding poorly. The CALOUT package is well optimized and uses very little system resource.

ON BEING EASY AND CONVENIENT TO USE. The user interface can be quite awkward and clumsy to work through. This is true to varying degrees among the packages offered. The CALOUT package is designed to support even the casual user without reference to the user manual. This of course is when everything is going well. When problems occur with the hardware link, CALOUT provides extensive diagnostic information to guide hardware maintenance activities. Protocols for logging and using a correspondent system can be invoked automatically from a table you define.

TRANSFERRING SETS OF FILES. The CALOUT package provides a wild card transfer request. With this feature many files may be automatically moved with a single request. It works much like PIP.

ALSO, ON BEING A TIME SHARED USER. You may often wish to run a few tasks on the correspondent system. The CALOUT package will let you run tasks or move files as

you wish. You may pop back and forth between several powerful modes with simple control commands.

ON NEEDING SOMEONE AT THE OTHER END. Watch out for this one. It can be quite inconvenient if you find that you must have someone at the correspondent system set your link up before you can transfer files. The CALOUT package requires no attention whatever at the other system site. Of course, they must have some standard dialup capability at their end.

REGARDING LOCAL SYSTEMS. For systems that are physically near each other, the CALOUT package can be implemented without a telephone line or any special hardware beyond a standard cable linking the two or more systems.

CALLING A NON-RSTS SYSTEM. The CALOUT package will fully support links with RT11 and VAX systems. Other non-RSTS and non-DEC systems are supported for text file transfers.

ABOUT THE TWX LINKS. The CALOUT package supports alternate dialup and direct TWX connection for fully automated use of the Western Union network.



HOW TO GET MORE INFORMATION. Call Janet at (617) 275-6642, or write: Clyde Digital Systems, Inc., P.O. Box 348, Bedford, MA 01730.

Coming . . .

- VAX MACRO
- Relational Data Bases
- A Free Advanced Video Board
- Push/Pull MACRO's
- More EDT Hints & Kinks
- Program Notes
- Login without LOGIN
- MACRO MAN
- VAX-Scene
- V7.1 Report
- Word Processing
- A PDP-11/115?
- How to use BUILD
- More . . .

The RSTS Professional Magazine, February 1, 1982, Vol. 4, No. 1. Published bi-monthly. Single copy price \$10.00, \$35.00 per year. Published by M Systems, Inc., 753 Johns Lane, Ambler, Pa. 19002-0245, telephone (215) 542-7008. Send all correspondence and change of address to: Box 361, Ft. Washington, Pa. 19034-0361. Copyright © 1982 by M Systems, Inc. No part of this publication may be reproduced in any form without written permission from the publisher.

NO!

NO! Only two letters long, but it sure packs a lot of negativity into a small space. The Word at the December Los Angeles DECUS meetings was: NO! DECUS is becoming one big NO and its catching on. Clerks and secretaries won't say no if they think the boss will say yes; the NO-ism comes from the top.

side the exhibit hall where it was accessible only from 9-5 (NO, we can't move it out).

I am a strong supporter of DECUS; Even now I am the TECO sub-SIG chairman and will give no less than three sessions at the Spring meetings (New user, TECO Macros, and How to get the most out of Version 7.1 or The Carl and Dave show revisited). The leadership of DECUS has got to change its perspective to a more positive one. The members of DECUS are important, the most important thing DECUS has. This is a USER organization, decUs, to serve the USERS not to support itself.

I would like to hear more YES's from DECUS. New members would feel more at home and old members might give a little more if they felt some positive feedback from the DECUS leadership. Why don't we find more ways to say "YES". Stop running scared with all the NO's. Grace Hopper once told a DECUS audience that she would come back to haunt anyone who said, "but, we have always done it that way". I think Ms. Hopper would visit some of you who only know how to say NO, and can't figure a way to say "YES".

DECUS might learn something from a story I like to tell of a time I was traveling in England after a United Kingdom DECUS Seminar. We spent the day driving and sightseeing and finally arrived at the Inn we were to spend the night at 5:30 P.M., past the usual hour for Tea. We were tired and cold and hopefully asked, "are we too late for Tea", "you are never too late for Tea", they replied. "Where can we have Tea", we asked. "Anywhere you like", was the answer. I told my wife, "we're going to like it here". I was right. And we're going back. ❤️

Dave Mallery will return in the next issue.

**Thanks for listening to us—
over and over again.**

Carl & Dave



R. D. Mallery

Carl B. Marbach

Assistant Editor/Advertising
Helen B. Marbach

Controller
Peg Leiby

Administrative Assistant
Hope Makransky

Subscription Fulfillment
Kathi B. Campione

United Kingdom Representative
Pauline Noakes
RTZ Computer Services Ltd.
P.O. Box 19, 1 Redcliff Street
Bristol, BS99-7JS
Phone: Bristol 24181

Philip G. Anthony

Al Cini
Mark H. Deibert
Mark J. Diaz
Steven L. Edwards
Peter Ehrenstrom
Lawrence Fisher
Rob Frazer
Timothy P. Hart
Michael H. Koplitz
Bob Meyer
James F. Shaughnessy, Jr.
David Spencer
Jim Swanson
Traudi Tissler

Douglas Benoit

Photographic Consultant
Bill Marbach

Design & Production
Grossman Graphics

Editorial Information: We will consider for publication all submitted manuscripts and photographs, and welcome your articles, photographs and suggestions. All material will be treated with care, although we cannot be responsible for loss or damage. (Any payment for use of material will be made only upon publication.)

*This publication is not promoted, not authorized, and is not in any way affiliated with Digital Equipment Corporation. Material presented in this publication in no way reflects specifications or policies of Digital Equipment Corporation. All materials presented are believed accurate, but we cannot assume responsibility for their accuracy or application.

LOW COST RSTS/E NETWORKING.

DMG/NET provides RSTS/E users with easy access to packet-switched (X.25) networks. It permits two-way file transfer and interactive dialogue with other RSTS/E systems and locally initiated communication with non-RSTS/E systems. From a RSTS/E host to other RSTS/E computers, to other DEC computers, even to non-DEC computers...communication is quick, simple and extremely inexpensive.

REDUCES COSTS

No matter how large or how small your RSTS/E system is, DMG/NET can substantially reduce communication costs by utilizing packet-switched (X.25) networks. With DMG/NET, you can save up to 90% of your cost of communication, compared to "dial-up" or leased lines.

EASY TO USE

Even a non-technical person can access the entire communication network quickly and easily with DMG/NET. There is no need to memorize a long series of network codes, numbers and procedures. Instead, a user accesses a remote database with only the familiar local sign-on and a short, easily remembered identification code...DMG/NET does the rest.

What's more, DMG/NET allows any locally connected terminal to access any specified remote database, eliminating the need for separate terminals, complicated switch boxes or terminal setting changes.

To find out how DMG/NET can meet *your* RSTS/E networking needs, contact Digital Management Group Ltd.

DMG/NET

RSTS/E and DEC are registered trademarks of Digital Equipment Corporation
DMG/NET is a registered trademark of Digital Management Group Ltd

Digital Management Group Ltd.

4800 Yonge Street, Willowdale, Ontario, Canada M2N 6G5
Telephone: (416) 225-7788

CIRCLE 88 ON READER CARD

Send letters to: Letters to the RSTS Pro, P.O. Box 361, Ft. Washington, PA 19034-0361.

We enjoy the *RSTS Pro* magazine and we have learned a great deal from it. But, one subject that we have never seen addressed is how to gear programs for the non-D.P. user. This is not quite as simple as it sounds. As the System Manager, I have to be constantly on the lookout to be sure that my programmers tailor their work for the user and not for themselves. Programmers seem to enjoy writing programs that can do really 'amazing' things, but if the user doesn't need those things or can't use certain features then the programmer should not be incorporating them into a user oriented program. Experimentation is fine and should always be going on, but not at the expense of the user. The programs should be geared so that the user doesn't have to answer too many questions or have to follow too many procedures but is still able to get everything he is looking for by himself. This is a very fine line, the programmer must understand that he has to tread carefully or he will fall into the trap of giving the user either too much or not enough. One thing that is very important is that the programmer learn to listen to exactly what the user/analyst is asking for. Then be able to extrapolate what they have not asked for and give him that too, but without going so far as giving the user more than he knows what to do with. Many off the shelf packages offer much more than a typical user really needs but those packages have to be geared for any type of user. When a programmer is working on an in-house program and is familiar with the people who will be using that program, he should gear the program towards those people. The program should be as intelligent as possible and be able to make it's own decisions without the user being aware of what is taking place. The user should be presented with concise, understandable questions and not have to refer to either an operations manual or to the Computer Room staff for help. Conversely, the user should not be presented with myriads of information about the program and how to answer the questions because the user doesn't need all that information. This is our basic philosophy on tailoring programs for the user. I could go on, but I believe you see what I am trying to get at by now.

[illegible]

Mark Ruggiero, Arlington, MA
P.S. Is it possible to buy a lifetime subscription?

Well John, we haven't reached the Doc for comment yet, but we do feel that he would make our better if he knew which game he was working on. Now then, concerning the map, as you probably know by now you are too late to stop the presses for DUNGEON, however, we may consider taking a poll before we print future "solutions". Thanks for the suggestion.

... continued on page 78

Better than Datatrieve!

- Easier to understand
- Much more powerful
- Better manuals
- Better support

Not Limited to RMS-11!

- Can access most file types and DBMS
- Include your own file routines
- Mix file types in a single report

**THE
ULTIMATE
REPORT WRITER**

GRS

**GENERALIZED REPORTING SYSTEM
QUERY LANGUAGE and REPORT WRITER**

for PDP-11/RSTS systems

from

etc ENTERPRISE
TECHNOLOGY
CORPORATION

Call or write for complete details:

305 Madison Avenue • New York, NY 10165
(212) 972-1860

Incredibly Flexible!

- Complete formatting flexibility
- Powerful built-in calculations
- User-specified calculations
- Include your own special routines

Easy to use!

- Usable by non-programmers
- English query-language
- Very user-friendly
- Nonprocedural language

Telephone Costs Rival Data Processing Costs?

Software Available to Manage Telephone Costs

By Traudi Tissler, Communications Analysis Corp.

To many of you this may not be a surprise. But if it is, maybe you should consider this. Especially if you belong to the group of managers who have found it necessary to give this issue of telecommunications costs a low priority in the past. Take for example the case of a local Boston-based University. It meant \$67,000 in annual savings to the University. The telecommunications manager was in the process of looking at new telephone switches to replace an older piece of equipment. Rather than sort through mounds of telephone bills close to the tune of 11,000 call records monthly, he sought a teleprocessing service bureau to do the job. Within a week, and for less than \$1,000, he was presented with a reconfiguration of his voice network which would conservatively save \$67,000. Conservatively, since the study was based on an off-peak summer month.

Your telephone system may serve more employees than the 1000 lines at this University in Boston, but your savings may be as astounding even if your company has a smaller telephone system, in the range of 50 to 75 lines.

IN-HOUSE PROCESSING

Up until recently, the customary route to accomplish CDR/SMDR analysis has been to send the call-data to a teleprocessing bureau. Yet, today many of the large users are turning to in-house processing. Complete software packages are available in the neighborhood of \$18,000 and up. Although a company may wish to process in-house, the packages are not generally developed in-house. The more reliable teleprocessing companies have the experience and expertise and will custom-tailor a package for you.

WHAT IS TELEPROCESSING?

First, one may ask "What exactly is a teleprocessing service bureau?" Teleprocessing service bureaus came into existence about 10 years ago; about the same time so many other industries were putting data processing power to use. These entrepreneurs recognized a void. There existed a need for a reporting system to control, manage, and analyze telephone use and costs. Until the early 1970's, the local Bell System operating company was the most logical, if not only, place to turn to for an answer. Yet, the Bell System as an answer poses several limitations and drawbacks:

1. Bell System limited the number of studies it would do, therefore you could not monitor PBX traffic activity on a periodic monthly basis.
2. You could not pay for a study or additional studies even if you wanted to make it attractive for Bell to respond to your request.
3. You might have to wait a couple of months, if not longer, for the information.

4. The studies were not a routine matter, so snags could easily arise.
5. Some information that would be helpful was not available.
6. Bell offered no equipment which would allow you to do this job yourself.
7. Bell would not recommend the new special common carriers who offer reduced costs for long distance calls.

Now, back to the entrepreneurs. Before the telephone call records could be processed, this data had to be collected from the telephone switch or PBX (Private Branch Exchange). Basically, a PBX is a switching unit located in the office building allowing calls within the building to be switched or transferred through this unit, rather than through the Bell System Central offices, as was the case with older switches. In addition, the PBX offers significant features, such as the ability to confer with a third party, answer a ringing phone from any phone across the room, redirect calls to another extension when you are unavailable.

So it was off this PBX that each and every call was to be recorded. A collection device was manufactured and attached to the RS232 port off the PBX, and data collection began. At the end of the month, the mag-tape, floppy disc, cassette, cartridge, etc. was ready to be processed. And this process became known as CDR/SMDR processing to the telephone industry and its customers.

CDR/SMDR PROCESSING

In its early stages, CALL DETAIL RECORDS/STATION MESSAGE DETAIL RECORDS processing was an expensive investment, both expertise and dollar wise for end-user, in-house processing. So teleprocessing service bureaus grew. On a monthly basis, the service bureau, combining the expertise of data processing with telecommunications, received the data and turned a report back to the client.

THE MANAGEMENT TOOL

The reports fall into two broad categories: telephone usage information and trunk/traffic utilization. And to the manager armed with this information, it means significant savings.

The telephone-usage information is built on a pyramid-like scale. Activity is first summarized on a per-user basis (see Diagram A). This information will show exactly who called, where, when and for how long. Also, these reports show how the call was placed, how often.

The more sophisticated programs compare the actual route chosen to complete the call and compare it to the most cost-effective route, highlighting in dollar figures what re-

Word Processing for DEC Systems

HAMILTON

- Spanning the DEC Product Family with a wide variety of system configurations, ranging from single user to large multi-workstation environments.

- Software designed to run under VMS, RSX/11M, RSTS/E, or its own operating system.

- Providing full word processing capability with the emphasis on ease of operation and flexibility.

- Available as layered product or bundled with system hardware for a dedicated word processing system.

- Facilitates integration of Word Processing and Data Processing files.

• FEATURES INCLUDE:

Auto Center

Auto Underscore

Global Search/
Replace

Auto Decimal
Alignment

User Defined Keys

Auto Page
Numbering

List Processing

Paragraph and
Abbreviation
Library

132 Character
Wide Screen

Document
Orientation

Dynamic Nature

"Menu" Driven

Operator Prompting

Auto Decimal
Alignment

- Excellent Price/Performance ratio for your system dollar.

- Training and Support

WRITE OR CALL FOR INFORMATION AND LITERATURE

SYSTEMS WITH SOLUTIONS

HAMILTON

Hamilton Rentals

Pearl Court,
Allendale, N.J. 07401

TOLL FREE 800-631-0298

IN NEW JERSEY
201-327-1444

LONDON

PARIS

DÜSSELDORF

TORONTO

NEW YORK

DEC, VMS, RSX/11M, RSTS/E, MACRO-11, PDP 11 are trademarks of Digital Equipment Corporation

Before moving on to the topic of trunk/traffic utiliza-

Similarly, certain industries will not have access to information so that clients can be billed for calls made on their behalf. An excellent application is the law market. An account code system is developed so that prior to each call, a lawyer punches a unique I.D. code. When the call data is processed, this information is readily available to be put on the client's next statement. It's as simple as that! (Diagram D)

Another misnomer is that WATS calls are "FREE." It is not even true to say that WATS calls are always less expensive. When an analysis of telephone

TRAFFIC ANALYSIS CONTINUED

Information is available, some in graph form, to identify the peak calling period, so that one can determine if your trunks are engineered for expected grade of service or line availability. Remember, the analysis of only trunk traffic for the Boston-based University resulted in a savings of \$67,000 annually. This does not take into account the savings that will be realized when non-business calls are reduced. Just the knowledge that a record of phone calls placed by an individual is available is incentive enough to minimize abuse of this company benefit.

Communications Analysis Corp. has developed a software package, MOSTE, to be used for the control and management of the telephone systems and its costs. MOSTE is proprietary licensed software which will provide comprehensive telecommunications management reports that record and summarize calls made from your telephone switch.

WHY TAKE RISKS?

HIGH RISK VS BIG SAVINGS

- NPI National Peripherals, Inc.**

CIRCLE 62 ON READER CARD

your trunks. Once you do pursue the area of telephone costs management and control, speak with several companies; this business is a competitive one and some companies offer excellent rates with a good staff of experienced data processing and telecommunications staff employees. Then, keep in close touch with your representative from the teleprocessing company, and ask questions; usually, they will be more than happy to help you interpret your reports.

TELEPHONE COSTS RIVAL DATA PROCESSING COSTS

Back to our original question. This question remains for you to investigate. As with almost any industry, telephone costs are affected by inflation and spiralling costs. It may be true that the percentage increase in phone costs has risen slower than for other services and products, but this is not reason to overlook the management control which can be exercised over telephone usage and costs by you. And today, the software is available to do the job.

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM
FOR
-----SAMPLE COMPANY-----
CUSTOMER CODE 100

ACCOUNT CODE REPORT

CUSTOMER CODE 100										SVGS				CAC
DATE	START TIME	AC	NUMBER CALLED AREA EXT-LINE	DESTINATION	MINS	COST	LCR	LOST SVGS	VS L.D.	CALLED NUMBER I.D.	ACCT EKTN	USE ONLY		
FRI 23 JAN81	15:35	66	312-329-5500	CHICAGO IL	3.1	1.10		0.00	0.00		2000 1493	5		
FRI 30 JAN81	16:02	67	812-636-8764	GREENSBURG IN	3.7	1.31		0.00	0.00		2000 1494	5		
WED 4 FEB81	14:40	66	513-866-6521	MBG W CRTN OH	13.2	4.69		0.00	0.00		2000 1493	5		
MON 9 FEB81	15:07	66	513-866-6521	MBG W CRTN OH	7.6	2.70		0.00	0.00		2000 1493	5		
FRI 13 FEB81	10:34	67	513-273-3800	CINCINNATI OH	.7	0.25		0.00	0.00		2000 1493	5		
FRI 13 FEB81	12:57	66	513-866-6521	MBG W CRTN OH	1.3	0.46		0.00	0.00		2000 1493	5		
FRI 13 FEB81	13:19	67	213-573-2332	COMPTON CA	.9	0.32		0.00	0.00		2000 1493	5		
FRI 13 FEB81	13:51	67	213-573-2332	COMPTON CA	1.1	0.39		0.00	0.00		2000 1493	5		
TUE 17 FEB81	15:58	66	213-573-2332	COMPTON CA	1.2	0.43		0.00	0.00		2000 1493	5		
TUE 17 FEB81	16:40	67	213-573-2332	COMPTON CA	1.4	0.50		0.00	0.00		2000 1493	5		
WED 18 FEB81	10:48	66	213-573-2332	COMPTON CA	3.8	1.35		0.00	0.00		2000 1493	5		
THU 19 FEB81	09:21	66	513-866-6521	MBG W CRTN OH	2.9	1.03		0.00	0.00		2000 1493	5		
THU 19 FEB81	13:26	66	513-866-6521	MBG W CRTN OH	1.8	0.64		0.00	0.00		2000 1493	5		
THU 19 FEB81	13:40	66	513-866-6521	MBG W CRTN OH	.9	0.32		0.00	0.00		2000 1493	5		
THU 19 FEB81	14:28	66	513-866-6521	MBG W CRTN OH	4.7	1.67		0.00	0.00		2000 1493	5		
FRI 20 FEB81	08:41	67	513-273-3800	CINCINNATI OH	2.3	0.82		0.00	0.00		2000 1493	5		
////////////////////////////////////														
SUB TOT	X	X	X	X	50.6	17.98								

*PLEASE NOTE: This report is not included as part of the standard report package, but is available upon request.

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM
FOR
-----SAMPLE COMPANY-----

ACCOUNT CODE SUMMARY

ACCOUNT CODE SUMMARY REPORT

ACCOUNT CODE	NUMBER OF CALLS	TOTAL MINUTES	TOTAL COST
0 324 001	56	165.2	\$ 47.97
1 324 001	7	28.1	\$ 5.60
1 324 190	12	41.4	\$ 10.06
1 324 999	16	48.9	\$ 12.27
			\$ 75.90
0 446 001	21	59.2	\$ 18.17
0 446 999	4	12.0	\$ 2.57
1 446 001	7	36.5	\$ 7.22
1 446 070	36	99.9	\$ 20.17
1 446 335	1	4.6	\$.23
1 446 999	11	43.3	\$ 8.87
			\$ 57.23
0 787 001	6	19.8	\$ 4.07
0 787 002	1	3.8	\$.36
1 787 001	9	37.3	\$ 8.46
1 787 099	2	17.1	\$ 5.55
1 787 999	13	39.9	\$ 7.20
			\$ 25.64
0 922 001	1	5.4	\$.81
0 922 999	4	17.7	\$ 3.98
1 922 001	3	8.1	\$ 1.35
1 922 500	36	141.0	\$ 35.35
1 922 999	21	69.0	\$ 18.57
			\$ 60.06


NOW YOU BENEFIT FROM OUR EXPERTISE!

4 YEAR WARRANTY

DEC COMPATIBLE ADD-IN MEMORIES

Yes, 4 Years! Only TRENDATA (Standard Memories) with over 15 years of experience in designing and manufacturing memories, can make this offer.


LOOK AT WHAT YOU HAVE TO CHOOSE FROM:



DEC PDP-11/44

PINCOMM 44S


A Megabyte of ECC memory on a single card. Also available in 512KB, 256KB and 128KB increments. Also compatible with diagnostics and operating systems of Regular or Extended Unibus in systems other than PDP-11/44.



DEC PDP-11/70

PINCOMM 70S


Pin compatible with PDP-11/70 CPUs using the MK-11 memory system. Offered in 256KB increments.

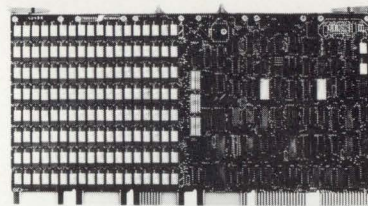

DEC PDP-11/24

PINCOMM 24S


Parity memory. Offered in 1024KB, 512KB, 256KB and 128KB on a single card. Also compatible with Regular or Extended Unibus in systems other than PDP-11/24.

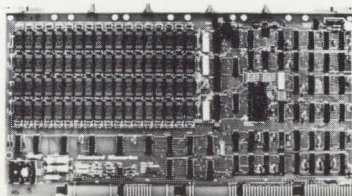

DEC PDP-11

PINCOMM PS


Offered in 128KB, 96KB and 32KB increments. Available with internal parity generation and checking and CSR registers.



DEC VAX-11/780

PINCOMM 780S

A direct replacement for DEC MS780Dx memory. Trendata D780S Memory Diagnostic available on Floppy Disk.



DEC VAX-11/750


PINCOMM 750S

Replacement for DEC MS750Ax memory. Offered in 256KB increments.

All memories have socketed RAMs, on-board spare RAMs, on line/off line switch, LED indicators.

★ NEW — PINCOMM 23S

**256k-byte parity memory for
DEC LSI-11/23 microcomputers -
Extended Q-bus addressing**



**On Site maintenance available in major Metropolitan areas
FOR FULL DETAILS CALL TODAY**

TOLL FREE: 800-854-3792/IN CALIF: 800-432-7271

Digital Equipment Corporation
(DEC) and its model designators
are recognized registered trademarks.


CIRCLE 89 ON READER CARD

Trendata
CORPORATION
STANDARD MEMORIES DIVISION
3400 W. SEGERSTROM AVE.
SANTA ANA, CALIFORNIA 92704
(714) 540-3605/TWX 910-595-1596

HIGH USAGE CALLS REPORT

RUN MONTH: APR 20
COMPUTER RUN: 7-MAY-81

CALLER NUMBER	IDENTIFICATION	NO. OF CALLS
312 333 1400	#	211
617 481 3640	#	196
404 748 4450	#	188
617 852 3000	#	183
617 839 5821	#	167
617 757 3295	#	141
516 466 5310	#	125
617 852 1000	STATE MUTUAL	113
411	#	113
617 852 5485	#	106
617 753 1411	WPI	104
617 791 2272	WORC CTY INS SAVIN	100
617 852 0600	FALLON CLINIC	96
617 886 6805	#	88
617 852 1050	ADVANCED BEARING	88
617 757 7659	#	81
617 752 2876	#	79
617 791 0961	#	79
617 757 8306	FOUR SEASONS TRAVE	78
216 341 1700	#	72
617 791 7861	#	72
617 829 5401	#	70
617 791 2251	#	70
617 791 3121	#	68
617 839 5300	#	65
714 546 2090	#	63
617 757 5631	#	62
401 421 4901	#	61
617 853 1000	NORTON CO.	60
617 755 4321	#	60
617 839 5475	#	60
617 752 1955	#	59
617 753 7225	WASHBURN GARFIELD	58
213 981 3740	#	54
617 839 5382	#	53
617 798 8151	#	53
617 366 8911	DATA GENERAL	52
617 839 6911	#	52
617 757 7751	#	52
617 832 6511	#	50
617 485 9263	#	49
513 271 5100	#	47
617 791 3657	WEATHER	45
815 725 9500	#	37
617 756 8311	RM ELECTRONICS	36
617 832 5801	#	36
617 852 4000	SHERATON LINCOLN	35
+++++		
TOTAL CALLS		6164

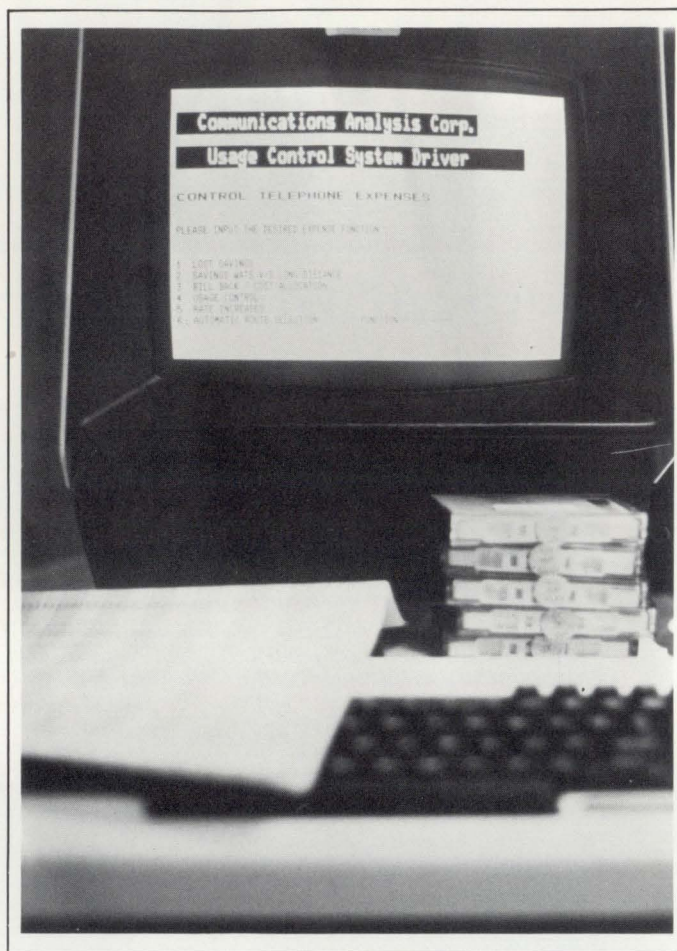

LOOKING FORWARD TO A NEW COMPUTER SYSTEM?

Once your system arrives, how many months will it be until your operations really begin?

After waiting for delivery, then you begin writing and testing software, converting data, training employees, etc. etc. But, during this time, your new computer system is technically idle, unlike your finance company who is still being paid!


Or, you can use COMLINK and begin your data processing the day your system is installed. Instead of just waiting, you can spend your predelivery time writing and testing software packages, converting data, sampling new technologies, training employees etc. - all under actual working conditions. Then, when your system arrives, you simply transfer all of your data via disk or magnetic tape, and your up and running.

COMLINK provides access to our PDP 11/70 (RSTS/E operating system) via 120 or 30 CPS telephone dialup for an hourly rate of \$6.00 or monthly for \$500.00. In addition, COMLINK users have access to a variety of printers, magtape drives, disk drives, and other sundry peripherals. A wide range of support and technical services are also available.

DIGITAL TECHNOLOGIES COMPANY

3322 La Cienega Place, Suite 200
Los Angeles, CA 90016
(213) 202-1122

This offer is subject to change without notice.

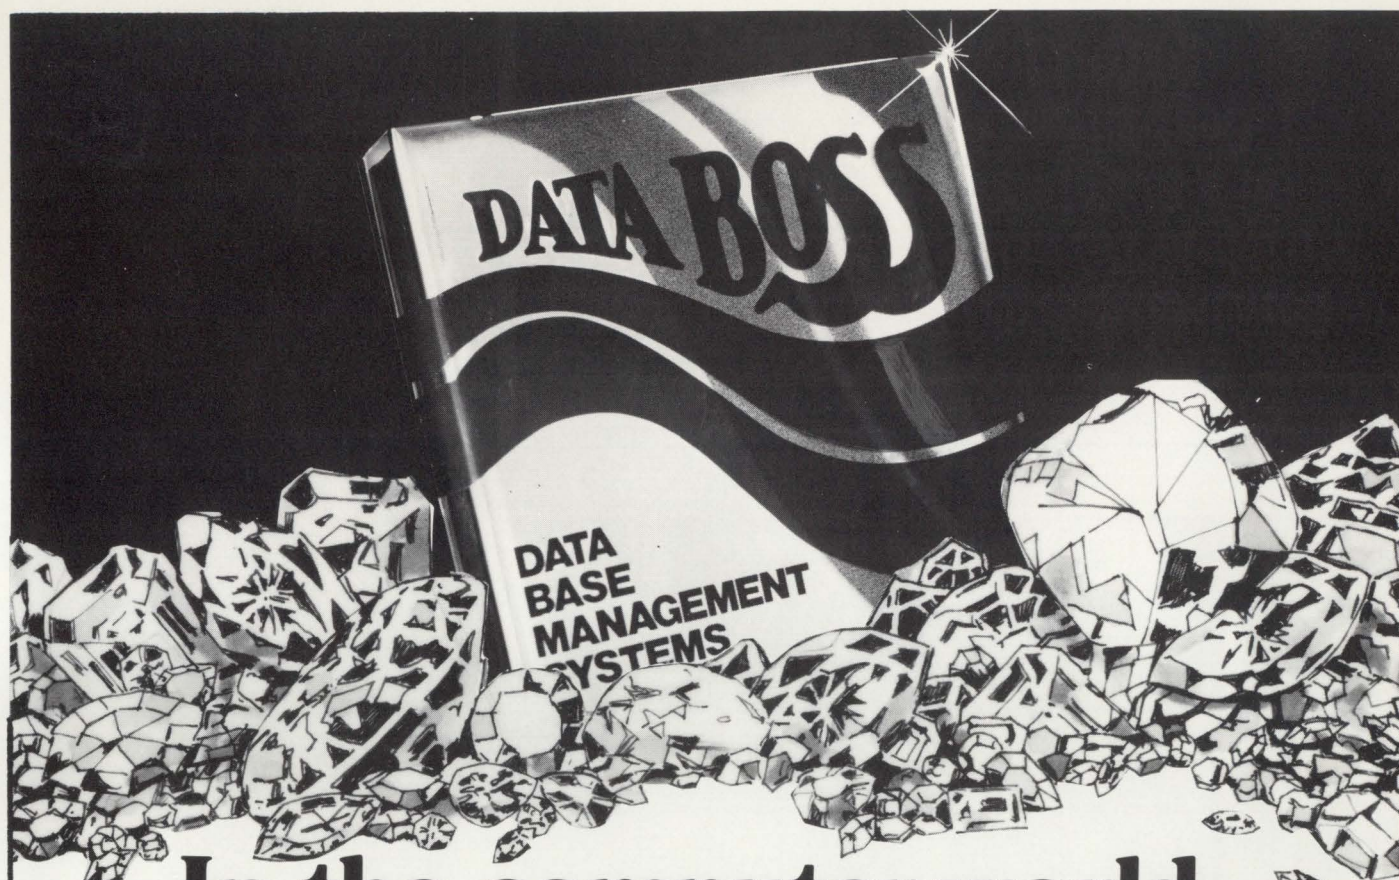


In the computer world, one gem stands a cut above the rest.

DATA BOSS is rapidly becoming the world's most valuable data base management system. **DATA BOSS** captured Datapro's highest rating in a user evaluation survey, scoring a perfect 4.0 mark in overall satisfaction. The reason is simplicity and reliability.

The simplicity of **DATA BOSS/2** and **DATA BOSS/32** systems saves you time and money. **DATA BOSS** operations can be learned within several hours by personnel without computer programming backgrounds.

DATA BOSS can be implemented in a fraction of the time normally required for an application. Up to 90% of your coding time is eliminated, and fast retrieval down to the most minute detail can be accomplished,

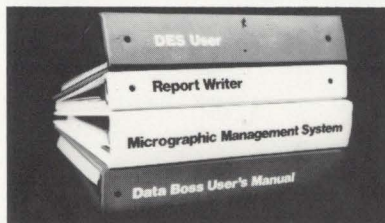

without time-consuming sorting or re-programming.

DATA BOSS/2 and **DATA BOSS/32** are available under RSTS/E and the VMS operating systems on Digital Equipment Corporation PDP-11 and VAX-11. Its valuable options include a Data Entry Subsystem (DES) and a Report Writer and Micrographics Management System (MMS).

Explore the possibilities of joining over 100 worldwide users of **DATA BOSS**; Fortune 500 corporations, hospitals, retail conglomerates, utilities, and dozens of other firms.

Please write for our full catalog. If information is essential to your firm, this information will be essential to your success.



Florida Computer, Inc.

99 N.W. 183rd Street, No. Miami, Florida 33169 (305) 652-1710


Turnkey

Turnkey Software Limited, 12 High Street, Chalfont St. Giles, Bucks HP8 4QA, Telephone: 02407 5995/3410, Telex: 24224 ref:Turnkey 3003

CIRCLE 40 ON READER CARD

RABBIT-4 FILE SECURITY GUNS DOWN DATA RUSTLERS ON RSTS/E SYSTEMS

**Do You Know Who The Pesky Varmints
Reading Your Confidential Information Are?**

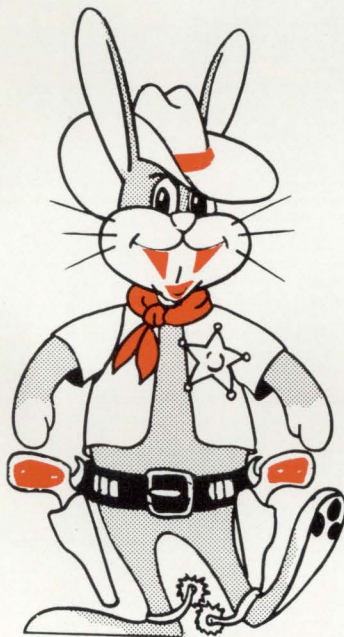

RABBIT-4 will help you track'm and catch'm, cause it has a proven record of performance.

RABBIT-4 will let you:

- ☐ Log secured file accesses
- ☐ Signal OPSER of violations
- ☐ Roll-out the bandits
- ☐ Freeze system activities with
6 levels of file security to keep your data safe
and secure, **RABBIT-4** will also:

- Secure up to 64 data files
- Provide 32 user descriptions plus wild cards
- Restrict file access to specified programs
- Identify intrusions and intruders
- Recover automatically from system crashes

SEE OUR TALENTED RABBITS AT THE ATLANTA DECUS MEETING

and pick up a free Rabbit Executive Coloring Book Souvenir!

We'll have a hospitality suite where we'll demonstrate

Rabbit's resourcefulness in

- * Performance Analysis * Job Accounting * Resource Accounting
- * Data Management * Financial Planning * File Security

RAXCO INC.

RAXCO Inc., Suite 200, 6520 Powers Ferry Road, Atlanta, GA 30339 • (404) 955-2553

TOTAL IDENTIFIED DIALS

CHANGE
COMPUTER RUN: 7-MAY-81
RUN MONTH: APR 20

CONDENSED BREAKDOWN BY NPA

RUN MONTH: 7-MAY-81

BILLING MONTH: APR 20

CALLED NUMBER

IDENTIFICATION

NO. OF CALLS

NPA	STATE	CALLS	MINUTES
202	NJ	277	1,806.00
202	DC	36	162.00
203	CT	130	664.00
203	ME	70	487.00
212	NY	374	1,998.00
213	CA	103	704.00
214	TX	157	910.00
215	PA	70	446.00
216	OH	55	464.00
303	CO	46	210.00
305	FL	93	568.00
312	IL	298	1,554.00
313	MI	90	483.00
315	NY	41	250.00
317	IN	49	284.00
401	RI	154	919.00
404	GA	170	890.00
412	PA	52	378.00
413	MA	128	957.00
415	CA	241	1,636.00
416	ONT	178	1,042.00
501	AR	47	292.00
513	OH	67	509.00
516	NY	111	715.00
518	NY	74	457.00
603	NH	517	2,674.00
612	MN	98	527.00
614	OH	34	151.00
615	TN	86	562.00
616	MI	87	824.00
617	MA	14,818	66,665.00
703	VA	59	392.00
704	NC	50	348.00
713	TX	47	262.00
714	CA	83	560.00
715	WI	35	305.00
716	NY	40	215.00
717	PA	50	332.00
802	VT	35	132.00
804	VA	42	252.00
809	PR	432	3,115.00
813	FL	78	417.00
904	FL	36	255.00
914	NY	86	315.00
918	OK	37	210.00
919	NC	57	421.00
999	TOTALS	21,109	105,537.00

617 852 1000	STATE MUTUAL	113
617 753 1411	AFI	104
617 791 2272	WORC CTY INS SAVIN	100
617 852 0600	FALLON CLINIC	96
617 852 1050	ADVANCED BEARING	88
617 757 8306	FOUR SEASONS TRAVE	78
617 853 1000	NORTON CO.	60
617 753 7225	WASHBURN GARFIELD	58
617 366 8911	DATA GENERAL	52
617 791 3657	WEATHER	45
617 756 8311	RM ELECTRONICS	36
617 852 4000	SHERATON LINCOLN	35
203 623 1621	MASHKIN	35
617 798 2561	MECHANICS NT'L BAN	35

617 753 4741	DEAN WITTER SP	34
617 791 7146	IRM	30
617 423 4200	COOPER&LYBRAND	28
617 799 4441	PAUL REVERE INS	28
617 791 7811	FRED WEISMANN	28
617 935 4736	DIGITAL EQUIP CORP	22
617 757 3651	STIMPSON, G.E. CO.	17
617 791 6361	TAG CLASSIFIED	15
617 799 0571	HOME FED SAV/LN	14
617 753 2952	KELLY SERVICES	14
617 752 725	KENMORE TRANSPORT	13
617 752 3751	WORC PUBLIC LIBRAR	12
617 777 1900	GTE SYLV	12
617 742 5151	CDM	11
617 855 7000	WORC CTY NAT'L BAN	10
617 936 1234	TIME	10
617 791 3861	PEOPLES SAVINGS BA	10
617 762 4300	FACT MUTUAL	9
617 879 7200	SHERATON TARATON	9
617 358 2721	RAYTHEON	8
617 755 3611	WORCESTER CLUB	8
617 852 6464	C&R TIRE	7
203 889 2334	AMER OFFICAL	7

IDENTIFIED	DIALED NUMBERS	1686
UNIDENT	DIALED NUMBERS	34518
TOTAL	DIALED NUMBERS	36204
UNIQUE	DIALED NUMBERS	8366
UNIQUE IDENTIFIED		128
UNIQUE UNIDENTIFIED		8237

PERCENTAGE OF IDENTIFIED NUMBERS IN TOTAL COUNT : 4.66%

INCOMING CALLS BY EXTENSION

SAMPLE COMPANY

RUN MONTH: APR 20

EXT	NO.CALLS	MINS	AVG.MINS	AVG.RINGS	UNANS.CALLS	EXT	NO.CALLS	MINS	AVG.MINS	AVG.RINGS	UNANS.CALLS
202	1	0.20	0.2	0.0	0	334	3	8.30	2.8	0.0	0
203	1	0.10	0.1	0.0	0	335	1	0.30	0.3	0.0	2
205	6	5.10	0.9	0.0	0	344	4	7.90	2.0	0.5	0
206	1	0.50	0.5	15.0	0	351	4	2.30	0.6	0.0	0
207	1	2.90	2.9	0.0	1	360	1	0.30	0.3	0.0	0
209	2	0.50	0.3	0.0	0	361	1	6.10	6.1	0.0	0
210	10	31.90	3.2	0.1	6	362	2	0.30	0.2	0.0	0
214	2	1.00	0.5	0.5	2	367	4	5.10	1.3	0.0	2
215	13	18.90	1.5	0.3	10	368	27	35.70	1.3	0.0	0
216	15	39.40	2.6	0.1	0	370	4	3.40	0.9	0.0	0
217	14	55.10	3.9	0.2	0	373	32	52.70	1.6	0.1	27
224	15	32.40	2.2	0.2	0	374	39	126.30	3.2	0.1	0
226	3	5.70	1.9	0.0	0	375	7	9.40	1.3	0.0	4
						376	29	58.00	2.0	0.1	0
						393	1	0.20	0.2	0.0	0
						394	2	1.10	0.6	0.0	0
						621	1	0.10	0.1	0.0	0
264	1	0.80	0.8	1.0	2	TOT. CALLS=	564	TOTAL MINS.	1,079		
320	7	15.30	2.2	0.0	0	AVG.MIN=	1.91				
327	2	0.60	0.3	0.0	0	AVG.RINGS=	4.88				
328	2	3.50	1.8	0.0	0	UNANSWERED CALLS=	188				
330	2	7.50	3.8	0.0	0						
332	9	22.10	2.5	0.0	2						

MACHINE READABLE 800 BPI DOS LABEL OF MAJOR PROGRAMS IN THIS ISSUE


Part of the proceeds will be going to the authors.

Send \$50 to: **M SYSTEMS, INC.** Box 361, Fort Washington, PA 19034-0361

"I JUST LOVE
EMULEX FEATURES
AND QUALITY..."



"BUT CAN YOU
BELIEVE THEIR
NEW LOW PRICES?"

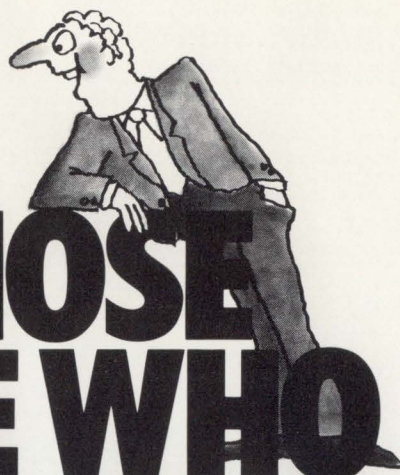

FOR ALL THOSE LSI-11 PEOPLE WHO NEVER CONSIDERED EMULEX ON PRICE.


Consider the products and prices below:

You'll soon see that Emulex is as unbeatable on price as we are in quality and performance. Included are two new Winchester disk controllers with remarkably high performance and reliability (MTBF over 70,000 hours).

All Emulex Q-bus tape and disk controllers have the same microprocessor architecture and all the key features of our PDP-11 and VAX-11 products, including error correction, micro-diagnostics, and software transparency. Price our performance. Write or call: Emulex Corporation, 2001 Deere Ave., Santa Ana, CA 92705; (714) 557-7580; TWX 910-595-2521.

For immediate off-the-shelf delivery, call our national distributor: First Computer Corporation, 645 Blackhawk Dr., Westmont, IL 60559; (312) 920-1050. In Europe: Emulex Corp., 10th floor, Cory House, High Street, Bracknell, Berkshire, England. Telephone: 0344-84234; Telex 851-849781.


SC01 (RM02/05, RP06) \$2528*



Put big SMD drives on your LSI-11.

Links Q-bus with 1-2 SMD-type drives. Software transparent & media compatible with DEC RM02, RM05, RP06. Features 3-sector data buffer, 32-bit ECC, up to half a billion bytes capacity. Over 1500 units in service!


SC02 (RL01/02, RP02/03) \$1600*
SC02 (RK06/07) \$1792*



Low cost for smaller-sized disks.

Single quad-board interfaces LSI-11s to 8" & 14" SMD hard disk drives. Same great SC01-level performance in most applications. Software transparent. Full 32-bit ECC, self-test, 512-word bootstrap, real-time clock control, and bus terminators. Mix and match drives on one controller. 72,000 hours MTBF!


SC04 (RL01/02) \$1504*
SC04 (RK06/07) \$1696*



New! ANSI interfacing for 8" Winchesters.

Supports up to 8 drives per single quad-board controller. Fits into any single LSI-11 back plane quad slot. Same design, performance, and high reliability as the SC02.

TC01 (NRZ) \$1536*
TC01 (PE) \$1920*



Q-bus embedded dual-density tape controller.

Handles all open-reel half-inch tapes — 800/1600 bpi, operating at 12.5-75 ips. Compatible with DEC's TU10/TM11. Daisy-chain up to 4 drives. Firmware includes a self-test and extended diagnostics. Fully embedded.



The genuine alternative

*Price each in 100 quantities. All Emulex disk, tape, and communications products can be combined to reach quantity price breaks.

[illegible]

CHANGE
CHANGE

EXTENSION USER ACTIVITY REPORT

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM
FOR

BILLING NUMBER 617-555-3221
EXTENSION NUMBER: 254
USER : --> DOE, JOHN
COST CENTER : ACCTS PAY 03-06155-02

----- SAMPLE COMPANY -----

BILLING MONTH: APR 20
COMPUTER RUN: 7-MAY-81 01:53 PM
PAGE NUMBER: 1

DATE	START TIME	AC	NUMBER AREA	CALLED EXT-LINE	DESTINATION	MINS	COST	LCR	LOST SVGS	SVGS V.S. L.D.	CALLED NUMBER I.D.	ACCT CODE	CAC USE ONLY	
++OUTGOING CALLS++														
THU 4 DEC80	11:09	0	1-595-0410	NOCHELMSFSD	MA	4	0.46		0.00	0.00			*-T	
THU 4 DEC80	11:17	9	1-312-594-2020	SUMMIT	IL	16	8.53	5	3.13	0.00			*-T	
THU 4 DEC80	12:00	9	463-7000	BOSTON	MA	.6	0.11		0.00	0.00	AMERICAN A/L		*	
MON 8 DEC80	09:56	74	658-5600	WILMINGTON	MA	1	0.30		0.00	0.00			*	
MON 8 DEC80	10:02	9	848-5227	BRAINTREE	MA	9.6	0.32		0.00	0.00		0410	*	
MON 8 DEC80	14:05	0	965-6280	NEWTON	MA	180	3.78		0.00	0.00	GE DATA PHONE		*	
MON 8 DEC80	15:14	9	1-312-594-2020	SUMMIT	IL	1.1	0.56		0.35	0.00		1171	*-T	
MON 8 DEC80	16:33	9	929-2146	DORCHESTER	MA	1	0.11		0.00	0.00			*	
WED 10 DEC80	10:22	89	1-413-781-1990	SPRINGFLD	MA	2.2	0.46		0.00	0.36			W5	
WED 10 DEC80	10:25	9	536-6230	BOSTON	MA	.9	0.11		0.00	0.00		2116	*	
TUE 16 DEC80	10:26	9	237-6600	WELLESLEY	MA	14.8	0.52		0.00	0.00			*	
TUE 16 DEC80	10:38	9	637-2176	BOSTON	MA	1.3	0.23		0.00	0.00			*	
FRI 19 DEC80	15:21	85	1-213-599-0202	LOS ANGELES	CA	15.2	5.21		0.00	3.26	LA SALES OFC		W5	
MON 22 DEC80	11:25	9	1-212-688-1200	NEW YORK	NY	.7	0.46	1	0.26	0.00			*-T	
MON 29 DEC80	10:27	9	843-7787	BRAINTREE	MA	6.2	0.21		0.00	0.00			*	
MON 29 DEC80	17:03	9	1-800-559-3455	*-FREE WATS-*		4.2	0.00		0.00	0.00		1049	*-T	
++ TOTALS FOR OUTGOING ++ NUMBER 16						255.2	\$21.37		\$3.74	\$3.62				
AVERAGE-						17.0	\$1.42							

++ALLOCATION++

USAGE										
LOCAL	\$	5.69	9	CALLS	214.1	MINS				
NON-LOCAL		15.68	7	CALLS	40.7	MINS				
EQUIPMENT		3.50								
OVERHEAD		11.57					++BEYOND-LOCAL FACILITY USE++			
FEDERAL EXCISE TAX		0.43								
STATE AND LOCAL TAXES		0.00					MASS WATS 9	0	1	2.2
TOTAL ALLOCATION TO							BAND 1 WATS	0	0	0
EXTENSION 254		36.87					BAND 5 WATS	0	1	15.2

```
[INCMNG CALLS]--> 135 CALLS AT 200.60 MINS AVG= 1.49
[INCMNG WATS]--> 23 CALLS AT 57.40 MINS AVG= 2.50 COST $16.45
```

NOTE: INCOMING CALL DATA IS NOT AVAILABLE FROM ALL SWITCHES.
IT WILL APPEAR AS SHOWN WHEN IT IS AVAILABLE.

CHANGE

SUMMARY OF EXTENSIONS BY DEPARTMENT

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM

BILLING NUMBER:617-555-3221
DEPARTMENT: ACCTS PAY
COST CENTER: 03-06155-02

- SAMPLE COMPANY -

DEPARTMENT TOTALS

BILLING MONTH: APR 20
COMPUTER RUN: 7-MAY-81

[illegible]

*** DEPARTMENTS WITHIN THIS DIVISION: ACCTG ADMIN, ACCTS PAY, ACCTS REC, FINANCE

TOTAL ACCOUNT NUMBER TELEPHONE COST : +++ \$194.73 +++

LETTERS to the RSTS Pro . . .

... is your column! Send us your comments, suggestions, or notes of interest to the RSTS community. We'd enjoy hearing from you.

LOOK at the "tear-out" cards in this issue.

There's subscription cards for you or a friend.

There's a FREE gift for you. Bring in new subscribers and collect rewards. See "BOUNTY HUNTERS" card.

There's a READERS INQUIRY card for your convenience.

"I THOUGHT EMULEX
JUST MADE DISK AND
TAPE CONTROLLERS."

"BITE YOUR TONGUE!
HOW ABOUT DH, DZ, OR
DV-WHATEVER? BEST
PRICES IN TOWN."

EMULEX IS MORE THAN ABLE TO COMMUNICATE WITH DEC.

We're also able to save you plenty: For instance, you get DH11 performance for a DZ11 price. Four new space-saving single-board communications multiplexers. And an increase in VAX-11 terminal handling capacity by up to 50%. Maintained nationwide by Control Data.

Microprocessor-based architecture and common hardware deliver faster, more flexible line-handling. Self-test on power-up. Full software transparency. And Emulex reliability standards.

Communicate with Emulex now. Write or call Emulex Corp., 2001 Deere Ave., Santa Ana, CA 92705; (714) 577-7580, TWX 910-595-2521.





For immediate off-the-shelf delivery, call our national distributor: First Computer Corporation, 645 Blackhawk Dr., Westmont, IL 60559: (312) 920-1050. In Europe: Emulex Corp., 10th floor, Cory House, High Street, Bracknell, Berkshire, England. Telephone: 0344-84234; Telex 851-849781.

CS11/H (PDP-11) \$7560 for 48 lines*
CS11/U (VAX-11) \$7884 for 48 lines*

CS11/V \$4464 for 16 lines*

CS21/Z \$2520*

CS21/U (VAX-11) \$2844 for 16 lines*
CS21/H (PDP-11) \$2520 for 16 lines*

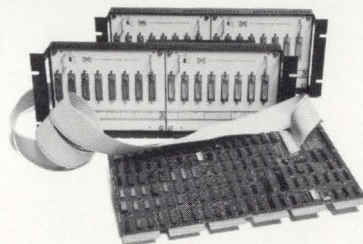

Up to 64 DH11 channels from one board.

DH11-compatible MUX lets you mix RS-232 & current loop interfaces in 8-line groups. Built-in DM11-compatible modem control. DMA output eliminates host interrupts. Self-test capabilities. Transparent to PDP-11 software. Emulex' own software on VAX.

Higher DV11 performance, lower price.

DV11-compatible multiplexer. Mixes 8-lines synchronous & asynchronous on PDP-11s. Ideal for Bisync & DECNET. 8-32 lines per controller. DMA input & output. Software transparent under DECNET. Compact package offering higher line-handling speeds & improved throughput.

Replace DEC DZ11/E and save.

Perfect if you don't need DH11 performance. Software-transparent to all DEC operating systems. Easy PROM change enables quick upgrade to DH-11 performance. Saves one slot per 16 lines.

New economical DH11-type multiplexer.

Lowest cost, high-performance communications MUX. Priced way less than DEC's DZ11, with DMA to boot. 16 RS-232 lines per board, modem control included. Can use H317 distribution panel. Transparent to PDP-11 software; Emulex software on VAX.



The genuine alternative

*Price each in 100 quantities. All Emulex disk, tape, and communications products can be combined to reach quantity price breaks.

CIRCLE 93 ON READER CARD

[illegible]

CHANGE

* C.A.C. TRUNK USAGE REPORT *

-----SAMPLE COMPANY-----

RUN MONTH: APR 20
COMPUTER RUN: 7-MAY-81

RUN MONTH: APR 20

TOTAL MINUTES

[illegible]

TOTAL MINUTES--> 67166.4

OVERALL AVERAGE(TOTAL MINS/TOTAL CALLS) : 1.85047

TOTAL NUMBER OF CALLS--> 36297

ACCOUNT CODE REPORT

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM
FOR

BILLING NUMBER 612-339-7833
CUST CODE NUMBER: 100
USER - JOB CODE:200
COST CENTER:1 100200

-----SAMPLE COMPANY-----

BILLING MONTH: APR 20
COMPUTER RUN: 07-MAY-81 01:50 PM
PAGE NUMBER: 9

										SVGS		CAC	
DATE	START TIME	AC	NUMBER CALLED AREA EXT-LINE	DESTINATION	MINS	COST	LCR	LOST SVGS	VS L.D.	CALLED NUMBER I.D.	ACCT EXTN	USE ONLY	
FRI 23 JAN81	15:35	66	312-329-5500	CHICAGO IL	3.1	1.10		0.00	0.00		2000 1493	5	
FRI 30 JAN81	16:02	67	812-636-8764	GREENSBURG IN	3.7	1.31		0.00	0.00		2000 1494	5	
WED 4 FEB81	14:40	66	513-866-6521	MBG W CRTN OH	13.2	4.69		0.00	0.00		2000 1493	5	
MON 9 FEB81	15:07	66	513-866-6521	MBG W CRTN OH	7.6	2.70		0.00	0.00		2000 1493	5	
FRI 13 FEB81	10:34	67	513-273-3800	CINCINNATI OH	.7	0.25		0.00	0.00		2000 1493	5	
FRI 13 FEB81	12:57	66	513-866-6521	MBG W CRTN OH	1.3	0.46		0.00	0.00		2000 1493	5	
FRI 13 FEB81	13:19	67	213-573-2332	COMPTON CA	.9	0.32		0.00	0.00		2000 1493	5	
FRI 13 FEB81	13:51	67	213-573-2332	COMPTON CA	1.1	0.39		0.00	0.00		2000 1493	5	
TUE 17 FEB81	15:58	66	213-573-2332	COMPTON CA	1.2	0.43		0.00	0.00		2000 1493	5	
TUE 17 FEB81	16:40	67	213-573-2332	COMPTON CA	1.4	0.50		0.00	0.00		2000 1493	5	
WED 18 FEB81	10:48	66	213-573-2332	COMPTON CA	3.8	1.35		0.00	0.00		2000 1493	5	
THU 19 FEB81	09:21	66	513-866-6521	MBG W CRTN OH	2.9	1.03		0.00	0.00		2000 1493	5	
THU 19 FEB81	13:26	66	513-866-6521	MBG W CRTN OH	1.8	0.64		0.00	0.00		2000 1493	5	
THU 19 FEB81	13:40	66	513-866-6521	MBG W CRTN OH	.9	0.32		0.00	0.00		2000 1493	5	
THU 19 FEB81	14:28	66	513-866-6521	MBG W CRTN OH	4.7	1.67		0.00	0.00		2000 1493	5	
FRI 20 FEB81	08:41	67	513-273-3800	CINCINNATI OH	2.3	0.82		0.00	0.00		2000 1493	5	
////////////////////////////////////													
SUB TOT	X	X	X	X	50.6	17.98							

*PLEASE NOTE: This report is not included as part of the standard report package, but is available upon request.

A RSTS INTERNALS MANUAL BY MIKE MAYFIELD

More than 200 pages in a binder.
— PUBLISHED BY THE RSTS PROFESSIONAL —
Price - \$95.00

SEND ORDERS TO: **M SYSTEMS, INC., BOX 361, FORT WASHINGTON, PA 19034-0361**

SUMMARY FOR COMPANY BY DEPARTMENTS

COMMUNICATIONS ANALYSIS CORP
USAGE CONTROL SYSTEM
FOR

*--SAMPLE COMPANY---

BILLING MONTH: APR 80
COMPUTER RUN: 7-MAY-81

BILLING NUMBER: 617-555-3221

DEPARTMENTS: ALL

COMPANY FINAL TOTALS

DIV. NO.	LOCAL		DDD(TOLL)		IDDD		WATS		FX-TL		OTHER		USAGE TOTALS		EQUIP	OVRHLD	TOTAL
	CALLS	COST	CALLS	COST	CALLS	COST	CALLS	COST	CALLS	COST	CALLS	COST	CALLS	COST	COST	COST	COST
110-01	44	5.09	24	42.64	0	0.00	95	57.03	68	9.45	370	0.00	601	114.21	79.89	80.99	275.09
130-05	77	9.17	15	16.25	0	0.00	90	52.59	17	2.18	222	0.00	421	80.19	216.97	80.99	378.96
140-01	30	3.49	18	17.41	0	0.00	66	31.63	30	3.91	75	0.00	219	56.44	29.04	80.99	166.47
155-02	101	15.37	10	10.57	0	0.00	37	61.04	7	0.72	0	0.00	155	87.70	35.86	69.42	192.98
160-01	70	8.10	11	9.52	0	0.00	64	36.44	20	2.20	250	0.00	415	56.26	58.08	80.99	195.33
170-20	17	1.97	1	0.41	0	0.00	17	8.17	10	1.20	105	0.00	150	11.75	24.93	23.14	59.82
223-01	23	1.42	9	12.17	0	0.00	24	13.18	30	3.82	61	0.00	147	30.59	41.64	34.71	106.94
250-02	37	3.17	75	97.73	0	0.00	199	112.69	34	4.35	244	0.00	589	217.94	148.40	80.99	447.33
260-01	36	4.77	7	8.15	0	0.00	32	13.27	11	1.21	84	0.00	170	27.40	52.22	34.71	114.33
310-05	63	5.37	32	38.69	0	0.00	268	120.03	35	4.78	238	0.00	636	168.87	180.52	80.99	430.38
311-02	35	3.85	14	18.77	0	0.00	63	35.92	34	5.49	119	0.00	265	64.03	14.52	46.28	124.83
350-00	231	31.82	85	96.48	0	0.00	210	121.95	114	16.66	250	0.00	890	266.91	274.45	80.99	622.86
402-01	52	5.60	4	0.00	0	0.00	23	11.81	5	0.65	32	0.00	116	18.06	11.92	23.14	53.12
415-01	67	7.02	52	44.70	0	0.00	262	185.46	118	18.59	681	0.00	1180	255.76	213.18	80.99	549.93
423-01	4	0.53	2	1.90	0	0.00	6	4.71	2	0.22	6	0.00	20	7.36	53.40	46.28	107.04
429-03	7	0.77	5	3.22	0	0.00	20	5.25	5	0.55	8	0.00	45	9.79	14.52	34.71	59.02
436-01	47	4.17	8	0.92	0	0.00	80	42.26	22	3.04	24	0.00	181	50.39	26.70	57.85	134.94
560-01	3	0.33	0	0.00	0	0.00	0	0.00	2	0.22	5	0.00	10	0.55	25.10	34.71	60.69
571-05	17	3.31	0	0.00	0	0.00	21	14.91	11	1.62	10	0.00	59	19.84	14.52	23.14	57.50
810-01	28	3.28	14	1.71	0	0.00	87	39.60	19	2.19	187	0.00	335	46.78	98.21	80.99	225.98
840-20	86	9.58	143	88.82	0	0.00	226	204.37	57	9.16	259	0.00	770	311.93	271.20	80.99	664.12
890-22	44	7.40	10	1.51	0	0.00	80	44.08	14	1.75	120	0.00	268	54.74	58.08	80.99	193.81
950-01	6	0.44	57	61.39	0	0.00	69	41.60	8	0.98	131	0.00	271	104.41	29.04	80.99	214.44
991-01	71	8.90	12	5.28	0	0.00	98	47.10	37	4.77	132	0.00	350	66.05	25.20	46.28	137.53
9999	142	15.75	49	16.48	0	0.00	87	34.50	17	3.00	432	0.00	727	69.73	130.00	80.99	280.77

FINAL TOTALS FOR COMPANY

LOCAL	2,654	\$312.73
DDD(TOLL)	1,665	\$1,469.42
IDDD	0	\$0.00
WATS	4,677	\$2,730.69
FX-TL	1,601	\$221.87
OTHER	7,072	\$0.00
EQUIP	0	\$4,122.52
OVRRD	0	\$1,527.24
TOTAL	17,669	\$10,384.47

* COMMUNICATIONS ANALYSIS CORP
* 100 FOUNTAIN ST
* FRAMINGHAM, MASS 01701
* 617-875-7300

NOTE: INWATS CALLS ARE SHOWN UNDER COLUMN *OTHER*

BACmac can do it all!

BAC into RTS / BAC into MAC / BAC into BAS

BACmac is a unique software tool, running under RSTS/E, which provides the following conversions:

- translation from Basic-Plus “compiled” back to Basic-Plus source code (only the comments will be missing)
- translation from Basic-Plus into Macro source code, which compiled under RSTS runs faster than Basic-Plus
- translation from Basic-Plus into Macro source code which may be compiled under RSTS for execution under RT11 — a migration facility
- translation from Basic-Plus into a RUN-TIME-SYSTEM. Now you can write an RTS in Basic-Plus. The ideal solution to memory thrashing due to “multi-copy” applications programs.

RSTS/E, RT11, Macro-11 and Basic-Plus are trademarks of Digital Equipment Corporation.

Please write for more information

TELECOM

Telecom Computer Systems, Inc.
P.O. Box 03285
Portland, Oregon 97203
503/286-5122

...EVEN WHEN THEY HAVE DIFFERENT OPERATING SYSTEMS

- ☐ Vol. 3, #4
☐ Vol. 4, #1

World's Biggest Exposition of DEC-Compatibles!

DEXPOTM 82

The First National DEC-Compatible Industry Exposition
Marriott Hotel, Atlanta May 10-12, 1982

Get The Most Out of Your DEC System... Visit the Only Show Big Enough for All Your DEC-Directed Needs...

Now there's a show dedicated to making your DEC system better. At DEXPO 82 every exhibitor will be demonstrating products and services that are compatible with your DEC equipment. That means starting today there's no longer a need to visit any other show, because DEXPO 82 features more DEC-compatibles than you'll find at any other event in the world.

DECUS Conference Registrants: Your Atlanta schedule is not complete until you visit DEXPO 82 — only a few blocks from your meetings!

- Compare thousands of the newest DEC-compatible products and services — many on exhibit for the first time anywhere — all under one roof.
- Select alternatives, enhancements and special solutions from an *international* group of vendors. Choose the best technologies in the world.
- Attend free "Product Forums" demonstrating the latest DEC-compatibles. Discover new capabilities, applications and ideas to improve or expand your system.
- Meet more than 100 vendors of DEC-compatible software, hardware and related services and supplies, including:

Accessories • Applications Software • Books • Bus Links • Consulting Services • Controllers • Data Entry Systems • Data Communications Equipment • Data Preparation Systems • Data Handling Systems • Disk Drives • Educational Services • Enhancements • Floppy Disk Drives • Forms • Graphic Display Terminals • Magazines • Memory Products • Multiplexers • Modems • Optical Character Recognition Equipment • Periodicals • Peripherals • Power Supplies • Printers • Productivity Tools • Software • Software Services • Supplies • Systems Software • Tape Drives • Terminals • Training Services • Video Processors • Video Displays



DEC is a registered trademark of the Digital Equipment Corporation. DEXPO 82 is not affiliated with DECUS or the Digital Equipment Corporation.

Mail Today for FREE Information, Reduced-Rate Tickets and Hotel Discounts

- ☐ Send _____ reduced-rate DEXPO 82 tickets for my associates and myself. Also send complete information on the Show.
- ☐ Send information on discount hotel rates available to DEXPO 82 visitors.

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Mail to: Expoconsul International, Inc.
19 Yeager Road
Cranbury, N.J. 08512
(Phone: 609-799-1661)

DISK I/O FROM MACRO

By Bob "MACRO MAN" Meyer

The following article describes the use of some basic disk-related monitor calls, and a detailed example of their use.

The calls we'll be using include:

- .FSS Use the file string scanner
- OPNFQ Open an existing file for input
- CREFQ Create a new file
- .READ Read blocks from the input file
- .WRITE Write blocks to the output file
- CLSFQ Close a file

In order to use all of the above calls, the sample program will do the following:

- 1) Open '\$UTILITY.HLP' for input (or any other file of your choice)
- 2) Create the output file 'OUTPUT.DAT' in the current account
- 3) Transfer blocks from the input file to the output file, watching for End of File
- 4) Close the output file

Let's examine each call in detail. The File String Scanner, or FSS, is a monitor function provided for interpreting various file name strings. The FSS routines will accept a file name, parse that name (quite thoroughly), and exit with the FIRQB setup for an open or close type function. The FSS call understands about many file name specifics, including Protection codes, Account specs, dollar signs, user assigned & system wide logicals, special switches to FIP (/mode:xx, /ro, /filesize:xx, etc...) and several other goodies. For more details on FSS, see your System Directives Manual, page 3-93.

So before opening the input file, we must pass the name & account specification through the file string scanner. This is shown in the example program just after clearing the FIRQB, under the symbol 10\$. To use the FSS, we simply pass (in the XRB) the length of the file name string, and its starting position. If no errors are detected, control is passed to the symbol 20\$. For the sake of simplicity, if any errors occur in the program, we'll just put the error code in R0 and crash the program. The BPT instruction will cause the RSX emulator to crash the task and give us a register dump on the terminal (in octal). The first group of numbers will contain the RSTS error code; be sure to translate to decimal before attempting to understand it.

Assuming the FSS worked correctly, the FIRQB should be setup for the open function of FIP. Before calling FIP, we must specify that we want a file open function (OPNFQ) by placing the proper code in the FIRQB. All that is left is to specify the channel number (times two) as shown at symbol 20\$, and the CALFIP directive can be executed. If anything goes wrong here, such as a non-existent file or incorrect protection code, the program will crash at this point, again with the octal error code in R0.

Once the input file is opened, we can create the output

file. As with the open for input function above, we must first run the file name through the file string scanner. This is done at symbol 40\$.

Now that the FIRQB is setup, we need to specify that we want to create a new file. This is done at symbol 50\$: by moving the create function code (CREFQ) into the FIRQB as well as the channel number (times two) of the output file. From there FIP is called, and we check for errors.

If we get this far, the both files must be open. The next step is to begin transferring data. This is done using the .READ directive as shown at symbol 60\$. The parameters passed on a read are:

- 1) Number of bytes to read (must be a multiple of 512 for disk)
- 2) Where to put the data in our workspace
- 3) The channel number to read from
- 4) An optional block number to read (zero being sequential)
- 5) And any device-dependant modifiers (none needed here)

After reading the block, we should check for End of File. This is done by the CMPB (compare byte) instruction a few lines under the .READ; in our example, if no error occurs, we go write a block at 70\$, if error 11 occurs (End of File on device), we branch to a close routine. If any other unexpected errors occur, we crash the program.

Now that we've read a block of data, we have it in our buffer (BUFF), and we have the option of doing anything we please with it. Again, for simplicity, we're just going to move it to the output file.

So, at symbol 70\$, we load the XRB for a .WRITE monitor call. As in the .READ, we specify the buffer address, the buffer length, and the output channel. After the .WRITE we check for errors, and if all is well we branch back to the READ routine, continuing until End of File is reached.

Once we get to the End of File, we close it using the CLSFQ function of FIP. Since no errors are possible with CLSFQ, we can just exit to the system default run-time system.

This program is very self contained, so assembly & linkage is simple:

```
MAC CREATE=CREATE
TKB CREATE=CREATE
```

That will do it. Run create, and by using !T you can watch the operation of the program. When finished, you should find the file OUTPUT.DAT in your account, and it should be an exact copy of the input file (UTILITY.HLP in our case).

That's all for now; thanks for reading!

```
[1,10] CREATE.MAC
```

```
.title      create
.ident      /1.0/
.dsabl      gbl

;
;define everything
;
clsfq      =0
opnfq      =2
crefq      =4

;close function code
;open function code
;create function code
```


CIRCLE 84 ON READER CARD

GETTING THE MOST OUT OF YOUR DEC FIELD SERVICE

By Mark H. Deibert, Systems Manager, Minicomputer Services E. R. Squibb and Sons, Inc.

The ability of a RSTS System Manager (small shops) or Technical Support Manager (larger shops) to keep his/her RSTS system up and running usually requires more than an ability to deal with RSTS. Effective interaction with Digital's Field Service organization can be the difference between promotability and the need to hastily update one's resume.

In four years of dealing with over nine different DEC Field Service branches, including most U.S. Field Service regions, I have found that the key to a positive and mutually beneficial relationship between the customer and Digital Field Service is that person known as the Branch Manager.

All too often we (customers) tend to deal with Field Service only in crisis mode. How many times has DEC Field Service received this type of call:

"My system crashed after a lightning storm; the system disk won't boot and I have 53 reports due on the C.I.S. director's desk in two hours . . . What do you mean you 'can't send someone out until about 3 P.M.'? . . . What am I paying for anyway?"

The most salient part of the fictional scenario mentioned above is the question "What am I paying for, anyway?". The time to find this out is well in advance of the first major disaster. There are, however, several answers to this question and the person who controls the implementation of those answers is the Branch Manager.

DEC offers essentially two flavors of Field Service Agreements: BASIC Service and DECservice.

Basic Service provides contractual coverage (parts and labor) for equipment on a BEST AVAILABLE EFFORT basis. Under Basic Service, DEC agrees to furnish a service technician and parts as soon as a technician is available. If you are a Basic Service customer, your ability to affect your local DEC Field Service organization can be pretty much reduced to a "who you know" (friend of a friend of a neighbor of the District Manager) situation. Although some of the suggestions following apply to you, your clout within DEC Field Service will be reduced.

Under DEC service (so the sales brochure says) DEC is committed to providing continuous effort and technical expertise escalation until the problem is resolved. If you are a DEC service customer (about a 25% contract price premium) you have entered into an agreement with your local Field Service organization indicating that you are willing to "put your money where your mouth is" for the best field service that DEC is willing to supply.

I would recommend that every DEC service customer take the following initiative to ensure that the communication pathways are open to the DEC Field Service Branch Manager:


1. Meet with your Branch Manager and Unit Manager during a non-crisis time (hopefully before your first crisis and preferably over lunch) to discuss your expectation level regarding your Field Service contract as it relates to your Branch's ability to provide service. Discuss such

matters as initial response time (with a real person as well as the DDC), escalation timeframes (the ones in the sales brochure are frequently mythical), sparring levels (if you have eighteen RPO6's you might reasonably expect the branch to be spared at least two boards deep, if you have the only DEC tape system in the branch the spares should still be in the branch), technician competence level and availability (does the branch manager dispatch his receptionist to DEC service sites so that his response time stays good even though all his senior technicians are tied up), and any special needs that you feel you have (e.g. "I can only give you the system after 3:00 PM for tape drive repairs").

2. Request that your Branch Manager set up a meeting with yourself and his/her District Manager to review the above issues at the District Level.
3. Get a table of organization for your Field Service Branch. The table should begin with your Site Rep and end with Ken Olson. Although you probably won't ever have to go above the Regional Level the purpose of getting the table is to ensure that DEC knows that YOU know how to get to the top if necessary.
4. Establish and maintain your credibility with your Branch Manager by verifying that your problems are hardware related before placing a service call. If the call is on a terminal, and you can wait until Monday to get the terminal repaired, don't insist on a four hour response time at 4:45 P.M. on a Friday afternoon.
5. Having done all of the above, when a crisis does occur insist on staying in the information flow. NEVER hassle a technician who is repairing your machine (you want him/her to WANT to fix it quickly), but request and insist upon periodic updates from the Problem Manager (usually the Unit Manager). There is no worse feeling than finding out that a problem that you thought was resolved last night is still keeping your system down this morning.
6. After a major problem or repair, meet with the Unit Manager and Branch Manager to iron out rough spots in the repair procedure.
7. Be assertive. If the problem is not being resolved in a reasonable and straightforward fashion, you are entitled to know from the Branch Manager how he/she is going to rectify the situation NOW.

Effective communications between DEC customer and DEC Field Service will certainly be enhanced if you proceed from the premise that your Branch Manager's job is to provide an acceptable level of service to you, while efficiently managing the resources at his/her disposal. My observation over the last several years has been that DEC Field Service management is usually willing to meet the customer more than halfway, provided the customer has a reasonable and realistic expectation of the service which he/she has purchased. ♥

The Solution to the DEC* Maze!

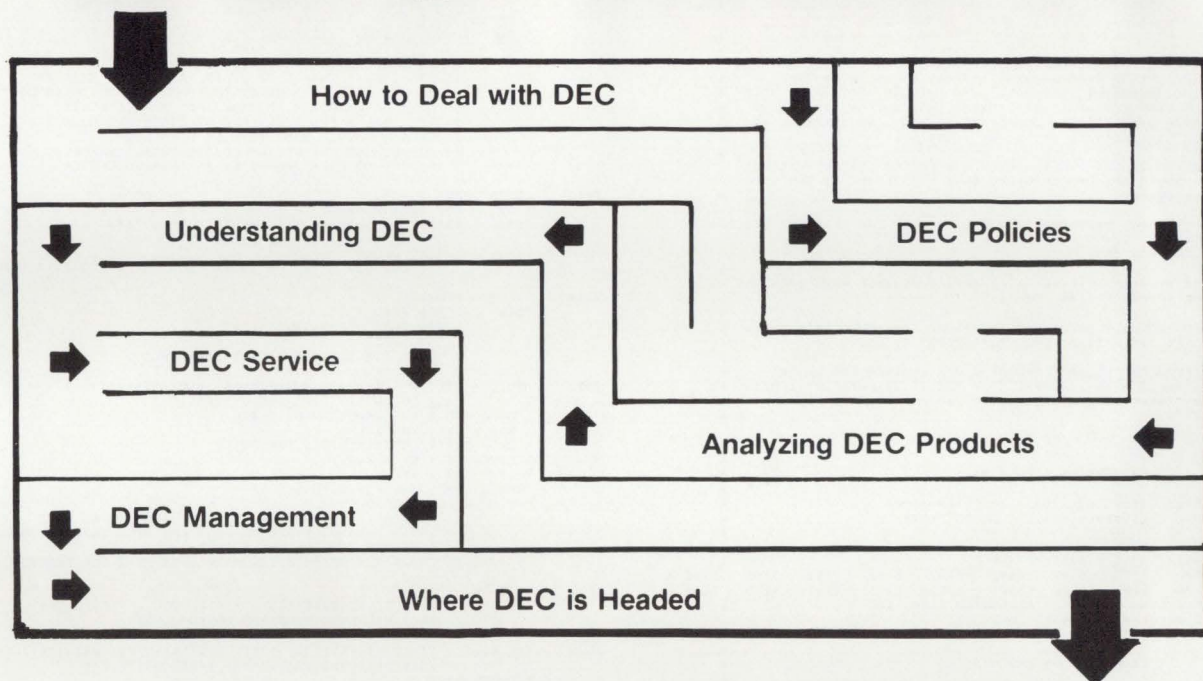

Monosson on DEC*

Monosson on DEC* is a monthly newsletter devoted to DEC, to understanding DEC, to analyzing DEC products, DEC policies, DEC services, DEC management, and where DEC is headed, representing the collective research of an organization operating exclusively in the DEC marketplace.

Our Subscribers Say

"I saved over \$20,000 following your advice on purchasing."
(A Major University)

"Your background on DEC enabled me to resolve my software conversion problem . . . we thank you!
(A Longtime DEC Customer)

"Particularly valuable for the people who buy from DEC"
(New DEC Customer)

"DEC's market strategy, products management . . . excellent information"
(Computer Analyst)

Call or Write: Monosson on DEC*
at: 712 Beacon Street, Boston, MA 02215, Telephone: 617-437-1100

CIRCLE 81 ON READER CARD

By Jim Swanson, Area Two Educational Computer Center, Mason City, Iowa

```

1 EXTEND
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```


BRAEGEN MPD HAS THE DESKTOP COMPUTER YOU NEED



Braegen's Minicomputer Peripherals Division is committed to providing the systems and peripherals DEC-users need . . .

FEATURES

- Based on *LSI 11/23 Processor
- Up to 256 KBYTES of MOS memory
- 24 MBYTE Winchester Disk
- 20 MBYTE cartridge tape back-up
- Available in desk-top or rack-mount configurations
- Four asynchronous communication ports
- Wide range of options available
- Quantity discounts available

For more information on the BC-223 family of desk-top systems or any of our full line of DEC-compatible disk and tape subsystems, terminals, printers, memories, multiplexors and more, please call or write:

Marketing Dept:



3320 East La Palma Avenue
Anaheim, California 92806
Telephone (714) 520-9200

"Be sure to ask about our field service force in over 50 cities nationwide"

*Trademark of Digital Equipment Corporation

CIRCLE 95 ON READER CARD


```

0030 RETURN
10500 !
!
! FIND A DEVICE CLUSTER SIZE
!
! RETURN DEVICE CLUSTER SIZE IN "PAKCLU%"
! RETURN ERROR FLAG IN "ERROR%" IF DEVICE NOT FOUND
!
ERROR% = 0%

10510 OPEN DEV$+'[1,1] ' FOR INPUT AS FILE #1%
\ PAKCLU% = U$(0%,4%)

10520 RETURN

19000 !
!
! STANDARD ERROR TRAP

19010 IF ERR = 5%
THEN
IF ERL = 10020%
THEN PRINT 'No matches found for -';FS
IF PPN.INX% = 0%
\ PPN.INX% = -1%
\ RESUME 10030
! OUT OF PPN$ IN WILDCARD PPN LOOKUP

19020 IF ERR = 5%
THEN
IF ERL = 2025%
OR ERL = 2015%
THEN PPN.INX% = PPN.INX% + 1%
\ RESUME 2010
! OUT OF FILES FOR THIS ACCOUNT
! GO LOOK FOR ANOTHER ACCOUNT

19030 IF ERL = 10510%
THEN ERROR% = -1%
\ RESUME 10520
! CAN'T FIND THE MFD ON THE PACK

19040 IF ERR = 5%
AND ERL = 4010%
THEN RESUME 4095%
! UFD NOT FOUND ON OPEN

19100 ES = RIGHT(SYS(CHRS(6%)+CHRS(9%)+CHRS(ERR)),3%)
!> ES = ERROR MESSAGE

19110 IF ERR = 1%
THEN PRINT #0%,
\ PRINT #0%, ES;' for ';DEV$+PPN$
\ PRINT ES;' for ';DEV$+PPN$ IF O%
\ RESUME 4090% IF ERL = 4010%
\ IF ERL = 2015%
THEN PPN.INX% = PPN.INX% + 1%
\ RESUME 2010%
! BAD DIRECTORY FOR DEVICE

19120 IF ERL = 2003%
THEN PRINT ES;' - ';FS
\ RESUME


19980 IF ERR > 49%
AND ERR < 53%
THEN PRINT 'Bad number.'
\ RESUME

19990 PRINT ERR;EKL;ES
\ STOP

20000 DEF FNL%(Z%) = (((Z% AND 3584%)/512%)*UFD.CLU%+
(SWAP$(Z% AND -4096%)/16%))
*32%+((Z% AND 496%)/16%)
!> FNL%(LINK WORD) = FIND LINK TO UFD ENTRY

32/67 END

```

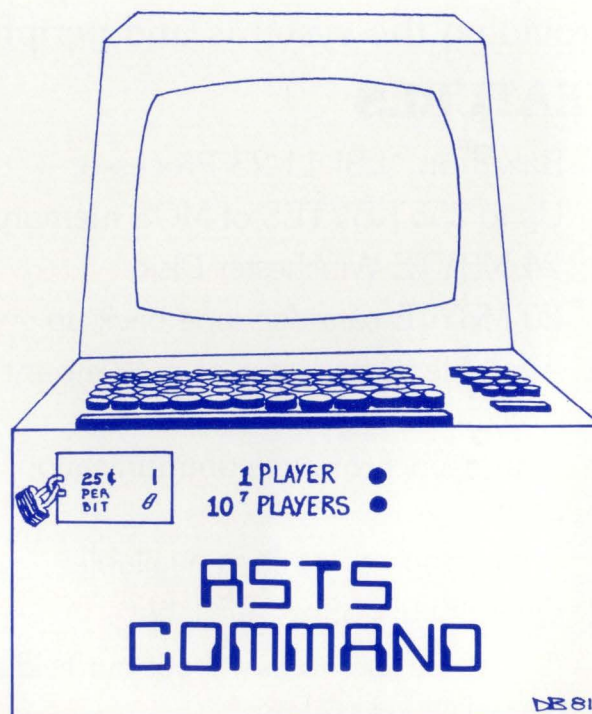

DILOG NUMBER 1 FOR DEC 11*

**With LSI 11/PDP 11 Software
Compatible Disc/Tape Con-
trollers Offering Single
Board Low Power μ P Based
Design and Low Cost...
Plus Many Other Good Reasons!**

The reasons start with DILOG'S (Distributed Logic Corp.'s) full time engineering and design staff. *Not outside suppliers.* That means when you contact DILOG for product selection or after sale service, you'll get "first hand" assistance... along with years of experience manufacturing μ P based controllers that interface with DEC 11 CPUs.

The intelligent products you'll discuss all utilize common proprietary architecture and DILOG automated design techniques—products with exceptional reliability and cost efficiency... mostly available from stock. And

when you plug a DILOG controller into your DEC CPU it's ready-to-run because it's *fully operating system software compatible.*


These high performance data storage interface products also feature • minimum bus/space requirements • up to 60% less power • 10 to 50% lower cost • automatic self-test... and numerous other features for easy system integration.

Consult the DILOG/disc-tape compatibility table for your needs. Then ask for detailed data on existing, or future products from DILOG... #1 in single board DEC 11 compatible disc/tape controllers.

Distributed Logic Corp., 12800-G Garden Grove Blvd., Garden Grove, CA 92643, Phone: (714) 534-8950 •
TELEX: 681 399 DILOG GGVE

DISC/TAPE DRIVE MANUFACTURER COMPATIBILITY CHART

MAGNETIC TAPE		DISC		
½" REEL-TO-REEL STD. & STREAMER	2315/5440/RK05 CARTRIDGE CLASS	CMD CARTRIDGE MODULE	SMD STORAGE MODULE	WINCHESTER 5¼", 8" OR 14"
AMPEX CIPHER CONTROL DATA DIGI-DATA KENNEDY MICRODATA PERTEC TANDBERG DATA (IDT) WANGCO TDX	AMPEX CAELUS CENTURY DATA CONTROL DATA DEC DIABLO IOMEC MICRODATA PERTEC WANGCO WESTERN DYNEX DRI	AMPEX CONTROL DATA	AMPEX CENTURY DATA CONTROL DATA BALL COMPUTER MITSUBISHI	BASF CONTROL DATA FUJITSU KENNEDY MEMOREX PRIAM SHUGART SEAGATE QUANTUM IMI
CAPACITIES 2.5 TO 300 MB				

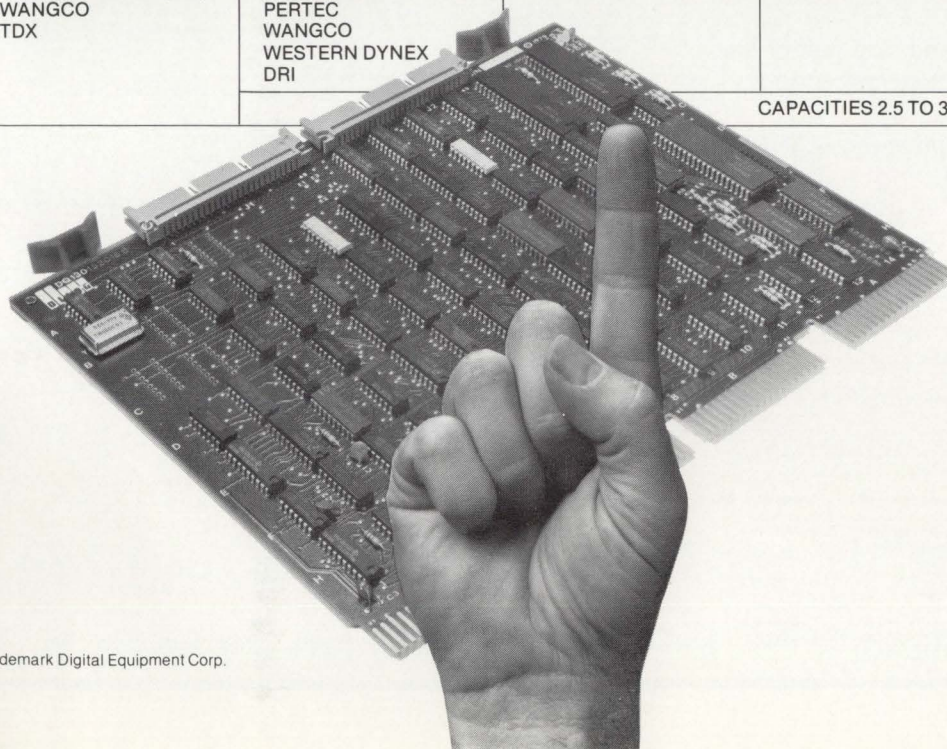

**DISTRIBUTED
LOGIC CORP.
DILOG**

*Trademark Digital Equipment Corp.

QUERY.TEC

A Search and Substitute TECO MACRO with QUERY Facility

By Mark J. Diaz, Dataguard Corp., Hinsdale, IL 60521

TECO is generally powerful enough to accomplish any given search and substitute modification throughout your entire text file with a single command string. For example, removing an unknown number of spaces embedded within a file specification in a file produced by DIRECT is easily done.

Occasionally the command string to accomplish the desired substitutions would either take longer to write than "manually" editing each occurrence, or would be nearly impossible to write because the occurrences are not defined by their context within the text.

For example:

You have entered an entire file manipulation module. However in about half the instances where you should have typed a variable name corresponding to one file, you have typed a variable name corresponding to another file. Assume your standard for variable names associated with file buffers is a unique 3 or 4 letter prefix, a dot, and suffix unique only within it's prefix. So, you have entered FILE1.FIELD\$ when you meant to enter FILE2.FIELD\$ and vice versa. There is no reasonable pattern as to which variables should be which.

This very example, and my desire to become more proficient in TECO, caused me to write the QUERY.TEC macro.

FEATURES

- Underlines text to be substituted
- Online instruction always available
- Informs user how to get help on invalid entries
- Options available:
 - 1) Do the substitution.
 - 2) Don't do the substitution.
 - 3) Don't do the substitution and skip rest of line.
 - 4) Substitute the rest of the matching strings.
 - 5) Exit search.
- Type only the letter for any option (no RETURN).
- Additional option easily added.

The actual TECO macro, loaded as usual with TECO's EIQUEYR\$ command follows.

```
!*
TECO macro:      QUERY.TEC

This macro performs search and substitute operations with
an operator query facility.
It is loaded (into Q-register Q) with the EIQUEYR$ command.

*!
$^A
Loading "QUERY.TEC" into Q-reg "Q".
Type "IUQMOS$" for instructions.
^A
OUQ          !* Zero the I-want-instructions flag *!
!* Load the macro into Q-reg Q *!
e^UQ/
QQ"N         !* If instructions are desired, print them and exit *!

^Ato use the QUERY macro after loading it into Q-register Q with
the EIQUEYR$ command, simply append an MQ command after your
substitute command.
```

Example: F\$pront\$print\$VMQ\$

Note: It would behoove you not to exit this macro with ^C because Q-registers I, R, 1, and 2 are used and restored on a normal exit (either an E command or a search failure).

After using the MQ command, QUERY will prompt for one of several options. Enter a question mark (?) for the help message.

```
^A
OUQ          !* Zero the I-want-instructions flag *!
^C          !* Exit macro *!

[I
[1
[2
[R          !* Save all registers used *!

^YXI        !* Save last string inserted *!
$OUR        !* Clear the Do-rest-of-matching-strings flag *!
IS!
:SS^E       !* If the search string can not be found, exit *!

^A?SRH Search failure ^A:G^A^A !* Display string not found *!
BJ          !* Return to beginning of buffer *!
OX$        !* Exit QUERY macro *!

V
QR"N        !* Display line containing string found *!
FR$ GIS    !* Is the Do-rest-of-matching-strings flag set ? *!
OSS        !* Yes?, then do the substitution *!
           !* Go look some more *!

           !* Underline the string to substitute *!

.U2         !* Save the current position *!
OL          !* Get to the beginning of the line *!
<
(Q2+^S-.)*E !* Are we at the string to substitute ? *!
           !* Yes?, then exit iteration loop *!
           0;
(UA-9)*E    !* Is the character a tab ? *!
           9^T !* Yes?, then display a tab *!
           |
           32^T !* No?, then display a space *!
           |
C           !* Advance a character *!
>
Q2J         !* Restore the buffer pointer *!
-^S<^A^A>  !* Display pointers to the string to substitute *!
^A
^A
!A!
^A>^A      !* Prompt the user for what option to do *!
^Tul       !* Get response into Q-reg 1 *!
^A
^A
(Q1-89)*E   !* Was a "Y" entered ? *!
           FR$ GIS !* Yes?, then do the substitution *!
           OSS    !* Go look some more *!
           |
(Q1-78)*E   !* Was an "N" entered ? *!
           OSS    !* Yes?, then go look some more *!
           |
(Q1-76)*E   !* Was an "L" entered ? *!
           L      !* Yes?, then skip the rest of this line *!
           OSS    !* Go look some more *!
           |
(Q1-82)*E   !* Was an "R" entered ? *!
           FR$ GIS !* Yes?, then do the substitution *!
           LUR    !* Set the Do-rest-of-matching-string flag *!
           OSS    !* Go look some more *!
           |
(Q1-69)*E   !* Was an "E" entered ? *!
           OX>    !* Yes?, then exit iteration loop *!
           |
(Q1-63)*E   !* If a question mark is entered, *!
           !* display the help message *!

^AValid options are:
Y - Yes, do the substitution.
N - No, do not do the substitution.
L - No, do not do the substitution and skip the rest of the line.
R - Substitute the rest or the remaining matches *!
E - Exit QUERY
? - This help message

^A
V           !* Redisplay the current line *!
OAS        !* Go ask again *!
           !* Entry was not a valid option *!

(Q1-13)*E   !* Was a carriage return entered ? *!
           T      !* Yes?, then get the line-feed *!
           |
^APlease enter a valid option, type "?" for HELP.


^A
V           !* Redisplay the current line *!
OAS        !* Go ask again *!

IX!        !* Exit QUERY macro *!
^A
^A
[R          !* Restore all Q-regiteres used *!
[2
[1
[1
$EIS$
```


WHY SYSTEMS

announces . . .

DIGICALC™

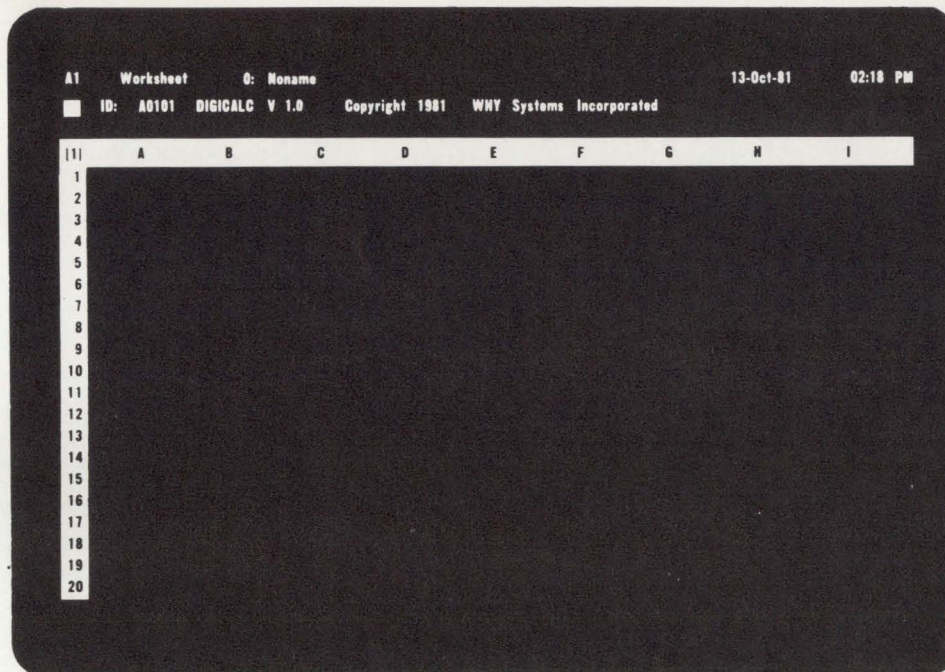

THE ELECTRONIC SPREADSHEET FOR DEC COMPUTER SYSTEMS

APPLICATIONS

Financial statements
Business forecasting
Resource management
Investment analysis
Job costing
Performance analysis
Cash Flow analysis
Error analysis

EASY TO USE

Built-in automatic training procedure
Instant HELP available at the terminal
User-friendly / interactive

SAVES MONEY

Reduces demand on information
system personnel
Eliminates long hours of
"what if" calculations
Report and form printing costs
reduced or eliminated
Low, one-time investment

PROVIDES INSTANT REPORTS

Choice of formats
Working copies or board-room quality

- AUTOMATIC CALCULATION
- EXTENSIVE MATH FUNCTIONS
 - ALGEBRAIC
 - LOGICAL
 - FINANCIAL
 - SCIENTIFIC
 - USER DEFINED FUNCTIONS
- TEN KEY NUMERIC DATA ENTRY
- EXTENSIVE **HELP** AT TERMINAL
- INCLUDES SELF TEACHING MODE
- WORKSHEET CONSOLIDATION
- VARIETY OF "BOARDROOM"
QUALITY REPORTS
- SAVES AND RECALLS WORKSHEETS
- EXTERNAL FILE INTERFACE

ON RSTS/E, RSX-11M, VMS, TOPS 10/20
VT-100 OR MOST EMULATORS


**WHY
SYSTEMS
INCORPORATED**

17130 Avondale Way, N.E.
Redmond, Washington 98052
(206) 881-2331

CALL TODAY FOR A DIAL-UP DEMONSTRATION

Ready

DEC USERS: Stop and think. Our disk systems are the only viable storage alternative. . .

TAKE FIVE.

- 1.** **More reliability.** We'll provide great alternative solutions—like our Add-On, Non-Stop Reliability (ANSR) systems. . . or our 160 or 675 Mbyte, SMD-compatible Winchester storage drives—for added dependability and increased throughput.
- 2.** **More flexibility and floor space.** We've eliminated the problem of limited choice. Name it; you've got it. And our alternative solutions take up much less floor space.
- 3.** **Faster delivery.** We've built our solid reputation on quick delivery. Typically, we can give DEC users value-packed storage systems in 30 to 45 days ARO.
- 4.** **Responsive service.** We have service centers both in the U.S. and Europe. We offer 4-hour response to any call within a 50-mile radius of major U.S. cities. And 24 hours/day, 7 days/week service contracts for all key metropolitan areas.
- 5.** **Big money savings.** For example, two RMO3s with a total capacity of 160 Mbytes cost \$50,000. Three of our 160 Mbyte Winchester drives in support of a DEC VAX-11/780 give you 480 Mbytes for \$42,500.

For more information about the only *viable* alternative to DEC data storage systems, contact us today at any of the addresses listed below.



United States: 1855 Barber Lane, Milpitas, CA 95035, (408) 942-1212.

Europe: System Industries (Europe), System House, Guildford Road, Woking, Surrey, GU22 7QQ, England, (44) 4862 5077, Telex 859124.
California (714) 851-6289, (213) 822-3161; **Colorado** (303) 986-1591; **Georgia** (404) 955-2252; **Illinois** (312) 948-9330; **Massachusetts** (617) 695-4022; **Michigan** (313) 663-4925;
New Jersey (201) 839-8650; **New York** (516) 482-6082; **New York Metro** (212) 785-9300; **Ohio** (513) 771-0075; **Texas** (713) 497-7224, (214) 386-8776;
Virginia (703) 734-9700; **Washington** (206) 451-8791; **West Germany** (49) 6102 5464; **Sweden** (46) 08-63 16 20

Now then, while using the `.WORD`, `.BYTE`, `.FLT2`, and `.FLT4` directives in this way is rather straightforward, the `.ASCII` directive is something of a pain because one must count the number of characters in the argument to see that it is neither longer nor shorter than the corresponding string in the map, e.g. in the example both `C$` and `"HELLO"` are five bytes long. I will therefore present, without explanation, a macro which will pad the string to the desired length, or generate an error at assembly time if the string is already too long. One can lift this macro from the example and use it as it stands, from the `.MACRO` to the `.ENDM` directives inclusive

MAP (IN1MAP)

```

A%,      ! Initialized to 100%
B,       ! Initialized to .05
C$ = 10% ! "STRING1  "
D$ = 15% ! "STRING2  "

```

```

.TITLE      EXAMPLE OF STRING PADDING MACRO
.RADIX      10

.MACRO      PADSTR    MAXLEN,STRING          ; Pad STRING to MAXLEN
; with spaces

.NCHR       STRLEN,STRING                   ; STRLEN is current length
.IF         LT      MAXLEN-STRLEN           ; If STRING is already longer
; than MAXLEN then generate
; the following error message

.ERROR      STRING ; STRING TOO LONG

.ENDC       ; End of error checking

.ASCII     /STRING/                        ; Reserve space for STRING
.REPT      MAXLEN-STRLEN                   ; And then fill it to MAXLEN
.ASCII     <32>                             ; with spaces
.ENDR       ; End of fill
.ENDM      ; End of macro

```

```

      .PSECT    INIMAP, RW, D, GBL, REL, OVR

INIMAP:
      .WORD    100                      ; A%
      .FLTL4   .05                      ; B
      PADSTR   10, <STRING1>             ; CS, padded with 3 spaces
      PADSTR   15, <STRING2>             ; DS, padded with 8 spaces.

      .END

```

In the interest of brevity I have neither discussed all of the data storage directives nor been as thorough as I might have been in my treatment of those I did discuss, but I hope that, in conjunction with the MACRO-11 Language Reference Manual, these examples can be of use. ♡

[1]RSTS/E is a trademark of Digital Equipment Corp.

TIPS & TECHNIQUES

A Column For The Advanced RSTS/E User

By Steven L. Edwards, Software Techniques

Basic-Plus and MACRO

In this issue we will demonstrate how to call MACRO subroutines from Basic-Plus. While this feature is completely unsupported by DEC, and may not be available in future releases of Basic-Plus (not likely), it is useful.

This feature can give your program access to functions which are not available in Basic-Plus. Please note that this feature in itself will not breach system security. The MACRO code is executed in exactly the same mode as the Basic-Plus program. This feature can also be used to re-code functions which are too slow or clumsy, coded in Basic-Plus.

If you look at a Basic-Plus link map, you will see 2 program sections, named UI and UI2. These program sections can be overlaid with MACRO code that your program can access via sys-call 10 (UI), and sys-call 13 (UI2). After you have assembled the new code, it must be linked into a new Basic-Plus run-time system before it can be used. The relevant portion of the sysgen control file is included below.

As a demonstration of this feature, I have implemented UI as a debugging aid to dump the current Basic-Plus program to a specified file, and UI2 as a general purpose interface to user written MACRO code.

UI — Dump current program

Executing the code in the UI program section will dump the contents of the currently running Basic-Plus program to the specified file. This file can be analyzed by the CUSP BPDA. The output of the BPDA program will show the contents of all of the variables and buffers. The format of the call is:

```
2010 V5 = SYS(CHRS(10)) + "BEFORE.PMD"
      I DUMP TO FILE BEFORE.PMD
```

UI2 — Execute machine code

Executing the code in the UI2 program section will execute the machine code string passed in the sys call. The format of the call is:

```
2010 V5 = SYS(CHRS(13) + CHRS(0)
      + CVT$ (SWAP$ (5599)) + CVT$ (SWAP$ (18209)) + CVT$ (SWAP$ (266))
      + CVT$ (SWAP$ (5599)) + CVT$ (SWAP$ (2429)) + CVT$ (SWAP$ (26))
      + CVT$ (SWAP$ (30684))
      + CVT$ (SWAP$ (1358)))
      I CHANGE OUR SYSTAT NAME TO 'WHAT?'
      I INVOKE UI2, AND WORD ALIGN FOLLOWING CODE.
      I 'MOV #777H, #FIRQB+PQAM1'
      I 'MOV #RAT?, #FIRQB+PQAM1+2'
      I '.NAME'
      I 'RETURN'
```

This method of executing machine code is quite cumbersome. An alternate method is to link the assembly language program, extract the code from the task image and then execute it:

```
2010 OPEN "NEWNAM.TSK" FOR INPUT AS FILE #18
      FIELD #18, 512 AS MCS
      GET #18, RECORD 58
      V5 = SYS(CHRS(13)) + CHRS(0) + MCS
      I OPEN THE TASK IMAGE FILE.
      I FIELD THE BUFFER.
      I READ THE CODE (SKIP THE TASK HEADER STUFF).
      I AND DO IT.
```

Note that the machine code string to be executed by UI2 must be written as position independent code and terminated by a RETURN (RTS PC).

Sysgen control file

```

*
*
SR LINK.SAV
BASIC/Z,UI/A/W,BASIC=IN:RTS,DK:SERR.STB/X/H:17776/U:4000/C
*
*
UI/C -- this is your code.
IN:VE
PA
*
*
UI.Loc
UI: BASIC-PLUS UN-IMPLEMENT MACRO V04.00 29-DEC-81 16:11:28 PAGE 1

1
2
3 000000 .ENABL LC
      Title UI,<BASIC-PLUS UN-IMPLEMENTED SYS CALLS>,01,30-NOV-81,<SLE>
      .FILE UI BASIC-PLUS UN-IMPLEMENTED SYS CALLS
      .IDENT "07.001"
      .SBTTL UI BASIC-PLUS UN-IMPLEMENTED SYS CALLS
      .SBTTL EDIT: DATE: BY:
      .SBTTL 01 30-NOV-81 SLE
      .SBTTL

4
5
6 Written by: STEVEN L. EDWARDS
7
8 Date: 30-NOV-81
9
10 Package: In-House
11
12 Description: IMPLEMENT THE UN-IMPLEMENTED SYS CALLS
13
14 Copyright (C) 1981
15 Software Techniques
16 Los Alamitos, CA 90720
17
18 This software is furnished under a license for use only on a
19 single computer system and may be copied only with the inclusion
20 of the above copyright notice. This software, or any other
21 copies thereof, may not be provided or otherwise made available
22 to any other person except for use on such system and to one who
23 agrees to these license terms. Title to and ownership of the
24 software shall at all times remain in Software Techniques.
25
26 The information in this document is subject to change without
27 notice and should not be construed as a commitment by Software
28 Techniques.
29
30 This software is un-released and Software Techniques has no
31 commitment to support it at this time, unless stated elsewhere in
32 writing.
33
34 .Sbtll Calling Format
35
36 UI
37
38 TEMP.05 = SYS(CHRS(13) + FILENAME$)
39
40 Arguments:
41
42 Name Description
43 -----
44 FILENAME$ FILE NAME TO DUMP IMAGE TO.
45
46 UI2
47
48 TEMP.05 = SYS(CHRS(10) + CHRS(0) + MCS)
49
50 Arguments:
51
52 Name Description
53 -----
54 CHRS(0) ALIGN MCS ON WORD BOUNDARY.
55 MCS MACHINE CODE STRING.
56
57 .Sbtll Modification History
58
59 Ver/Edit Date Reason (Who)
60 -----
61
62 V7.0-01 30-NOV-81 Initial conception.
63
64 .Sbtll Program Description
65
66
67
68
69 THIS MODULE IMPLEMENTS THE UN-IMPLEMENTED BASIC-PLUS SYS
70 CALLS. THE FIRST CALL (SYS 10) DUMPS THE CURRENT PROGRAM TO THE
71 SPECIFIED FILE. THE SECOND CALL (SYS 13) EXCLUDES THE MACHINE
72 LANGUAGE CODE STRING PASSED TO US.
73
74 .Sbtll Assembly Instructions:
75
76
77
78 MACRO UI = COMMON/P11, UI
79
80
81 .Sbtll Global Symbols
82
83
84 .Globl UI2, B.4
85
86
87 .Sbtll Variable Description and Initialization
88
89
90 000000 .Psect UI, RW, I, GBL, REL, OVR
91
92 000036 CHAN = 17*2 ; CHANNEL 15.
93 000200 FATAL = 200 ; FATAL ERROR BIT.
94 000004 LENGTH = 4 ; OFFSET INTO STRING HEADER.
95
96 .MACRO CHKERR 7A
97 TSTB #FIRQB ; ERROR?
98 BQZ A ; GOOD.
99 TRAP FATAL+1 ; LET BASIC HANDLE IT.
100
101 A: .ENDM CHKERR
102
103 .Sbtll SYS CALL 10.
104
105
106
107 000000 .Psect UI, RW, I, GBL, REL, OVR
108
109 000000 UI: PUSH <R0,R1,R2,R3,R4,R5> ; SAVE THE REGISTERS.
110 000014 .STAT BQZ A ; GET JOB SLOTS.
111 000016 MOV #XRB=XLEN,R2 ; OLD CORE SIZE.
112 000022 CALL SETXRB ; CLEAR XRB.

```

... continued on page 44

What Are You Doing This Weekend?

If you're spending this weekend in the computer room, think about this: DISKIT, the disk management tool kit, can save you hundreds of hours of valuable time.

DISKIT provides all of the tools you need to create and manage well-structured disks. Use DISKIT to race through backup at 10,000 blocks/minute. At the same time, DISKIT will optimize your disks, improving your system's throughput by as much as 50 percent*. A faster system means happier users and more free time for you.

Want more information? Just tear out the Business Reply Card. Or give us a call. You really don't have time not to.



*Based on information supplied by our customers.

Software
Techniques
Incorporated

SOFTWARE CONSULTING FOR DEC SYSTEMS

5242 Katella Avenue
Los Alamitos, CA 90720 USA
(213) 594-9405 (714) 995-0533

74/76 Northbrook St.
Newbury, Berkshire RG131AE UK

THE CASE FOR NFF

By Philip G. Anthony, Technical Systems, Fidelity Bank, Philadelphia, PA

Conventional wisdom in the RSTS community has it that the new-files-first (NFF) option for account directories represents the height of folly, the path to perdition, and the surest way to slow file processing down to a crawl. The resulting complexity of directory linkage under NFF, opponents charge, increases the time required for file creation and bounces the user all around the directory during retrieval. Even DEC, which includes the option in its DSKINT procedure, recommends an automatic 'no' answer to the option. Taking the option, declares DEC, will somehow bury such frequently used programs as LOGIN irrevocably at the bottom of SY:(1,2).

In fact, the NFF option can speed file processing significantly. Careful design of accounts on the system, plus a few simple procedures, will almost entirely eliminate the disadvantages of NFF while freeing up processing time and increasing throughput.

'Careful design of accounts' can be defined — with variations depending on the applications of the system and the programming philosophy — as follows:

- All permanent and long-term data files have their own account or accounts. If possible, these accounts are located on a private disk (which need not be structured NFF). The files in question are the major data bases that will be opened for input only or for in-place update (Mode 1). They may even be extended (Mode 2) as necessary, though this leads to a highly fragmented disk structure; still, extension retains the existing directory links, adding only new retrieval information as required. Because the directories don't change, the question of old or new files first is moot.
- Executable programs in operating modules and their source files. These file types again each have their own account or accounts. They change more frequently than do the data file accounts, but still very slowly; at least, one would hope that no more than a couple of pieces of operating software need revision each week. Once again, because of the infrequency of change, directory order is inconsequential.
- Executive control files, menus, and the other overhead files that make the executable programs accessible to the users. Another nonvolatile type with its own account.
- Medium-term files. Typically, they are holding files, containing information to be posted into the main data files at the end of a specified period — daily, weekly, monthly, quarterly. Shorter-term notes, such as daily files, are often kept around for a week or a month before final posting into longer-term summary files, which may be permanent data storage or other medium-term files. Like the others, they have their own account or accounts.
- Temporary files, work files, and print files. All go into one or several accounts that contain no permanent, frequently accessed files and an absolute minimum of the medium-term variety. If there is only one such account, it ideally should be the one from which programs are run.

This permits short-term work space for system utilities, such as sorts, without extra lines of code being necessary to place the work files elsewhere. If several accounts are available for these short-term file types, separating the print files from the others is desirable.

- The less said about program development accounts, the better. With a hard-working staff of programmers, directories to these accounts are going to be a bloody mess no matter what directory protocol is chosen.

The volatile accounts are the ones in which the advantages of placing new files first in the directory are realized. In my own experience, more than three quarters of file accesses in transient-file accounts involve the ten most recently created files. Better than 95 per cent go after one of the fifty newest files even in accounts containing queued print files. And more than half the files in print and work file accounts are deleted within an hour of their creation. It's a rare file in one of these accounts, and probably reflects bad programming practice or account management, that stays on disk for more than five working days. Because of the last-in, first-out character of the temporary and work files, LIFO directory ordering speeds processing noticeably.

Decreasing access overhead to temporary files becomes even more important when over-all file handling is examined. As a class, transient files are likely to be accessed more frequently than medium-term and permanent files.

Once a user enters a data file or an index file, for instance, he is likely to continue using it for a period of several minutes to several hours; and under V7.0, the file opening time is greatly reduced when somebody else already has the file open. The volatile files, on the other hand, are typically short. They are usually kept open for much shorter periods, and a program is likely to open and close several of them in the course of its run. Also, they are single-purpose entities, intended for one-user handling. Thus, they are the files on the system involving the highest processing overhead and most in need of help from a friendly directory structure.


Medium-term files are most hurt by NFF; in general, they are accessed in FIFO order. But on most installations, they are not accessed frequently. And several strategies are available for speeding their access times if it becomes important. The most obvious of these is to keep them on a private disk not structured NFF.

If this isn't an available option, the medium-term data can be stored in permanent, random-access files with control records handling space utilization within the file — intermediate files (IMFs). Instead of these files' being deleted at the end of their useful lives, they are simply zeroed out and recycled. Being permanent, they have no directory-order problem.

Another method is to request the files' being placed at the bottom of the directory on file creation (Mode 1024). This open-for-output mode overrides the system default and defeats NFF locally.

Fourth, REORDR can be used periodically to sort the

Still, file manipulation represents the single operation that does the most to slow a system down. An option that speeds access to the peskiest files on anybody's system, while affecting other files only minimally, will provide more processing time for everybody using it. ❤️

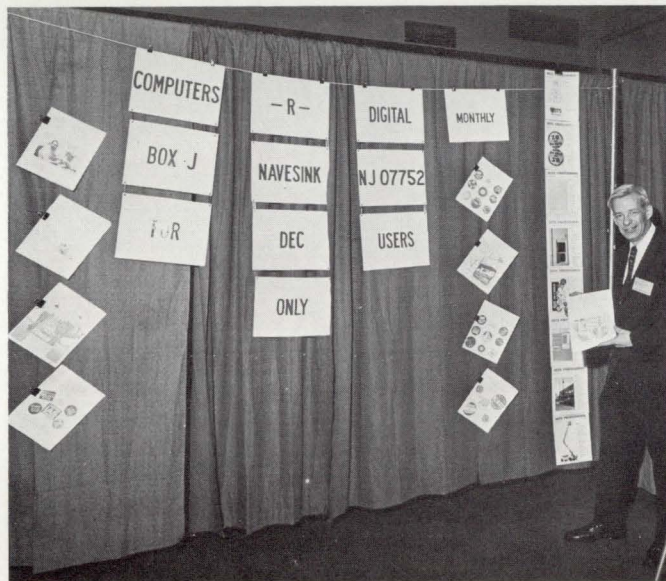

IN 100 LOT
OEM QUANTITIES

CIRCLE 96 ON READER CARD

PURCHASE PLAN • 12-24 MONTH FULL OWNERSHIP PLAN • 36 MONTH LEASE PLAN

	DESCRIPTION	PURCHASE PRICE	12 MOS. PRICE	PER MONTH 24 MOS.	36 MOS.
DEC	LA36 DECwriter II	\$1,095	\$105	\$ 58	\$ 40
	LA34 DECwriter IV	995	95	53	36
	LA34 DECwriter IV with XMS Ctrl.	1,095	105	58	40
	LA120 DECwriter III KSR	2,295	220	122	83
	LA120 DECwriter III RO	1,095	200	112	75
	VT100 CRT DECscope	1,695	162	90	61
	VT101 CRT DECscope	1,195	115	67	43
	VT125 CRT Graphics	3,295	315	185	119
	VT131 CRT DECscope	1,745	167	98	63
	VT132 CRT DECscope	1,995	190	106	72
	VT18XAC Personal Computer Option	2,395	230	128	86
TEXAS INSTRUMENTS	TI745 Portable Terminal	1,595	153	85	58
	TI765 Bubble Memory Terminal	2,595	249	138	93
	TI Insight 10 Terminal	695	67	37	25
	TI785 Portable KSR, 120 CPS.	2,395	230	128	86
	TI787 Portable KSR, 120 CPS	2,845	273	152	102
	TI610 RO Printer	1,695	162	90	61
	TI620 KSR Printer	2,195	211	117	80
LEAR SIEGLER	ADM3A CRT Terminal	595	57	34	22
	ADM5 CRT Terminal	645	62	36	24
	ADM32 CRT Terminal	1,165	112	65	42
	ADM42 CRT Terminal	1,995	190	106	72
DATAMEDIA	DT80/1 CRT Terminal	1,695	162	90	61
	DT80/3 CRT Terminal	1,295	125	70	48
	DT80/5L APL 15" CRT	2,295	220	122	83
TELEVIDEO	920 CRT Terminal	895	86	48	32
	950 CRT Terminal	1,075	103	57	39
NEC SPINWRITER	Letter Quality, 7715 RO	2,895	278	154	104
	Letter Quality, 7715 KSR	3,295	316	175	119
GENERAL ELECTRIC	2030 KSR Printer 30 CPS	1,195	115	67	43
	2120 KSR Printer 120 CPS	2,195	211	117	80
HAZELTINE	Executive 80/20	1,345	127	75	49
	Executive 80/30	1,695	162	90	61
EPSON	MX-80 F/T Printer	745	71	42	27
	MX-100 Printer	895	86	48	32

FULL OWNERSHIP AFTER 12 OR 24 MONTHS • 10% PURCHASE OPTION AFTER 36 MONTHS

MICROCOMPUTERS

APPLE • COMMODORE • HP85 • DEC LSI 11

ACCESSORIES AND PERIPHERAL EQUIPMENT

ACOUSTIC COUPLERS • MODEMS • THERMAL PAPER • RIBBONS • INTERFACE MODULES • FLOPPY DISK UNITS



TRANSNET CORPORATION

1945 ROUTE 22 • UNION, N.J. 07083 • (201) 688-7800
TWX 710-985-5485 800-526-4965 OUTSIDE N.J.

CIRCLE 28 ON READER CARD

RSTS PROFESSIONAL

Box 361 • Ft. Washington, PA 19034-0361 • (215) 542-7008

- ☐ **PAYMENT ENCLOSED** for one year's subscription (6 issues).
US 3rd class, \$35 / Canada & US 1st class, \$50 US /
A! all other countries air mail, \$60, payable in US dollars.
- ☐ **BILL ME** for one year's subscription:
- ☐ US 3rd class / ☐ Canada or US 1st class / ☐ Other foreign.

Please send BACK ISSUES circled: Vol. 1, #1 Vol. 2, #3 Vol. 3, #2 Vol. 4, #1

- | | | | |
|---|-----------|-----------|-----------|
| <input type="checkbox"/> \$10 per issue enclosed. | Vol.2, #1 | Vol.2, #4 | Vol.3, #3 |
| <input type="checkbox"/> Bill me for \$12.50 per issue. | Vol.2, #2 | Vol.3, #1 | Vol.3, #4 |

- ☐ Send me a RSTS PRO Tee Shirt — \$6.95 ☐ S ☐ M ☐ L ☐ XL (Adult Sizes Only)

Name _____

Address _____

City/State/Zip _____

Country _____ Phone () _____

FREE CLASSIFIED AD WITH SUBSCRIPTION!!

Your first 12 words are absolutely FREE, only \$1.00 per word thereafter.
Use the space provided below.

```

113 000026 016110      MOV          LENGTH(R1), (R0)          ; LENGTH OR F.LENAME.
114 000032 000004      MOV          ;
114 000032 005310      DEC          (R0)                    ; ADJUST FOR FUNCTION CUD.
115 000034 012020      MOV          (R0)+, (R0)+          ; *
116 000036 010310      MOV          R3, (R0)              ; ADDRESS OF FILENAME.
117 000040      CALL          SETFQB             ; CLEAR FIRQB.
118 000044      .FSS                          ; SCAN THE FILENAME.
119 000046      CHKERR                          ; CHECK FOR AN ERROR.
120
121
121 000056 112720      MOVb        #CREFQ, (R0)+          ; CREATE FILE FUNCTION CODE.
122 000062 000004      MOV          #CHAN, (R0)          ; CHANNEL 15.
123 000066 000036      MOV          ;
124 000070 006302      ASL          R2                    ; OLD IMAGE SIZE TIMES 2
125 000072 010237      R2, #FIRQB+PQSIZ                ; FOR FILELISTE.
126 000074 104000      CALFIP     CHKERR                  ; CHECK FOR AN ERROR.
127
128 000106      CALL          SETXRB             ; CLEAR XRB.
129 000112 072227      ASH          #11, R2              ; OLD IMAGE SIZE TIMES 2048
130
130 000116 010210      MOV          R2, (R0)              ; FOR BYTE COUNT.
131 000120 010200      MOV          (R0)+, (R0)+          ; * * *
132 000122 005720      TEST         (R0)+, (R0)+          ; STARTING AT 0.
133 000124 012710      MOV          #CHAN, (R0)          ; CHANNEL 15.
134
134 000130 104004      .WRITE     CHKERR                  ; CHECK FOR AN ERROR.
135
135 000132      MOV          ;
137 000142      CALL          SETFQB             ; CLEAR FIRQB.
138 000146 112720      MOVb        #CLASFQ, (R0)+        ; CLOSE CHANNEL FUNCTION CODE
139 000152 012710      MOV          #CHAN, (R0)          ; CHANNEL NUMBER.
140
140 000156 104000      CALFIP     CHKERR                  ; ChkCk FOR AN ERROR.
141 000160
142
142 000170      RETURN: POP          (R5, R4, R3, R2, R1, R0) ; RESTORE THE REGISTERS.
143 000172      POP          ;                ; BACK TO BASIC(5).
144
144 000204      SETFQB: PUSH         #FIRQB+PQFUN, R1 ; SAVE R0, R1.
145 000206      PUSH         #FIRQB, R0          ; POINT AT FIRQB
146 000214 012700      MOV          #PQBSIZ/2, R1        ; SIZE OF FIRQB IN WORDS.
147 000216 000402      BR          CLEAR                ; JOIN COMMON CODE.
148 000220 012701      MOV          #PQBSIZ/2, R1        ; SIZE OF XRB IN WORDS.
149 000222 000407      BR          CLEAR                ; JOIN COMMON CODE.
150
150 000226      SETXRB: PUSH         #XRB+XRLFN, R1 ; SAVE R0, R1.
151 000234      MOV          #XRB, R0          ; POINT AT XRB.
152 000236 000442      MOV          #XCRBSIZ/2, R1       ; SIZE OF XRB IN WORDS.
153 000240 012701      BR          CLEAR                ; JOIN COMMON CODE.
154 000244
155
156 000244 005020      CLEAR: CLR          (R0)+          ; ZAP A WORD.
157 000246 077102      SOB          R1, CLEAR            ; UNTIL WE ARE DONE.
158 000250      POP          (R1, R0)            ; RESTORE R0, R1.
159 000254      RETURN                          ; BACK TO MAINLINE CODE.
160
161
162      , .Sbttl 13                     SYS CALL 13.
163
164
165 000000      .Psect    UI2, RW, I, GBL, REL, OVR
166
167 000000 032761      UI2:  BIT          #1, LENGTH(R1)      ; ODD STRING LENGTH?
168 000004 000001      BFC          ;
169 000006 001401      BTF          105                  ; BRANCH IF EVEN.
170 000010 200G      TRAP          FATAL+8, 4      ; FATAL OUT WITH ODD ADDRESS
171
172 000012      105:  PUSH         (R0, R1, R2, R3, R4, R5) ; SAVE THE REGISTERS.
173 000014      JMP          RETURN              ; CALL THEIR CODE.
174 000016 000170'      JMP          RETURN              ; BACK TO BASIC(5).
175
176
177 000018      .End
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
77
```

CORRECTION!

David Spencer's "TTYSET Optional Patch for VT100 Width Changes," which appeared in the last issue of the RSTS PROFESSIONAL, was printed with two lines missing from the patch to the TTYSET program. Following is a reprint highlighting the missing lines. [We apologize to David and to our readers.]

```

G/2/V<cr>
Zl<tab><tab>PROGRAM<tab><tab>: TTYSET.BAS<cr>
*H/1040<tab>/V<cr>
1040<tab>GOTO 1530 IF C$="HELP" &<cr>
*I<cr>
WIDTH% = 0% &<cr>
<tab> \ <esc>
*V<cr>
<tab> \ GOTO 1530 IF C$="HELP" &<cr>
*H/1240<tab>/V<cr>
1240<tab>GOSUB 12100 &<cr>
*Al<cr>
<tab> \ WIDTH% = V% &<cr>
<esc>
*V<cr>
<tab> \ IF E%=0% AND V%>1% AND V%<256% THEN &<cr>
*H/1430<tab>/V<cr>
1430<tab>GOTO 1500 UNLESS LEN(F$) &<cr>
*OAl<cr>
1425<tab>M%(4%) = ASCII(MID(SYS$(CHR$(6%)+CHR$(9%)),2%,1%))/2% &<cr>
<tab><tab><tab>IF M%(4%) = 255% &<cr>
<tab> \ IF WIDTH% = 81% AND M%(9%) = 255% THEN &<cr>
<tab><tab>C1$ = SYS$(CHR$(6%)+CHR$(5%)+CHR$(M%(4%))) &<cr>
<tab><tab> + CHR$(155%)+ "<" + CHR$(155%)+ "[73l" + CHR$(155%)+ "[72l" &<cr>
<tab><tab>I GET KB #, GET OUR OWN TO SET UP COLUMN CHANGE FOR VT100 &<cr>
<tab><tab>I IF WE HAVE XON AND WIDTH OF 80 THEN &<cr>
<tab><tab>I BECOME VT100, SWITCH TO 80 COLUMNS, BECOME VT52 AGAIN &<cr>
<cr>
1427<tab>IF WIDTH% = 133% AND M%(9%) = 255% THEN &<cr>
<tab><tab>C1$ = SYS$(CHR$(6%)+CHR$(5%)+CHR$(M%(4%))) &<cr>
<tab><tab> + CHR$(155%)+ "<" + CHR$(155%)+ "[73h" + CHR$(155%)+ "[72l" &<cr>
<tab><tab>I IF WE HAVE XON AND WIDTH OF 132 THEN &<cr>
<tab><tab>I BECOME VT100, SWITCH TO 132 COLUMNS, BECOME VT52 AGAIN &<cr>
<cr>
<esc>
*V<cr>
1430<tab>GOTO 1500 UNLESS LEN(F$) &<cr>
*FX<cr>

```


HOW DO YOU READ A RSTS/E DISK STRUCTURE?

By Michael H. Koplitz,

There are many articles printed whose topic is about the RSTS/E disk structure. These articles generally discuss what the basic entries are in the disk structure, but never how to write the algorithms necessary to read the disk structure. There are several ways to read the RSTS/E disk structure, but only one way will be addressed. It is assumed that the reader has some basic understanding about the disk structure. Figure A gives the RSTS/E disk structure indicating what all the entries are.

The MFD (master file directory) and UFD (user file directory) are opened in the same manner. They are opened as virtual arrays dimensioned MFD%(3583%,7%) and UFD%(3583%,7%). The algorithms will be written in BASIC-PLUS, so an understanding of it will also be assumed. The open statement for the MFD is as follows:

```
OPEN "[1.1]" + DEVICES$ FOR INPUT AS FILE #X%, MODE 8192%
```

The variable DEVICES\$ is the device to inspect, MODE 8192% is for read only mode. The UFD open statement is as follows:

```
OPEN ACCOUNTS$ FOR INPUT AS FILE #Y%, MODE 8192%
```

Where the variable ACCOUNTS\$ is the account to inspect.

The MFD label entry words are MFD%(0%,X%) where X% = 0% to 7%. Therefore:

```
PCS = MFD%(0%,4%)
STATUS = MFD%(0%,5%)
PACK.ID$ = RAD$(MFD%(0%,6%)) + RAD$(MFD%(0%,7%))
```

All disk directory links are of the same format:

bits 0 — 3	flags
bits 4 — 8	entry offset within block
bits 9 — 11	offset into FDCM
bits 12 — 15	block offset within cluster

The link is a combination of the offsets. The following function is an algorithm to retrieve the link and put it into a format usable in the array.

```
DEF FNGET.LINK%(LINK%)
  CLO.MASK% = 7% * 512%
  ENO.MASK% = 31% * 16%
  UL.BLO% = (SWAP%(LINK%) AND 240%) * 2%
  UL.ENO% = (LINK% AND ENO.MASK%)/16%
  FNGET.LINK% = UL.BLO% + UL.CLO% + UL.ENO%
FNEND
```

To get the link to the first MFD name entry:

```
NEXT.MFD% = FNGET.LINK%(MFD%(0%,0%))
```

The value of NEXT.MFD% is the row index into the MFD% array for the first MFD name entry. Therefore the password of the first MFD name entry is:

```
PASSWORD$ = RAD$(MFD%(NEXT.MFD%,2%))
            + RAD$(MFD%(NEXT.MFD%,3%))
```

The project-programmer number is:

```
PROJ% = SWAP%(MFD%(NEXT.MFD%,1%)) AND 255%
PROG% = MFD%(NEXT.MFD%,1%) AND 255%
```

The status byte, protection code, access count are:

```
STATUS% = MFD%(NEXT.MFD%,4%) AND 255%
PROT.CODE% = SWAP%(MFD%(NEXT.MFD%,4%))
            AND 255%
ACCESS% = MFD%(NEXT.MFD%,5%)
```

The starting UFD cluster is in DCN form, it is:

```
UFD.CLUSTER = MFD%(NEXT.MFD%,7%)
```

The following algorithm converts the DCN to a physical cluster number:

```
DEVICE.CLUSTER = ((DCN - 1) * DCS)/PCS
```

Where DCN is the device cluster number (a positive value), DCS is the disk cluster size (dependent on the hardware), PCS is the pack cluster size from the MFD label entry. To get a positive value for the DCN, if the array value is negative, the following function can be used to convert the integer into a positive number:

```
DEF FNPOS(NEG%) = 65535 - NEG%
```

Then:

```
DCN = FNPOS(DCN) IF DCN < 0%
```

The links in the MFD name entry can be found by using the FNGET.LINK function already described. When the function returns a zero, it is indicating that there are not any more entries of that kind.

The following statement retrieves the accounting entry link:

```
LINK.TO.ACCOUNTING% = FNGET.LINK%(MFD%(NEXT.MFD%,6%))
```

Then the words of the accounting entry are as follows:

```
LSB.CPU.TIME = MFD%(LINK.TO.ACCOUNTING%,1%)
CONNECT.TIME = MFD%(LINK.TO.ACCOUNTING%,2%)
LSB.KCT = MFD%(LINK.TO.ACCOUNTING%,3%)
DEVICE.TIME = MFD%(LINK.TO.ACCOUNTING%,4%)
MSB.CPU = 16384% * (SWAP%(MFD%(LINK.TO.ACCOUNTING%,5%)) AND 127%)
MSB.KCT = 65535 * (MFD%(LINK.TO.ACCOUNTING%,5%) AND 511%)
QUOTA = MFD%(LINK.TO.ACCOUNTING%,6%)
UFD.CLUSTER = MFD%(LINK.TO.ACCOUNTING%,7%)
```

Then convert any of the values if they are negative by calling the FNPOS function. Once this is accomplished the following statements combine the LSB (least significant byte) and MSB (most significant byte).

```
CPU.TIME = MSB.CPU + LSB.CPU
KCT = MSB.KCT + LSB.KCT
```

At this point all of the MFD information about an account has been gathered. Below is a simple procedure (in pseudo code) to read the MFD name entries.

```
MFD.LINK% = MFD%(0%,0%)
DO WHILE MFD.LINK% <> 0%
  MFD.LINK% = FNGET.LINK%(MFD.LINK%,0%)
  IF MFD.LINK% <> 0%
    THEN do your procedure
  ENDDIF
ENDDO
```



```

UFD.LINK% = FNGET.LINK%(UFD%(0%,0%))
PROJECT.NUMBER% = SWAP%(UFD%(0%,6%)) AND 255%
PROGRAMMER.NUMBER% = UFD%(0%,6%) AND 255%

```

```

UFD.NEXT.LINK% = FNGET.LINK%(UFD%(0%,0%))
FILENAMES      = RAD$(UFD%(UFD.LINK%,1%))
                + RAD$(UFD%(UFD.LINK%,2%))
EXTENSIONS     = RAD$(UFD%(UFD.LINK%,3%))
PROTECTION.CODES = SWAP$(UFD%(UFD.LINK%,4%)) AND 255%
STATUS%        = UFD%(UFD.LINK%,4%) AND 255%
ACCESS.COUNT    = UFD%(UFD.LINK%,5%)
ACCOUNTING.ENTRY.LINK% = FNGET.LINK%(UFD%(UFD.LINK%,6%))
RETRIEVAL.ENTRY.LINK% = FNGET.LINK%(UFD%(UFD.LINK%,7%))

```

```
LINK.TO.ATTRIBUTE% = FNGET.LINK(UFD%(ACCOUNTING.ENTRY.LINK%,0%))
DATE.LAST.ACCESS = DATE(UFD%(ACCOUNTING.ENTRY.LINK%,1%))
FILE.SIZE = UFD%(ACCOUNTING.ENTRY.LINK%,2%)
DATE.OF.CREATIONS = DATES(UFD%(ACCOUNTING.ENTRY.LINK%,3%))
TIME.OF.CREATIONS = TIMES(UFD%(ACCOUNTING.ENTRY.LINK%,4%))
RUNTIME.SYSTEMS = RADS(UFD%(ACCOUNTING.ENTRY.LINK%,5%))
+ RADS(UFD%(ACCOUNTING.ENTRY.LINK%,6%))
FILE.CLUSTERSIZE = UFD%(ACCOUNTING.ENTRY.LINK%,7%)
```

```
LINK.TO.SECOND.ATTRIBUTE% = FNGET.LINK(UFD%(ATTRIBUTE.ENTRY%,0))
FILE.ORGANIZATION% = UFD%(ATTRIBUTE.ENTRY%,1%)
RECORD.SIZE% = UFD%(ATTRIBUTE.ENTRY%,2%)
HIGHEST.VIRTUAL.BLOCK = UFD%(ATTRIBUTE.ENTRY%,4%)
EOF.BLOCK% = UFD%(ATTRIBUTE.ENTRY%,6%)
OFFSET.INTO.EOF = UFD%(ATTRIBUTE.ENTRY%,7%)
```

```
PRINT.CONTROL% = SWAP%(FILE.ORGANIZATION%) AND 127%
PRINT.CONTROLS = "FORTRAN" IF PRINT.CONTROL% = 1%
PRINT.CONTROLS = "CARRIAGE RETURN" IF PRINT.CONTROL% = 2%
PRINT.CONTROLS = "UNUSED" IF PRINT.CONTROL% = 4%
PRINT.CONTROLS = "DOES NOT SPAN BLOCKS"
    IF PRINT.CONTROL% = 10%
FILE.ORG% = FILE.ORGANIZATION% AND 120%
FILE.ORG% = "SEQUENTIAL" IF FILE.ORG% = 0%
FILE.ORG% = "RELATIVE" IF FILE.ORG% = 1%
FILE.ORG% = "INDEXED" IF FILE.ORG% = 2%
RECORD.FORMAT% = FILE.ORGANIZATION% AND 9%
RECORD.FORMATS = "UNDEFINED" IF RECORD.FORMAT% = 0%
RECORD.FORMATS = "FIXED" IF RECORD.FORMAT% = 1%
RECORD.FORMATS = "VARIABLE" IF RECORD.FORMAT% = 2%
RECORD.FORMATS = "VFC" IF RECORD.FORMAT% = 3%
RECORD.FORMATS = "STREAM" IF RECORD.FORMAT% = 4%
```

```
RETRIEVAL.ENTRY.NEXT% = FNGET.LINK(UFD%(RETRIEVAL.ENTRY.LINK%,0%))
DEVICE.CLUSTERS% = UFD%(RETRIEVAL.ENTRY%.Z%)
```

```
NEXT% = FNGET.LINK(UFD%(UFD.LINK%.7%))
IF NEXT% = 0% THEN FLAG% = 1%
DO WHILE FLAG = 0%
  X% = 1%
  DO WHILE UFD%(NEXT%.X%) < 0% OR X% < 8%
    OUTPUT FNPOS(UFD%(NEXT%.X%)) IF UFD%(NEXT%.X%) < 0%
    OUTPUT UFD%(NEXT%.X%) IF UFD%(NEXT%.X%) > 0%
    X% = X% + 1%
  ENDDO
  NEXT% = FNGET.LINK(UFD%(NEXT%.0%))
  IF NEXT% = 0% THEN FLAG% = 1%
ENDDO
```

RSTS/E DISK STRUCTURE (Figure A)

! LINK !	!LINK TO NEXT ENTRY!	! LINK (ALWAYS ZERO)
! -1 !	!PROG NUM !PROJ NUM!	! LSB OF ACCUM. CPU TIME
! 0 !	! PASSWORD !	!ACCUM. CONNECT TIME MIN.
! 0 !	! IN RADIX-50 !	! LSB OF ACCUM. KCT
! PCS !	!PROT CODE! STATUS !	! ACCUM. DEVICE TIME
! STATUS !	! ACCESS COUNT !	! MSB CPU ! MSB KCT
! PACK- !	!LINK TO ACCOUNTING!	! DISK QUOTA IN BLOCKS
! ID !	!START UFD CLUSTER !	! UFD CLUSTERSIZE
MFD LABEL ENTRY	MFD NAME ENTRY	MFD ACCOUNTING ENTRY

LINK	LINK TO NEXT NAME	LINK TO ATTRIBUTES
-1	FILENAME	DATE LAST ACCESS
0	IN RADIX-50	FILE SIZE
0	EXTENSION (RAD-50)	DATE OF CREATION
0	PROT STATUS	TIME OF CREATION
0	ACCESS COUNT	RUN-TIME SYSTEM
PHNOJ PHOGI	LINK TO ACCOUNTING	IN RADIX-50
"UFD"	LINK TO RETRIEVAL	FILE CLUSTERSIZE
UFD LABEL ENTRY	UFD NAME ENTRY	UFD ACCOUNTING ENTRY

LINK TO 2ND ATTRIB!	FUTURE EXPANSION!
INTERNAL FILE ORG!	BUCKET SIZE
RECORD SIZE!	MAX LENGTH OF REC!
0!	!
HIGH VIRTUAL BLOCK!	!
0!	!
EOF BLOCK NUMBER!	!
OFFSET INTO EOF!	!
UFD FIRST ATTRIBUTE ENTRY	UFD SECOND ATTRIBUTE ENTRY

LINK	NEXT	RETRIEVAL
1	DCN	1
1	DCN	1
1	DCN	1
1	DCN	1
1	DCN	1
1	DCN	1
1	DCN	1
RETRIEVAL ENTRY		

RSTS/E SOFTWARE PACKAGES

- **KDSS**, a multi-terminal key-to-disk data entry system. (Also available for RSX-11M.)
 - **TAM**, a multi-terminal screen-handling facility for transaction-processing applications. (Also available for RSX-11M.)
 - **FSORT3**, a very fast sort. Directly sorts RSTS/E files containing up to 16 million keys or records. Up to 70 times as fast as the RSTS-11 Sort package in CPU time.
 - **SELECT**, a convenient, very quick package for extracting records that meet user-specified selection criteria.
 - **BSC/DV**, a device driver for the DEC DV11 synchronous multiplexer that handles most bisynchronous protocols.
 - **COLINK**, a package that links two RSTS/E systems together using DMC11s. Supports file transfers, virtual terminals, and across-the-link task communication.
 - **DIALUP**, a package that uses an asynchronous terminal line to link a local RSTS/E system to a remote computer system. Supports file transfers, virtual terminals, and dial-out through a DN11.
- (The performance-critical portions of the first five packages are implemented in assembly language for efficiency.)
- Evans Griffiths & Hart, Inc.**
55 Waltham Street
Lexington, Massachusetts 02173
(617) 861-0670


Evans Griffiths & Hart, Inc.
55 Waltham Street
Lexington, Massachusetts 02173
(617) 861-0670

CIRCLE 29 ON READER CARD

<pre> 03-Dec-81 12:57 [11,11] UFD,BAS Page 1 \ \ 001 EX.END ***** \! THIS PROGRAM WAS WRITTEN BY M H KOPLITZ, SYSTEMS MANAGER, \! \! \! THIS PROGRAM WILL GIVE A FULL ACCOUNT REPORT OF ANY USER \! INCLUDING ALL MFD, AND UFD INFORMATION. \! \! ***** \ 010 DIM #1%,MFD\$(3583\$,7%) DIM #2%,UFD\$(3583\$,7%) XS = SYS(CHRS(6%)+CHRS(-7%)) DCS% = 8% \ 020 ON ERROR GOTO 32000 !ERROR FLAGGING SET UP \ 030 PRINT "UFD V1.0 Allis-Chalmers "; PRINT " Full report on an account" \ PRINT !PRINT BANNER. \ 040 INPUT "Account number";PROJ%,PROG% INPUT "Device<SY:>";DEVICES INPUT "Output to <KB:>";OUTPUT.FILES !ASK NECESSARY QUESTIONS \ 050 OPEN "SACCT.SYS" FOR INPUT AS FILE #1% DEVICES\$ = "SY:" IF DEVICES = "" OUTPUT.FILES\$ = "KB:" IF OUTPUT.FILES\$ = "" CS% = 16% OPEN OUTPUT.FILES FOR OUTPUT AS FILE #10% IOPEN SACCT.SYS FOR INPUT IOPEN OUTPUT.FILES FOR OUTPUT. \ 060 INPUT #1%,A.PROJ%,A.PROG%,PASSWORDS, A.UFD%,A.QUOTA%,A.NAMES GOTO 070 IF A.PROJ% = PROJ% AND A.PROG% = PROG% \ GOTO 060 !READ ACCT.SYS UNTIL MATCH. \ 070 GOSUB 25000 \ 080 OPEN "[1,1]" + DEVICES FOR INPUT AS FILE #1%, MODE 8192% !OPEN THE MFD READ ONLY. \ 090 GOSUB 26000 PRINT #10% GOSUB 26000 PRINT #10%,"System Pack ID: "; RADS(MFD\$(0%,6%)); RADS(MFD\$(0%,7%)); MFD.STATUS% = MFD\$(0%,5%) PCS% = MFD\$(0%,4%) PRINT #10%,TAB(30%);"Date or last write"; IF MFD.STATUS% AND 2048% PRINT #10%,TAB(50%);"New files first"; </pre>	<pre> IF MFD.STATUS% AND 512% PKINT #10%,TAB(65%);"Pack cluster size: "; PCS% PRINT #10% PKINT #10% !DISPLAY PACK INFORMATION LINK% = MFD\$(0%,0%) GOSUB 15000 MFD.LINK% = LINK% !GET FIRST NAME ENTRY, GIVE ! VALUE OF ARRAY INTO LINK% ! THEN RETURNED LINK% IS ! INDEX INTO ARRAY. \ 110 MFD.PROJ% = SWAP*(MFD\$(MFD.LINK%,1%)) AND 255% MFD.PROG% = MFD\$(MFD.LINK%,1%) AND 255% GOTO 130 IF MFD.PROJ% = PROJ% AND MFD.PROG% = PROG% LINK% = MFD\$(MFD.LINK%,0%) GOTO 120 IF LINK% = 0% GOSUB 15000 MFD.LINK% = LINK% GOTO 110 \ 112 \ \ 120 PRINT "?Can not find account" GOTO 32767 \ \ 130 LINK% = MFD\$(MFD.LINK%,6%) GOSUB 15000 UAA.LINK% = LINK% !GET ACCOUNTING ENTRY LINK. \ 140 GOSUB 26000 PRINT #10%,"UFD cluster";TAB(15%); "CPU Time";TAB(25%);"KCN"; TAB(35%);"Device";TAB(45%); "Quota";TAB(55%);"Connect" GOSUB 26000 PRINT #10%,TAB(5%);"-----"; TAB(15%);STRINGS(8%,45%); TAB(25%);STRINGS(8%,45%); TAB(35%);STRINGS(8%,45%); TAB(45%);STRINGS(8%,45%); TAB(55%);STRINGS(8%,45%); UFD.CLUSTER = FNUSI(MFD\$(MFD.LINK%,7%)) MCPU = FNUSI(MFD\$(UAA.LINK%,1%)) + 16384*(SWAP*(MFD\$(UAA.LINK%,5%))) AND 127% MKCT = FNUSI(MFD\$(UAA.LINK%,3%)) + 65535*(MFD\$(UAA.LINK%,5%) AND 511%) MDEV = FNUSI(MFD\$(UAA.LINK%,4%)) MDPER = FNUSI(MFD\$(UAA.LINK%,6%)) MCON = FNUSI(MFD\$(UAA.LINK%,2%)) GOSUB 26000 </pre>
---	---

... continued on page 5

TIP THE

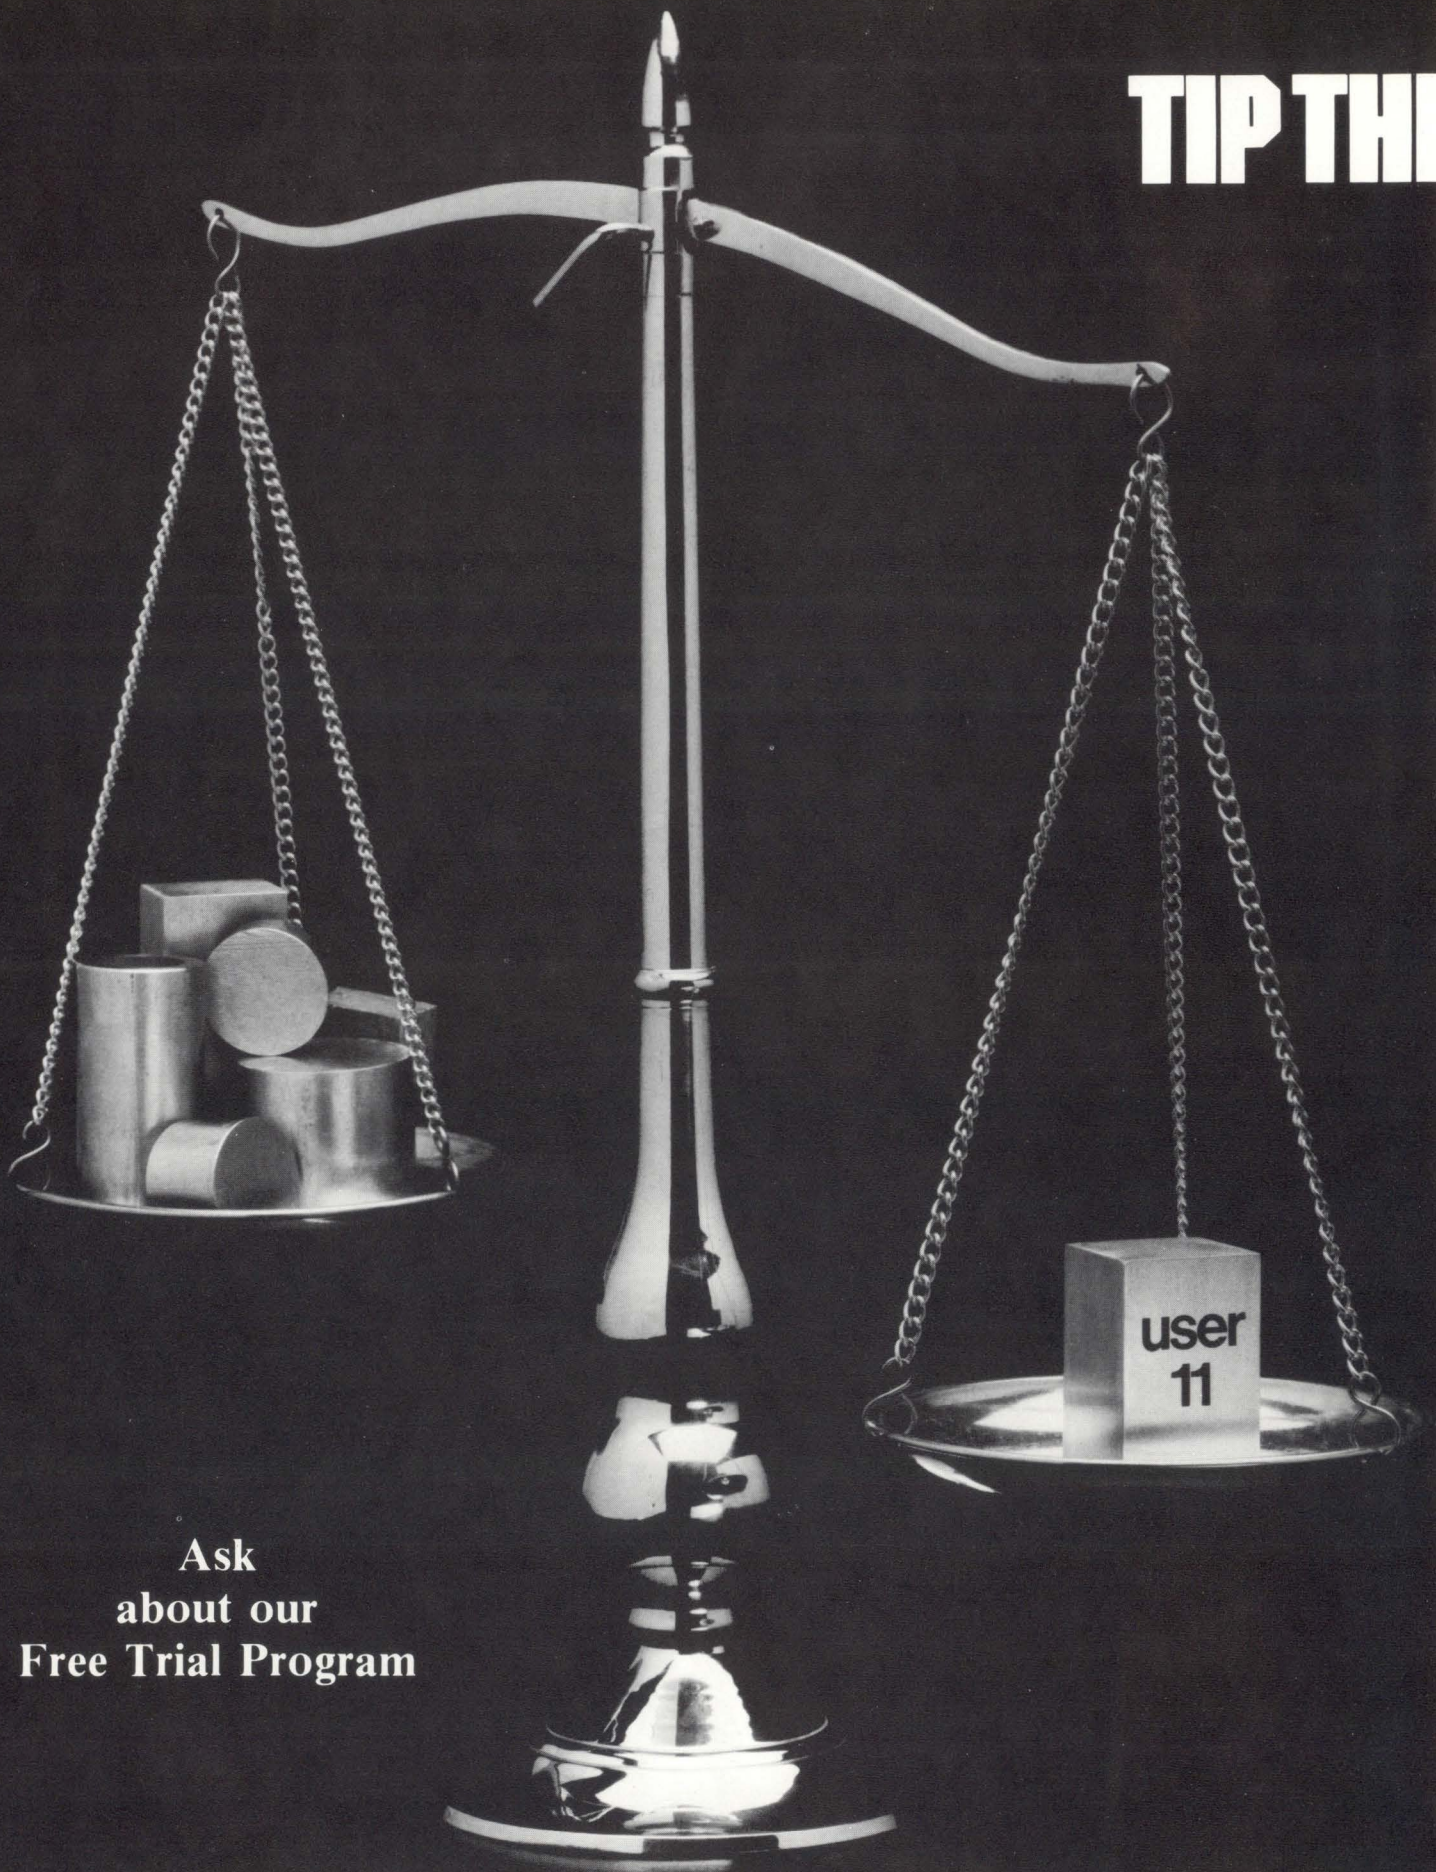

Ask
about our
Free Trial Program

APPLICATIONS SCALE IN YOUR FAVOR...WITH USER-11.

USER-11 is a comprehensive applications development facility for the DEC RSTS operating environment. Dozens of integrated programs harness RSTS's power for unparalleled productivity and performance in constructing on-line and batch application systems.

PRODUCTIVITY...

A MATTER OF TIME.

More than a data management system, **USER-11** features common-function programs that permit numerous applications to be installed without writing a single line of code. Complete building blocks and interfaces are provided for those remaining applications requiring custom work.

PERFORMANCE...

SIMPLY INCREDIBLE.

USER-11 combines advanced BASIC and MACRO coding techniques with ultra-efficient file accessing mechanisms to optimize application system performance.

RELIABILITY...

A PROVEN FACT.

USER-11 is currently installed on hundreds of time-sharing systems world-wide with a reliability record that users repeatedly praise. All software is exhaustively tested and benchmarked prior to any distribution release.

SECURITY...

MORE THAN RSTS.

USER-11 incorporates a unique MENU system which flexibly and securely controls all processes. Secondary, encoded security databases are provided for each project. A special Run Time System is invoked to prevent accessing the RSTS ready state, unless the software developer desires this for the user.

STANDARDIZATION...

A BYPRODUCT.

All **USER-11** generated packages employ programming and documentation conventions which enhance compatibility, readability, and maintainability.

ADAPTABILITY...

NO PROBLEM.

USER-11 programs are dictionary and parameter driven throughout. Files can be restructured without program modifications.

DOCUMENTATION...

GOOD AND PLENTIFUL.

USER-11 features a wealth of easy-to-follow documentation. An extensive on-line "/HELP" facility is at software developer and user fingertips. All documentation is maintained and distributed on your system's compatible media.

TRAINING...ALL KINDS.

USER-11 training courses are held frequently with instructional programs to suit your need—beginner to expert.

FEATURES...ON AND ON.


USER-11 includes virtually every facility needed to quickly construct high performance management applications—nothing else is required. If you find this hard to believe or would like more information, contact us; we will furnish you with solid user proof!




**North County
Computer Services, Inc.**
2235 Meyers Ave.
Escondido, California 92025
(714) 745-6006, Telex: 182773

DEC and RSTS are registered trademarks of Digital Equipment Corporation.

© Copyright NCCS

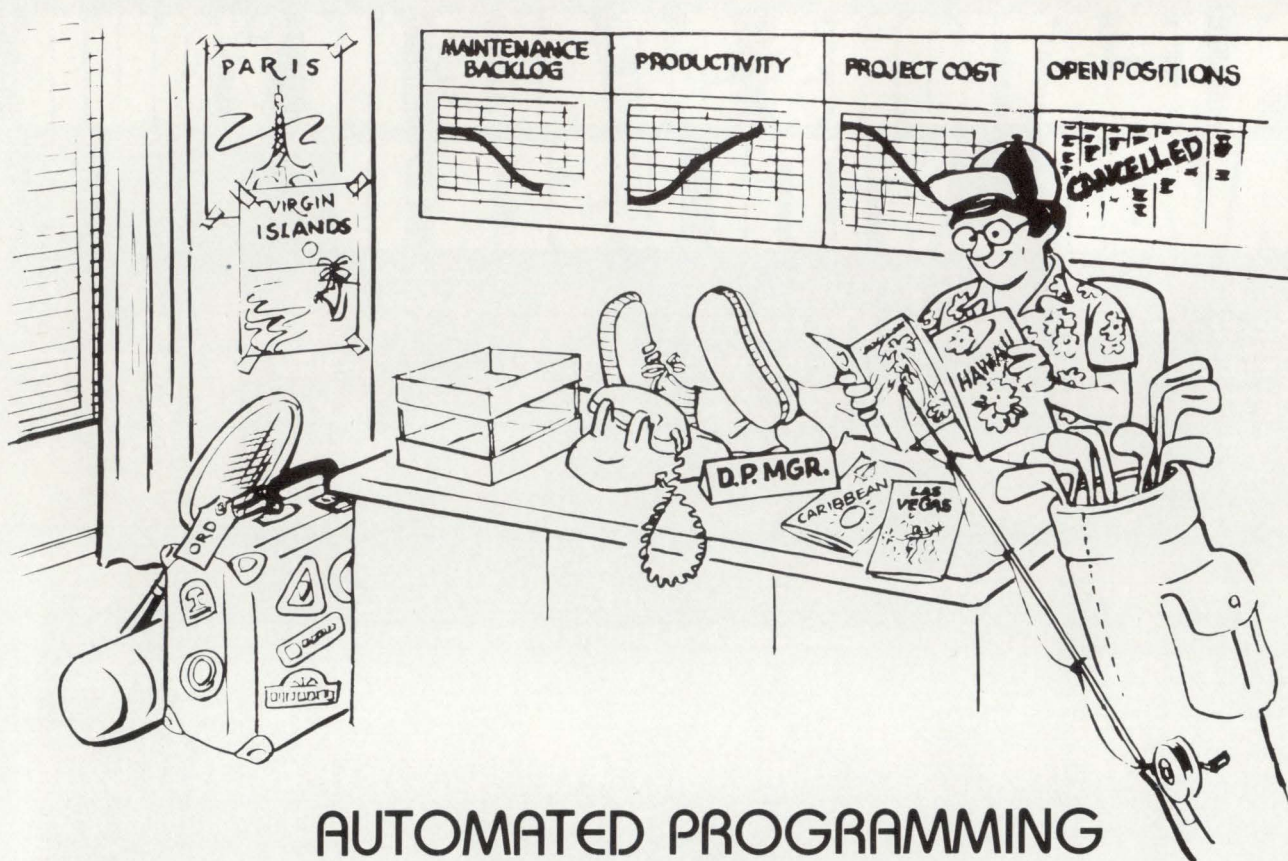

AUTOMATED PROGRAMMING
is the better way



COBOL PROGRAM GENERATION

for PDP-11/RSTS-E/RSX11/IAS*...VAX/VMS*...DEC-20/TOPS-20*

Proven and demonstrable increases of up to 20:1 in high-quality programming productivity have been achieved with SB-5,TM with up to 98% automation of the coding effort.

SB-5 produces 100% source COBOL code for business applications...plus 100% accurate system, program, and operating documentation...the highest levels of performance obtainable from any automated programming system.

SB-5 . . . The Better Way

- Maximum Productivity
- Highest Quality Results
- Shortest Project Schedules
- Lowest Project Costs
- Ease of Operation
- Easily Maintained Software
- Automatically Produced Documentation
- Application Flexibility
- System Portability



For a complete demonstration,
or more information,
write or phone...

BUSINESS CONTROLS CORPORATION

507 Boulevard, Elmwood Park, N.J. 07407 201/791-7661

*Trademarks of Digital Equipment Corporation

Field-Proven

COBOL ACCOUNTING PACKAGES

**ACCOUNTS PAYABLE
ACCOUNTS RECEIVABLE
PAYROLL
GENERAL LEDGER**

- Stand-alone or integrated modules
- Maximum performance capabilities
- Available off-the-shelf
- Produced with BCC's SB-5


CIRCLE 95 ON READER CARD

The VAX-SCENE

Number 6




(RSTS PROFESSIONAL, Vol. 4, No. 1)

February 1982

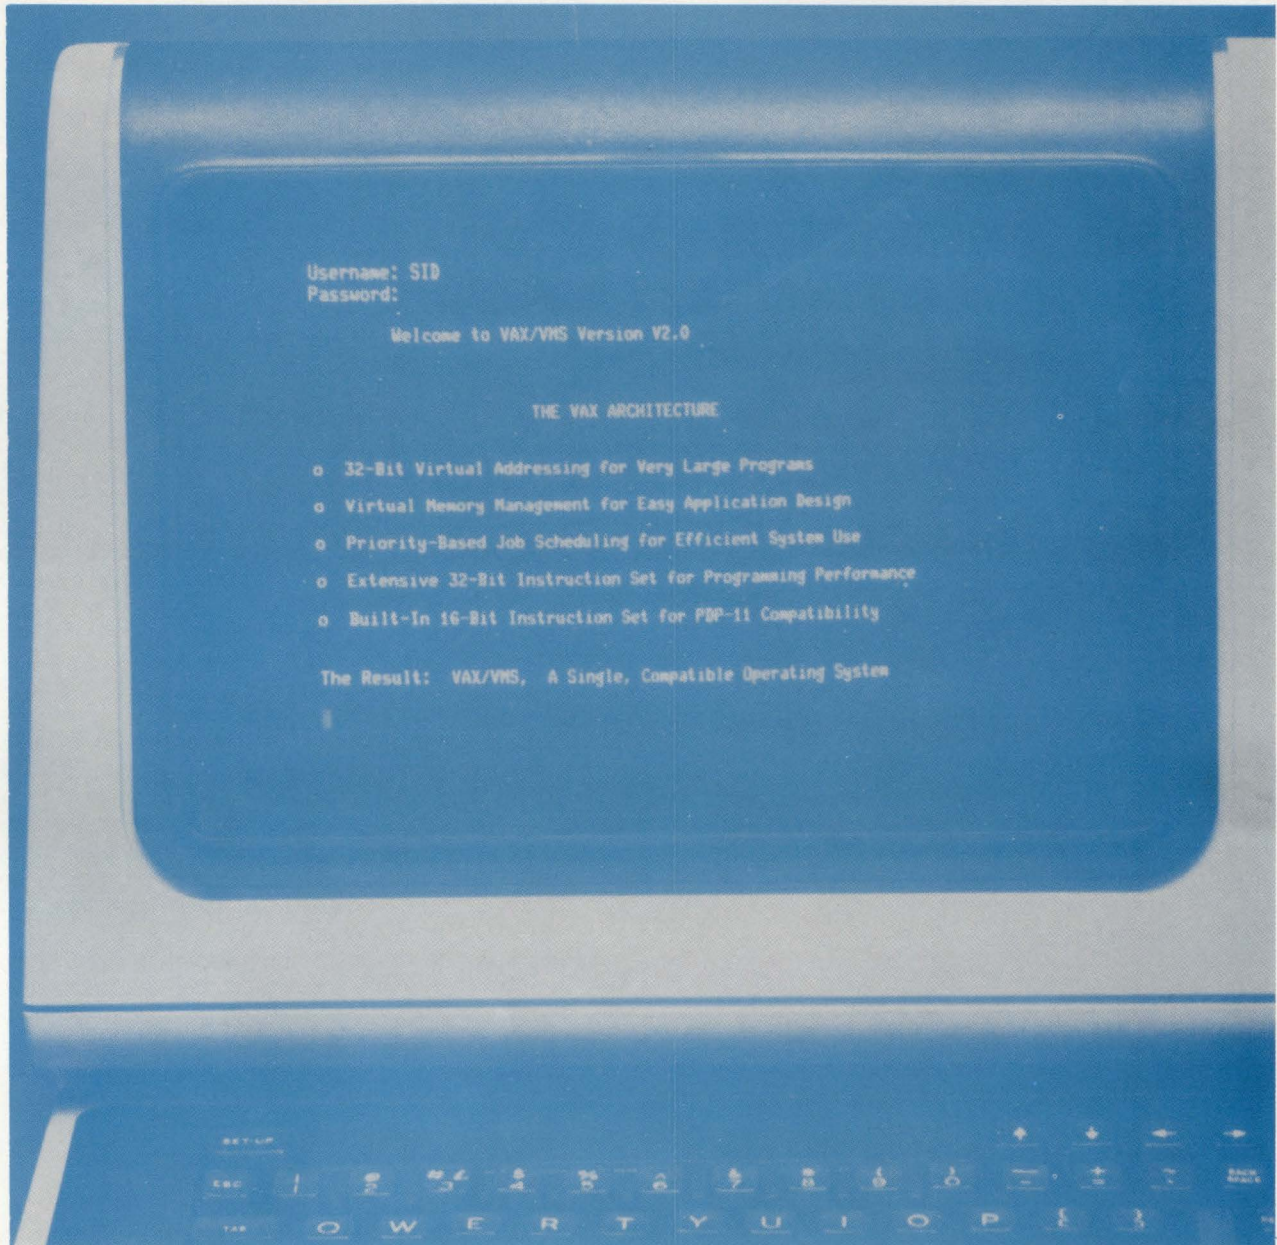

INSIDE:

- ☐ Writing Structured Programs in VAX-11 BASIC

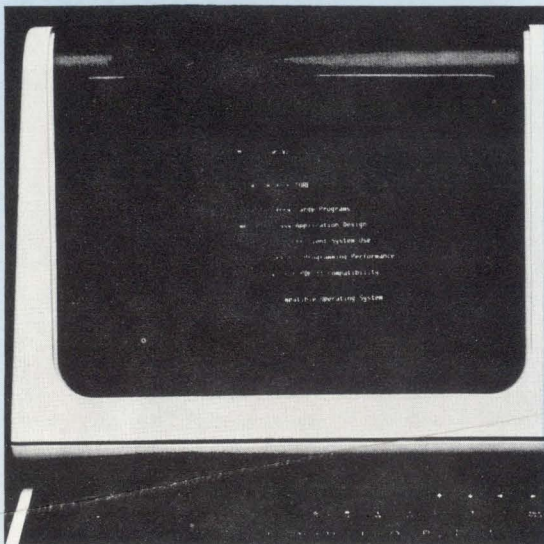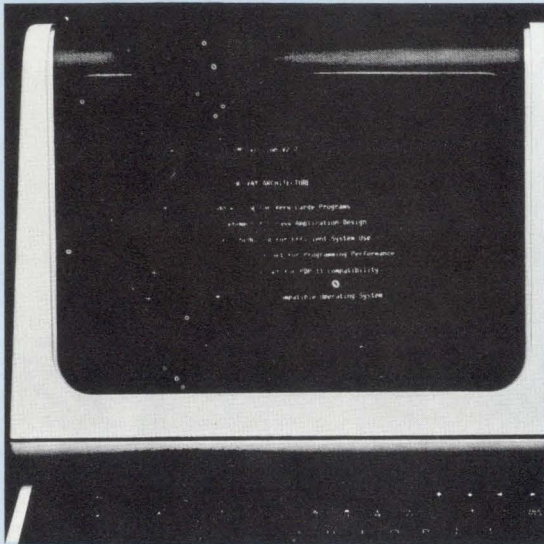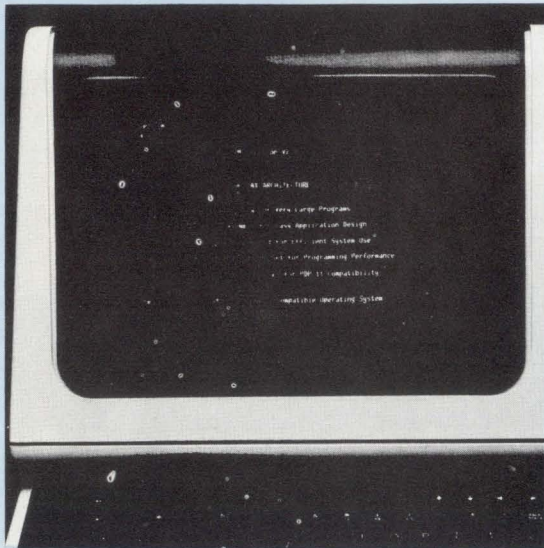

WRITING STRUCTURED PROGRAMS IN VAX-11 BASIC

By Al Cini, Computer Methods Corporation

A FEW THOUGHTS ON SOFTWARE STANDARDS

Despite supervisors' and managers' good intentions, software standards are often ridiculed, resented, and largely ignored by programmers. The legendary rebelliousness of coders notwithstanding, the standards themselves and the way they are introduced are usually to blame.

Most programming standards are shallow, arbitrary collections of narrowly devised rules aimed at uniformity of style rather than good programs. They tend to recognize neatness (indentation, comments, spacing) to the exclusion of quality (organization, structure, modularity). Of course, neatness (**face validity**) is an important first impression of credibility, but neat programs are not necessarily good programs. Many shops have devised a program or two which take messy code and clean it up to conform with local standards. Can we really believe that something as elusive as quality software is so simple to fabricate?

"Standard" paradoxically implies both minimally acceptable mediocrity and an ideal worth working toward. To inspire the latter rather than settle for the former, we need to look for principles which promote quality programming in substance as well as style, and to present those principles in an educational rather than legislative way. When they recognize that such standards will really help them do a better job, programmers will police conformance in themselves and their colleagues, and develop their own unique style of workmanship within them.

LEVELS OF STANDARDIZATION

Programming standards can be devised to guide software engineering at four levels:

- **Documentation.** Documentation standards govern the cosmetic characteristics of programs, including spacing, indentation, and commenting. These standards are sometimes extended to include the selection of variable names and statement labels; in BASIC dialects, some documentation standards to control the use of line numbers are frequently adopted to avoid conflicts between a "main" program segment and source components APPENDED from a library.
- **Implementation.** At the implementation level, programming standards prescribe the organization of language elements. Structured programming, which dictates rules for branching within a program, is an implementation-level standard.
- **Design.** Standards for software design govern the way in which programs and program components are combined to form systems.
- **Analysis.** Specific procedures for the development of software specifications from information provided by users are recommended by analysis-level standards.

This article will present documentation, implementation, and some design standards for VAX-11 BASIC programmers.

VAX-11 BASIC: A BRIEF INTRODUCTION

VAX-11 BASIC is the latest in a series of BASICoid languages developed by DEC for use on its VAX-11 computer family under the VMS operating system. The fact that it isn't called "BASIC-PLUS-3" misleads us to believe that it owes little to its familiar PDP-11-based predecessors; on the contrary, VAX-11 BASIC is what you might get if you crossed the flexibility and "programmer friendliness" of the BASIC-PLUS interpreter with the broadened capabilities and improved performance of the BASIC-PLUS-2 compiler. While VAX-11

BASIC and VMS offer some very unique capabilities of their own, the syntax of the language is much the same and is, for the most part, upward-compatible from the PDP-11.

We can't detail all of the compatibility issues in this article, but to help RSTS readers get a sense of the language, we will discuss some of the major differences which make programming VAX-11 BASIC a special experience. The example program at the end of this article will demonstrate many of these differences and features.

DEF/FNEND BLOCKS

VAX-11 BASIC won't tolerate branches into and out of multi-line functions. Any GOTOs or GOSUBs contained inside a function must be to line numbers also contained within that function. Likewise, ON ERROR GO TO statements within functions must name locally contained statements as their targets.

Error handling within a function is local to the function in VAX-11 BASIC. When the function exits, any previously established error handling is reactivated. The following program yields these results in VAX-11 BASIC:

```

LISTNH
900      ZERO=0
910      I=1
1000     ON ERROR GO TO 1090
1010     E=I/ZERO
1020     X=FNERROR
1030     E=I/ZERO
1090     PRINT "MAIN ERROR";ERR;"HAPPENED AT LINE";ERL
1091     RESUME 1020 IF ERL=1010
1092     RESUME 32767
10000    DEF FNERROR
10010    ON ERROR GO TO 10090
10020    E=I/ZERO
10030    FNEXIT
10090    PRINT "FUNCTION ERROR";ERR;"HAPPENED AT LINE";ERL
10100    RESUME 10030
10110    FNEND
32767    END

Ready

RUNNH

MAIN ERROR 61 HAPPENED AT LINE 1010
FUNCTION ERROR 61 HAPPENED AT LINE 10020
MAIN ERROR 61 HAPPENED AT LINE 1030
Ready

```

The same program in BASIC-PLUS-2 behaves somewhat differently:

```

RUNNH
MAIN ERROR 61 HAPPENED AT LINE 1010
FUNCTION ERROR 61 HAPPENED AT LINE 10020
FUNCTION ERROR 61 HAPPENED AT LINE 1030
?FNEND without function call at line 10030 in 'ETEST'

```

In VAX-11 BASIC, a multi-line function is established as a separate program unit with its own internal data block contained within a main program. In BASIC-PLUS-2, the organization of a function is less formal, more closely resembling a GOSUB-type subroutine with arguments. This formal block structure can "lose" variables from function to function and drive a conversion programmer a little crazy. Consider this VAX-11 BASIC example:

```

1000      X=FTEST1(1)
10000      DEF FTEST1(X)
10010      PRINT 'INSIDE TEST1:';X
10020      X1=FTEST2
10030      FNEED
10040      DEF FTEST2
10050      PRINT 'INSIDE TEST2:';X
10060      FNEED
10070      RUNNH.
10080      INSIDE TEST1: 1
10090      INSIDE TEST2: 0

```

The same routine in BASIC-PLUS-2:

```

RUNNH
INSIDE TEST1: 1
INSIDE TEST2: 1

```

In the VAX BASIC example, the argument X in FNTEST1, which gets a value of 1 from the main program (line 1000), is local to FNTEST1 and curiously "unknown" to FNTEST2, which is invoked by FNTEST1. To be safe, you must remember to pass any arguments in a function's argument list down through the argument lists of subordinate functions (this is almost as hard to explain as it was to debug). Note that this applies only to argument list variables.

Variables outside of DEF argument lists are globally known across function boundaries, as in BASIC-PLUS and BASIC-PLUS-2.

To avoid confusion and survive conversion, the DEF* construction can be used in VAX BASIC to "revert" to BASIC-PLUS and BASIC-PLUS-2 function handling.

DATA TYPES

VAX BASIC introduces a new class of data (EXTERNAL), as well as a new data type (LONG, for longword integer). A DECLARE statement, which allows the definition of symbolic constants and explicit typing of program variables, is also provided.

VAX BASIC integers may be 16- or 32-bit values, depending on whether they are DECLARED "WORD" or "LONG" within the program. Variables declared INTEGER, and integer variables defined in the traditional fashion by a trailing %, will be compiled as word or longword depending on a COMPILE command switch (/WORD or /LONG). As on the PDP-11, 16-bit integers can represent numbers from -32768 to +32767. The new 32-bit integer, or **longword**, can assume values from -2147483648 to +2147483647. Unfortunately, while short and long integers can be mixed within a single program via DECLARE, it is still not possible to mix both single and double precision floating point variables. The precision of floating point values is still determined on an all-or-nothing basis by a COMPILE switch (/DOUBLE).

EXTERNAL variables and constants are resolved at LINK time (the LINKER is VMS' much faster answer to TKB), and are used to reference global error constants, to define external program functions, and to reference externally defined variables. External constants are used by VMS to define symbolic status values which are returned by operating system services. Using EXTERNAL constants, a program which issues a system service can check the results against the symbol SS\$__NORMAL rather than the constant 1%. This makes the program more readable and, should the value for an external constant change, the referencing program can be adapted without editing by simply re-LINKing it.

The DECLARE statement permits the definition of symbolic constants within an application program. "DECLARE INTEGER TRUE = -1" will establish an integer constant TRUE with a boolean value of "true" within the program. Likewise, I/O channel numbers and other program-dependent parameters can be established as symbolic constants using DECLARE. Variables within the program can be "typed" in DECLARE statements, eliminating the requirement that integer names end in a percent sign and string names end in a dollar sign. "DECLARE STRING X" establishes a string variable X, which is not to be confused with the well-known floating point variable of the same name. In practice, using DECLARED variables with implicitly typed % and \$ variables can be very confusing, and will demand a lot of mental adjustment.

An undocumented compiler directive in BASIC-PLUS-2 allows a programmer to establish symbolic constants within their programs. Try this some day:

```
.DEFINE .X% = -1%
.DEFINE .Y$ = "ABC"
X% = .X%
Y$ = Y$
PRINT X%, Y$
```

VAX BASIC offers the .DEFINE as well, but **use these at your own risk**. Memory management violations, inaccurate results, and reserved instruction traps may await you, and the "feature" can be withdrawn from a future release without warning.

INTERFACE TO VMS

BASIC-PLUS and BASIC-PLUS-2 programmers under RSTS/E communicate with the operating system via SYS(). VAX BASIC programmers "CALL" VMS system services as they would call their own externally compiled subroutines and functions. (Did I neglect to mention? VAX BASIC allows the separate compilation of external functions via the FUNCTION/FUNCTIONEND statements.) The interface to VMS system services is the same for most VAX languages

(CORAL and DSM are a little strange), and all VAX languages share a common run-time library of support routines. Thus, under VMS, it is possible for programs written in VAX BASIC to call or be called from COBOL, FORTRAN, or what-have-you.

PROGRAM FORMAT

An undocumented feature of VAX BASIC, described in the VAX BASIC User's Guide (in an undocumented section of the document), allows programming without backslashes and, for the most part, ampersands. This "new" program format is experimental and, to experienced BASIC-PLUS programmers, a little strange. Nonetheless it is already used so widely that there is little hope it will be withdrawn in a future release (without some new version of TRANS to get us from "there" back to "here").

PROGRAM SIZE

The most profound characteristic of VAX BASIC programming is the severely confining VAX/VMS program size restriction: a program under VMS is strictly limited to one billion bytes, and not one byte more (Note that a PDP-11 task is limited to 65K bytes, or roughly one 15000th that size.). In practice, however, a 1GB program image would occupy 4 RM05 disks (about 15 RM03s), so jobs that size are not normally found in nature. Just the same, a PDP-11 programmer who would like to open 10 or 15 indexed files in a single program, or pull a virtual array into real virtual memory for quicker processing, can get very comfortable on a VAX in short order. Subroutine overlays, RMS co-trees, and the plethora of familiar shoe-horning techniques needed to get programs to fit on the PDP-11 can be forgotten on the VAX, unless you are using BASIC-PLUS-2 in compatibility mode.

STRUCTURED VAX BASIC

Two years ago, in the RSTS Professional Vol. 1, No. 1, we adapted structured programming techniques to the BASIC-PLUS and BASIC-PLUS-2 languages. We will do the same here for VAX BASIC, and take this opportunity to add a few options we missed then.

Structured programming recognizes three elementary program "forms:"

Sequence. In a sequence structure, one program statement follows and is executed after another.

Selection. In a selection, one or another separate alternative paths through a program are taken depending on the evaluation of a logical condition.

Iteration. In an iteration, a program section is executed repeatedly while a logical condition is true.

Traditional flowcharts describing these elements are shown in figure 1. Note that each has only one entry point and exit; hence, they can be "plugged" together to make complex composites (programs) which likewise will offer only one path in and one path out. Also, the process squares in the flowcharts can be replaced by other structures in a nesting arrangement. This interchangeability has inspired an alternative representation of these elements, called Chapin charts (figure 2), which highlights the "building block" nature of these elementary structures.

In VAX BASIC, **sequence** consists simply of non-branching executable program statements. For example

INPUT X

$$Y = \text{SOR}(X)$$

```
PRINT "THE SQUARE ROOT OF";X;"IS";Y
```

A **selection** is managed by an IF-THEN as follows:

INPUT X

IF $X < 0$ THEN

```
PRINT "CAN'T TAKE THE SQUARE ROOT OF":X
```

ELSE

$$Y = \text{SQR}(X)$$

```
PRINT "THE SQUARE ROOT OF";X;"IS";Y
```

! ENDIF

Note the comment ! ENDF in this example. The present version of

VAX BASIC lacks an `ENDIF` instruction, so we've inserted one here as a comment to preserve visual symmetry. `IF` blocks are implicitly terminated by a new line number, and the lack of an explicit `ENDIF` can complicate matters when we include an `IF` within another `IF`.

Consider this structured English (sometimes called **pseudocode**) example:

```
IF APPLICANT IS OVER 40 THEN
  IF APPLICANT IS MALE THEN
    ASSIGN TO RISK CLASS 1
  ELSE
    ASSIGN TO RISK CLASS 2
  ENDIF.
  ADD 1 TO OVER FORTY COUNT
ELSE
  ASSIGN APPLICANT TO RISK CLASS 3
  ADD 1 TO UNDER FORTY COUNT
ENDIF.
```

VAX BASIC offers no direct representation of this example. The statement "ADD 1 TO OVER FORTY COUNT" is left dangling in the absence of an ENDIF to end the inner IF block without also ending the outer IF block. We need to re-arrange the logic a little to represent this using VAX BASIC:

```

1000      IF APPLIC.AGE% > 40% THEN
              OVER.FORTY% = OVER.FORTY% + 1%
              IF APPLIC.SEX$ = "M" THEN
                  APPLIC.RISK% = 1%
              ELSE
                  APPLIC.RISK% = 2%
              !ENDIF.
          ELSE
              UNDER.FORTY% = UNDER.FORTY% + 1%
              APPLIC.RISK% = 3%
          !ENDIF.
      !ENDIF.
  
```

1005

By moving our dangling statement up after the initial IF, we arrange for the inner and outer IF blocks to terminate in the same place and avoid the problem. Some more complex IF nesting may require that the blocks be separated, and that the same condition be tested more than once to represent all the alternatives.

VAX BASIC offers several iteration mechanisms, all of them essentially variants of the DO-WHILE drawn in figures 1 and 2.

```
WHILE LEN(X$) > 0%
    D% = INSTR(1%, X$, ",")
    D% = LEN(X$) + 1% &
        IF d% = 0%
    PRINT LEFT(X$, D%-1%)
    X$ = RIGHT(X$, D%+1%)
```

NEXT

This example extracts and prints substrings delimited by commas or by the end of the string from X\$.

The VAX BASIC "UNTIL" statement is the same as "WHILE NOT." Unlike the DO-UNTIL in figure 1, VAX BASIC "UNTIL" is a leading decision loop construct. Our iteration example is easily rewritten using the equivalent UNTIL:

```
UNTIL LEN(X$)=0%
  D% = INSTR(1%, X$, ",")
```

NEXT

In either case, the loop contents are not executed at all if the terminating condition is satisfied upon entry (i.e., $LEN(X\$) = 0\%$).

In a "real" (remember VAX BASIC doesn't have one) DO-UNTIL, the loop contents will always be executed at least once, and conditions established within the loop will determine whether the loop will be repeated. Sequential file processing, in which a READ must be issued to determine whether any records remain in the stream, warrants a DO-UNTIL. Such loops must be built using a DO-WHILE in VAX BASIC:

(RSTS/E Operating System Simulator for VAX)

ROSS/V is a software package, written in VAX-11 MACRO, which provides a RSTS/E monitor environment for programs running in PDP-11 compatibility mode on DEC's VAX-11.

ROSS/V supports:

- The BASIC-PLUS interactive environment.
- Concurrent use of multiple run-time systems.
- Update mode (multi-user read/write access to shared files.)
- CCL (Concise Command Language) commands.
- An extensive subset of RSTS/E monitor calls.

ROSS/V runs under VMS and interfaces to programs and run-time systems at the RSTS/E monitor call level. ROSS/V makes it possible for DEC PDP-11 RSTS/E users to move many of their applications directly to the VAX with little or no modification and to continue program development on the VAX in the uniquely hospitable RSTS/E environment. Most BASIC-PLUS programs will run under an unmodified BASIC-PLUS run-time system.

RSTS, PDP-11, VAX-11, and DEC are trademarks of Digital Equipment Corporation.

ROSS/V is available from:

(Eastern U.S.)
Evans Griffiths & Hart, Inc.
55 Waltham Street
Lexington, Massachusetts 02173
(617) 861-0670

(Central U.S.)
Interactive Information Systems, Inc.
10 Knollcrest Drive
Cincinnati, Ohio 45237
(513) 761-0132

CIRCLE 67 ON READER CARD

(Western U.S.)
Online Data Processing, Inc.
N. 637 Hamilton
Spokane, Washington 99202
(509) 484-3400

```

100      END.OF.FILE% = 11%
        DECLARE WORD TRUE = -1%, &
                FALSE = 0%

1000     X% = FNREAD.RECORD%
        UNTIL NO.MORE.RECORDS%
            PRINT DATA.RECS
            X% = FNREAD.RECORD%
        NEXT

        .
        .
        .

2000     DEF FNREAD.RECORD%
            ON ERROR GO TO 2090
            LINPUT DATA.RECS
            NO.MORE.RECORDS% = FALSE%
            FNEXIT
2090     IF ERR = END.OF.FILE% THEN
            NO.MORE.RECORDS% = TRUE
            RESUME 2099
        ELSE
            ON ERROR GO TO 0
        !ENDIF.
2099     FNEND

```

A function reference with no arguments (FNREAD.RECORD%) is like a named GOSUB. Since the current version of VAX BASIC doesn't allow alphabetic statement labels, the "readability" of a program can sometimes be improved by using functions.

The initial FNREAD.RECORD% call at line 1000 is sometimes referred to as a "priming read," because it primes the DO-UNTIL with an initial value for the logical integer NO.MORE.RECORDS%. We could have avoided two FNREAD.RECORD% calls by setting NO.MORE.RECORDS% = FALSE initially and re-arranging the loop, but then NO.MORE.RECORDS% would be modified in **two** places

rather than one, possibly creating future maintenance headaches. For those of you who object to two `FNREAD.RECORD%` calls, we can re-write the loop using just one by returning the `NO.MORE.RECORDS%` value as the result of the function:

```

1000      UNTIL FNREAD.RECORD% = END.OF.FILE%
          PRINT DATA.RECS$
          NEXT
          —or—
1000      PRINT DATA.RECS$ &
          UNTIL FNREAD.RECORD% = END.OF.FILE%
          .
          .
          .
2000      DEF FNREAD.RECORD%
          ON ERROR GO TO 2090
          LINPUT DATA.RECS$
          FNREAD.RECORD% = 0%
          FNEXIT
2090      IF ERR = END.OF.FILE% THEN
          FNREAD.RECORD% = ERR
          RESUME 2099
      ELSE
          ON ERROR GO TO 0
      IENDIF.
2099      FNEND

```

Of course, we could have written this in about four statements (please, no letters). Instead, we established local error trapping within an FNREAD function which houses our LINPUT statement to establish a **functional** module which performs a single service within our program. This module can be tested by itself in immediate mode, converted to an external procedure, or completely re-written without regard for the main program which invokes it. The traditional "ON ERROR GO TO 19000" defeats functional

modularity and complicates maintenance. The more complex the function, the more obvious the "local error handling" advantage becomes.

We can use this opportunity to make a few observations about symbolic constants and logical variables. There are two kinds of documentation: **primary** documentation is executed by the computer (source programs, command procedures) while **secondary** documentation (flowcharts, comments within programs) is not. People tend to edit primary documentation when the need arises, but usually ignore the corresponding secondary documentation. This is called **documentation lag**, and implies that the **final say** about why software behaves as it does are the **listings of the procedures themselves**, and nothing else. Our programs are not only more readable when we use symbolic constants and logical variables, but maintenance programmers can rely on our program statements to follow our code without hunting around for comments, which are possibly inaccurate and misleading anyway.

Assigning the value 11% to the variable END.OF.FILE%, or declaring /DEFINEing a named constant with a value of 11, allows us to test the name rather than the number in our programs. This avoids a distracting look-up during maintenance.

Integer values for all of the VAX BASIC run-time errors have been defined as EXTERNAL CONSTANTS and can be referenced from VAX BASIC, although this is not documented. This technique is a little cumbersome, though, and might not suit every situation:

```
100      EXTERNAL INTEGER CONSTANT %
          BAS$_ACCDEVUSE %
          BAS$_CANFINFIL %
          BAS$_UNUERR178 %
          BAS$_BADDIRDEV %
/
110      PRINT FNERRZ(BAS$_ACCDEVUSE);ERT$(FNERRZ(BAS$_ACCDEVUSE)) &
          PRINT FNERRZ(BAS$_CANFINFIL);ERT$(FNERRZ(BAS$_CANFINFIL)) &
          PRINT FNERRZ(BAS$_UNUERR178);ERT$(FNERRZ(BAS$_UNUERR178)) &
          PRINT FNERRZ(BAS$_BADDIRDEV);ERT$(FNERRZ(BAS$_BADDIRDEV)) &
/
120      STOP
10000 %
DEF FNERRZ(LONG ERROR_CONSTANT) %
  FNERRZ=(ERROR_CONSTANT AND (NOT X'FFFF8000'))/8% &
\FNEND %
%
%
```

Likewise, defining I/O channels, filenames, and logical values as constants at the beginning of a program offer single-source edits to these items as well as improved readability.

Another form of iteration mechanism provided by VAX BASIC is **recursion**. DEF functions can call themselves in VAX BASIC as in BASIC-PLUS and BASIC-PLUS-2. In addition, external functions and subprograms can also be used recursively. Frightening as the concept seems to most programmers, recursion is sometimes the most obvious way to represent a procedure:

```
10000      DEF FNFACTORIAL%(N%)
          IF N% <= 0% THEN
              FNFACTORIAL% = 1%
          ELSE
              FNFACTORIAL% = FNFACTORIAL%(N%-1%)*N%
          !ENDIF.
10099      FNEND
```

This textbook example computes the factorial of a number by calling itself until its argument equals 1. Because the function is referenced the same way from within itself as from without (sort of like holding a mirror to a mirror), this is sometimes called **symmetrical recursion**.

Asymmetrical recursion, when a function calls itself with different argument values from those it received from the main program, can be applied to less esoteric (and much more common) commercial applications:

```
DEF FNDISPATCH%(OPTIONS)
  IF OPTIONS$="ADD" THEN
      X%=FNADD%
  ELSE
      IF OPTIONS$="DEL" THEN
          X%=FNDELETE%
      ELSE
```

```
IF OPTIONS$="SHO" THEN
      X%=FNDISPLAY%
  ELSE
      IF OPTIONS$="ALL" THEN
          X%=FNDISPATCH%("ADD")
          X%=FNDISPATCH%("DEL")
          X%=FNDISPATCH%("SHO")
      !ENDCASE.
  .
  .
  .
FNEND
```

In this example, a "dispatch" function offers three elementary alternatives ("ADD", "DEL", and "SHO") and a composite option ("ALL") which executes all three. The "ALL" option is handled by calling the dispatch routine recursively for all three elementary options.

Of course, for iteration with built-in indexing you can use FOR-NEXT. A VAX BASIC FOR loop is a leading decision (DO WHILE) iteration with a built in indexing feature which increments or decrements a variable each time the loop is executed. The terminal value of the indexing variable can be specified, or an UNTIL/WHILE condition can be used to end loop execution.

PROGRAM FORMATTING

Standard comments such as copyright notices and variable descriptions, line number and variable name conventions, subroutine naming rules — all of these are matters of local discretion and can't be discussed in detail here. You can find a sample program "shell" in your User's Guide to start with and develop your own from there.

I've found that indentation of program statements within loops and selections helps me navigate through my listings, and I include an !ENDIF comment for all my IF blocks to help me avoid accidentally omitting or miswriting clauses. I maintain MAPs as external source modules which can be APPENDED to new programs as needed, and to avoid conflict with internal program variables (unlike COBOL, VAX BASIC doesn't allow qualified names) I prefix my MAP variables with a brief mnemonic:

```
MAP (CUSTOMER_RECORD) &
  CU__ADDRESS$(4) = 40%, &
  CU__CODE$      = 10%, &
  CU__BAL.DUE. &
  CU__TERRITORY%
```

MAKING STANDARDS (THAT) WORK

You can take the "standards" suggested in this article, add some you've read about elsewhere, and combine them with a few of your own to devise "rules" which will encourage good programming without handcuffing your programmers. Its worth taking the time to understand what a good program is, and encouraging your colleagues and employees to do the same.

SAMPLE PROGRAM

The following sample VAX BASIC program illustrates many of the points discussed in this article. This program (SYSLINK) allows a VAX to communicate with a RSTS/E (or anything else) system via asynchronous line. The terminal from which SYSLINK is invoked is established as a "virtual terminal" to the remote machine, and a rudimentary file transfer feature allows the interchange of source (i.e., sequential ASCII) data between systems. (Note: If you decide to try SYSLINK, remember to SET TERM/FULL DUPLEX on both the terminal from which you run it and the VAX terminal line into which the PDP-11 is connected.)

Al Cini will be conducting a one-day presymposium seminar at DECUS this Spring on structured methods for BASIC-PLUS, BASIC-PLUS-2 and VAX-11 BASIC programmers. For more information, call Computer Methods Corporation at (609) 778-8440, or write DECUS, Presymposium Seminars, MR2-3/E55, 1 Iron Way, Marlborough, MA 01752.

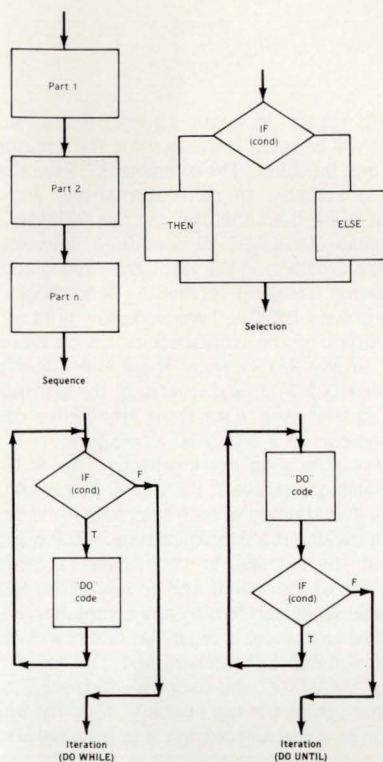


FIGURE 1.

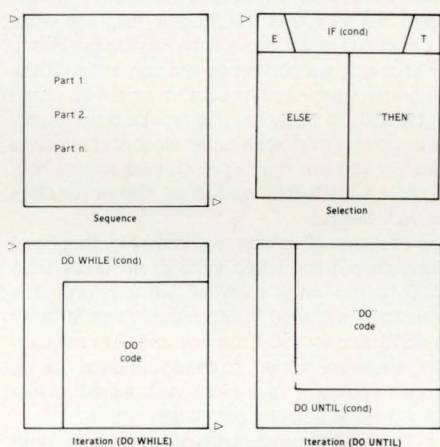


FIGURE 2.

```

1 TYPE SYSLINK.BAS
2
3 SYSLINK = Inter-machine Asynchronous Communication Program
4
5 The terminal from which this program is run will become
6 a "virtual" terminal to a remote BSTRSC (or whatever)
7 system. The communications link is broken by carriage
8 return (CR). Turning on the terminal will enable the
9 storage of incoming characters in a VMS file, or
10 will transmit characters from a VMS file down the line.
11 This can be used to perform rudimentary ASCII file
12 transfers.
13
14 Inter-machine VAX lines are defined in the DATA statements
15 at the 1990-2000 line. They can be added/removed by adding/
16 removing entries from this table.
17
18 Remember to SET TERM,FULLDUPLEX at BOTH the terminal from
19 which SYSLINK is invoked AND the VAX terminal lines used
20 to connect the actual hardware.
21
22 It is a good idea to allocate a fairly large TTY.TYPANISH
23 with SYSDSK. The VMS default of 7 bytes characters is somewhat
24 lean; and can degrade system performance when SYSLINK
25 is active.
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

```

[illegible]

```

10099 I
FNMEND I
I
11000 I
DEF FNPOLL.DEVICESZ I
I DECLARE LONG EFM.CLUSTER
I
11005 IF LOCAL.LOGGINGNZ THEN
LOCAL.LOG.CHARS=FNDCT.NEXT.LOCAL.LOG.CHARS
IF NO.MORE.LOCAL.LOG.CHARZ THEN
LOCAL.LOGGINGNZ=NO
CLOSE LOCAL.LOG.CHAN
I
I (ELSE)
ENDIF.
I
11010 ERRORZ=SYS$MFLOR(REMOTE.TERM.EFM BY VALUE, I
FMBITMASKZ(REMOTE.TERM.EFM) OR I
FMBITMASKZ(LOCAL.TERM.EFM) BY VALUE) I
I
I UNLESS LOCAL.LOGGINGNZ
I
I Wait for activity on either the link or local terminal lines,
I unless we have some from the local log file.
I
XI=FERRORZ('Wait for EFM Failure',ERRORZ) I
I IF FNFATALZ(ERRORZ)
REMOTE.FLAGSTATUSZ =SYS$READEP(REMOTE.TERM.EFM BY VALUE, EFM.CLUSTER)
LOCAL.FLAGSTATUSZ =SYS$READEP(LOCAL.TERM.EFM BY VALUE, EFM.CLUSTER)
XI=FERRORZ('Error Reading EFM',LOCAL.FLAGSTATUSZ) I
I IF FNFATALZ(REMOTE.FLAGSTATUSZ) OR FNFATALZ(LOCAL.FLAGSTATUSZ)
REMOTE.MSGZ =(REMOTE.FLAGSTATUSZ+SS$.WASET)
LOCAL.MSGZ =(LOCAL.FLAGSTATUSZ+SS$.WASET)
I
11099 I
FNMEND I
I
12000 I
DEF FWWRITE.MSGZ(PRINT.CHANGZ,MESSAGES) I
I
12010 TT.BUFFER - MESSAGES
TT.BUFFSIZES - LEN(MESSAGES)
ERRORS=SYS$DISC(I
I PRINT.CHANGZ BY VALUE I
I PRY.FUNC.CODEZ BY VALUE I
I
I
I TT.BUFFER BY REF I
I TT.BUFFSIZES BY VALUE I
I
I
I )
I
12020 XI=FERRORZ('Terminal DIO# Failure', ERRORZ) I
I IF FNFATALZ(ERRORZ)
12099 I
FNMEND I
I
13000 I
DEF FNWRITE(ERR.CODEZ)=(ERR.CODEZ AND SS$.NORMAL)::SS$.NORMAL I
15000 I
DEF FNDGT.NEXT.LOCAL.LOG.CHARK I
15010 ON ERROR GO TO 15090
IF LEN(LOCAL.LOG.BUFFERS)=0Z THEN
LINPUT #LOCAL.LOG.CHAN, LOCAL.LOG.BUFFR
LOCAL.LOG.BUFFERS =RIGHT(LOCAL.LOG.BUFFERS,:2Z)
NO.MORE.LOCAL.LOG.CHARZ =NO
FNMEXIT
I
I (ELSE)
ENDIF.
I
15020 FNDGT.NEXT.LOCAL.LOG.CHARS= LEFT(LOCAL.LOG.BUFFERS,:1Z)
LOCAL.LOG.BUFFERS =LEFT(LOCAL.LOG.BUFFERS,:2Z)
NO.MORE.LOCAL.LOG.CHARZ =NO
FNMEXIT
I
15090 IF ERR-END.OF.FILE THEN
NO.MORE.LOCAL.LOG.CHARZ=YES
RESUME 15099
I
I (ELSE)
ENDIF.
I
15099 I
FNMEND I
I
20000 I
DEF FWFIL.CONTROLZ I
I
20030 PRINT
PRINT 'File Control'
PRINT
PRINT 'Select:'
PRINT
PRINT '[E]xecute and Store Incoming Characters (From RSTS)'
PRINT '[T]ransmit Stored Characters (From VMS)'
PRINT
PRINT 'Option:'
LINPUT FILE.OPTIONZ
FILE.OPTIONZ=LEFT(CUTSTR(FILE.OPTIONZ,-1Z),:2Z)
IF FILE.OPTIONZ='E' THEN
PRINT TAB(5Z) 'Received Characters Storage File'
LINPUT REMOTE.LOG.FILES
OPEN REMOTE.LOG.FILES FOR OUTPUT AS FILE REMOTE.LOG.CHAN
MARGIN REMOTE.LOG.CHAN, 200Z
REMOTE.LOGGINGNZ=YES
I
ELSE
IF FILE.OPTIONZ='T' THEN
PRINT TAB(5Z) 'Transmit Contents of File'
LINPUT LOCAL.LOG.FILES
OPEN LOCAL.LOG.FILES FOR INPUT AS FILE LOCAL.LOG.CHAN
LOCAL.LOGGINGNZ=YES
I
ELSE
PRINT
PRINT TAB(5Z) '?' -Invalid File Option-Ignored'
PRINT
ENDIFCASE.
I
20099 I
FNMEND I
I
21000 I
DEF FNMED.REMOTE.LOGGINGNZ I
21010 PRINT
PRINT 'Closing Receiving File ' REMOTE.LOG.FILES
PRINT
CLOSE REMOTE.LOG.CHAN
REMOTE.LOGGINGNZ=NO
I
21099 I
FNMEND I
I
22000 I
DEF FNMED.LOCAL.LOGGINGNZ I
22020 PRINT
PRINT 'Closing Transmission File '#LOCAL.LOG.FILES
PRINT
CLOSE LOCAL.LOG.CHAN
LOCAL.LOGGINGNZ=NO
I
22099 I
FNMEND I
I
30000 I
DEF FNXEXIT = SYS$EXIT(SS$.NORMAL BY VALUE)
30100 I
DEF FNEERRORZ(ERR.MSGZ, ERR.CODEZ) I
30110 PRINT
PRINT '??ERR.MSGZ? -- Code=?ERR.CODEZ
PRINT
FNEERRORZ=SYS$EXIT(ERR.CODEZ BY VALUE)
I
30199 I
FNMEND I
I
30200 I
DEF FNFATALZ(ERRORZ) = (ERRORZ AND SS$.NORMAL)::SS$.NORMAL I
31000 I
DEF FMBITMASKZ(BIT.TO.SETZ) I
31010 BIT.TO.SETZ=0Z
I BIT.TO.SETZ=BIT.TO.SETZ OR
BIT.TO.SETZ=BIT.TO.SETZ-8Z I WHILE BIT.TO.SETZ >= 3Z
FMBITMASKZ=2*BIT.TO.SETZ
I
31099 I
FNMEND I
I
32767 END

```


PROGRAM NOTES

By Carl Marbach

SELECT

Ever wanted to know what records in one of your data files matched some special criteria? For example, who in your master file is over 40 years old, college educated and has an income of over \$20,000 per year. The standard way of finding this out would be to create a standard program to pass through the file; you would insert the proper code in the middle of this program:

```
IF DATA = WHAT.WE.WANT THEN PRINT
```

If you are a DATATRIEVE user or are using a database query language, then you are using the constructs of that system to configure a report. Report generators are useful tools that allow english-like commands to format and create a report from a file or data base. All of these have a common problem, particularly if the file is a large one: It takes a long time to pass through the entire file.

Many standard programs in any system also pass through these files or data bases picking out certain totals, separating items, and preparing reports. Trial balances, Account distributions, Inventory listings, delinquency reporting and general file listings are examples of some reports printed on a regular basis.

Last year we began using a product from Evans, Griffiths and Hart (EG&H) called SELECT. This product reads input from any file (except RMS Indexed files), selects records based in input parameters, and outputs a file specified by user input. You can scan a 256 Byte/record & 2 per block record I/O file, look to see if bytes 23-24 are equal to 30%, and output a file with as little a 6 bytes per record up to the entire 256 bytes of the input record (more if the input record is larger). SELECT is written in MACRO, and uses its own run-time system (SELECT.SLC) to get some speed. It is FAST. So fast that we thought something was wrong the first time we ran it.

How fast is it? Our 50,000 record, 256 Byte/record file was scanned for one field (1 byte integer) >= 0 AND the second field (2 byte integer) = 0 in 12.8 CPU seconds. That's right! 12.8! The same file but with simpler or more complex extraction expressions varied from a low of 10.5 seconds to 15.8 for a very complicated selection. All of these times included writing out a file of sub-data from the selected records. One day a bank question occurred that looked like it would be hard to answer: To whose account have we recently applied a 117.07 Payment? The problem required the scanning of our entire history file which has 20 bytes/record and is 1,085,000 records long! Over a million records! The SELECT program was run yielding several 117.07 payments from which we found the correct one. The total time to scan and write out the records which matched was 103 CPU seconds! Under two minutes to scan more than one million records!

We now routinely use SELECT to write index files for processing the main data files; This way we read only those records that we are interested in. We use SELECT to scan through a file and write out only the data fields we need for a report, allowing our programs to manipulate much less data. SELECT has revolutionized the way we think about access to our files; things that were hard to get to are now easy. Times to access data have been reduced 100 fold in many cases.

An option to the SELECT package is FSORT3. FSORT3 is EG&H's Fast Sort program. When attached to the SELECT package, it allows sorting of the output file by any of the selection fields. One Payroll file we have is kept in department order, but we often want things run alphabetically. Simple: use a SELECT procedure to pull out relative record number and name, sort on the name, and use the RRN as an index into the file. Takes 5 CPU seconds to SELECT and 3 seconds to SORT the 700 or so people in the file. Of course we use QUE-11 and the 'DO' command to make this procedure transparent to the operator, but we'll do QUE-11 another time.

SELECT is a fast selection and optional sort package from EG&H. It passes almost any kind of file with unbelievable speed. It has changed the way we access our files and the way we think about file design under RSTS.

Define A as an integer starting at byte 1 and output an integer at byte 1. Define B as an integer starting at byte 3 and output an integer at byte 3. Define C as an integer starting at byte 6 but don't write in the output file ... write out (H) in the output file 6 blanks beginning at byte 5.

```
Number of output header records <1> ?
[For input file DB0:LOA]
Type of input file <1> ?
Number of data records <from data file header> ? 40000
Length of data records ? 256
Number of records reserved for header <0> ?
Begin selection at data record <1> ?
End selection at data record <40000> ?

Key descrp ? A:11,A11
Key descrp ? B:13,A13
Key descrp ? C:16
Key descrp ? D:19
Key descrp ? E:193
Key descrp ? H: 'A5.6'
Key descrp ?
Record selection expression ?
* (C<29464) AND ((A>=0) AND (B>0)) AND (D>=0) AND (E>0)
*
Keys to sort on ?
# A
# B
#
SELECT Wall time 82 CPU time 12.1
[8849 records selected]
SORT Wall time 19 CPU time 8.2
Number of output header records <1> ?
```

VISICALC

A couple of years ago a graduate student did a graduate project which consisted of a program to use a micro-computer as an electronic worksheet. The computer displayed the matrix of rows and columns. Unlike a paper and pencil worksheet, this one allowed elements to be either data or equations involving other matrix elements. This program, now called VISICALC (tm), has become the best selling program in computer history. It currently runs on many micros such as APPLE and TRS-80 as well as the CP/M on DEC's VT100 add on (an we suspect DATANODES as well). We often wondered why companies with 11/70's would have to buy an APPLE to run VISICALC; now they don't. VISICALC has been incarnated on RSTS as DIGICALC. There is however no connection between the two companies who produce this competing product, and although they look very much alike; they are different.

DIGICALC is a product from WHY SYSTEMS, and run by Wayne Yarnell. DIGICALC is now available for RSTS, RSX (?), and VAX computers. The 'now' may be a few weeks away, but it is definitely here. I tried DIGICALC, or rather had our financial V.P. try it to get his impressions since he uses and APPLE and VISICALC now.

While they are not the same, if you can run VISICALC on the APPLE you can run DIGICALC on

a RSTS system in about 15 minutes, most of which will be spent learning some RSTS features built into DIGICALC. The complete RSTS file structure is available to store worksheets and of course more than one user can use DIGICALC at one time. DIGICALC distinguishes between a USER, a GROUP and the WORLD, allowing access for saving, recalling or revising worksheets by these groups. DIGICALC will also allow printing of the output of the worksheet or the worksheet itself to any RSTS device. There is an interface between DIGICALC and user data through ASCII files so that your data from any source could become part of a DIGICALC worksheet.

An interesting implementation for RSTS is the training available at the VT100 (required) terminal. The training is both interactive and table driven making it a unique exercise. HELP is available at the terminal in two modes: a general HELP for all commands and an interactive HELP available while performing any command.

The worksheet is organized into rows which are designated by numbers and run down the side of the VT100, and columns which are letters and run across the top of the VT100. The intersection of a row and column is called a-cell and is labeled by its coordinates: A2 or B12, etc. Using the arrows on the keyboard you move the cursor to the cell you want and then simply put in data, and equation or a label. If A1 contains a 10, and B2 contains a 3, and C3 contains A1*B2; when you calculate (either automatic or on demand) C3 would contain 30. The second line down from the top of the VT100 is the prompt/help line while the next line down is the entry line. In our example above, if we positioned the cursor to C3 the Entry line would say A1*B2 and the cell C3 would contain 30. To really see this type of program operate, go to a micro-computer store and ask for a Demo; if you can find a person who knows how to use an electronic worksheet demonstrations are very helpful.

The original version required a Floating Point Processor but the latest version will allow DIGICALC to run on a machine without one. The workspace is limited to 60 columns and 50 rows on RSTS and is 150 Columns and 200 rows on VAX, these are subject to change and may be reduced if you don't have a FPP. As the product matures these will surely get larger.

This type of product has proved popular with the non-programming people that I have met. The accountants can relate to a spread sheet they can see, and they seem to adapt to the computerized one more easily than to a more program oriented model system. DIGICALC will do some modelling and a lot of 'fill in the blanks' type of 'what if' questions. There are better packages for real business modelling if this is what you want. The bigger and more featured ones will allow better documentation, more efficient calculations, looping for 'what if' conditions so you can run a model for inflation running from 8% to 14% in .5% increments and see what the results would be; you can even graph the results for better understanding of the output.

For easy use, friendly help, good training, large user group, low price and entry into computerized spread sheet analysis DIGICALC is a neat product. A trial version is available. Now if we only could play space invaders.

HOW DO YOU READ A RSTS/E DISK STRUCTURE?

... continued from page 47

```

PRINT #10%,TAB(5%);
UPD.CLUSTER = ((UPD.CLUSTER-1)*DCS%)/PCS%
PRINT #10%,USING "#####",UPD.CLUSTER;
SECONDS = INT(MCPU/10)
GOSUB 20000
PRINT #10%,TAB(14%);EDIT.TIMES;
PRINT #10%,TAB(25%);
PRINT #10%,USING "#####",MKCT;
SECONDS = MDEV
GOSUB 20000
PRINT #10%,TAB(34%);EDIT.TIMES;
PRINT #10%,TAB(45%);
PRINT #10%,USING "#####",MDPER;
IF MDPER > 0
PRINT #10%," UNLIMIT";
IF MDPER = 0
SECONDS = MCON
GOSUB 20000
PRINT #10%,TAB(54%);EDIT.TIMES      IPRINT ACCOUNTING DATA.

150 CLOSE #1%
UPD.ACCOUNTS = "["+NUM1$(PROJ%)+","
+ NUM1$(PROG%)+"]"
OPEN UPD.ACCOUNTS+DEVICES
FOR INPUT AS FILE #2%,
MODE 8192%      IOPEN UPD.

160 UPD.LINK% = UPD%

170 GOSUB 25100

200 LINK% = UPD%(UPD.LINK%,0%)
GOSUB 15000
UPD.LINK% = LINK%
GOTO 1000 IF UPD.LINK% = 0%      IGO GET NEXT LINK

210 GOSUB 26000
PRINT #10%,RAD$(UPD%(UPD.LINK%,1%));
RAD$(UPD%(UPD.LINK%,2%));
" ";
RAD$(UPD%(UPD.LINK%,3%));      IPRINT FILE NAME

220 PROT% = SWAP$(UPD%(UPD.LINK%,4%)) AND 255%
STAT% = UPD%(UPD.LINK%,4%) AND 255%
PRINT #10%,TAB(11%);"<";
PRINT #10%,USING "###",PROT%;
PRINT #10%,>;TAB(17%);
PRINT #10%,USING "###",
UPD%(UPD.LINK%,5%);
PRINT #10%,TAB(21%);
STAT$ = ""
STAT$ = "D"
IF STAT% AND 128%
STAT$ = STAT$ + "Q"
IF STAT% AND 32%
STAT$ = STAT$ + "C"
IF STAT% AND 16%
STAT$ = STAT$ + "O"
IF STAT% AND 8%
STAT$ = STAT$ + "W"
IF STAT% AND 4%
STAT$ = STAT$ + "P"
IF STAT% AND 2%
PRINT #10%,STAT%;      IPRINT PROT, ACCESS.
*****
/* STATUS TABLE:
/* P = FILE IS PLACED
/* W = WRITE ACCESS NOT GIVEN
/* O = FILE OPEN UPDATE MODE
/* C = CONTIGUOUS
/* Q = NO DELETE OR RENAME
/* D = FILE MARKED FOR DELETION
/*
*****

250 LINK% = UPD%(UPD.LINK%,6%)
GOSUB 15000
UAA.UPD.LINK% = LINK%
GOTO 450 IF UAA.UPD.LINK% = 0%      IGET THE ACCOUNTING ENTRY

260 LINK% = UPD%(UAA.UPD.LINK%,0%)
GOSUB 15000
ATTRIBUTE.LINK% = LINK%      IGET THE ATTRIBUTE LINK

270 PRINT #10%,TAB(28%);
DATES(UPD%(UAA.UPD.LINK%,1%));
TAB(38%);
PRINT #10%,USING "#####",
UPD%(UAA.UPD.LINK%,2%);
PRINT #10%,TAB(44%);
DATES(UPD%(UAA.UPD.LINK%,3%));
TAB(54%);
PRINT #10%,
LEFT(TIMES(UPD%(UAA.UPD.LINK%,4%)),5%);
TAB(60%);
RAD$(UPD%(UAA.UPD.LINK%,5%));
RAD$(UPD%(UAA.UPD.LINK%,6%));
TAB(67%);
PRINT #10%,USING
"###",UPD%(UAA.UPD.LINK%,7%);      IACCOUNTING DATA OUT

300 GOTO 450 IF ATTRIBUTE.LINK% = 0%

360 PRINT.CONTROL% =
SWAP$(UPD%(ATTRIBUTE.LINK%,1%))
AND 127%
FILE.ORG% = UPD%(ATTRIBUTE.LINK%,1%)
AND 120%
RECORD.FORMAT% = UPD%(ATTRIBUTE.LINK%,1%)
AND 9%      IGET FIRST WORD OF ACCOUNTING
1 ENTRY

370 PRINT #10%,TAB(71%);
PRINT #10%,"FO";
IF (PRINT.CONTROL% AND 1%) = 1%
PRINT #10%,"CR";
IF (PRINT.CONTROL% AND 2%) = 2%
PRINT #10%,"UN";
IF (PRINT.CONTROL% AND 4%) = 4%
PRINT #10%,"NO";
IF (PRINT.CONTROL% AND 10%) = 10%

```

```

      380      PKINT #10%,TAB(74%);
      PRINT #10%,"Sequ";
      IF FILE.ORG% = 0%
      \      PKINT #10%,"Rela";
      IF FILE.ORG% = 1%
      \      PRINT #10%,"Inde";
      IF FILE.ORG% = 2%
      \      !INDICATE FILE ORGANIZATION

390      PRINT #10%,TAB(79%);
      PRINT #10%,"Undef1";
      IF RECORD.FORMAT% = 0%
      \      PRINT #10%,"Fixed";
      IF RECORD.FORMAT% = 1%
      \      PKINT #10%,"Variab";
      IF RECORD.FORMAT% = 2%
      \      PRINT #10%,"VFC";
      IF RECORD.FORMAT% = 3%
      \      PRINT #10%,"Stream";
      IF RECORD.FORMAT% = 4%
      \      !INDICATE RECORD FORMAT

400      PRINT #10%,TAB(86%);
      PRINT #10%,USING "#####",
      \      UFD%(ATTRIBUTE.LINK%,2%);
      PRINT #10%,TAB(91%);
      \      PRINT #10%,USING "#####",
      \      UFD%(ATTRIBUTE.LINK%,6%);
      PRINT #10%,TAB(97%);
      \      PKINT #10%,USING "#####",
      \      UFD%(ATTRIBUTE.LINK%,7%);
      \      !REST OF ATTRIBUTE STUFF

410      LINK% = UFD%(ATTRIBUTE.LINK%,0%)
      GOSUB 15000
      SECOND.A.LINK% = LINK%
      GOTO 450 IF SECOND.A.LINK% = 0%
      \      !GET SECOND ATTRIBUTE ENTRY

420      PRINT #10%,TAB(106%);
      PRINT #10%,USING
      \      "#####",UFD%(SECOND.A.LINK%,1%);
      PRINT #10%,TAB(114%);
      \      PRINT #10%,USING "#####",
      \      UFD%(SECOND.A.LINK%,2%);
      \      !PRINT OUT SOME RMS STUFF

450      PRINT #10%,TAB(122%);"ON";
      IF UFD%(UFD.LINK%,0%) AND 4%
      \      PRINT #10%,TAB(125%);"YE";
      IF UFD%(UFD.LINK%,0%) AND 2%
      \      PKINT #10%,TAB(128%);"SEC";
      IF UFD%(UFD.LINK%,6%) AND 4%
      \      AND UFD%(UFD.LINK%,0%) AND 4%
      PRINT #10%,TAB(128%);"RAN";
      IF (UFD%(UFD.LINK%,6%) AND 4%) = 0%
      \      AND UFD%(UFD.LINK%,0%) AND 4%
      \      !PRINT OUT FLAGS

500      PKINT #10%
      PRINT #10%,"      DEVICE CLUSTERS:";
      \      !PRINT BANNER

510      LINK% = UFD%(UFD.LINK%,7%)
515      GOSUB 15000
      \      UAR.LINK% = LINK%
      \      GOTO 900 IF UAR.LINK% = 0%
      \      !GET RETRIEVAL ENTRIES.

520      GOSUB 26000
      FOR X% = 1% TO 7%
      \      GOTO 900
      \      IF UFD%(UAR.LINK%,X%) = 0%
      \      PRINT #10%,TAB(20%+X%*10%);
      \      UNSIGNED.TEST =
      \      UFD%(UAR.LINK%,X%)
      \      GOSUB 600
      \      DISK.CLUSTER =
      \      ((UNSIGNED.TEST-1)*DCS%)/PCS%
      \      PRINT #10%,USING "#####",
      \      DISK.CLUSTER;
      \      !PRINT OUT RETRIEVAL ENTRIES,
      \      ! DISK.CLUSTER = ((DCN-1)*DCS)
      \      ! /PCS

530      PRINT #10%
      LINK% = UFD%(UAR.LINK%,0%)
      \      GOTO 515
      \      !GET MORE UNTIL ZERO IN LINK%

600      GOTO 610 IF UNSIGNED.TEST > 0
      \      UNSIGNED.TEST = 32768 + UNSIGNED.TEST
      \      + 32767
      \      !CONVERT NEGATIVE TO INTEGER

610      RETURN
      \      !ALL DONE

900      PKINT #10%
      \      GOSUB 26000
      \      PRINT #10%
      \      GOTO 200

1000     GOTO 32767

15000    !*****
      \      !*
      \      !* THIS SECTION CALCULATES A LINK%
      \      !*
      \      !*****

15010    CLO.MASK% = 7% * 512%
      \      ENO.MASK% = 31% * 16%
      \      UL.BLO% = (SWAP%(LINK% AND 240%)*2%
      \      UL.CLO% = ((LINK% AND CLO.MASK%)/16%)*CS%
      \      UL.ENO% = (LINK% AND ENO.MASK%)/16%

15050    LINK% = UL.BLO% + UL.CLO% + UL.ENO%
      \      RETURN

15100    !*****
      \      !*
      \      !* THIS FUNCTION CONVERTS UNSIGNED INTEGER TO FLOATING PT.
      \      !*
      \      !*****

15110    DEF FNUSI(USINT%)
      \      USTMP = USINT%
      \      USTMP = USTMP + 65535 IF USINT% < 0%
      \      FNUSI = USTMP
      \      FEND

      \      PRINT #10%,TAB(15%);MCPU;TAB(25%);
      \      MKCT;TAB(35%);MDEV;
      \      TAB(45%);MDPER;TAB(55%);
      \      MCON
      \      !PRINT ACCOUNTING DATA.

```



```

25115      PRINT #10,TAB(71%);** ** RECORD      MANAGEMENT";
          * SERVICES * * * * *;
          TAB(122%);** FLAGS **
\
\      PRINT #10%
\      PRINT #10%,TAB(28%);"DATE LAST";TAB(38%);
          "FILE";TAB(44%);"DATE OF";
          TAB(54%);"TIME";TAB(74%);"FILE";
          TAB(79%);"REC";TAB(86%);"REC";
          TAB(91%);"EOF";TAB(97%);"FIRST";
          TAB(106%);"BUCKET";TAB(114%);"MAX REC";
          TAB(128%);"CA"
\
      PRINT #10%,"FILENAME";TAB(11%);"PROT";
          TAB(17%);"ACC";TAB(21%);"STATUS";
          TAB(31%);"ACCESS";TAB(38%);"SIZE";
          TAB(44%);"CREATION";TAB(54%);"CREAT";
          TAB(60%);"RTS";TAB(67%);"CL";
          TAB(71%);"PC";
          TAB(74%);"ORG";TAB(79%);"FORMAT";
          TAB(86%);"SIZE";TAB(91%);"BLOCK";
          TAB(97%);"BYTE EOF";TAB(107%);
          "SIZE";TAB(115%);"LENGTH";
          TAB(122%);"CA";TAB(125%);"BB";
          TAB(128%);"TYPE"
\
      PRINT #10%,STRINGS(10%,45%);TAB(11%);"-----";
          TAB(17%);"---";TAB(21%);"-----";
          TAB(28%);STRINGS(9%,45%);TAB(38%);
          "-----";TAB(44%);STRINGS(9%,45%);
          TAB(54%);"-----";TAB(60%);"-----";
          TAB(67%);"-----";TAB(71%);"---";
          TAB(74%);"-----";TAB(79%);"-----";
          TAB(86%);"-----";TAB(91%);"-----";
          TAB(97%);STRINGS(8%,45%);TAB(106%);
          STRINGS(6%,45%);TAB(114%);STRINGS(7%,45%);
          TAB(122%);"---";TAB(125%);"---";
          TAB(128%);"-----"
\
      L0% = L0% + 5%
\      RETURN
\
\
\
\
26000      !*****
          !*
          !* COUNTS LINES ON PAGE AND DETERMINES PAGING.
          !*
          !*****
\
\
\
26005      L0% = L0% + 1%
          GOTO 26100 IF L0% < 60%
          GOSUB 25000
          GOSUB 25100
\
\
\
26100      RETURN
\
\
\
32000      !*****
          !*
          !* ERROR SECTION.
          !*
          !*****
\
\
\
32005      IF ERR = 28 THEN 32767
32010      ON ERROR GOTO 0
\
\
\
32766      !*****
          !*
          !* EOJ
          !*
          !*****
\
\
\
32767      CLOSE #1%
          CLOSE #2%
          END
\
\

```

- No major project is ever installed on time, within budget, with the same staff that started it.
- Projects progress quickly until they become 90% complete; then remain at 90% complete forever.
- If project content is allowed to change freely, the rate of change will exceed the rate of progress.
- No system is ever completely debugged; attempts to debug a system inevitably introduce new bugs that are even harder to find.
- Project teams detest progress reporting because it vividly demonstrates their lack of progress.

[illegible]

BIO.BAS

By Rob Frazer, Nationwide Data Dialog, Inc., Southampton, PA

```

1  EXTEND
10  ! BIO.BAS
!
!   BIORHYTHM GRAPH AND/OR COMPATABILITY PROGRAM
!
20  ! The biorhythm theory is that from the day of one's
!   birth, one's intellectual, emotional, and physical
!   highs and lows fall into a 33-, 28-, and 23-day cycle
!   respectively. A more positive reading indicates that
!   powers or sensitivities are at a peak, and a negative
!   reading implies the opposite; however, on days when the
!   neutral or zero level is intersecting, the powers are
!   unpredictable and can be suprisingly high or low.
!
30  ! The compatibility reading is simply a measure of how
!   in-phase two individual's cycles are.
!
40  ! In examining my own biorhythm after-the-fact when I
!   have had an extremely good or bad day, I have come to
!   the conclusion that, for me, the whole concept is one
!   big pile of FIRQB. (But it was fun to code.)
!
44  ! PROPRIETARY NOTICE:
!   by: Rob Frazer, Applications for
!       Nationwide Data Dialog, Inc.
!       70 James Way
!       Southampton, PA 18966
!
!   This software is furnished free (just what it's worth)
!   to all subscribers of the RSTS PROFESSIONAL.
!   The author assumes no responsibility for any emotional
!   insecurities, bad-karmic loops, suicides, mass-murders,
!   Picasso's "Guernica", earthquakes, the Sex Pistols, or
!   any bad luck which may blah, blah, blah...
!
60  Z = .1E39          ! DEMAND SCALE FACTOR ZERO
90  GOSUB 19600         ! NORMAL PGM SETUP
!
92  DIM G.POS%(101%)   ! HORIZONTAL POSITION
!
94  KB.BDTS = '22-JUN-51'
  \ DF.DAYS% = 15%
  \ F.OUT$ = 'KB:'
!
100 GOSUB 11000        ! GET BIRTHDATE
!
200 PRINT #KB%, 'Enter <G>raph, or <C>ompatibility....';
  \ INPUT #KB%, Z$
  \ Z% = ASCII(CVT$(Z$,1%))
  \ GOTO 1000 IF Z% = 71%
  \ GOTO 2000 IF Z% = 67%
  \ PRINT #KB%, 'G or C, please...'
  \ GOTO 200
!
1000 GRAPH
!
  \ GOSUB 11100
  \ GOSUB 11200
  \ GOSUB 12000
  \ FOR I.OLD% = D1.OLD% TO D2.OLD%
  \   \ GOSUB 11300
  \   \ GOSUB 11400
  \   \ COMPUTE, PRINT
!
1140 NEXT I.OLD%
!
1160 GOSUB 12200       ! GRAPH TRAILER
  \ GOTO 100
!
!
2000 COMPATIBILITY
!
  \ GOSUB 11500
  \ GOSUB 11600
  \ GOSUB 11700
  \ PRINT #KB%, 'Anyone else ?';
  \ INPUT #KB%, Z$
  \ GOTO 2000 IF ASCII(CVT$(Z$,1%)) = 89%
  \ GOTO 32767
!
!
11000 GET OPERATOR'S BIRTHDATE
!
  \ PRINT #KB%, 'Enter your birthdate in format DD-Mon-YY'
  \ PRINT #KB%, '<'KB.BDTS:'>.....';
  \ INPUT #KB%, Z$
  \ KB.BDTS = CVT$(Z$,4%) IF LEN(Z$)
  \ BDT.JUL$ = FNJUL$(KB.BDTS)
  \ GOTO 11000 IF E%
  \ RETURN
!
11100 GET GRAPH DATES
!
  \ KB.D1$ = DATES$(U%)
  \ PRINT #KB%, 'Enter 1st day of graph <'KB.D1$:'> ?';
  \ INPUT #KB%, Z$
  \ KB.D1$ = CVT$(Z$,4%) IF LEN(Z$)
  \ D1.JUL$ = FNJUL$(KB.D1$)
!
  \ D1.OLD% = FNDAY.DIFF$(BDT.JUL$,D1.JUL$)
  \ PRINT #KB%, 'You are '; D1.OLD%; ' days old as of '; KB.D1$
!
  \ PRINT #KB%, 'Enter number of days to graph <'DF.DAYS%:'>?';
  \ INPUT #KB%, Z%
  \ Z% = DF.DAYS% UNLESS Z% > 0%
  \ D2.OLD% = D1.OLD% + Z% - 1%
  \ D1.D% = VAL(RIGHT(D1.JUL$,3%))
  \ D1.Y% = VAL(LEFT(D1.JUL$,2%))
  \ MAX.Y% = FND.Y%(D1.Y%)
  \ RETURN

```

ALRSTSPROFESSIONALRSTSPROFESSIONALRSTSPROFESSIONALRSTSPROFESSIONALRSTSPROFESSIONALRSTSP



28690 Southfield Rd./Suite 291
Lathrup Village, MI 48076/(313) 569-5570

A DIVISION OF
ADVANCED COMPUTER SYSTEMS

Developers of High Technology Software Products
For D.E.C. Computers Since 1974
Specialists in CTS-300 and CTS-500

Partial List of Our Products:

1. QSORT - An extremely high speed, reentrant sort for use on CTS-500/RSTS systems. By adding the available DIBOL/MCBA translator, QSORT becomes a software compatible, direct replacement for the D.E.C. and M.C.B.A. Dibol sorts. No program changes are normally needed with DIBOL SYSTEMS.
2. SECURE - A major enhancement to the CTS-500/RSTS password scheme, secure provides for a controlled environment on large turnkey systems. Usable with any D.E.C. or non-D.E.C. language, no program changes are normally needed.
3. MSIRCV - A reentrant system to interface the MSI Models 66,77 and 88 portable data collection terminals to a D.E.C. CTS-500/RSTS system. MSIRCV produces files which may be used by any language.

Custom systems and applications software is available for the most demanding problems.

We have consulted for clients throughout the U.S., Canada and Mexico and have successfully solved a variety of difficult problems.

Dealer inquiries invited.

CIRCLE 97 ON READER CARD

PROVERBS . . . from a friend at DECUS

1. You cannot produce a baby in one month by impregnating nine women.
2. The same work under the same conditions will be estimated differently by ten different estimators or by one estimator at ten different times.
3. The most valuable and least used word in a project manager's vocabulary is "NO."
4. You can con a sucker into committing an unreasonable deadline, but you can't bully him into meeting it.
5. The more ridiculous the deadline, the more it costs to try to meet it.
6. The more desperate the situation, the more optimistic the situatee.
7. Too few people on a project can't solve the problems—too many create more problems than they solve.
8. You can freeze the user's specs but he won't stop expecting.
9. Frozen specs and the abominable snowman are alike: They are both myths and they both melt when sufficient heat is applied.
10. The conditions attached to a promise are forgotten and the promise is remembered.
11. What you don't know hurts you.
12. A user will tell you anything you ask about—nothing more.
13. Of several possible interpretations of a communication, the least convenient one is the only correct one.
14. What is not on paper has not been said.
15. Parkinson and Murphy are alive and well—in your project.

CIRCLE 80 ON READER CARD

```

11590 RETURN
11600 FIND THE THREE PHASE PERCENTAGES
      X = DAY.DIF%
      C.P = 23. * (X/23. - FIX(X/23.)) ! HOW FAR OUT OF PHASE
      C.E = 28. * (X/28. - FIX(X/28.))
      C.I = 33. * (X/33. - FIX(X/33.))
      C.P = 23. - C.P IF C.P > 23./2. ! ROUND TO FORWARD
      C.E = 28. - C.E IF C.E > 28./2. ! OUT OF PHASE
      C.I = 33. - C.I IF C.I > 33./2.
      P.P = 100. * (1. - C.P/(23./2.)) ! PERCENTAGE OF
      P.E = 100. * (1. - C.E/(28./2.)) ! HALF-CYCLE OUT
      P.I = 100. * (1. - C.I/(33./2.))
      RETURN
11700 DISPLAY CALCULATED PERCENTAGES
      PRINT #KB%, 'The compatibility percentages are:'
      PRINT #KB%, 'Physical'
      PRINT #KB% USING '###.##', P.P;
      PRINT #KB%, '%'
      PRINT #KB%, 'Emotional'
      PRINT #KB% USING '###.##', P.E;
      PRINT #KB%, '%'
      PRINT #KB%, 'Intellectual'
      PRINT #KB% USING '###.##', P.I;
      PRINT #KB%, '%'
      PRINT #KB%
      PRINT #KB%, 'Average'
      PRINT #KB% USING '###.##', (P.P+P.E+P.I)/3.;
      PRINT #KB%, '%'
      PRINT #KB% FOR I% = 1% TO 3%
      RETURN
12000 HEADING FOR BIOGRAPH
      PRINT #F.OUT% FOR I% = 1% TO 4%
      PRINT #F.OUT%, TAB(30%); 'Biorhythm for'; KB.BDTS
      PRINT #F.OUT%
      PRINT #F.OUT%, 'Date'; TAB(12%);
      PRINT #F.OUT%
      RETURN
12200 GRAPH TRAILER
      PRINT #F.OUT%, TAB(12%);
      PRINT #F.OUT% FOR I% = 1% TO 6%
      RETURN
13000 FNDAY.DIFF% DERIVE DIFFERENCE IN DAYS
      DEF FNDAY.DIFF%(XS,YS)
      Y% = VAL(LEFT(XS,2%)) ! 1ST YEAR
      S% = FND.Q%(Y%) - VAL(RIGHT(XS,3%)) ! PORTION
      Y% = Y% + 1%
      GOTO 13008 IF Y% > VAL(LEFT(YS,2%)) ! MORE TO COME
      S% = S% + FND.Q%(Y%) ! DAYS PER YEAR
      GOTO 13004
13008 S% = S% - FND.Q%(Y%-1%) ! NOT WHOLE YEAR
      S% = S% + VAL(RIGHT(YS,3%)) ! PORTION
      FNDAY.DIFF% = S%
      FPNEND
13100 FND.Q% = NUMBER OF DAYS IN YEAR Y%
      DEF FND.Q%(Y%) = 365% - (Y% > 0% ! NON-CENTURY
      AND Y% = 4% * (Y%/4%)) ! LEAP YEAR
13400 FNJULS DERIVE JULIAN DATE "YYDDDD"
      DEF FNJULS(DS)
      MS = CVT$(MID(DS,4%,3%),32%) ! UPPER CASE
      M% = INSTR(1%, 'XXJANFEBMARAPR MAYJUNJUL AUGSEP OCTNOVDEC',M%) / 3%
      E% = (M% = 0%)
      D% = VAL(MID('XX000031059090120151181212243273304334',
      3%*M%,3%)) ! ODD DAYS FROM PRIOR MONTH
      Y% = VAL(RIGHT(DS,8%))
      D% = D% + 1% IF Y% = 4% * (Y%/4%) ! LEAP YEAR
      IF M% > 2% ! AFTER FEB.
      Z% = NUM1$(1000% + VAL(LEFT(DS,2%)) + D%)
      FNJULS = RIGHT(DS,8%) + RIGHT(Z%,2%)
      FPNEND
19600 STANDARD INITIALIZATION
      ON ERROR GOTO 19800
      KB% = 12%
      OPEN 'KB:' AS FILE KB%, MODE 4%
      RETURN
19800 LOCAL ERROR TRAPS
      E% = ERR
19990 GOTO 32000
20000 STANDARD ROUTINES
27950 DEF FNSIN(X)
      X = X - (2 * PI * FIX(X/(2*PI))) ! SUBTRACT 2PI'S
      SUM, TRM = X
      FOR N% = 2% TO 999%
        GOTO 27954 IF ABS(TRM) < 0.00001 ! PRECISION
        Y% = 2%*N% - 1%
        Y = -(X*X)/(Y%*(Y%-1%)) ! TERM MULTIPLIER
        TRM = TRM * Y
        SUM = SUM + TRM
      NEXT N%
27954 SUM = SGN(SUM) IF ABS(SUM) > 1.
      FNSIN = SUM
      FPNEND
32000 STANDARD ERROR TRAPS
32500 ON ERROR GOTO 0
      STOP
32560 DEF FNES(E%) = CVT$(RIGHT(SYS(CHRS(6%)+
      CHRS(9%)+CHRS(E%)),3%),5%)
32767 END

```


Hinditron

Offshore Software Capability.

It Costs About 50% Less.

Hinditron Computer Systems and Consultants has the offshore software facility to help you get more from your computer for less.

Hinditron's software development centre in Bombay, India, is geared to meet your specific requirements, using a wide range of computer and microprocessor systems.

Hinditron offers software services for developing Application Software, System Software, Process Control Software and Software Conversions on turnkey and contract basis.

Hinditron offers all this for almost half the prevailing rate.


The Company

Hinditron has exclusive representation rights for DEC, Tektronix, Applicon, FPS and several other internationally reputed companies in India. The company provides TOTAL technical support, training and consultancy services to its clients.

Hinditron has a multi-disciplinary team of over 200 professionals including software engineers, business applications specialists and hardware engineers.

Hinditron's software development centre is equipped with a PDP-11/34 System and will shortly acquire a VAX 11/780 System.

Hinditron has developed sophisticated software products and carried out software projects in U.S.A.; U.K.; Australia. New Zealand and the Middle-East, South-East Asian and African regions. DEC and a number of DEC OEMs have availed of these services.

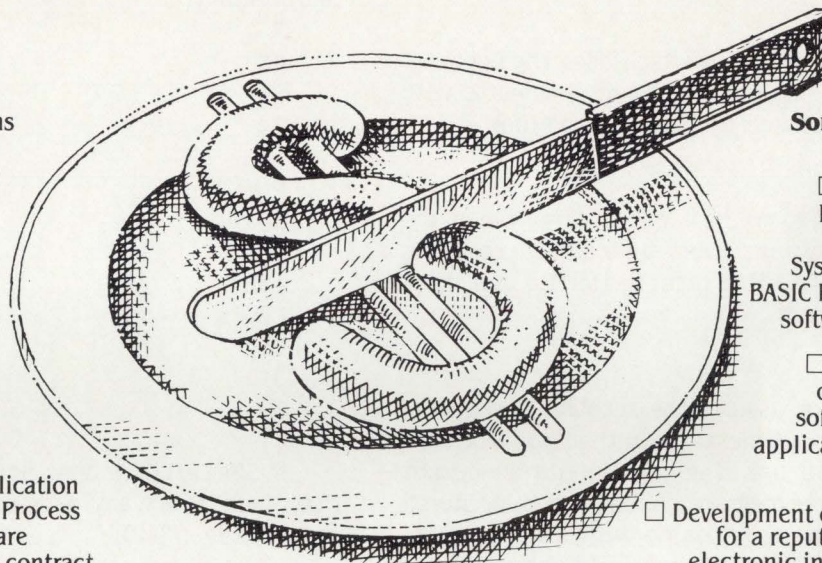

Some of Our Current Projects:

- ☐ Development of a DBMS based on-line Accounts Payable System under RSTS/E - BASIC PLUS II for a leading software house in U.S.A.
- ☐ Development of an on-line DBMS-based software for insurance applications for a leading DEC OEM in USA.
- ☐ Development of PASCAL Compiler for a reputed manufacturer of electronic instruments in U.S.A.
- ☐ Development of an I/O Handler in MACRO-11.
- ☐ Conversion of software packages in FORTRAN from RSX-11M to IAS Operating System for a leading DEC user.

Our Clients Know The System Works

Our national and international clients have put Hinditron's offshore capabilities to work in everything from batch to on-line DBMS, from business applications to engineering design and graphics to hardware design.

And they all know IT WORKS.

For more information on how you can join us offshore, return the coupon below or call Red Carlson at (206) 486-6555.



HINDITRON

Hinditron Computer Systems and Consultants
6450 NE 183, Seattle, WA 98155

☐ Please send me information on how I can save up to 50% on my computer software.

☐ Please have a representative call.

Name _____

Title _____ Phone _____

Company _____

Address _____

City _____

State _____ Zip _____

DEC, RSTS/E, RSX-11M, IAS are the registered trademarks of Digital Equipment Corporation, U.S.A.



HINDITRON COMPUTER SYSTEMS & CONSULTANTS PVT. LTD.
Eros Building,
42, Maharshi Karve Road,
Bombay 400 020, India
Telex : 011-2326 India.

THE LOW SPEED SPOOLING PACKAGE

By M. H. Koplitz,

1.0 INTRODUCTION

The low speed spooling package will enable the user to spool out reports to terminals without the need of the RSTS spooling package. There are three programs involved in the package. They are SPOLER.BAS, SPOL1.BAS and CHAR.BAS.

1.1 SPOLER.BAS

SPOLER.BAS is the program which does the spooling. The program can either be run directly or chained to with the critical data being passed to it by core common.

1.2 SPOL1.BAS

SPOL1.BAS is used to create a virtual array file of the accounts on the RSTS system. Every time a new account is added to the system SPOL1.BAS must be run. No user input is needed for this program.

1.3 CHAR.BAS

This program is not used in the spooling package. It allows the user to print out messages in the large block letters that RSTS spoolers use. The user inputs an output device for the block letter messages to be printed, or stored (on disk). Then he inputs the lines he wishes to have converted to block letters. When the input is finished <CR> will end the program. The output can be queued to a printer if so desired.

INSTALLATION OF THE PACKAGE

2.0 How to Install

Log into a privileged account. If the package is on magnetic tape medium, copy it to disk. Three files exist in the package. Make sure that you are in the BASIC-PLUS runtime system. Then old each program and compile them in [1,0] with a protection code of 232. The three files are SPOLER.BAS, SPOL1.BAS, CHAR.BAS. Then run [1,0]SPOL1.

SPOL1.BAS will create one of the data files needed by SPOLER.BAS. A second file is optional and can be created by any editor. This file is SPOLER.DAT and MUST reside in [1,0].

2.1 Contents of SPOLER.DAT

SPOLER.DAT contains information about alias names that you have set up for terminals. If you wish to have KBO: known to SPOLER as "CONSOLE" then an entry in SPOLER.DAT for "CONSOLE" must be set up. For each alias SPOLER.DAT will contain the following attributes:

- 1) Alias name
- 2) Number of lines per form
- 3) KB number of alias
- 4) Width of form.

Each entry is followed by a carriage return.

NOTE: If a terminal is busy for an alias the requested spooling can be sent to the RSTS spooling system with the

form name equal to the alias. Therefore it is good policy to give alias names to terminals which will at some time of the day have a RSTS spooler running on that form name.

The first value of SPOLER.DAT is a number informing SPOLER how many entries there are in the file. Example of a SPOLER.DAT:

```
3
PC
68
24
132
PURCH
68
25
132
PINES
50
31
80
```

If SPOLER.DAT does not exist then SPOLER assumes that there aren't any alias names. Note that SPOLER.DAT must reside in [1,0]!

SPOLER.BAS

3.0 OVERVIEW

SPOLER.BAS can be run in two ways:

- 1) Run directly (RUN [1,0]SPOLER),
- 2) Or chained to (CHAIN "[1,0]SPOLER" 500) with commands in core common.

NOTE: When run directly SPOLER will ask for all the information it needs to do its job.

SPOLER does the following functions (listed in chronological order):

- 1) Gets information about terminal name, form sizes, width, etc.
- 2) Determine account using SPOLER.BAS.
- 3) Determine whether job is on pseudo keyboard or not.
- 4) If alias give translate it to terminal number.
- 5) Analyze file name for account number.
- 6) Analyze file name for device number.
- 7) Analyze file name for body and extension.
- 8) Do a directory lookup of file name.
- 9) Convert terminal name to terminal number.
- 10) Assign terminal.
- 11) Do printing.

3.1 RUNNING SPOLER DIRECT

Use the RUN command to invoke SPOLER.BAC out of account [1,0]. The program banner will be displayed followed by several questions.



All the financial questions recorded in the Minutes, answered in seconds.

If you ever wished you had inside information on what would happen under certain circumstances, you are a prime candidate for the FPS-80 service from RTZ Timesharing.

With FPS-80 you can have any information about financial planning in seconds – as an instant display on your own VDU or as a permanent printed record.

When you subscribe to FPS-80, you are able to compile a store of information on your company on our computers. You will be linked directly to our service, and by dialling a special number on your own telephone, you are immediately connected and free to key in any questions you might have that could affect your company's financial stability.

On the other hand, if you should wish to work from your own computer, no matter what size, we may still be able to help – just ask for further details.

The FPS-80 system is highly flexible and easy to use – even for

novices. It's backed by the technical knowledge, financial expertise and excellent service for which RTZCS is renowned and what's more, is surprisingly inexpensive.

If you have any questions about how to ask questions about the future, fill in the coupon today.



Please send me further details on FPS-80

Name

Company

Address

Tel No

RTZ

Timesharing

Whenever it's a question of money.

Post to: David Holroyd, RTZ Computer Services Ltd.,
103 Jermyn Street, London SW1Y 6EB. Tel: 01-930 4163.

M

EEC SYSTEMS

LEX-11 WORD AND DATA PROCESSING FOR VAX, PDP-11 AND LSI- 11

- Integrated word, data list processing
- Supports RT-11, TSX-PLUS, RSX-11M, RSTS/E, UNIX, IDRIS, IAS, VMS
- Fast, friendly, flexible
- Calculator, Graphics
- Spelling Dictionary, Forms
- Custom modification easy
- ASCII Formated Files
- Report Writer, Data Entry
- OEM Discounts

EEC Systems
Dept. RST
286 Boston Post Road
Wayland, MA 01778
(617) 358-7781/2
(617) 443-6376

CIRCLE 43 ON READER CARD

```
RUN [1.0]SPOLER
SPOLER V1.0 Installation name Spool files to terminals

File name? XXXXXX

Terminal to spool to? XXXXX or KB??:

Form width? XX (only if KB??: answered above)

Form size? XX(only if KB??: answered above)

Number of copies? XX
```

There are two switches that are available when answering the above questions.

They are "/D" on the filename indicating that the file is to be deleted after it is spooled, and "/DET" on the terminal name (or KB??:) which will cause SPOLER to detach and print "SPOLER is detaching in job slot ??".

If SPOLER runs detached it will log itself off when done.
NOTE: Filename must be in the following format:

```
[xxx.yyy]Device:Filename.ext
If the account is left out the current account is assumed.
If the Device: is left out then SY0: is used
```

3.2 CHAINING TO SPOLER

The information needed for SPOLER must be placed in core common in the following order and in the following format. (Filename);(Terminal name);(Program to chain to);(line number to goto in chained program);(number of copies)

The semicolons are used as delimiters, the parens are not used. An example of the command is:

```
SPOLER.BAS:PURCH:[1,51]ZZM:1:5
```

SPOLER will print five copies of SPOLER.BAS to the PURCH terminal then chain to [1,51]ZZM at line 1. To delete a file after spooling place the "/D" switch described in 3.1 on the filename option.

KB??: can be substituted in place of the terminal name. If this is done the questions,

```
Form size of KB? XX
Form width? XX
```

will appear. Note that the "/DET" switch does not work when chaining to SPOLER.3-2 Chapter 3 SPOLER.BAS
SPOLER must be chained to at line 500.

3.3 DETACHED ERRORS

If the terminal specified is not available during spooling in the detached state the filename given is queued to the lp: with the form name equal to the terminal name. If a terminal number is given and it is not available then an error is generated to OPSE and the SPOLER terminates.

If any other error occurs OPSE is sent a message about the error and SPOLER terminates.

3.4 ATTACHED ERROR ON TERMINAL AVAILABILITY

The only recoverable (non-fatal) error is when the terminal requested for is not available. SPOLER then gives the following options:

```
%Terminal not available for printing
```

1. Wait (10 times then queued up)
2. Queue to spooler (report available ??????????)
3. Queue to high speed printer


```

001 EXTEND [11,11] SPOLER.BAS
010 *****
020 THIS PROGRAM WAS WRITTEN BY M H KOPLITZ, SYSTEM ADMINISTRATOR,
030 05-AUG-81.
040
050 THIS PROGRAM WILL SPOOL FILES TO LOW SPEED PRINTERS (TERMINALS).
060 A TABLE EXISTS IN THE PROGRAM WHICH WILL IDENTIFY THE
070 DIFFERENT PRINTERS. THIS TABLE WILL BE FILLED IN BY THE
080 SYSTEMS MANAGER AND IS UPDATED AFTER EVERY HARD COPY TERMINAL
090 CHANGE.
100
110 THE PROGRAM CAN BE ENTERED IN TWO WAYS. 1) IS BY CHAINING TO
120 LINE 500, IN CORE COMMON MUST BE THE FOLLOWING INFO;
130 A) FILE TO SPOOL WITH ACCOUNT (IF NO ACCOUNT ONE IN ASSUMED),
140 B) TERMINAL TO SPOOL TO.
150 C) PROGRAM TO CHAIN TO.
160 D) LINE NUMBER TO CHAIN TO.
170 ALL DATA WILL BE SEPARATED BY SEMICOLONS.
180
190 2) RUNNING THE PROGRAM DIRECTLY WILL CAUSE PROMPTS TO COME
200 UP FOR THE ABOVE INFORMATION
210
220 *****
230 REVISION #1 - M H KOPLITZ OCTOBER 2, 1981
240
250 PURPOSE: WHEN KB: IS ENTERED AS THE TERMINAL TO SPOOL TO
260 KB:, THE REPORTS GOES TO KB0:. CORRECT THIS
270 PROBLEM BY LINE 1025 AND CHANGES TO 1030.
280 *****
290
300 PRINT "SPOLER V1.1 ";
310 " Spool files to terminals"
320 ON ERROR GOTO 25000
330 XS = SYS(CHRS(6)+CHRS(-7%))
340 ATTACHED% = 1%
350 PRINT "PRINT BANNER, SET
360 FLAGGING AND ^C
370 TRAP."
380
390 PRINT "File name";
400 INPUT LINE FILE.NAMES
410 FILE.NAMES = CVT$(FILE.NAMES,4%)
420 GOTO 32767 IF FILE.NAMES = ""
430 INPUT "Terminal to spool to: "; TERMINAL.NAMES
440 GOTO 110 IF TERMINAL.NAMES = ""
450 GOTO 120 IF LEFT(TERMINAL.NAMES,2%) <> "KB"
460 INPUT "Form width: "; KB.WIDTH%
470 INPUT "Form size: "; TERMINAL.SIZE%
480 ! TERMINAL NAME AND
490 ! FILE NAME TO USE.
500 *****
510 ! FILE NAME MUST BE IN FOLLOWING ORDER:
520 [XXX,YYY]DEVICE:FILENAME.EXTENSION
530 ! ACCOUNT AND/OR DEVICE CAN BE LEFT OUT!
540 ! ACCOUNT DEFAULTS TO SY0:, ACCOUNT TO CURRENT.
550 *****
560
570 INPUT "Number of copies"; QS
580 GOTO 110 IF QS = ""
590 C9% = VAL(QS)
600 T% = INSTR(1%, TERMINAL.NAMES, "/")
610 GOTO 140 IF T% = 0%
620 XS = TERMINAL.NAMES
630 TERMINAL.NAMES = LEFT(TERMINAL.NAMES, T%-1%)
640 INSTRUCTIONS = MID(XS, T% + 1%, LEN(XS) - T%)
650 GOTO 130 IF ASCII(INSTRUCTIONS) = ASCII("D")
660 PRINT "Illegal switch"
670 GOTO 110
680 ! SEE IF THE DETACH
690 ! SWITCH WAS PUT ON
700 ! THE TERMINAL SPEC.
710 ! ALSO GET NUMBER
720 ! COPIES.
730 ! IF SO CHECK LEGALITY
740 ! ELSE ERROR OUT.
750
760 PRINT "SPOLER is detaching in job slot ";
770 PEEK(518%)/2%
780 XS = SYS(CHRS(6)+CHRS(7%))
790 ! DO THE DETACH HERE
800
810 GOTO 600
820 ! GOTO PROCESSING
830 ! SECTION.
840
850
860 ON ERROR GOTO 25000
870 XS = SYS(CHRS(6)+CHRS(-7%))
880 XS = SYS(CHRS(7%)) + "; "
890 CHAINED.TO% = 1%
900 ATTACHED% = 1%
910 ! GET CORE COMMON
920 ! STRING, SINCE WE
930 ! ENTERED VIA CHAIN
940 ! STATEMENT.
950 *****
960 AT LINE 500 IS WHERE ONE WOULD CHAIN TO FROM ANY
970 PROGRAM. CORE COMMON NEEDS THE FOLLOWING
980 SPECS:
990
1000 FILE NAME DELIMITED BY ;
1010 TERMINAL NAME (COULD BE KB??) DELIMITED BY ;
1020 PROGRAM TO CHAIN TO DELIMITED BY ;
1030 LINE NUMBER IN PROGRAM TO CHAIN TO DELIMITED
1040 BY ;
1050 NUMBER COPIES
1060 *****
1070
1080 T% = INSTR(1%, XS, ";")
1090 GOTO 550 IF T% = 0%
1100 FILE.NAMES = LEFT(XS, T% - 1%)
1110 T1% = INSTR(T% + 1%, XS, ";")
1120 GOTO 550 IF T1% = 0%
1130 TERMINAL.NAMES = MID(XS, T% + 1%, T1% - T% - 1%)
1140 T2% = INSTR(T1% + 1%, XS, ";")
1150 GOTO 550 IF T2% = 0%
1160 PROGRAM.TO% = MID(XS, T1% + 1%, T2% - T1% - 1%)
1170 T3% = INSTR(T2% + 1%, XS, ";")
1180 GOTO 550 IF T3% = 0%
1190 LINE.NUMBER% = VAL(MID(XS, T2% + 1%, T3% - T2% - 1%))
1200 T4% = INSTR(T3% + 1%, XS, ";")
1210 GOTO 550 IF T4% = 0%
1220 C9% = VAL(MID(XS, T3% + 1%, T4% - T3% - 1%))

```

```

\
GOTO 575

550 ERROR.FLAG% = 1%

600 A% = PEEK(PEEK(PEEK(520%) + 8%) + 24%)
    PROJ.NUMBER% = SWAP(A%) AND 255%
    PROG.NUMBER% = A% AND 255%

610 IF ((PEEK(PEEK(PEEK(PEEK(520%))) + 2%)
        AND 255%) = (PEEK(518%) AND 255%)
        AND
        (PEEK(PEEK(PEEK(PEEK(520%))) + 6%)
        AND 8192%) = 8192%)
    THEN
        ATTACHED% = 1%
    ELSE
        ATTACHED% = 0%

620 X% = SY$(CHR$(6%) + CHR$(26%) + CHR$(0%) + CHR$(0%))
    Y% = MID(X%, 5%, 1%)
    PSEUDO.NUMBER% = ASCII(Y%)

630 GOTO 32000 IF ERROR.FLAG%

640 OPEN "[1,0]SPOILER.DAT" FOR INPUT AS FILE #10%
    INPUT #10%, KB.TABLE%(0%, 0%)
    FOR X% = 1% TO KB.TABLE%(0%, 0%)
        INPUT #10%, KB.TABLE%(X%, 0%)
        INPUT #10%, KB.TABLE%(X%, 1%)
        INPUT #10%, KB.TABLE%(X%, 2%)
        INPUT #10%, KB.TABLE%(X%, 3%)
    NEXT X%
    CLOSE #10%

*****
! * THIS FILE IS UNDER THE NAME [1,0]SPOILER.DAT.
! * IT CONTAINS THE NAMES OF THE KBs AND SPECS ABOUT
! * EACH. THE ORDER IS:
! *     ITEM ONE MUST BE NUMBER TERMINALS IN
! *         FILE
! *     NAME OF TERMINAL(ALIAS)
! *     # LINES/FORM
! *     KB NUMBER
! *     WIDTH OF PRINTER
! *
! * FOR EACH TERMINAL.
*****

700 *****
! *
! * INITIALIZATION COMPLETE, WE HAVE ALSO DETERMINED
! * OUR STATUS ON THE COMPUTER, TO WHETHER WE ARE
! * DETACHED OR ATTACHED OR WHATEVER.
! * NOW LET US CHECK TO SEE IF WE HAVE ACCESS TO THE
! * FILE WE WISH TO PRINT.
*****

710 TS = CVT$(FILE.NAMES, 64%)
    T% = INSTR(1%, TS, "%")
    GOTO 800 IF T% = 0%

720 FILE.NAMES = RIGHT(FILE.NAMES, T% + 1%)
    ACCOUNTS = LEFT(TS, T% - 1%)
    T% = INSTR(1%, ACCOUNTS, ",")
    GOTO 780 IF T% = 0%
    OR ASCII(ACCOUNTS) <> ASCII(",")
    FILE.PROJ% = VAL(MID(ACCOUNTS, 2%, T% - 2%))
    FILE.PROG% = VAL(MID(ACCOUNTS, T% + 1%, LEN(ACCOUNTS) - T%))
    ACCOUNTS = RIGHT(ACCOUNTS, 2%)

730 GOTO 810 IF PROJ.NUMBER% = 1%
    GOTO 790 IF FILE.PROJ% <> PROJ.NUMBER%
    GOTO 790 IF FILE.PROG% <> PROG.NUMBER%

740 GOTO 810

780 ERROR.FLAG% = 2%

! TAKE THE CORE COMMON
! STRING AND BREAK
! IT UP INTO THE 4
! COMPONENTS. GOTO
! 550 IF ERROR
! OCCURS.

! SIMPLY SET ERROR
! FLAG TO 1% THIS
! MEANS THAT SOME
! COMPONENT OF THE
! CORE COMMON IS
! MISSING.

! SINCE KB SPECS
! ON CHAIN GET THE
! FORM SIZE.

! GET THE PROGRAMMER
! AND PROJECT NUMBER.

! DETERMINE WHETHER
! WE ARE ATTACHED OR
! DETACHED. PG 7-150
! PROGRAMMERS MAN.

! ARE WE ON A PSEUDO
! KEYBOARD? PSEUDO
! NUMBER% = 0%
! MEANS WE AREN'T

! GOTO ERROR HANDLING
! SECTION IF ERROR
! .FLAG% = 1%

! TERMINAL TABLE,
! ZERO ELEMENT OF
! INTEGER TABLE IS #
! ENTRIES. INT. TABLE
! IS NUMBER LINE PER
! PAGE ON PRINTER. THE
! SECOND VALUE IS THE
! TERMINAL NUMBER.

! CONVERT ALL [] TO
! (). THEN SEE IF
! ANY EXIST. IF NONE
! THEN ASSUME CURRENT
! ACCOUNT. ALLOW PRIV
! ACCOUNT ACCESS TO
! ALL FILES.

! GET THE PROGRAMMER
! AND PROJECT NUMBER
! OF THE FILE TO SPOOL
! ALSO STRIP THE
! ACCOUNT NUMBER FROM
! THE FILE NAME

! ERROR OUT IF THE ACCT
! NUMBERS DO NOT
! MATCH.

! FILE OK GO TO NEXT
! PART

```


VERSION 2.1 NOW AVAILABLE:

QUE-11 — V2.1

ONE JOB SPOOLER FOR RSTS/E CONTROLS ALL SPOOLING



REPLACES:

- SPLIDL, SPLRUN ... etc.
- BATIDL, BATRUN ... etc.
- QUEMAN, QUMRUN ... etc.
- OPSER, OPSRUN ... etc.
- ATPRO
- ATPK

QUE-11:

- DEC QUE Compatible
- Block letters on spooled header page
- One job controls all spooling
- Saves small buffers and job slots
- Spawns jobs as needed
- Handles line printer and keyboard spooling
- Controls as many BATCH JOBS as pseudo-keyboards
- Full parameter replacement in QUE
- calls "DO" command replaces indirect processors
- QUEMAN SYS call supported
- Program deliveries — NOW
- Only \$995 single cpu license
- Trial Version \$100

For more information contact:

On Track Systems, Inc.
P.O. Box 245
Ambler, PA 19002-0245
Phone: 215/542-7133

CIRCLE 11 ON READER CARD

[illegible][illegible]


```
32000 !*****
/      !*
/      !* THIS IS THE ERROR.FLAG PROCESSING SECTION.
/      !*
/      !*****
```

From one of the pioneers in commercial data processing using RSTS. Off the shelf software ready for immediate delivery. Completely interactive. Extensively documented. Fully supported. Ideal for OEM's, service bureaus or end users. Cost effective solutions including:

- For complete details, contact us at:

**P.O. Box 160
Plymouth, IN 46563
(219) 935-5121**

```

32010 IF ERROR.FLAG% = 1% THEN ERROR.OUT$ = "?Core common error"
ELSE IF ERROR.FLAG% = 2% THEN ERROR.OUT$ = "?Illegal account specs"
ELSE IF ERROR.FLAG% = 3% THEN ERROR.OUT$ = "?Protection violation"
ELSE IF ERROR.FLAG% = 4% THEN ERROR.OUT$ = "?Illegal device specs"
ELSE IF ERROR.FLAG% = 5% THEN ERROR.OUT$ = "?No file ext. given"
ELSE IF ERROR.FLAG% = 6% THEN ERROR.OUT$ = "?Can not find terminal name"
ELSE IF ERROR.FLAG% = 7% THEN 110
ELSE IF ERROR.FLAG% = 8% THEN ERROR.OUT$ = "?Bad line number passed"
ELSE IF ERROR.FLAG% = 9% THEN ERROR.OUT$ = "?Illegal account number"
ELSE IF ERROR.FLAG% = 10% THEN ERROR.OUT$ = "?Illegal terminal # specified"
ELSE IF ERROR.FLAG% = 11% THEN 32500
ELSE IF ERROR.FLAG% = 12% THEN ERROR.OUT$ = "?Can not find file or account"
ELSE IF ERROR.FLAG% = 13% THEN 32700
ELSE IF ERROR.FLAG% = 14% THEN ERROR.OUT$ = "?Error to output terminal"
ELSE IF ERROR.FLAG% = 15% THEN ERROR.OUT$ = "?C trap"
ELSE IF ERROR.FLAG% = 16% THEN ERROR.OUT$ = "?Chaining to prog. not found"
ELSE IF ERROR.FLAG% = 17% THEN ERROR.OUT$ = "?Illegal switch on filename"
ELSE IF ERROR.FLAG% = 18% THEN ERROR.OUT$ = "?Deletion of file in error"
ELSE ERROR.OUT$ = "?Unknown error AT LINE " + NUMIS(ERL) + " error: "+NUMIS(ERR)

\                                     !MAKE UP OUTPUT STRING
\                                     ! WITH CORRECT ERROR.
\                                     ! IF 7 OR 13 GOTO
\                                     ! 32700, IF 11 GOTO
\                                     ! 32500.

32050 GOTO 32090 IF ATTACHED% = 0%
PRINT
// PRINT ERROR.OUT$
GOTO 32060 IF PSEUDO.NUMBER%
GOTO 32700

\                                     !IF ATTACHED PRINT
\                                     ! OUT ERROR MESSAGE
\                                     ! IF NOT PSEUDO THEN
\                                     ! GOTO END.

32060 C$ = ERROR.OUT$ + "-----" + "ON ACCOUNT"
      + "[" + NUMIS(PROJ.NUMBER%) + ","
      + NUMIS(PROG.NUMBER%) + "]"
      + " WHILE IN SPOLER ON PSEUDO KB"
\ XS = FN09$(C$)
\ GOTO 32700

\                                     !SEND ERROR MESSAGE
\                                     ! TO OPSR SINCE ON
\                                     ! PSEUDO KB#. THEN END
\                                     ! PROGRAM

32090 C$ = ERROR.OUT$ + CHR$(13%) + "ON ACCOUNT"
      + "[" + NUMIS(PROJ.NUMBER%) + ","
      + NUMIS(PROG.NUMBER%) + "]"
      + " WHILE IN SPOLER IN DETACH MODE"
\ X$ = FN09$(C$)
\ GOTO 32700

\                                     !SEND ERROR MESSAGE
\                                     ! TO OPSR SINCE WE
\                                     ! ARE IN DETACHED
\                                     ! MODE.
```


CIRCLE 80 ON READER CARD

```

+ PROGRAM.TOS + "-"
+ CVT$(LINE.NUMBER%) + "-"
+ CVT$(ATTACHED%) + "-"
+ CVT$(PSEUDO.NUMBER%) + "-"
\ CHAIN "SQUE" 31000
!QUE UP FILE TO
! PRINT WITH FORM
! EQUAL TO TERMINAL
! NAME.

32540 X$ = SYS(CHRS(8%)+"[1,0]SPOLER"+CHRS(13%))
+ CVT$(32600) + "Q LP:/FO:NORMAL = "
+ LATER.DEVICES + ":"
+ "[" + ACCOUNT$ + "]"
+ FILE.NAMES + "." + EXTENSIONS$
+ QUE.DELETES
+ CHRS(13%)
+ PROGRAM.TOS + "-"
+ CVT$(LINE.NUMBER%) + "-"
+ CVT$(ATTACHED%) + "-"
+ CVT$(PSEUDO.NUMBER%) + "-"
\ CHAIN "SQUE" 31000
!QUE UP FILE TO
! PRINT WITH FORM
! EQUAL TO NORMAL
! SO GOES TO HIGH
! SPEED PRINTER.

32580 PRINT "2Doing queing"
GOTO 32530
IF LEFT(TERMINAL.NAMES,2%) <> "KB"
GOTO 32540
IF LEFT(TERMINAL.NAMES,2%) = "KB"
!10 ATTEMPTS FAILED
! SO DO QUEING.

32600 !*****
!*
!* REENTER FROM QUE TO THIS POINT
!*
!* *****
32610 Z9$ = SYS(CHRS(7%))
Z9$ = RIGHT(Z9$,2%)
T1% = INSTR(1%,Z9$,CHRS(13%))
T1% = INSTR(T1%,Z9$, "-")
PROGRAM.TOS = MID(Z9$,T1% + 1%,T1%-T1%-1%)
LINE.NUMBER% = CVT$(MID(Z9$,T1% + 1%, 2%))
T2% = INSTR(T1%+1%,Z9$, "-")
ATTACHED% = CVT$(MID(Z9$,T2% + 1%,2%))
T3% = INSTR(T2%+1%,Z9$, "-")
PSEUDO.NUMBER% = CVT$(MID(Z9$,T3% + 1%,2%))
!RETURN FROM QUE AND
! RETORE ALL VALUES
! NEEDED TO FINISH UP

32700 !*****
!*
!* THIS SECTION ENDS THE PROGRAM, AND THEN DOES
!* ANY NECESSARY CHAINS, IF IT IS
!* DETACHED AND NOT CHAINING OUT THEN KILL
!* THE JOB.
!*
!* *****
32710 CLOSE #1%,#2%,#11%
XS = SYS(CHRS(6%) + CHRS(11%) + STRING$(20%,0%)
+ "KB" + CHRS(TERMINAL.NUMBER%)
+ CHRS(255%))
!DEASSIGN TERMINAL.

32712 GOTO 32715 IF ERROR.FLAG% <> 13%
OR SWITCH$ <> "D"
KILL "[" + ACCOUNT$ + "]" + LATER.DEVICES + ":"
+ FILE.NAMES + "." + EXTENSIONS
!KILL THE FILE IF
! /D ON FILE NAME

32715 GOTO 32720 IF ASCII(PROGRAM.TOS) = 0%
CHAIN PROGRAM.TOS LINE.NUMBER%
! IF PROGRAM EXISTS
! TO CHAIN DO SO.

32720 GOTO 32767 IF ATTACHED%
XS = SYS(CHRS(6%) + CHRS(8%)
+ CHRS(PEEK(518%)/2%) + STRING$(23%,0%)
+ CHRS(0%) + CHRS(255%))
!SINCE WE ARE DETACHED
! KILL OFF THE JOB.

32730 GOTO 32767 IF ERROR.FLAG% <> 13%
OR SWITCH$ <> "D"
KILL "[" + ACCOUNT$ + "]" + LATER.DEVICES + ":"
+ FILE.NAMES + "." + EXTENSIONS
!KILL THE FILE IF
! /D ON FILE NAME
! REQUESTED

32767 END

[11,11] SPOLL.BAS

001 EXTEND
!*****
!*
!* THIS PROGRAM WAS WRITTEN BY M H KOPLITZ
!* SYSTEMS ADMINISTRATOR
!* ALLIS-CHALMERS HTD, YORK
!* PA 17404.
!*
!* THIS PROGRAM MAKES A VIRTUAL FILE FROM
!* ACCT.SYS FOR THE SPOLER.BAS PROGRAM.
!*
!* *****
010 OPEN "SACCT.SYS" FOR INPUT AS FILE #1%
OPEN "SPOLER.VIR" FOR OUTPUT AS FILE #2%
DIM #2%,NAME,ACCTS(150%) = 15%
,ACCT.PROJ$(150%)
,ACCT.PROG$(150%)
015 ON ERROR GOTO 100
020 INPUT #1%,PROJ%,PROG%,PASS.WORD$,QUOTA,
UFD$,THE.NAMES :INPUT LINE
030 COUNTER% = COUNTER% + 1%
NAME.ACCTS(COUNTER%) = LEFT(THE.NAMES,15%)
ACCT.PROJ$(COUNTER%) = PROJ%
ACCT.PROG$(COUNTER%) = PROG%
COTO 020
!PLACE ACCT.SYS DATA INTO .VIR

```


A black and white photograph showcasing a diverse range of Xerox office equipment. The collection includes several large floor-standing copiers with multiple paper trays and output bins, smaller desktop models, and a compact shredder on a stand. The machines are arranged in a cluster, highlighting the variety of solutions offered by Xerox for office productivity.

With prices up to 40% off the minicomputer manufacturer's list, delivery in 30 to 40 days, installation by factory-trained technicians and a nationwide service network, it's easy to see why Digital Associates is the source for minicomputer line printer alternatives.

The Printer Store

(800) 243-9054 *In Connecticut call (203) 327-9210

PROPOSED STANDARD EDT 2.0 INITIALIZER

By David Spencer, Infinity Software Corporation

1.0 INTRODUCTION

This is the first of two articles describing techniques to get more out of EDT version two. This installment deals with an EDTINI.EDT initializer file. It was created in a joint effort of Steven Edwards of Software Techniques and myself.

The second article will deal with EDT hints and kinks. This includes a "wish-list" of additional commands, work-arounds to problems, and complaints.

Credit is due to Steve and members of the Software Techniques staff, which have contributed lots of useful information that has been incorporated into these articles.

2.0 REASONS FOR EXTENDED COMMANDS

Everyone agrees that EDT version 2 is a wonderful editor. What we can't agree on, though, is a standard set of redefined keys. It seems everybody has their own idea on the best functions. Hopefully this argument can be cooled somewhat with the introduction of a standard EDT initializer file.

The distributed EDT comes with assignments to a number of keys for keypad editing (figure 1). Although these keys do an excellent job, more sophisticated users outgrow the set supplied by DEC.

For example, EDT provides a number of simultaneous buffers. The range of commands available for buffer manipulation is fantastic. But there is no way to access buffers through editing keys. Any buffer changes must be executed with line-mode commands either in line-mode (unsatisfactory) or with the keypad "GOLD 7" command (cumbersome). Either way, keypad editing is reduced to something only slightly better than line-mode editing.

What I present with this article is a standard set of EDT extensions. These extensions allow users to access buffers, do file input/output, and other things available only in line-mode. This set (figure 2) does not interfere with any keys pre-assigned by DEC. However, these extra definitions increase EDT's usability many-fold.

3.0 DEFINITION OF TERMS

A number of terms are used throughout these two articles to describe commands. To prevent confusion, definitions of these terms follow. I assume that the reader already has some knowledge of EDT, and has at least glanced at the manual.

- **GOLD**
"GOLD" is a synonym for the blue key on VT52's and the PF1 key on VT100's.
- **CONT x**
"CONT x" is used to symbolize the typing of the control character "x".

- **GOLD x**
"GOLD x" is the striking of the GOLD key followed by key "x", where "x" is a letter, control character, or keypad key.
- **Keystroke**
A keystroke is one or more keyboard keys typed to complete an editing sequence. For example, the combination "GOLD CONT Z" is thought of as one keystroke.
- **Internal Key Number**
EDT uses an internal numbering scheme to uniquely identify keystrokes. The second article will include a table of all the internal EDT key numbers and keystrokes.
- **Iteration**
All EDT editing keys can be prefixed with a repetition count. This is entered by striking the GOLD key, a number, and a keystroke.

4.0 NEW KEY DESCRIPTIONS

Here is a detailed list of the additional EDT key definitions. Nearly all of these commands accept an iteration count.

In those commands which ask for input (like buffer name), the input must be terminated with the keypad ENTER key. If for some reason you wish to abort the command asking for input, type "CONT U" and EDT will terminate the command without any action taking place.

NEW COMMANDS

GOLD ARROW-UP

Move the editing window upward 22 lines. The vertical orientation of the cursor will be maintained from the line it left.

GOLD ARROW-DOWN

Move the editing window downward 22 lines. Once again, the vertical orientation of the cursor will be maintained from the line previous to the GOLD ARROW-DOWN.

CONT B

Move backward a word. Identical to striking the keypad "5" key followed by the keypad "1" key. "CONT B" works to move the cursor backward regardless of the motion flags.

CONT F

Move forward a word. This key is identical to striking the keypad "4" key and then the keypad "1" key. "CONT F" works the same at all times.

GOLD CONT H

Transpose previous two characters. By striking the GOLD key and backspace, the previous two characters will be transposed. This is helpful for typists that frequently type "teh" instead of "the".

GOLD CONT W

controlling usage of
here panic when
ou ever bothered to
ystem security is a
ASMAN, the intel-

GOLD CONT X

Copy region to named buffer. Select a region and type GOLD CONT X. EDT will accept a buffer name. The selected region will then be copied to the buffer name entered.

GOLD CONT Z

Complete edit and leave EDT to the monitor. It is the equivalent of invoking the EDT "EXIT" command.

GOLD

Insert special file marker. This keystroke inserts the “~~/\~~” special position marker. The mark can

GOLD /

Locate position file marker. This command locates and deletes the special position marker from the text buffer. Leaves the cursor in the position formerly occupied by the marker.

CIRCLE 87 ON READER CARD

GOLD C

GOLD F

GOLD I

GOLD L

GOLD M

GOLD O

GOLD Q

GOLD S

5.0 OUTLINE OF INITIALIZER FILE

6.0 NOTES ON USING BUFFERS

7.0 USE FILES LIKE A LIBRARY

8.0 USE EDT FOR MULTIPLE EDITS

Many files can be edited in a single EDT session. By using the "GOLD I" input and "GOLD O" output commands, files may be read into buffers, modified, and written back out. So, if you want, you could stay in EDT all day.


```

[1,11] FASINI.EDT
DEF M DELIM_PROG
F=DELIM_PROG
I
DEF K 75 AS "EXT DELIM_WP."
^Z
C; ISE EN WO '^Z 9ASC 10ASC 11ASC 12ASC 13ASC 27ASC I ([]) ,--*/='^Z EX
^Z
DEF M DELIM_WP
F=DELIM_WP
I
DEF K 75 AS "EXT DELIM_PROG."
^Z
C; ISE EN WO '^Z 9ASC 10ASC 11ASC 12ASC 13ASC 27ASC I ,'^Z EX
^Z
DEF M WIDTH_132
I=WIDTH_132
DEF K 94 AS "EXT WIDTH_80."
SE SC 132
^Z
DEF M WIDTH_80
I=WIDTH_80
DEF K 94 AS "EXT WIDTH_132."
SE SC 80
^Z
DEF K 46 AS "-W."
DEF K 50 AS "+W."
DEF K 51 AS "PASTE=?'Put buffer: '."
DEF K 60 AS "PAR."
DEF K 68 AS "CUTSR=?'Cut buffer: '."
DEF K 34 AS "(-22V)."
DEF K 35 AS "(+22V)."
DEF K 75 AS "EXT DELIM_WP."
DEF K 78 AS "CUTSR=DELETE PASTE=?'Rep buffer: '."
DEF K 79 AS "(-C D-C C UNDC)."
DEF K 94 AS "EXT WIDTH_132."
DEF K 95 AS "EXT CO SELECT TO=?'Cop buffer: ' ; F L."
DEF K 9 / AS "EXT EX."
DEF K 117 AS "I--/\---Z -6C."
DEF K 118 AS "S%--/\---%."
DEF K 137 AS "EXT F=?'Buffer: '.."
DEF K 138 AS "(C SEL W CHGCSR)."
DEF K 141 AS "(SEL PAR FILSR)."
DEF K 144 AS "EXT INC ?'Input file: '=?' Buffer: '."
DEF K 147 AS "EXT F L."
DEF K 148 AS "EXT F=MAIN.."
DEF K 150 AS "EXT WR ?'Output file: '=?' Buffer: '."
DEF K 152 AS "EXT QUIT/SAVE."
DEF K 154 AS "EXT SH BU."
SE WR 79
SE TR
SE K
SE M C
DELIM_PROG
F=MAIN

```

FIGURE 3. New Initializer File Listing (2 of 2)

LETTERS to the RSTS Pro . . .

... continued from page 6

I left Volume 3, No. 2, of the *RSTS Professional* on an airplane last week. Would it be possible for you to send me another copy of that issue?

D. Ross Porter
Pioneer Hi-Bred Internat'l, Inc.
Des Moines, Iowa

*It's already sent, Ross. We appreciate your getting **RSTS Professional** airborne. And we're sure the RSTS pro that picks up your copy will find it more enjoyable than the reading fare that is currently offered on planes. Thanks.*

After reading your December, 1981 issue, I was disturbed by the article "Benchmark Dibol vs. BASIC +2" by Frank Metcalf [p. 82]. Although I am sure Mr. Metcalf meant well, he has painted a grossly inaccurate picture. He seems to be comparing Dibol v4C with Basic +2. Dibol v4C does not support RMS file structures, as most languages did not at that time.

A more accurate comparison would have been Dibol v4D vs. Basic +2, or better yet, the new Dibol v4.5 and BP2 v1.6 using resident libraries. I believe Mr. Metcalf would be mildly surprised, to say the least. (I have seen some DEC internal documents

showing that Dibol is the fastest and most compact language after Macro!). Although we use

Basic +, BP2, Dibol and Datatrieve in our shop, we

are primarily a Dibol shop.

In short, I feel that the comparison done was inaccurate, all be it with good intentions. Dibel does have its deficiencies (i.e. no supported system call functions). Overall, it is a viable language that should be considered during application development.


Mike Milner

Director of Data Processing
City of Largo, Florida

P.S. The magazine is excellent; keep up the good work!

*Thank you for your concerned comments, Mike.
We like to view all sides.*

I certainly appreciated Mr. George May's article

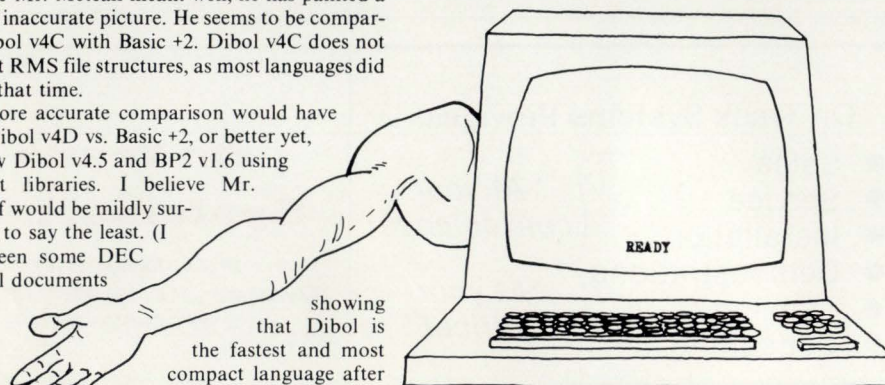

WRIST WRESTLING R.S.TS

D. Benoit 81

\$REORDR - Sorting Alphabetically, (RSTS Professional, Vol. 3, No. 4). I have his version of REORDR running on my machine now; however, I found a problem with line 1210 that must be corrected before installation.

Line 1210 should read:

```

1210 GOTO 1220 IF LEN(C$) = 0
C$ = LEFT$(C$(C$-32),32)
%
GOTO 1220 IF C$ = "CRE"
GOTO 1205 IF C$ < "ACC" AND C$ < "ALP"
C3$ = -1X IF C$ = "ALP"
C3$ = 1X IF C$ = "ALP"
PRESET TO DEFAULT VALUE, DONE IF DEFAULT INPUT; ELSE
GET FIRST THREE CHARACTERS IN UPPER-CASE ONLY, DONE IF
"ACC", GET AGAIN IF NOT "ACC" OR "ALP", OTHERWISE,
SET TO ACCESS DATE SETTING

```

Thank you for a great publication!

Steve Young
Missouri Pacific Railroad Co.
St. Louis, MO

Thank you, Steve. We're glad we could help each other.

I enjoy your publication very much. Keep up the good work. Please provide more information concerning hardware failures, potential problems, etc. As a starter, an article on RSTS Error Logging (ERRDIS) would be great. DEC's System Manager Documentation is very inadequate along this line.

L. Dawson, Sr. Systems Specialist
E.I. du Pont de Nemours & Co.
Kinston, NC

O.K. L., we'll try to get an article on Error Logging into one of the next few issues. Keep watching.

Enclosed is payment for another fabulous year of RSTS Pro. I can't express the joy of finding a magazine of this type and caliber.

Thank you.
Mark Ruggiero

Thank YOU, Mark. Our readers make it possible.

SHOW

By Lawrence Fisher
Los Angeles Unified School District, Los Angeles, CA

SHOW is a program designed to display files on any video terminal that has TECO support on this system. It supports wildcard filespecs given in the normal format.

To run show, simply type SHOW <filespec>. No filespec will assume the argument of *.* (note: When displaying files that use Basic + lines, be certain to include a "/" at the end of the filespec so that TECO can convert the line structure to normal ASCII stream).

Show has one switch upon entry, that being "/s:<text>" where <text> is any phrase you might want the first screen to include.

The following is a summary of the commands that are available from within the program:


Command	Function
<SP>	Go forward one screen (note: this won't go forward an entire screen if there isn't enough text remaining on that page to complete an entire screen).
1H	Go back one screen. Same as above.
1L	Append next page of text. This reads in the next page of text after the end of the current page.
1Y	Yank next line of text. This clears the text buffer before reading in the next page.
1N	Go forward to next file. If you are using a wildcard filespec this will go to the next file in the sequence. If you are at the last file, it will exit the program. If you are not reading a wildcard file, you will return to the front of your file.
*	This prints out the name of the current file you are reading in the upper left hand corner of your screen.
<num>	Go to the line specified.
+ <num>	Go forward the specified number of lines.
- <num>	Go backward the specified number of lines.
1Z	Exit the program.

```

1 !SHOW.TES!! 1101.00!! 1 B$ Wildcard Filespec 1
1 Last edit 11-11-81 by LWF 1 D$ First half of spec 1
1 1 E$ Second " " " 1
1 Copyright (C) 1981 1 N$ Get Number Macro 1
1 Lawrence Fisher 1 S$ Search Argument 1
1 Options: 1 1% 2/3 the screen 1
1 /S: Search 1 3% Last key typed 1
1 Q-regs used: 1 4% EOL for Term 1
1 A$ Current Filename 1 9% Screen Height 1
1 N$ Numeric Arg var. 1
1 S$ Search Arg Entered 1
1 Enter the Get Number Macro 1
1 @UN%UN.URJQN1$<^TUNQN^DQNI$0;^I $J^UN.+1,0KQPJQN$
1 Get the Command line and process it out. 1
1 Z^E G_ $ 1
1 J 1
1 :@%$%$ B..D | :@FS%SHOW%$ 1
1 :@%$%$%L .-3..D .,ZXS .,ZD -1US 1
1 I strip all spaces & tabs and post fix extension (if none found) 1
1 I Borrowed part of this code from TYPE.TES 1
1 HXA HXB 0,0XE 1U2 J :@%$%$%U 0,0XA 0,0XB J < @FS/^ES//; > 1
1 J < @%$%$; 0,,:XA 0,,:K > 1
1 J :@%$%$%S .-1U9 @%$%$ Q9,,:XA Q9,,:K 1
1 J :@%$%$%S .-1U9 @%$%$ Q9,,:XA Q9,,:K 1
1 J :@%$%$%S .-1U9 @%$%$ -1EJ-4^E Q9,,:XB | Q9,,:XA ' Q9,,:K 1
1 J :@%$%$%S R.,Z:XE ,ZK 1
1 ^U8 -1EJ-4^E 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 J :@%$%$%S ^$:@UA%$ -D 1
1 Z^E -1EJ-5^E @I%$.** | @I%$.** 1
1 J :@%$%$%P HXD ZJ @I%$.** -1EJ-5^E :QA^N :@ER%`EQD`EQE%$S -2D ' ' ' 1
1 R .^E @I%$.** 1
1 J GA ZJ GB HXA 1
1 J :@%$%$%S 0U2 $1^ | :@%$%$%S 0U2 $1^ | HXB Q2^E @EN/^EQB/ ' ' 1
1 Test for Scope support 1
1 399ETS 1
1 ET&512^E ^A%No interactive scope available. 1
1 ^A @ISTOP! 1

```

and another one



Ken Haarstad, Lead Programmer, Turtle Mountain Community School, Turtle Mountain Indian Reservation, North Dakota.

"Ambase training... a good foundation"

"Everything we have developed over the past year has been under AMBASE; our student registration packages for high school and college, the fund accounting system for the school district, the test scoring program, even the payroll system.

AMBASE training gave me a good foundation. Installation was very easy, and customer service is excellent. I always

get a quick response.

If someone were to take AMBASE away from me, I would quit. It speeds things up so much!"

AMBASE is a revolutionary state-of-the-art system for application development and data base management. AMBASE is increasing programming productivity worldwide

from 100-900%. In addition to the data management system, AMBASE includes a report generator, query language, screen formatter and automatic code generator.

If you would like to find out more about AMBASE, write to 1900 Plantside Dr., Louisville, KY 40299, U.S.A. or call, 502-491-9820. We will send you free information immediately.

amcor computer corp.



Headquarters: Louisville, KY Regional Offices: Nationwide Telex 204122

CIRCLE 3 ON READER CARD

```

1 Attempt to open the file 1
1 Q2^N @0INOLOK! ' :@EN//+1^G @^A%Can't find file %:GA @^A%. 1
1 @ISTOP! ' HK G^ HXB 1
1 INOLOK! HK :@ER/^EQB^EQE/^U @^A%Can't find file %:GA @^A%. 1
1 @ISTOP! ' 1
1 Set up the scope for support unique to it (EOL and Height) 1
1 1:W-64^E 9U1 16U9 | 15U1 24U9 ' 1
1 0:W-4^E 155^U4$ 91:~U4$48:~U4$ 75:~U4$ 1
1 | 0:W-10^E 155^U4$ 15:~U4$ | 155^U4$ 75:~U4$ ' 1
1 Clear the screen, read in a page, and position the cursor either 2/3 1
1 of the way down the screen, or at the item searched for. 1
1 -1W$ 1
1 Y$ 1
1 QS^L@_%EQ$% 0L | Q1L$ ' 1
1 -1W$ 1
1 Begin the actual command loop 1
1 <^TU3$ 1 Get a character 1
1 Q3^N J Q3MNL -1W F< | 1 Test for a numeric , if so, go to that line 1
1 Q3-8^E -Q9L -1W$ F< | 1 Test for a backspace, if so, go back a screen 1
1 Q3-12^E A -1W$ F< | 1 Test for a ^L (FF) if so, append a page 1
1 Q3-14^E Q2^N @0INOLOK! ' :@EN//; HK G^ HXB INOLOK! HK :@ER/^EQB^EQE/^U 1
1 @0!END! ' -1W Y Q1L -1W | 1 Test for a ^N, if so, go to next file 1
1 Q3-23^E 0W$ -1W$ F< | 1 Test for a ^W, if so, repaint screen 1
1 Q3-25^E Y Q1L -1W$ F< | 1 Test for a ^Y, if so, Yank in the next page 1
1 Q3-26^E @0!END! | 1 Test for ^Z to exit 1
1 Q3-32^E Q9L -1W$ F< | 1 Test for <SP> to go forward a screen 1
1 Q3-42^E -1,5:W 6:W-1J -1W :G4 :G* $ ^TS -2W Q1L 32768W$ -1W 0,5:W F< | 1
1 Test for "*" - if so, print filespec in upper right hand corner, and 1
1 I await the typing of any character 1
1 Q3-43^E Q3MNL -1W F< | 1 Test for + sign, for advancing x lines 1
1 Q3-45^E Q3MNL -1W ! Test for - sign for going back x lines 1
1 ..... > 1
1 Go to the bottom of the screen 1
1 !END! 1
1 -1,5:W 1
1 6:WJ 1
1 23L 1
1 -1W 1
1 ^A 1
1 ^A 1
1 And terminate all operations. 1
1 !STOP! 1
1 ^C^C 1
1 $$ 1

```


'INPUT LOOP' PROGRAMMING TECHNIQUE

By James F. Shaughnessy, Jr., Mirfanta Corp., New York

Copyright by James F. Shaughnessy, Jr. Original Publisher, John Runyon & Computers-R-Digital

Synopsis: The "Input Loop" is a set of BASIC code to handle screen-oriented data entry applications. The same loop is executed for each entry field. The particular path through the loop is controlled by a mode variable and a set of parameters for each field.

Interactive entry and maintenance programs for data files are, obviously, one of the more common types of applications written for minicomputers. When I started to write these types of programs, I looked at examples (in BASIC) that had been supplied with the mini my firm had purchased and used them as a model for what I wanted to do. This model consisted of:

- a creation program to put a new record into the file.
- an inquiry program to look at records already in the file.
- a maintenance program to allow records in the file to be modified.
- a delete program to remove records from the file.

The create and modify programs were essentially the same, with the exception of code for identifying and retrieving the record from the file, and code for identifying the particular field(s) within the record to be changed. Another standard feature was that for each input field there was a section of code of perhaps 10 statements that was almost identical to sections of code for the other fields handled by the program.

I soon found the process of writing programs patterned after this model to be time-consuming, tedious, and exasperating. The euphoria of successfully debugging the "create" program quickly dissipated in the realization that I couldn't look at or change the records I had just created until I finished debugging the "inquiry" and "modify" programs! Another problem was that by being ambitious and trying to create a record with a lot of data fields, all handled by one program, I ran into memory overflows.

I started to find a solution to this set of frustrations when I realized that I could write a program with a single "INPUT" statement that would handle every field on the screen if I could come up with the proper set of parameters on which to branch around that input statement.

The technique which developed out of this centers on what I call the "Input Loop". The program flows continually through the same loop, branching on a "mode" variable, a field counter, and a set of parameters for each field. There are four primary "modes" of operation:

- Create
- Inquire
- Modify
- Delete

In addition, there are two secondary modes of operation: change a single field while in primary Create mode change a single field while in primary Modify mode

Each field is uniquely identified by an integer number (1%) and has associated with it an array of integer

parameters (Z9%(1%,X%)). These parameters are used to identify:

- 0% — Screen row, if < 0%, convert input to uppercase
- 1% — Starting column; if < 0%, clear line before input
- 2% — Maximum input length, if < 0%, RSET the input with spaces (unless overridden, the input will be automatically LSET with spaces to the maximum input length)
- 3% — Input Restrictor (absolute value):
 - 1% — accept anything up to the maximum input length
 - 2% — do not accept null
 - 3% — accept only maximum input length
 - 4% — accept only null or maximum input length
 - 5% — accept only "Y" or "N" (if < 0%, do not pad the input)
- 4% — Pointer for edit routine
- 5% — Pointer to assign routine
- 6% — Pointer to element within array for assign and display routines (see below)
- 7% — Pointer to format and display routine
- 8% — Display length
- 9% — Help message number

Primary branching is to an Edit module, an Assignment module, a Format (& Display) module, and an Accept, Modify, Cancel module.

Let's look at the steps required for creating a new record:

- The field counter is set to a starting value, and we start through the input loop.
- Parameters are set according to the current field.
- Data is input for that field.
- Perform the edit function for that field. If the input doesn't pass, go back to the input statement.
- Assign the value input to the proper file variable.
- Format and display the file variable. (More on this later.)
- Increment the field counter. If it's not greater than the ending value, go back to the top of the input loop.
- Ask the user to Accept, Modify, Cancel (A/M/C) the record.
- On Accept, put the record to the file and go back to the top of the input loop and reset the field counter for the next record.
- On Cancel, just go back to the top of the input loop and reset the field counter.
- On Modify, change the mode to 5%, ask the user to identify the field to modify, set the parameters for

If there are no more fields to change, go back to the Accept/Modify/Cancel prompt.

Now, for the variations, in the Inquiry mode:

Have the user identify the record by key and retrieve it from the file.

Display it by going through the input loop for each field, only executing the Format module.

In the Modify mode:

Identify, retrieve, and display the record as in the inquiry mode.

Change the mode to 6%, ask the user to identify the field to change, etc.

On Accept, update the record.

In the Delete mode:

Identify, retrieve, and display the record as in the inquiry mode.

Ask the user to verify his/her intention to delete the record.

Delete it, if verified.


That's the essence of the technique. One enhancement used in some applications is to automatically record modifications to existing records in a log on a field-by-field, parameter-driven basis. Others include displaying records from different files on the screen at the same time, spreading a single record over multiple screens, and zero-balancing multiple records against a control figure before allowing any of them to be accepted.

Some of the “user-oriented” features include:

- back up a field by entering a “/”
- start over by entering a “*”
- reuse the value in the buffer by entering a “-”

and
another one

**"Ambase
is making
our lives
easier..."**



*Sam Walden, Vernay
Laboratories, Inc.,
Yellow Springs, Ohio,
manufacturer of
laboratory gaskets,
using AMCOR'S
AMBASE and
AMFACS systems
in an integrated
environment.*

"AMBASE is making our lives easier through aid messages, and more reliable data. It puts the data in a common area.

Amcor's training facilities are very conducive to learning and the training program is complete. Installation of AMBASE was very, very, very, easy, and Amcor's support is good.

Using AMBASE in an integrated environment with Amcor's application products is advantageous to us

because the systems have a number of things built into them that would have taken us a long time to develop. Getting everything under AMBASE completely will bring about programming conformity."

AMBASE is a revolutionary state-of-the-art system for application development and data base management.



AMBASE is increasing programming productivity worldwide from 100-900%. In addition to the data management system, AMBASE includes a report generator, query language, screen formatter and automatic code generator.

If you would like to find out more about AMBASE, write to 1900 Plantside Dr., Louisville, KY 40299, U.S.A. or call, 502-491-9820. We will send you free information immediately.

amcor computer corp.

Headquarters: Louisville, KY Regional Offices: Nationwide Telex 204122

CIRCLE 3 ON READER CARD

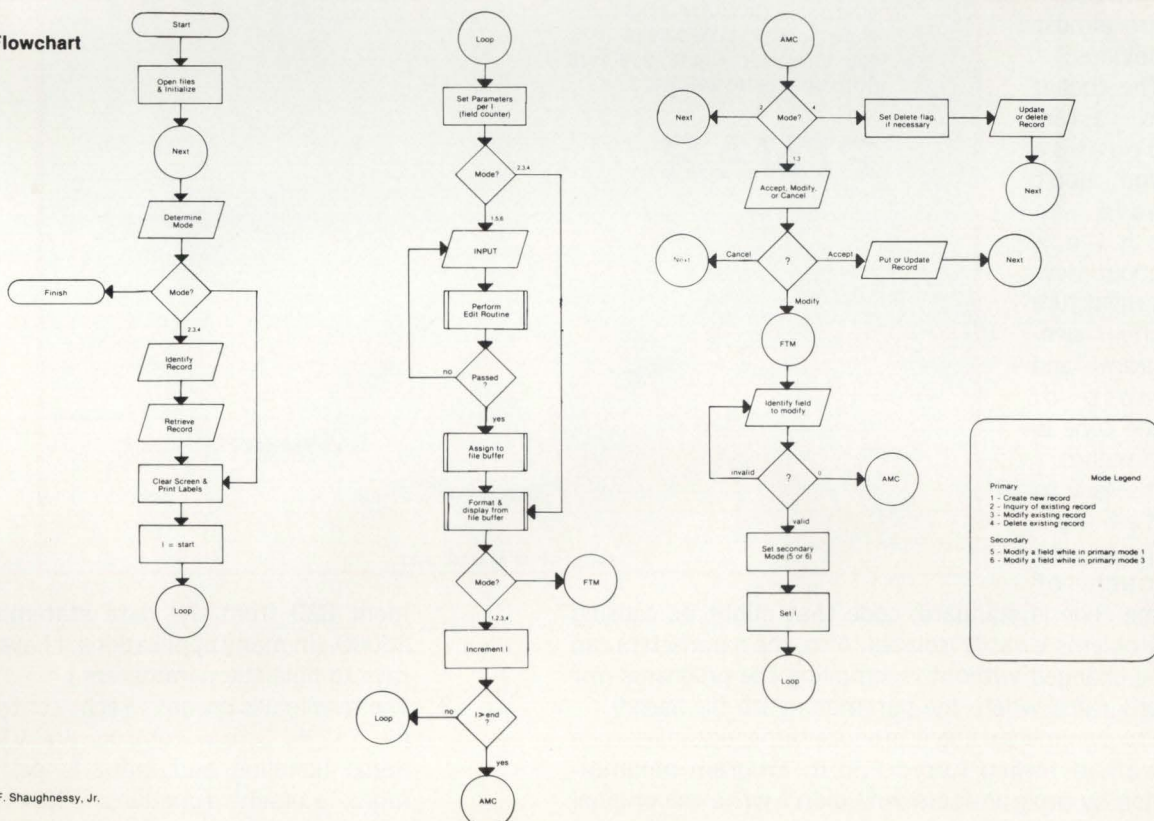

3. The terminal is opened in echo control mode (8%) as file #12%. Screen controls are VT100 ANSI. Terminal handling and input is performed by two multistatement functions, FNS\$ (see Statement 20010) and FNIS (see Statement 20100).

Statement

711, 820
& 25000

The input parameters and help messages for each field must be changed according to the new application.

751 Field the output according to the new applica-
tion.

810 & 5201 A new table string for the look-up of the field to be modified has to be devised.

821 Include new title for the screen.

851 Paint the screen with labels appropriate for the new application.

1011 Clear the screen for each new record in the most efficient manner for the application.

1102 & 1291 New start and end values for the input loop.

Subroutines

11000 Insert edit and verification statements appropriate for the new application.

12000 Insert assignment statements according to
the new field statement.

13000 Insert format statements according to the new field statement. Formatted numeric output can be accomplished with a "PRINT #12% USING" statement instead of "PRINT #12%, X\$;". (If you are working in BASIC-PLUS-2, it is very helpful to have FORMAT\$(A,B\$) in your repertory of frequently-used string functions.)

Author's Notes: The author makes no claims as to the suitability of the accompanying program listing for any purpose other than the demonstration of the programming technique described above. This article originally appeared in the August, 1981 edition of *Computers-R-Digital*.

[1,4] INPUT.LST

```

500      EXTEND
      !SA02.BAS
      -----
      |
      |      Demonstration of 'Input Loop' technique
      |
      |      Copyright 1981 by James F. Shaughnessy, Jr.
      |      New York, NY
      |
      |      No warranty is expressed or implied about the
      |      suitability of this program for any application
      |
      |      -----
      |
      |      M.ODE% = 1%, Create new record
      |              = 2%, Inquire on an existing record
      |              = 3%, Modify existing record
      |              = 4%, Delete existing record
      |
      |              = 5%, Modify field while in M.ODE% = 1%
      |              = 6%, Modify field while in M.ODE% = 3%
      |
      |

```

and
you could
be the next

Amcor Computer Corporation is one of the oldest mini-computer software vendors in the world. We have over a decade of experience in developing software solutions for a multitude of industries.

The people of Amcor are committed to achieving their goal of software excellence. Respon-

siveness to the requirements of the industries served by Amcor's New Generation Software Products is one of the essential elements that assures our continued success as a leading producer of software.

Amcor offers a full range of Accounting and Business Control application software products, as

well as a comprehensive Data Base Management System.

If you would like more information on how you can join our ever-growing list of satisfied customers, just clip the coupon below and drop it in the mail, or give us a call. We will be happy to send you free information immediately.

please send more information on:

RSP1

☐ Accounts Receivable ☐ Inventory Control ☐ AMFACS/G/L Financial Management
☐ Accounts Payable ☐ Sales Analysis ☐ Order Processing/Billing
☐ Payroll ☐ AMBASE/DRMS ☐ Amerco's "Bundled System Discount"

company name _____

street _____ city _____

state _____ zip _____ phone number _____

contact _____

computer type and model _____ language _____

_____ operating system

amcor computer corp.



Headquarters: Louisville, KY Regional Offices: Nationwide Telex 204122

CIRCLE 3 ON READER CARD

```

601      ON ERROR GOTO 23000
610      PRINT CHR$(155%) + "<";           I Set VT100 to ANSI mode
700      |-----
700      |                                     DIMENSION STATEMENTS
700      |-----
710      DIM X9%(50%)
710      | Used in the CHANGE function
711      DIM      HELPS$(16%),
711      29%(16%,10%)
711      | Dimension statements for help messages and input parameters.
711      | See 25000 for data statements. All prompts are hard-coded.
750      |-----
750      |                                     FILE OPENS
750      |-----
751      OPEN "JFS.DAT" FOR INPUT AS FILE #1%
751      FIELD #1%, 2% AS SA.NEXT.RECORD$
751      GET #1%, RECORD 1%
751      / NEXT.RECORD% = CVT$(SA.NEXT.RECORD$)
751      / FIELD #1%,
751      2% AS SA.ID$,
751      4% AS SA.PREFIX$,
751      10% AS SA.FM.NAME$,
751      15% AS SA.L.NAME$,
751      30% AS SA.TITLES$,
751      30% AS SA.COMPANY$,
751      30% AS SA.ADDR$,
751      13% AS SA.CITY$,
751      2% AS SA.STATES$,
751      5% AS SA.ZIP$,
751      10% AS SA.PHONES$,
751      2% AS SA.NEXT.DATES$,
751      24% AS FILL$,
751      30% AS SA.ALT.CNTCT$,
751      1% AS SA.DELETED$
751      | Map statement for target file,
751      | First record of the file contains the next available
751      | record for a new record.
751      | The "ID Number" of a record is 1 less than the file record
751      | number where it is stored. "ID Number" 00001 is stored in
751      | file record 2%, etc.
762      OPEN "KB:" AS FILE #12%, MODE 8%
800      |-----
800      |                                     INITIALIZE VARIABLES
800      |-----
810      F.IND$ = "YX.PR.FM.LA.TI.CO.AD.CI.ST.ZI.PH.NE.CR.LY.TY.AL."

```



```

1 beginning in column 26 on rows 6,8,9,11,12,13,17,18,19 & 21,
! so we are just going to clear to end of line.
! Label at end of line 15 has to be reprinted.

1011 PRINT #12$,FNSS("CL",R%,26%); FOR R% = 6% TO 19%
      PRINT #12$,FNSS("CE",21%,26%);
      PRINT #12$,FNSS("PC",15%,41%); "Next Contact Date";

1050 GOTO 1200 IF M.ODE%>1%

1100 ! M.ODE%=1%, Create a new record
      ! The first field is the ID Number, which is system assigned.

1101 GOTO 24010 IF NEXT.RECORD%<0%
      ! In which case, the file is filled.

1102 Z9.START% = 2%
      Z9.END% = 16%
      GOTO 2000 ! The beginning of the input loop

1200 ! We are here because M.ODE%=2% OR M.ODE%=3% OR M.ODE%=4%
      ! We first have to retrieve the record which is to be worked with.
      !
      ! WARNING ...
      ! We are going to jump into and out of the input loop.
      !
1201 Z9.START% = 0% ! in case we have to execute statement 2130
      I% = 1% ! (entering a "/" or "#")
1202 GOTO 2030

1210 ! Return here from input loop
      ! Do what has to be done on the basis of the input,
      ! or else display the record retrieved.

1211 NUM.OF.CHANGES% = 0% IF M.ODE%=3%

1290 !The record retrieved will be formatted and displayed
1291 Z9.START% = 1%
      Z9.END% = 16%
      GOTO 2000

2000 !----- START OF INPUT LOOP -----!
      !
2010 FOR I% = Z9.START% TO Z9.END%

2020 GOTO 2400 IF M.ODE%=2% OR M.ODE%=3% OR M.ODE%=4%
      ! In any of these cases, we are just displaying a record which
      ! has been retrieved from the file.

2030 R% = Z9%(I%,0%)

2031 C% = Z9%(I%,1%)
      IF (M.ODE%=1% AND M%=3%)
          OR M.ODE%=3%
          OR M.ODE%>4%
      THEN B9% = ABS(Z9%(I%,8%))
      ELSE B9% = 0%

2100 GOTO 2450 IF Z9%(I%,2%)=0%
      L% = Z9%(I%,2%)
      P% = 0%
      M% = ABS(Z9%(I%,9%))
      A% = Z9%(I%,3%)
      X$ = FNIS(P%,A%)

2101 ON M% GOTO 2110,2120,2130,2200,2150 !X$="", M%=1%
                                           !X$="*", M%=2%
                                           !X$="/" OR "#", M%=3%
                                           !X$=DATA, M%=4%
                                           !X$="-", M%=5%

2110 ! Entered a null, M%=1%
      GOTO 841 IF I%=Z9.START%
      GOTO 841 IF M.ODE%=2% OR M.ODE%=3% OR M.ODE%=4%
      GOTO 2400 IF M.ODE%=5% OR M.ODE%=6%
      GOTO 2200

2120 ! Entered a "*", M%=2%, Start over
      GOTO 2400 IF M.ODE%=5% OR M.ODE%=6%
      GOTO 1010 IF I%>Z9.START% AND M.ODE%=1%
      GOTO 841

2130 ! A "/" or "#" was entered, M%=3%
      ! Back up to previous field.
2131 IF M.ODE%<4%
      THEN GOTO 841 IF I%<=Z9.START% OR Z9.START%=0%
          I% = I% - 1%
          GOTO 2130 IF Z9%(I%,2%)=0%
          GOTO 2030

2132 GOTO 2400 !M.ODE%=5% OR M.ODE%=6%

2150 ! A "-" was entered, M%=5%
      ! Re-use the information in the buffer.
      ! Make sure that the field doesn't represent a key.
      ! Normally, all that has to be done is to go to
      ! statement 2400 to format and display the information.
      !
2151 GOTO 2030 IF Z9.START%=0%
      GOTO 2400

2200 ! Entered data, M%=4%
      ! Perform any necessary edit checks.
      ! Remember, all input is accepted in string form;
      ! therefore, in the edit routines, convert to integer
      ! or floating point, also.
      !
2201 GOSUB 11000
      IF S%=0%
      THEN ON M.ODE% GOTO 2300,
          2400,
          2400,
          2400,
          2300,
          2300

2210 ! Input failed edit check
      ! Display help message if one is defined
      !
2211 GOTO 2250 IF Z9.START%=0%

```

**WHEN YOU NEED
DEC . . .**


TERMINALS
• VT-100 • VT-103
• LA34 • LA120

**INTERFACES
MODEMS**

**PERIPHERALS
LSI/11 MODULES**

**PDP 11/03
PDP 11/23
SYSTEMS**

**Standard & Custom
Software Packages
WORD PROCESSING**

 **UNITRONIX**
CORPORATION

(201) 231-9400
197 Meister Ave.
Somerville, NJ 08876
TELEX: 833184

CIRCLE 25 ON READER CARD


```

5210      ! Here is the place to reject any fields which are not allowed
        ! to be changed or to ask for a password.

5220      GOTO 5200 IF I%=1%

5240      GOTO 2030

5300      ! Cancel
5301      M.ODE% = 1% IF M.ODE% = 5%
        \ M.ODE% = 3% IF M.ODE% = 6%
        \ PRINT #12%, FN$$("CE",24%,1%);
        \ PRINT #12%, "No record created!";CHR$(7%); IF M.ODE%=1%
        \ PRINT #12%, "Record not changed!";CHR$(7%); IF M.ODE%=3%
        \ SLEEP 3%

5320      GOTO 1010

5400      ! Inquiry section.
        ! Have just completed displaying the requested record.
5401      PRINT #12%, FN$$("CE",23%,32%);
        \ PRINT #12%, "<cr> to continue";
        \ R% = -23%
        \ C% = 49%
        \ B9% = 0%
        \ L% = 1%
        \ M% = 0%
        \ XS = FN$(0%,1%)
        \ GOTO 1010

5500      ! Delete an existing record.
        ! Ask first, just to make sure.
        !
5501      PRINT #12%, FN$$("CE",23%,14%);
        \ PRINT #12%, "Are you sure you want to delete this record ? (Y/N)";

5510      R% = -23%
        \ C% = 66%
        \ B9% = 0%
        \ L% = 1%
        \ M% = 0%
        \ XS = FN$(0%,5%)
        \ ON M% GOTO 5510,32700,1010,5520,5510

5520      PRINT #12%, FN$$("CE",24%,1%);
        \ IF XS="N"
        THEN PRINT #12%, "Record not deleted!";CHR$(7%);
            \ GOTO 5550

5530      ! We execute this statement only if XS="Y"
5531      LSET SA.DELETED$ = "Y"
        \ PUT #1%, RECORD GET.RECORD%
        \ PRINT #12%, "Record Deleted!"; CHR$(7%);

5550      SLEEP 2%
        \ GOTO 1010

```

CIRCLE 7 ON READER CARD

```

5210      ! Here is the place to reject any fields which are not allowed
        ! to be changed or to ask for a password.

5220      GOTO 5200 IF I%=1%

5240      GOTO 2030

5300      ! Cancel
5301      M.ODE% = 1% IF M.ODE% = 5%
        \ M.ODE% = 3% IF M.ODE% = 6%
        \ PRINT #12%, FN$$("CE",24%,1%);
        \ PRINT #12%, "No record created!";CHR$(7%); IF M.ODE%=1%
        \ PRINT #12%, "Record not changed!";CHR$(7%); IF M.ODE%=3%
        \ SLEEP 3%

5320      GOTO 1010

5400      ! Inquiry section.
        ! Have just completed displaying the requested record.
5401      PRINT #12%, FN$$("CE",23%,32%);
        \ PRINT #12%, "<cr> to continue";
        \ R% = -23%
        \ C% = 49%
        \ B9% = 0%
        \ L% = 1%
        \ M% = 0%
        \ XS = FN$(0%,1%)
        \ GOTO 1010

5500      ! Delete an existing record.
        ! Ask first, just to make sure.
        !
5501      PRINT #12%, FN$$("CE",23%,14%);
        \ PRINT #12%, "Are you sure you want to delete this record ? (Y/N)";

5510      R% = -23%
        \ C% = 66%
        \ B9% = 0%
        \ L% = 1%
        \ M% = 0%
        \ XS = FN$(0%,5%)
        \ ON M% GOTO 5510,32700,1010,5520,5510

5520      PRINT #12%, FN$$("CE",24%,1%);
        \ IF XS="N"
        THEN PRINT #12%, "Record not deleted!";CHR$(7%);
            \ GOTO 5550

5530      ! We execute this statement only if XS="Y"
5531      LSET SA.DELETED$ = "Y"
        \ PUT #1%, RECORD GET.RECORD%
        \ PRINT #12%, "Record Deleted!"; CHR$(7%);

5550      SLEEP 2%
        \ GOTO 1010

```


[illegible]


```

2101 FLAG% = 0%      ! is set if help message is requested

2105  R.ABS% = ABS(R%)
    \ C.ABS% = ABS(C%)
    \ BYTE.COUNT% = ABS(L%)
    \ A.ABS% = ABS(A%)
    \ P.ABS% = ABS(PROMPT%)
    \ IF B9% <> 0%
    THEN PRINT #12%, CHR$(155%); "["; NUM1$(R.ABS%); ";"; NUM1$(C.ABS%); "H";
        STRING$(B9%,32%);

2110 MSG$ = ""
    \ BACK% = 0%
    \ PRINT #12%, CHR$(155%); "["; NUM1$(R.ABS%); ";"; NUM1$(C.ABS%); "H";
    \ PRINT #12%, CHR$(155%); "2K"; IF C% < 0%
    \ GOTO 2020 IF PROMPT% = 0%
    \ MSG1$ = PROMPT$(P.ABS%)

2115 MSG1$ = CVT$(MSG1$,128%) + " "
    \ BACK% = LEN(MSG1$)
    \ PRINT #12%,MSG1$;

2120 PRINT #12%,STRING$(BYTE.COUNT%,95%);
        CHR$(155%); "["; NUM1$(R.ABS%); ";"; NUM1$(C.ABS%+BACK%); "H";

2130 PRINT #12%,RECORD 256%, CHR$(0%) + CHR$(BYTE.COUNT%) + CHR$(95%);

2135 GET #12%
    \ RE.COUNT% = RECOUNT
    \ FIELD #12%, RE.COUNT% AS RET$

2140 IF R% < 0%
    THEN RET$ = CVT$(RET$,4%+32%)
    ELSE RET$ = CVT$(RET$,4%)


```

- Much faster than BACKUP
- Supports RSTS Large-File feature
- Ideal for big databases
- Proven and reliable, easy to use

305 Madison Avenue
New York, N.Y. 10165
(212) 972-1860

CUT YOUR DEVELOPMENT TIME
with **ADT-11™**
an Applications Development Tool for
VAX/VMS* SYSTEMS

- Fully Integrated Data Dictionary
- Utilizing native VMS* file structures
- Data Entry, Maintenance, Inquiry
- Full Function Report Writer
- BASIC Program Code Generator
- Library of Data Access & Screen Routines



CIRCLE 101 ON READER CARD

PRE-OWNED DEC EQUIPMENT

SYSTEMS • CPU's • PERIPHERALS • TERMINALS
OPTIONS • MEMORY • COMPATIBLES

Carico Center
2845 NW 62nd Street
Ft. Lauderdale, Florida 33309
Telephone (305) 979-2844

CIRCLE 49 ON READER CARD


```

00442      X9%(J%) = X9%(J%) - 32% IF      X9%(J%)>96%
                                           AND X9%(J%)<123%
                                           AND X9%(J%-1%)<48%

00443      NEXT J%

00450      CHANGE X9% TO IN.PUT$

00499      FNCA P$ = IN.PUT$
           \    FNCND

00500      DEF FNDIGITS%(IN.PUT$,S%)

           |-----
           |
           | The purpose of the this function is to ve
           | IN.PUT$ is a comprised of a given number
           | with no other characters present.
           |
           | IN.PUT$ - the string to be tested.
           |
           | S% - the number of digits expected
           |
           | FNDIGITS%: 0% if IN.PUT$ passed the test,
           |                S% if IN.PUT$ failed the test
           |-----

00520      CHANGE IN.PUT$ TO X9%
           \    GOTO 00570 IF S%<>X9%(0%)

00530      FOR J% = 1% TO X9%(0%)

00540      IF      X9%(J%)<48% OR  X9%(J%)>57%
           THEN    FNDIGITS% = S%
           \        GOTO 00570

00550      NEXT J%

00560      FNDIGITS% = 0%

00570      FNCND

00600      DEF FNDATE$(X$)

```

```

|-----|
| The purpose of this function is to translate a date string |
| of the format MM/DD/YY to the corresponding RSTS integer |
| value.  If the incoming string cannot be successfully |
| translated, the function returns a value of -1%. |
|-----|

```

```

20610  MOS = LEFT(X$,2%)
        DAS = MID(X$,4%,2%)
        \
        \ YRS = RIGHT(X$,7%)
        \
        \ X$ = MOS + DAS + YRS
        \ GOTO 20690 IF FNDIGITS$(X$,6%)

20620  MO% = VAL(MOS)
        GOTO 20690 IF MO%<1% OR MO%>12%
        \

20630  YR% = VAL(YRS)
        YR% = YR% + 100% IF YR%<3%
        \
        \ GOTO 20690 IF YR%<70%
        \
        \ LEAP% = 0%
        \ LEAP% = 1% IF YR%=YR%/4%*4%
20640  DA% = VAL(DAS)
        DA.LIMIT% = 31%
        \
        \ DA.LIMIT% = 30% IF MO%=4% OR MO%=6% OR MO%=9% OR MO%=11%
        \ DA.LIMIT% = 28% + LEAP% IF MO%=2%

20642  GOTO 20690 IF DA%<1% OR DA%>DA.LIMIT%

20650  FDOM$ = "000031059090120151181212243273304334"
        X% = (YR%-70%)*1000% + VAL(MID(FDOM$,MO%*3%-2%,3%)) + DA%
        \
        \ X% = X% + LEAP% IF MO%>2%

```

```
20660  FNDATE% = X%  
      \  GOTO 20699  
  
20690  FNDATE% = -1%  
20699  FNEND
```

```
23000 !-----!
!               ERROR HANDLING               !
!-----!
```

```
23010  IF      ERR=19%
        THEN  SLEEP 1%
        \ RESUME
```

```

23020 IF      ERR=5% AND ERL=751%
      THEN  OPEN "JFS.DAT" FOR OUTPUT AS FILE #1%
            \ FIELD #1%, 2% AS SA.NEXT.RECORD%
            \ LSET SA.NEXT.RECORD% = CVT%$(2%)
            \ PUT #1%, RECORD 1%
            \ CLOSE #1%
            \ RESUME

```

23030 RESUME 11999 IF ERR=52% AND ERL=11701%

```
23990 PRINT
      \ PRINT "Error"; ERR; "at line"; ERL
      \ CLOSE #I% FOR I% = 1% TO 12%
      \ ON ERROR GOTO 0
```

```

24000 !-----!
!          SPECIAL MESSAGES TO OPERATOR          !
!-----!

```

```
24010 PRINT #12%, FN$( "EL",24%,1%);
      \ PRINT #12%, "File is full. Please see software manager!";CHR$(7%);
      \ SLEEP 3%
      \ GOTO 841
```

25000	!-----! !
	! DATA STATEMENTS !

25010 ! Help messages

the IBM Solution	SOFTWARE RESULTS CORPORATION	the CDC Solution
HASPBTMBOX		UT200BTMBOX

RSTS•VAX•RSX!
DATA COMMUNICATIONS

- INSTALLATIONS THROUGHOUT NORTH AMERICA AND EUROPE
- FRONT END PROCESSOR-BASED FOR LOW OVERHEAD
- FULL LINE UTILIZATION FOR HI-THRUPUT (UP TO 19.2 KB)
- USER INTERFACE DESIGNED FOR RELIABILITY AND SIMPLICITY

614/421/2094 COLUMBUS, OH 43212 USA TWX 810 482 1631

CIRCLE 44 ON READER CARD

*** * * * * INTRODUCING * * * * ***

The New HYPERBUS Driver!

No PDP-11 should be without one!

Thanks to the latest in Black Hole technology, we are able to offer for the first time, the HYPERBUS driver and interface. With this you'll never have to wait on memory management again! For the first time you'll never have to worry about the number of slots on the bus when considering expansion!

**OUR PATENTED MEMORY SYSTEM RUNS FASTER
THAN THOSE SUPER-CONDUCTOR SYSTEMS
COULD POSSIBLY TOUCH!**

"But how can that be?" you may right now be asking. Simple — we have combined the original concepts of high speed memory with our special enhanced rotating black hole generators, thus producing a local field distortion in the space-time continuum (WARNING: special care must be taken when working in the immediate area of this bus due to the possibility of general and special relativity distortions).

Naturally, there are certain drawbacks to this new media (such as forcing you to be on a solid floor due to the additional weight added to your system (somewhere in the nature of 23 tons), but the space savings are incredible), but we feel that this problem will be resolved shortly (we are currently developing an improved version that uses advanced field manipulation to remove the excess weight incurred by the HYPERBUS).

Send now for additional information on the
HYPERBUS to:

Incredible Systems, Inc.
1777773 Trap Row
New Los Angeles, Luna

THE DEC/RSTS DECISION SUPPORT SOLUTION

When it comes to comprehensive financial, organizational or strategic planning, there is only one choice for the RSTS user:

FCS-EPS

FCS-EPS is the one system that brings the power of the computer directly into the hands of the planning professional.

More than just a modeling system, FCS-EPS is a sophisticated, open-ended system easily applied to virtually any planning task. Over 60 built-in planning-oriented functions allow you to be immediately productive.* "What if" analysis, goal-seeking, a customized report writer, hierarchical consolidation, and a built-in financially oriented language make the utility of FCS-EPS virtually unlimited, all without the need to know any cryptic computer language.

The system is also available on the Decsystem 10 and 20, VAX and over 40 other hardware/operating system combinations.

700 users of FCS-EPS can't be wrong. Find out more about truly user-oriented financial planning systems. Contact EPS today. San Jose, CA 800/538-7578 or 408/292-6212; Toronto 416/279-8711; London (01) 579-6931.

Clip and mail to EPS, Inc., 1788 Technology Drive, San Jose, CA 95110

☐ Yes. Send me information on FCS-EPS

____ Yes. Send me "Selecting and Evaluating Financial Modeling Systems."

Name _____ Title _____

Company _____ Address _____

City _____ State _____ Zip _____

Phone _____ Computer now in use _____

CIRCLE 103 ON READER CARD

```
25011 DATA "Enter prefix: Mr., Mrs., Ms., Miss, etc.",
"Enter first & middle names and/or initials",
"Enter last name",
"Enter person's title (see documentation for abbreviations)",
"Enter Company Name",
"Enter mailing address",
"Enter City (use 13 character Post Office format)",
"Enter State abbreviation",
"Enter Zip Code (5 digits required)",
"Enter phone number, including area code (10 digits required)",
"Enter record ID Number (Range: 00001-32766)",
"Enter next contact date in format 'MM/DD/YY'",
"Enter credit limit (0 implies unlimited credit!)",
"Enter sales amount for last year",
"Enter sales-to-date for the current year",
"Enter person to contact when primary contact is not available"
```

```

25020  ! Input Parameters
          !-----Input-----
          ! Row   Col   Len  Rstr  Edit  Asgn  Ary   Ele   Fmt   Dspl  Len  Help  Xtra
          !-----
25021  DATA  6,   26,   5,   -1,   7,   0,   0,   1,   5,   11,  0,   0,
          8,   26,   4,   1,   4,   1,   0,   2,   4,   1,   0,
          8,   31,  10,   1,   1,   2,   0,   3,  10,   2,   0,
          8,   42,  15,   1,   1,   3,   0,   4,   15,   3,   0,
          9,   26,  30,   1,   5,   4,   0,   5,  30,   4,   0,
          11,  26,  30,   1,   1,   5,   0,   6,  30,   5,   0,

```

12,	26,	30,	1,	1,	6,	0,	7,	30,	6,	0,
13,	15,	13,	1,	6,	7,	0,	8,	13,	7,	0,
13,	41,	2,	3,	0,	8,	0,	9,	2,	8,	0,
13,	45,	3,	2,	9,	9,	0,	10,	5,	9,	0,
15,	26,	10,	-1,	3,	10,	0,	11,	12,	10,	0,
15,	59,	8,	4,	8,	11,	0,	12,	9,	12,	0,
17,	26,	6,	-1,	9,	12,	0,	13,	10,	13,	0,
18,	26,	7,	-1,	9,	12,	1,	13,	10,	14,	0,
19,	26,	7,	-1,	9,	12,	2,	13,	10,	15,	0,
21,	26,	30,	1,	1,	13,	0,	14,	30,	16,	0,

```
32000 !-----!  
!          EXIT  HANDLER          !  
!-----!
```

```
32700 ! Clear screen
32701 PRINT #12%, FN$$( "CE",18,18)
```

```

32710      ! Save next record number
32711      FIELD #1%, 2% AS SA.NEXT.RECORD$
      \ LSET SA.NEXT.RECORD$ = CVT$(NEXT.RECORD%)
      \ PUT #1%, RECORD 1%

```

```

32760  CLOSE #J% FOR J% = 1% TO 12%
      \  ! If you are going to chain somewhere, do it here.

```

32767 END

Still
\$200!

\$200. RSTS/E*
WORD PROCESSOR
CBEDIT.BAS

MORE
FEATURES!

Basic-Plus* program with VDT input, window edit and document save. Add, locate, change, replace, delete, block move and copy merge, etc. Crash and operator error recovery. Supports DEC, Hazletine and Mime standard VDT's. Others easy to add.

Fully formatted output (margins, justify, center, underscore, super-sub-script, readers, page numbers, etc.), to type-writer, line printer or disk. Bidirectional driver for Diablo-Xerox 16-17.

User's manual and source code included.

9-Track \$200. RKO5 \$260. ppd
T. F. Hudgins & Associates, Inc.
P.O. Box 10946, Houston, Texas 77018
Woods Martin 713/682-3651
*TM Digital Equipment Corporation

CIRCLE 9 ON READER CARD

REPRINTS
REPRINTS
REPRINTS
REPRINTS
REPRINTS!

All content in this publication is copyrighted.

All reprints must be purchased from M Systems, Inc. No other reprints are authorized.

All reprints shall contain both a cover and a subscription blank.

Price quotation available on request.

DEC
SYSTEMS
&
COMPONENTS

C.D. SMITH &
ASSOCIATES, INC.
12605 E. Freeway,
Suite 318
Houston, TX 77015
(713) 468-2384

CIRCLE 54 ON READER CARD

THE RSTS/E SYSTEM MANAGER

By Jeffrey R. Harrow, 485 Creekview Drive, Stone Mountain, GA 30083

Last issue I mentioned that there appeared to be a problem with the TU77 tape drive showing both EOT and BOT conditions at the same time (with the expected operational problems from this situation). This condition has now been identified and (at my site) rectified, but let's take this opportunity to look at the chain of events and how RSTS/E significantly aided the problem resolution.

Several months ago I began to occasionally see a situation where, during BACKUP, the tape would "hang" at the EOT marker shuttling back and forth. The error log indicated that both EOT and BOT were set (you have to decode the error registers for this information). Field Service called in and they spent some time readjusting and finally replacing the EOT/BOT sensor on the drive. The problem appeared to be resolved for about a week, at which point it reappeared, but this time with the tape shuttling at the **beginning** of the tape!

Field Service again worked with readjusting and replacing the EOT/BOT sensor but the problem began to occur with increasing frequency towards the point where I was losing more BACKUPS than were successful. Of course, their diagnostics would not reproduce the problem, so they were limited to the information available once the BACKUPS had failed, and herein lay part of the problem: The Branch did not have the ability to monitor the internal states of the drive when it failed, and due to the intermittent nature of the problem, it was not escalated to the District and Regional levels (where such equipment and personnel is available) until the problem had assumed "major" significance to our operation.

At this point, the error logs indicated the following scenario: BACKUP would be proceeding as normal, showing an acceptable number of retries during the "write" phase of a tape. Towards the end of the reel (as determined by comparing the time of the error entry and the BACKUP message on the console printer indicating that the "write" phase was "out of room" on that volume as well as the "record number" counter kept in the drive's DDB (as displayed in the error log)), the drive's implicit "read-after-write" check of the data it had just written indicated that there was a "bad" spot on the tape. The MM Driver software in RSTS/E correctly initiated the industry standard recovery procedure where the drive backspaces over the "bad" record it had just written, writes a long interrecord gap over the "bad" spot on the tape, and attempts to re-write the record (now slightly

farther into the tape). In this case, this procedure continued several times (which is OK), but, having begun near the EOT marker, **continued its recovery operation PAST the EOT marker**, where it finally found a "good" spot of tape and successfully wrote the record. The next entry in the error log, about 4.5 minutes after the last "write" error, was an indication of "Operation Incomplete," and (by decoding the registers in the error log with the aid of the "Peripherals Handbook") both EOT and BOT were set. This condition would continue to generate hundreds of identical errors (with the DDB's Record Number indicating that it **thought** that it was still at the end of the reel) until the drive was taken Off-line.

Now for the detective work: There was no argument that it was an illegal condition for EOT and BOT to be set at the same time, and a monitoring of the actual sensors indicated that they were set correctly. Additionally, examination of a failing tape indicated that the EOT and BOT reflective strips were placed within tolerance. So, where was the error coming from? The TM03's manual indicated that the Operation Incomplete error was **correct** when the drive was at BOT and doing a Space Reverse operation (also indicated by decoding more error log registers). OK, then why was the drive attempting to Space Reverse from the **beginning** of the tape, and why was EOT set when we were obviously at BOT?

The next key was that 4.5 minutes during which the tape "rewound," plus the fact that the DDB in the error log indicated that it still believed itself at the **end** of the reel: The TU77 manual indicates that rewind time is around 2.5 minutes, and this "rewind" was taking around twice that long. It turns out, however, that at 125 inches per second (the Space Reverse speed of this drive) it would **take just over 4 minutes to Space Reverse, rather than Rewind, the entire tape!** In fact, that is just what was happening . . . the drive, while recovering from some bad tape near the EOT marker, **passed the EOT marker** (which **stays** set until it is reset by one of several conditions, including a Rewind command or backspacing over the EOT marker), finally successfully wrote the record, noticed that it was at EOT, Space Reversed to get "before" the EOT marker (so that it could do its end-of-volume work), **but still found itself at EOT** (EOT was still set) so it Space Reversed again, **but again still found itself at EOT** so Space Reversed again, and indeed kept this up until it got to the beginning of the tape and encountered BOT. At this point, it **still** had to do a Space Reverse

(because EOT was set), but this was no longer successful because that operation at **BOT** is illegal and (correctly) generated the Operation Incomplete error. This error kept occurring because once the Operation Incomplete error occurred, the original operation (Space Reverse) was retried because EOT was still set, with the same results.

Note that the problem is **now** defined: All of the symptoms can be the direct result of EOT appearing to be set when it shouldn't be! Now, of course, the question is "hardware or software." While the MM driver was examined to see if it was misreading the EOT bit or was not re-reading it each time, District and Regional Field Service brought in a Logic Analyzer and probed various points within the drive. Additionally, based upon the theory that this series of events was triggered only during a retry after encountering a "bad" spot near the EOT marker, a test tape was prepared with EOT placed near the beginning of the tape (so that tests wouldn't take a long time) and a scratch was made on the tape near EOT. Sure enough, this would consistently cause the problem and the Logic Analyzer was able to verify that the EOT indicator was not being cleared (hence hardware and not software!)

All of the pieces have now fallen into place, except **why** the EOT indication was not being reset when the drive Space Reversed back over the EOT marker. The Field Service personnel rapidly found a section in the tape drive's logic which, in effect, **prevented** EOT from being cleared when Space Reversing back over the marker! They then devised a modification which defeated this logic, and the drive operated **perfectly** on the test tape and (so far) for all subsequent BACKUPS! (It should be noted that this field modification to the TU77 may not be the final "fix" which comes out, but **has** proven quite successful at my site.)

What was the point of going through this detailed description of the quest for my too prevelant EOT problem? There are several:

- RSTS/E error logs are **extremely** valuable to the System Manager and should be printed on a periodic basis **before** you've exceeded the "100 error limit" for any logged area;
- You should retain these "full" listings for as long as feasible to allow you to examine previous invocations of a problem at a later time (in this case, my old error log allowed me to quickly verify that all of these conditions were initiated during a "retry" near EOT once the evidence pointed in this direction and saved additional investigation of other potential causes);
- Familiarity with your hardware (not at the component level but at the "conceptual" level) and their manuals (remember the key of the 4.5 minute "rewind"?) can significantly aid you in determining the actual cause of a problem;

- Familiarity with the error log printouts can aid you in providing Field Service with the most pertinent information relating to your problem: remember that not all Field Service engineers are familiar with the error logs from all operating systems;
- Tracking the historical performance of all of your systems' components can indicate trends and provide valuable perspective on "new" problems, and can help you to get escalation on truly "long-term intermittent" problems (I have a set of programs which operate on all of my systems and, using DECnet, provide me with a comprehensive database of detailed information on all errors which occur, and which can be queried via Datatrieve for information such as "PRINT ALL ERRORS WITH DEVICE EQ "MM" AND DESCRIPTION CONTAINING "EOT" AND DESCRIPTION CONTAINING "BOT" AND DESCRIPTION CONTAINING "OPERATION INCOMPLETE" SORTED BY SYSTEM");
- Examine **all** potential sources of information relating to a problem . . . in this case the Console Terminal (KBO:) provided significant information in the form of OPSEr's time/date stamp for the BACKUP messages;
- Attempt to examine **all** of the evidence to determine if a slippery problem has **changed** . . . in this case the sensor was apparently misadjusted which caused the first problems (with the tape shuttling at **EOT**) while the **actual** problem left the tape shuttling at **BOT**, and this important difference took a while to filter down from the Operations folks.

In general, even a "small" RSTS/E system is a complex mix of hardware and software which has the ability to "mask" problems and make them appear in ways which do not directly point to their origin. The error logs, handbooks, and manuals constitute a wealth of information (tools) which can aid you in ferreting out just where the problem is occurring, and can greatly reduce the time required for its resolution. You will have a "better managed" system which will yield increased "System Uptime," the bottom line. See you next issue.



RSTS SITE MANAGEMENT AND APPLICATION DEVELOPMENT TOOLS

- ☐ **APC**
an automatic password changer that creates meaningful six-character passwords and updates the ACCT.SYS file, allows selective changing of passwords and produces three informative reports.
- ☐ **ENCRYPTION ROUTINES**
a site security feature which encodes ASCII characters and can be incorporated into any application where sensitive data is processed. Also exists as a stand alone program for encoding and decoding entire files.
- ☐ **M/APS**
a menu/authorization processor and application security system that controls user access to menus and applications programs. Uses DEC's VT series CRTs.
- ☐ **STANDARD SUBROUTINE LIBRARY**
callable macro-11 routines that perform screen and terminal I/O, cursor positioning and many other necessary program functions, including data conversions.
- ☐ **SOURCE/FILE CROSS-REFERENCE (XREF)**
XREF provides cross-reference listings which detail the relationship between source files, callable routines, data files and task images.
- ☐ **VT100 ACCOUNTING CALCULATOR**
a multi-function calculator designed for user's of DEC's VT100 CRTs. Options and features beyond the capabilities of the normal Accountant's calculator.

McHUGH, FREEMAN & ASSOC., INC.

1135 Legion Drive
Elm Grove, Wisconsin 53122
(414) 784-8250

RDR's features include:


- The S-20 controller operates in the following four modes: RAM load, DAVFU load, print and test. The RAM load mode allows the character set to be fully programmable. Character translation is performed by the S-20 where required. The DAVFU load mode allows the printer

The package carries out and monitors the entire transfer process. It performs CRC error-correction to CCITT Recommendation V41 and, when it detects errors, re-transmits the block or blocks in which the errors were found.

A key feature of the package is that it eliminates the need to buy dedicated communi-

Able Computer	I.B. Cover	Infinity Software Corp.	p.75
Advanced Software Products	p.61	Innovative Data Technology	p.43
Amcor Computer Corp.	pp.77,79.81	Interactive Software Systems Inc.	p.87
Bob 'Macro Man' Meyer	p.27	Interactive Technology Inc.	p.36
Braegen MPD	p.31	McHugh, Freeman & Associates, Inc.	p.91
Business Controls Corp.	p.50	Monosson	p.29
C.D. Smith & Associates, Inc.	p.90	National Peripherals, Inc.	p.11
Clyde Digital Systems	p.2	Nationwide Data Dialog	pp.62,67,72,85
CornDesign, Inc.	p.10	North County Computer Services, Inc.	pp.48-49
Data Processing Design, Inc.	B. Cover	On-Track Systems, Inc.	pp.70,77
Dataram Corp.	p.96	Plycom Services, Inc.	p.71
Dataware Inc.	p.87	Raxco Inc.	p.17
Digital Associates Corp.	p.73	Ross Systems, Inc.	I.F. Cover
Digital Management group Ltd.	p.5	RTZ Computer Services, Ltd.	p.65
Digital Technologies Co.	p.14	Software Results Corp.	p.88
Distributed Logic Corp.	p.33	Software Techniques, Inc.	p.41
EEC Systems	p.66	Southern Systems, Inc.	p.1
Emulex Corp.	pp.19,21	System Industries	p.37
Enterprise Technology Corp.	pp.7,87	Telecom Computer Systems, Inc.	p.23
EPS, Inc.	p.89	T.F. Hudgins & Associates, Inc.	p.90
Evans Griffiths & Hart, Inc.	pp.47,55	TransNet Corp.	p.44
Expoconsul International, Inc.	p.25	Trendata Corp.	p.13
Finar Systems Ltd.	p.82	Unitronix Corp.	p.84
Florida Computer, Inc.	p.15	WHY Systems, Inc.	p.35
Hamilton Rentals	p.9	Xoren Computing, Ltd.	p.24
Hinditron Computer Systems & Consultants Pvt. Ltd.	p.63		

DEC®-COMPATIBLE PERIPHERAL CONTROLLERS

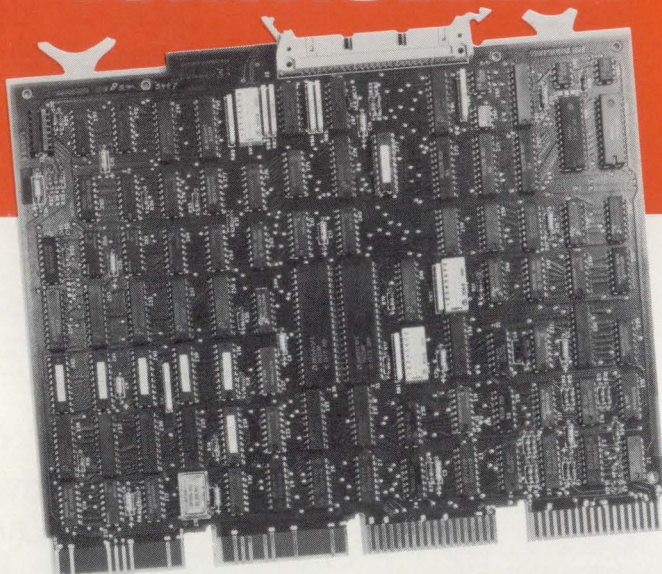

Dataram Corporation offers the industry's widest range of DEC-compatible peripheral controllers — from comparatively simple NRZI tape controllers to complex 300 MB storage module drive (SMD) controllers.

An impressive array of state-of-the-art controllers, all built around high-speed bipolar microprocessors. All software compatible with the host LSI-11®, PDP®-11, or VAX® minicomputer...and all available now.

And Dataram's controllers are designed to save you money, and, more importantly, space — our controllers typically occupy half the space required for the comparable controller from DEC. Doing it with a level of performance that makes any member of this family worth looking at.

The chart shows our current family of peripheral controllers, growing every day. If you don't see the controller you need, we're probably working on it right now. Call us and discuss your requirements.

**DATARAM
CORPORATION**

Princeton Road
Cranbury, New Jersey 08512
Tel: 609-799-0071 TWX: 510-685-2542

Canada: Ahearn & Soper Ltd., 416-245-4848 • Denmark: Technitron ApS, 02 96 98 22 • Finland: Systek OY, (80) 73 72 33 • France: YREL, (03) 956 81 42 • Hungary/Poland/Romania: Unitronex Corporation, WARSAW 39 6218 • Italy: ESE s.r.l., 02/607 3626 • Netherlands: Technitron b.v., (020) 45 87 55 • Sweden: M. Stenhardt AB, (08) 739 00 50 • Switzerland: ADCOMP AG, 01/730 48 48 • United Kingdom: Sintrom Ellinor Ltd., (0734) 85464 • West Germany: O.E.M.-Elektronik GmbH, 07 11-79 80 47 • Yugoslavia: Institut "Jozef Stefan", 263-261 • Australia/New Zealand: Anderson Digital Equipment, (03) 544-3444 • India: Infosystems Private Limited, 79281 • Israel: Minix Computers & Systems Ltd., 03-298783 • Japan: Matsushita Electric Trading Co., Ltd., 06 (282) 5111 • Taiwan: Rabbit Associates, Ltd., 7219573-5 • Hong Kong: Automated Systems (HK) Ltd., 5-630256-9 • Malaysia: Automated Systems (M) Sdn Bhd., 773777 • Indonesia: P. T. Daya ASL, 584306 • Singapore: Automated Systems (PTE) Ltd., 2354133

CONTROLLER	DESCRIPTION	COMPATIBILITY
C03	Cartridge disk controller	RK05
C33	Cartridge disk controller	RK05
T03	NRZI mag tape controller	TM11/TU10
T04/N	NRZI mag tape controller	TM11/TU10
T04/D	Dual density mag tape controller	TM11/TU10
T34/N	NRZI mag tape controller	TM11/TU10
T34/D	Dual density mag tape controller	TM11/TU10
T36	Dual density mag tape controller	TM11/TU10
S03/A	80MB/300MB SMD controller	RM02/RM05
S03/A1	160MB SMD controller	RM02
S03/B	80MB/300MB SMD controller	RK07
S03/C	200MB/300MB SMD controller	RP06
S03/D	96MB CMD controller	RK06
S33/A	80 MB/300 MB SMD controller	RM02/RM05
S33/A1	80 MB/160 MB SMD controller	RM02
S33/B	80 MB/300 MB SMD controller	RK07
S33/C	200 MB/300 MB SMD controller	RP06
S33/D	96 MB CMD controller	RK06

Products printed in red are LSI-11 Bus compatible.

Products printed in black are UNIBUS® compatible for PDP-11 and/or VAX minicomputers.

DEC, LSI-11, PDP, UNIBUS and VAX are registered trademarks of Digital Equipment Corporation.

ABLE VaxDZ clears up your data traffic jams.


You've been hurting over the problem with VAX interrupt capacity for some time. Now we have a DZ that breaks up the terminal handling bottleneck and keeps your VAX system in the fast lane. It's ABLE VaxDZ, the only DZ with an output buffer which lets you select any silo depth from 0 to 16 characters. With this novel feature, you can literally set the optimum performance level for your system.

That alone should clear up the traffic, but there's more! We've given ABLE VaxDZ an intelligent input silo two times as big as the standard DZ buffer. Both big and smart means doubling the VAX input data-handling capacity in some systems or providing dramatic improvement in every system all the way up to the maximum line configuration. We've even included a "data throttle" which allows any external device to control the clear-to-send (CTS) line and optimize its own data rate.

VaxDZ puts sixteen lines with modem control on a single hex-width board at one unit load and includes a panel which supports EIA only (an optional panel supports a mix of EIA/CL). Other features include an on-board LED display for pinpointing malfunctions automatically, an on-board self-test for immediate verification of system integrity and a variable PROM set for proprietary OEM applications.

Now, here is the best part. ABLE VaxDZ will match or beat DH performance in VAX systems without the addition of foreign software.

You don't have to be a hero to deserve an ABLE VaxDZ medal. Just be smart enough to use our new multiplexer. Write for details. We'll include information on the ABLE line of UNIBUS-compatible products, as well as the MAGNUM™ Series of computer systems.

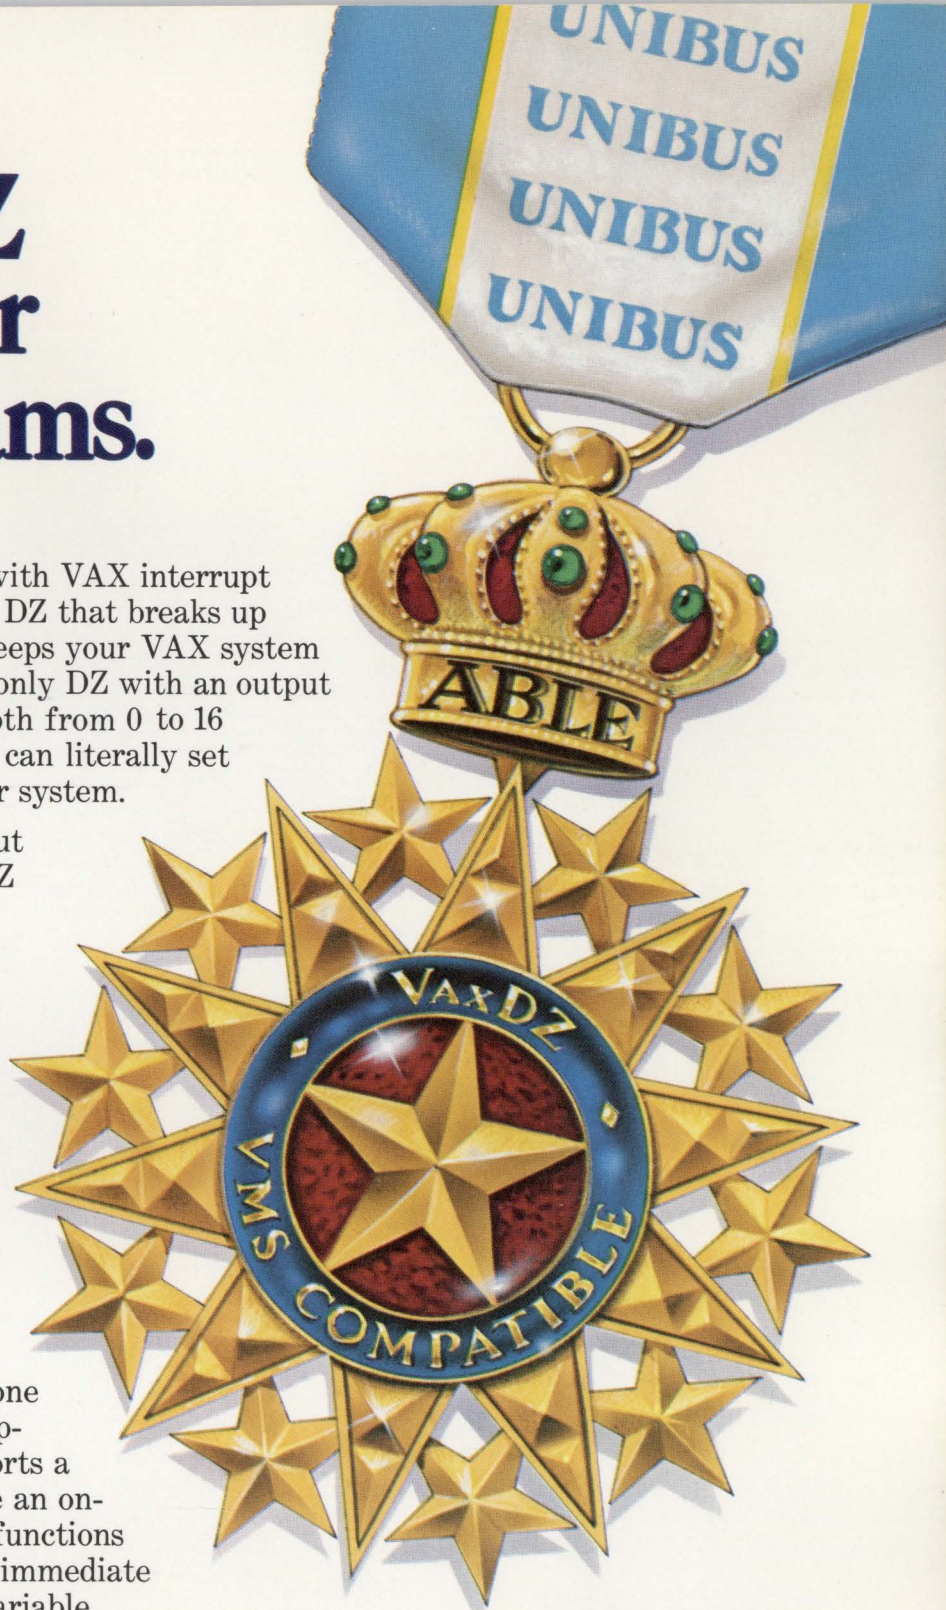

ABLE

the computer experts


ABLE COMPUTER, 1732 Reynolds Avenue,
Irvine, California 92714. (714) 979-7030.
TWX 910-595-1729 ACT IRIN.

ABLE COMPUTER-UK, 74/76 Northbrook Street,
Newbury, Berkshire, England RG13 1AE.
(0635) 32125. TELEX 848507 HJULPHG.

ABLE COMPUTER-GERMANY, Forsthausstrasse 1,
8013 Haar (Near Munich), West Germany.
089/463080, 463089.

VAX and UNIBUS are trademarks of Digital Equipment Corporation.

Responsive Word Processing. Take Our Word For It.

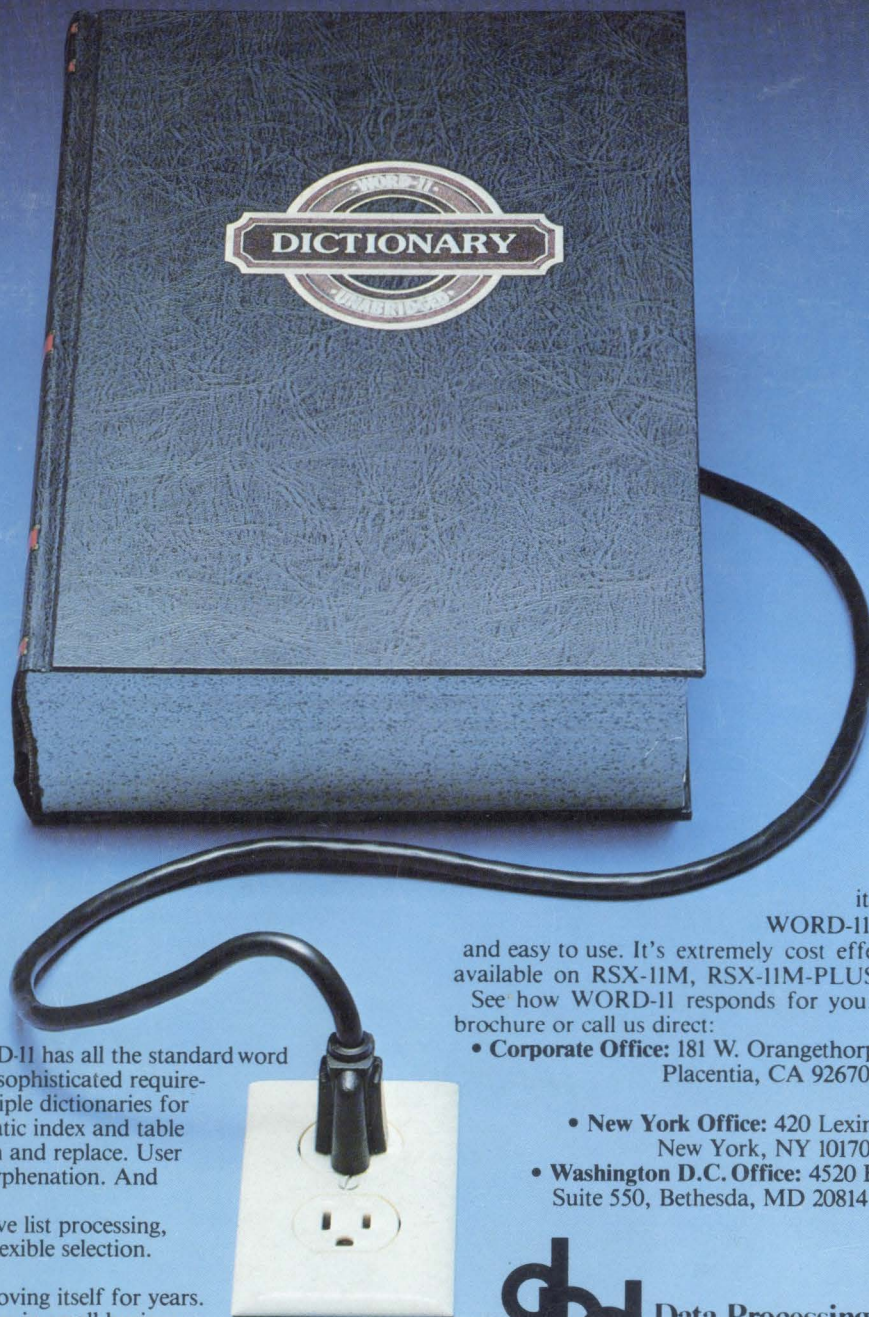

WORD-11.

WORD-11 is a complete word processing system. It's responsive. It's powerful. And it's sharable on up to fifty terminals while running concurrently with data processing.

WORD-11 is talented, too. Designed to work on Digital's family of mini-computers, WORD-11 has all the standard word processing functions. For more sophisticated requirements, WORD-11 provides multiple dictionaries for spelling error detection. Automatic index and table of contents creation. Text search and replace. User defined keys. User-controlled hyphenation. And automatic footnoting.

Included with comprehensive list processing, WORD-11 offers fast sorting. Flexible selection. And extensive math functions.

And WORD-11 has been proving itself for years. You'll find successful installations in small businesses, Fortune 500 companies, in universities and in banks—wherever Digital computers are in place.

Yet despite its sophistication, WORD-11 is easy to learn and easy to use. It's extremely cost effective. And it's available on RSX-11M, RSX-11M-PLUS, and RSTS/E. See how WORD-11 responds for you. Write for our brochure or call us direct:

- **Corporate Office:** 181 W. Orangethorpe Ave., Suite F, Placentia, CA 92670, (714) 993-4160, Telex 182-278.
- **New York Office:** 420 Lexington, Suite 647, New York, NY 10170, (212) 687-0104.
- **Washington D.C. Office:** 4520 East-West Hwy., Suite 550, Bethesda, MD 20814, (301) 657-4098.



Data Processing Design, Inc.

AUTHORIZED **Digital** COMPUTER DISTRIBUTOR

Overseas Distributors:

*Management Information Services PTY. LTD.
Melbourne, Australia*

*Jenson, LTD.
Bristol, England*

*Network Computer Services PTY. LTD.
Sydney, Australia*

*Systime, LTD.
Leeds, England*

*On-Line Computing PTY. LTD.
Subiaco, W. Australia*