

	Debu for the Sun V	gging Tools Workstation
A service of the serv		

Sun Microsystems, Inc. • 2550 Garcia Avenue • Mountain View, CA 94043 • 415-960-1300

### Credits and Trademarks

Sun Workstation® is a registered trademark of Sun Microsystems, Inc.

SunStation®, Sun Microsystems®, SunCore®, SunWindows®, DVMA®, and the combination of Sun with a numeric suffix are trademarks of Sun Microsystems, Inc.

UNIX, UNIX/32V, UNIX System III, and UNIX System V are trademarks of AT&T Bell Laboratories.

Intel® and Multibus® are registered trademarks of Intel Corporation.

DEC®, PDP®, VT®, and VAX® are registered trademarks of Digital Equipment Corporation.

Copyright © 1986 by Sun Microsystems.

This publication is protected by Federal Copyright Law, with all rights reserved. No part of this publication may be reproduced, stored in a retrieval system, translated, transcribed, or transmitted, in any form, or by any means manual, electric, electronic, electro-magnetic, mechanical, chemical, optical, or otherwise, without prior explicit written permission from Sun Microsystems.

### Contents

Chapter 1 Introduction	3
1.1. Three Debuggers	3
1.2. Debugging Modes of dbx and dbxtool	4
1.3. Common Features of dbx and dbxtool	4
Filenames	4
Expressions	5
dbx and Fortran	6
dbx Scope Rules	6
Chapter 2 dbxtool	11
2.1. dbxtool Options	11
2.2. dbxtool Subwindows	12
2.3. Scrolling	12
2.4. The Source Window	13
2.5. Constructing Commands	13
2.6. Command Buttons	14
2.7. Choosing Your Own Buttons	14
2.8. The Display Window	15
2.9. Editing in the Source Window	15
2.10. Controlling the Environment	15
2.11. Other Aspects of dbxtool	15
toolenv	16
button	16
unbutton	16

2.12. Bugs	•••
Chapter 3 dbx	
3.1. Preparing Files for dbx	•••
3.2. Invoking dbx	•••
3.3. dbx Options	
3.4. Listing Source Code	. <b></b>
3.5. Listing Active Procedures	· • •
3.6. Naming and Displaying Data	· • •
3.7. Setting Breakpoints	· • •
3.8. Running and Tracing Programs	·••
3.9. Accessing Source Files and Directories	· <b>••</b>
3.10. Machine-Level Commands	•••
3.11. Miscellaneous Commands	·••
3.12. Debugging Processes that Fork	·••
Chapter 4 adb Tutorial	
4.1. A Quick Survey	
Starting adb	•••
Current Address	•••
Formats	•••
General Request Meanings	•••
4.2. Debugging C Programs	•••
Debugging A Core Image	
Setting Breakpoints	
Advanced Breakpoint Usage	
Other Breakpoint Facilities	•••
4.3. Maps	•••
407 Executable Files	•••
410 Executable Files	•••
413 Executable Files	•••
Variables	
4.4. Advanced Usage	•••

	Formatted Dump	48
	Accounting File Dump	50
	Converting Values	50
4.5.	Patching	51
4.6.	Anomalies	52
Chapt	ter 5 adb Reference	55
5.1.	adb Options	55
5.2.	Using adb	55
5.3.	adb Expressions	56
	Unary Operators	57
	Binary Operators	57
5.4.	adb Variables	58
5.5.	adb Commands	58
	adb Verbs	58
	?, /, @, and = Modifiers	59
	? and / Modifiers	60
	: Modifiers	61
	\$ Modifiers	62
5.6.	adb Address Mapping	63
5.7.	See Also	63
	Diagnostic Messages from adb	63
	Bugs	64
Chapt	ter 6 Debugging UNIX Kernels with adb	67
6.1.	Introduction	67
	Getting Started	67
	Establishing Context	68
6.2.	adb Command Scripts	68
	Extended Formatting Facilities	68
	Traversing Data Structures	72
	Supplying Parameters	73
	Standard Scripts	75

6.3. Generating adb Scripts with adbgen	76
6.4. Summary	76
Chapter 7 Generating adb Scripts with adbgen	79
7.1. Example of adbgen	80
7.2. Diagnostic Messages from adbgen	80
7.3 Rugs in adhoen	80

### **Tables**

Table 1-1	Operators Recognized by dbx	5
Table 2-1	Attribute-Value Pairs for dbxtool	16
Table 3-1	Groups of dbx Functions	19
Table 3-2	Tracing and its Effects	25
Table 4-1	Some adb Format Letters	34
Table 4-2	Some adb Commands	35
Table 6-1	Standard Command Scripts	75

# Figures

Figure 2-1	Five dbxtool Subwindows	12
Figure 4-1	Executable File Type 407	45
Figure 4-2	Executable File Type 410	46
Figure 4-3	Executable File Type 413	47

# Program Debugging Tools for the Sun Workstation

# Introduction

Introduction	3
1.1. Three Debuggers	3
1.2. Debugging Modes of dbx and dbxtool	4
1.3. Common Features of dbx and dbxtool	4
Filenames	4
Expressions	5
dbx and Fortran	6
dbx Scope Rules	6

·		

### Introduction

#### 1.1. Three Debuggers

This manual describes three debuggers available on Sun Workstations™: dbx, dbxtool, and adb. This document is intended for competent C, Fortran, or Pascal programmers.

dbx is an interactive, line-oriented, source-level, symbolic debugger. It lets you determine where a program crashed, view the values of variables and expressions, set breakpoints in the code, and run and trace a program. In addition, machine-level and other commands are available to help you debug code. A detailed description of how to use dbx is found in Chapter 3.

dbxtool is based on dbx, but provides a window interface to it. Thus, debugging is easier because you use the mouse to delimit portions of code and construct commands from redefinable buttons on the screen. You can use any of the standard dbx commands in the command window. A detailed description of how to use dbxtool is found in Chapter 2.

adb is an interactive, line-oriented, assembly-level debugger. It examines core files to determine why they crashed, and provides a controlled environment for the execution of programs. Since it dates back to Version 7, it is likely to be available on UNIX† systems everywhere. Chapter 4 is a tutorial introduction to adb, and Chapter 5 is a reference manual for it.

Since dbxtool and dbx are the debuggers of choice, this document begins with them. They are much easier to use than adb, and are sufficient for almost all debugging tasks. There are only two good reasons to use adb: for interactive examination of binary files without symbols, and for patching binary files or object code.

Some programs produce core dumps because they contain a bug that causes a system fault. You can always produce a core dump by typing CTRL-\) while a process is running. If a process is in the background, or originated from a different process group, you can get it to dump core by using the gcore(1) utility.

<sup>†</sup> UNIX is a trademark of AT&T Bell Laboratories.



### **1.2.** Debugging Modes of dbx and dbxtool

Both dbx and dbxtool support five distinct types of debugging: post-mortem, live process, arbitrary process, multiple process, and kernel debugging. References to dbx below apply to dbxtool as well.

You can do post-mortem debugging when a program creates a core file. Using the core file as its image of the program, dbx retrieves the values of variables from it. The most useful operations in post-mortem debugging are getting a stack trace with where, and examining the values of variables with print. Operations such as setting breakpoints, suspending and continuing execution, and calling procedures, are not supported with port-mortem debugging.

In live process debugging, a process is started under control of dbx. From there, the user controls when the process begins, at which breakpoints it stops, and when it restarts. The most useful operations are getting a stack trace with where, examining the values of variables with print and display, setting breakpoints with stop, and continuing execution with next, step, and cont.

Arbitrary process debugging is an alternate form of live process debugging. The two styles differ only in how the process is initiated. An arbitrary process is any process that begins outside of dbx's control. When you wish to debug an arbitrary process, you can attach it to dbx. Attaching a process causes the process to stop, so dbx can examine its state. At this point, debugging may proceed as if the process had begun under dbx's control. The detach command releases the process from dbx's control.

Multiple process debugging is most useful when debugging the interaction between two tightly coupled programs. For example, in a networking situation it is common to have server and client processes that use some style of interprocess communication (remote procedure calls, for example). To debug both the client and the server simultaneously, each process must have its own instance of dbx. When using dbx for multiple process debugging, it is advisable to begin each dbx in a separate window. This gives you a way to debug one process without without losing the context of the other debugging session.

Kernel debugging is a special form of post-mortem debugging. Specify the -k option on the command line (or with the debug command) to initiate kernel debugging. When debugging the kernel, dbx uses page maps in the kernel's core image to map addresses. The proc command specifies which process' user structure is mapped into the kernel's uarea. The where command displays the kernel stack associated with the process currently mapped into the uarea.

### 1.3. Common Features of dbx and dbxtool

The following symbols and conventions apply to both dbx and dbxtool; as before, references to dbx apply to dbxtool as well.

**Filenames** 

Filenames within dbx may include shell metacharacters. The shell used for pattern matching is determined by the SHELL environment variable.



#### **Expressions**

Expressions in dbx are combinations of variables, constants, procedure calls, and operators. Hexadecimal constants begin with "0x" and octal constants with "0". Character constants must be enclosed in single quotes. Expressions cannot involve literal strings, structures, or arrays, although elements of structures or arrays may be used. However, the print and display commands do accept structures or arrays as arguments and, in these cases, print the entire contents of the structure or array. The call command accepts literal strings as arguments, and passes them according to the calling conventions of the language of the routine being called.

Table 1-1 Operators Recognized by dbx

Operators Recognized by dbx		
+	add	
_	subtract	
*	multiply	
/	divide	
div	integer divide	
ક	remainder	
<<	left shift	
>>	right shift	
&	bitwise and	
1	bitwise or	
^	exclusive or	
~	bitwise complement	
&	address of	
*	contents of	
<	less than	
>	greater than	
<= >=	less than or equal to	
>=	greater than or equal to	
	equal to	
!=	not equal to	
!	not	
& &	logical and	
11	logical or	
sizeof	size of a variable or type	
(type)	type cast	
	structure field reference	
->	pointer to structure field reference	

The operator "." can be used with pointers to records, as well as with records themselves, making the C operator "->" unnecessary (though it is supported).

Precedence and associativity of operators are the same as in C. Parentheses can be used for grouping.

Of course, if the program being debugged is not active and there is no core file, you may only use expressions containing constants. Procedure calls also require that the program be active.



dbx and Fortran

Note the following when using dbx with Fortran programs:

- 1) Array elements must be referenced with square brackets [ and ] rather than with parentheses. So use print var[3] instead of print var(3).
- 2) The main routine is referenced as MAIN (as distinguished from main). All other names in the source file that have upper case letters in them will be lower case in dbx, unless the program was compiled with £77 -U. For more information, see the section on dbxenv case under Miscellaneous Commands in Chapter 3.
- 3) When referring to the value of a logical type in an expression, use the value 0 or 1 rather than false or true, respectively.

The dbx program uses two variables to resolve scope conflicts: file and func (see Accessing Source Files and Directories in Chapter 3). The values of file and func change automatically as files and routines are entered and exited during execution of the user program. The values of file and func can also be changed by the user. Changing func also changes the value of file; however, changing file does not change func.

The func variable is used for name resolution, as in the command print grab where grab may be defined in two different routines. The search order is:

- 1) Search for grab in the routine named by func.
- 2) If grab does not exist in the routine named by func, search the file containing the routine named by func.
- 3) Finally, search the outer levels the whole program in the case of C and Fortran, and the outer lexical levels (in order) in the case of Pascal for grab.

Clearly, if grab is local to a different routine than the one named by func, or is a static variable in a different file than is the routine named by func, it won't be found. Note, however, that print a.grab is allowed, as long as routine a has been entered but not yet exited. Note that the file containing the routine a might have to be specified when the file name (minus its suffix) is the same as a routine name. For example, if routine a is found in module a.c, then print a.grab would not be enough — you would have to use print a.a.grab. If in doubt as to how to specify a name, use the whereis command, as in whereis grab to display the full qualifications of all instances of the specified name — in this case grab.

The variable file is used to:

- 1) Resolve conflicts when setting func for example, when a C program has two static routines with the same name.
- 2) Determine which file to use for commands that take only a source line number for example, stop at 55.
- 3) Determine which file to use for commands such as edit, which has optional arguments or no arguments at all.

dbx Scope Rules



When dbx begins execution, the initial values of file and func are determined by the presence or absence of a core file or process ID. If there is a core file or process ID, file and func are set to the point of termination. If there is no core file or process ID, func is set to main (or MAIN for Fortran) and file is set to the file containing main or MAIN.

Note that changing func doesn't affect the place where dbx continues execution when the program is restarted.



### dbxtool

dbxtool	11
2.1. dbxtool Options	11
2.2. dbxtool Subwindows	12
2.3. Scrolling	12
2.4. The Source Window	13
2.5. Constructing Commands	13
2.6. Command Buttons	14
2.7. Choosing Your Own Buttons	14
2.8. The Display Window	15
2.9. Editing in the Source Window	15
2.10. Controlling the Environment	15
2.11. Other Aspects of dbxtool	15
toolenv	16
button	16
unbutton	16
2.12. Bugs	16

### dbxtool

#### dbxtool [-k ] [-I dir ] [ objectfile [ corefile | processID ] ]

A source-level debugger with a window and mouse-based controls, dbxtool accepts the same commands as dbx, but provides a more convenient user interface. Using the mouse, one can set breakpoints, examine the values of variables, control execution, peruse source files, and so on. There are separate subwindows for viewing source code, entering commands, and several other uses. This debugger functions in the *suntools* (1) environment, so that the standard tool manager actions, such as moving, stretching, exposing, etc. can be applied to it.

In the usage above, objectfile is an object file produced by cc, f77, or pc, or a combination thereof, with the -g flag specified to produce the appropriate symbol information. If no objectfile is specified, one may use the debug command to specify the program to be debugged. The object file contains a symbol table which includes the names of all the source files translated by the compiler to create it. These files are available for perusal while using the debugger.

NOTE

Every stage of the compilation process, including the loading phase, must include the -g option.

If a file named core exists in the current directory, or a *corefile* is specified on the command line, dbxtool can be used to examine the state of the program when it faulted.

If a processID is given instead of a corefile, dbxtool halts the process and begins debugging it. Detaching the debugger from the process allows it to continue.

Debugger commands in the file .dbxinit are executed immediately after the symbolic information is read, if that file exists in the current directory, or in the user's home directory if it isn't there.

#### 2.1. dbxtool Options

- -k Kernel debugging.
- -I dir

Add dir to the list of directories searched when looking for a source file. Normally dbxtool looks for source files in the current directory, and then in the directory where objectfile is located. The directory search path can also be set with the use command. Multiple —I options may be given.



#### 2.2. dbxtool Subwindows

A dbxtool window consists of five subwindows. From top to bottom they are:

status Gives the location where execution is currently stopped, and a description of lines displayed in the *source* subwindow.

source Displays source text of the program being debugged, and allows you

to move around in the source file.

buttons Contains buttons for frequently used commands; picking a button

with the mouse invokes the corresponding command.

command Provides a typing interface to supplement the buttons subwindow.

Also, most command output appears in this subwindow.

display Provides a way to track the values of selected variables by updating

a display of their values each time execution stops.

Figure 2-1 Five dbxtool Subwindows

```
Stopped in File: ./dumpcore.c
                                                      Func: dumpcore
                                                                            Line:
                                                                                    18
File Displayed:
                  ./dumpcore.c
                                                                            Lines: 1-20
     #define LIMIT 5
                               /* print message and die */
              int i:
              for (i = 1; i <= 10 ; i++) {
    printf("Goodbye world! (%d)\n", i);</pre>
                     dumpcore(i);
     }
      int *ip;
                                /* dereference NULL pointer */
      dumpcore(lim)
      int lim;
            →if (lim >= LIMIT)
                       *ip = lim;
                print next step stop at cont stop in redo
  Reading symbolic information...
  Read 198 symbols
  (dbxtool) stop at "dumpcore.c":9
   1) stop at "dumpcore.c":9
   (dbxtool) run
  Running: dumpcore
  Goodbye world! (1) (dbxtool) step
  (dbxtool)
```

#### 2.3. Scrolling

The source, command, and display windows have scroll bars to facilitate browsing their contents. The scroll bar is at the left edge of each window. The bar is a medium gray background with a darker gray area superimposed over it indicating the portion of the source file, command transcript, or display currently visible in the window. Note that the size of the darker gray area corresponds to the number of characters visible in the source window, not the number of lines.



Within the scroll bar, the mouse buttons have the following functions:

left Scroll forward, moving towards the end of the file.

middle Scroll to absolute position in the text.

right Scroll backwards, moving towards the beginning of the file.

Positioning the cursor within the scroll bar next to a given line and clicking the left button causes the line to move to the top of the window. Clicking the right button causes the top line in the window to move to the position of the cursor. The middle button treats the scroll bar as a thumb bar. The top of the thumb bar represents the beginning of the text, and the bottom represents the end of the text. Clicking the middle button in the scroll bar picks a point within the text relative to its entire size. This point is displayed at the top of the window.

See Windows and Window-Based Tools: Beginner's Guide for a more complete description of scroll bars.

#### 2.4. The Source Window

The source window displays the text of the program being debugged. Initially, it displays text from either the main routine, if there is no core file, or the point at which execution stopped, if there is a core file. Whenever execution stops during a debugging session, it displays the point at which it stopped. The file command can be used to switch the source window to another file; the focus of attention moves to the beginning of the new file. Similarly, the func command can be used to switch the source window to another function; the new focus of attention is the first executable line in the function.

Breakpoints are indicated in the *source* window by a solid stop sign at the beginning of the line. The point at which execution is currently stopped is marked by a rightward pointing outlined arrow. See the figure above.

#### 2.5. Constructing Commands

One can either type commands to dbxtool, or construct them with the selection and button mechanism (if a button is provided for the command), but typing and buttons cannot be combined.

The command window is a text subwindow. You can make a text selection by pointing the mouse at one end of the desired text and clicking the left button, then pointing the mouse at the other end of the text and clicking the middle button. Double clicking the left button selects a word; triple clicking selects a line. The selected text is highlighted in reverse video. To save the text, press GET (usually the L6 function key). Then to paste in the text, press PUT (usually the L8 function key). Generally you use these two keys in succession. See Windows and Window-Based Tools: Beginner's Guide for a more complete description of the text selection facility.

The software buttons operate in a postfix manner. That is, one first selects the arguments, and then clicks the software button with the left mouse button. Each command interprets the selection as appropriate for that command.

There are five ways that dbxtool may interpret a selection:

literal A selection may be interpreted as exactly representing selected material.



expand A selection may be interpreted as exactly representing selected

material, except that it is expanded if either the first or last character of the selection is an alphanumeric character or underscore. It is expanded to the longest enclosing sequence of alphanumeric characters or underscores. Selections made outside of dbxtool cannot be

expanded and are interpreted as exactly the selected text.

lineno A selection in the *source* window may be interpreted as representing

the (line number of the) first source line containing all or some of the

selection.

command A selection in the command window may be interpreted as

representing the command containing the selection.

ignore Buttons may ignore a selection.

#### 2.6. Command Buttons

The standard set of command buttons in the *buttons* window is as follows:

print Print the value of a variable or expression. Since this button expands the selection, identifiers can be printed by selecting only one charac-

ter.

next Execute one source line and then stop execution, except that if the

current source line contains a procedure or function call, execute through the called routine before stopping. The next button

ignores the selection.

step Execute one source line and then stop execution again. If the current

source line contains a procedure or function call, stop at the first executable line within the procedure or function. The step button

ignores the selection.

stop at Set a breakpoint at a given source line. Interpret a selection in the

source window as representing the line number associated with the

first line of the selection.

cont Resume execution from the point where it is currently stopped. The

cont button ignores the selection.

stop in Set a breakpoint at the first line of a given function or procedure.

Interpret the selection in the same manner as the print button; that is, selecting an occurrence of a procedure or function name sets a

breakpoint in the corresponding routine.

redo Repeat a selected command. Interpret a selection in the command

window as representing the command containing the selection.

### 2.7. Choosing Your Own Buttons

The button command defines buttons in the buttons window. It can be used in .dbxinit to define buttons not otherwise displayed, or during a debugging session to add new buttons. The first argument to button is the selection interpretation for the button, and the remainder is the command associated with it. The default set of buttons can be replicated by the sequence



```
button expand print
button ignore next
button ignore step
button lineno stop at
button ignore cont
button expand stop in
button command redo
```

The unbutton command may be used in .dbxinit to remove a default button from the *buttons* window, or during a debugging session to remove an existing button. The argument to unbutton is the command associated with the button.

#### 2.8. The Display Window

The display window provides continual feedback of the values of selected variables. The display command specifies variables to appear in the display window, and undisplay removes them. Each time execution of the program being debugged stops, the values of the displayed variables are updated.

### 2.9. Editing in the Source Window

The source window is a standard text subwindow (see Windows and Window-Based Tools: Beginner's Guide for details). Initially dbxtool puts the source subwindow in browse mode, meaning that editing capabilities are suppressed. To the standard text subwindow menu in the source window, dbxtool adds a "start editing" entry. When this menu item is selected, the file in the source window becomes editable, the menu item changes to "stop editing", and any annotations (stop signs or arrows) are taken down. The "stop editing" menu item is a pull-right menu with two options: "save changes" and "ignore changes". Selecting either of these menu items disables editing, changes the menu item back to "start editing", and causes the annotations to return.

After editing a source file, it is advisable to rebuild the program, as the source file no longer reflects the executable program.

### 2.10. Controlling the Environment

The toolenv command provides control over several facets of dbxtool's window environment, including the font, the vertical size of the source, command, and display windows, the horizontal size of the tool, and the minimum number of lines between the top or bottom of the source window and the arrow. These are chiefly useful in the .dbxinit file to control initialization of the tool, but may be issued at any time.

### **2.11. Other Aspects of** dbxtool

The commands, expression syntax, scope rules, etc. of dbxtool are identical to those of dbx. Three of the commands, toolenv, button, and unbutton affect only dbxtool, so they are described below. See Chapter 3 for a description of the others.



#### toolenv

toolenv [attribute value]

Set or print attributes of the dbxtool window. This command has no effect in dbx. The possible attribute-value pairs and their interpretations are as follows:

Table 2-1 Attribute-Value Pairs for dbxtool

Attribute-Value	Description
font fontfile	Change the font to that found in <i>fontfile</i> ; default is taken from the DEFAULT_FONT shell variable.
width nchars	change the width of the tool window to <i>nchars</i> characters; default is 80 characters.
srclines nlines	make the source subwindow <i>nlines</i> high; default is 20 lines.
cmdlines nlines	make the command subwindow <i>nlines</i> high; default is 12 lines.
displines nlines	make the display subwindow <i>nlines</i> high; default is 3 lines.
topmargin nlines	keep the line with the arrow at least <i>nlines</i> from the top of the source subwindow; default is 3 lines.
botmargin nlines	keep the line with the arrow on it at least <i>nlines</i> from the bottom of the source subwindow; default is 3 lines.

The toolenv command with no arguments prints the current values of all the attributes.

button

button selection command-name

Associate a button in the buttons window with a command in dbxtool. This command has no effect in dbx. The argument selection is described in the Command Construction section above.

unbutton

unbutton command-name

Remove a button from the buttons window. The button with a matching command-name is removed.

2.12. Bugs

The interaction between scrolling in the source subwindow and dbx's regular expression search commands is wrong. Scrolling should affect where the next search begins, but it does not.



# dbx

dbx	19
3.1. Preparing Files for dbx	20
3.2. Invoking dbx	20
3.3. dbx Options	20
3.4. Listing Source Code	21
3.5. Listing Active Procedures	21
3.6. Naming and Displaying Data	22
3.7. Setting Breakpoints	23
3.8. Running and Tracing Programs	24
3.9. Accessing Source Files and Directories	26
3.10. Machine-Level Commands	28
3.11. Miscellaneous Commands	29
3.12. Debugging Processes that Fork	30

dbx[-r][-k][-I dir][objectfile[corefile|processID]]

A tool for source-level debugging and execution of programs, dbx accepts the same commands as dbxtool, but has a line-oriented user interface, which does not use the window system. It is useful when you only have an old-fashioned terminal.

Table 3-1 Groups of dbx Functions

Groups of dbx Functions			
Function	Commands		
list active procedures	down, proc, up, where.		
name, display, and set variables	assign, display, dump, print, set, set81, undisplay, whatis, whereis, which.		
set breakpoints	catch, clear, delete, ignore, status, stop, trace, when.		
run and trace program	<pre>call, cont, next, rerun, run, step.</pre>		
access source files & directories	<pre>cd, edit, file, func, list, pwd, use, /, ?.</pre>		
process manipulation	attach, debug, detach, kill.		
miscellaneous commands	alias, dbxenv, help, sh, source, quit.		
machine-level commands	nexti, stepi, stopi, tracei.		

Although dbx provides a wide variety of commands, there are a few that you will execute most often. You will probably want to



- find out where an error occurred,
- display and change the values of variables,
- set breakpoints,
- and run and trace your program.

#### 3.1. Preparing Files for dbx

When compiling programs with cc, f77, or pc, you must specify the -g option on the command line, so that symbolic information is produced in the object file. Every step of compilation (including the 1d phase) must include this option.

#### 3.2. Invoking dbx

To invoke dbx, type:

```
% dbx options objfile corefile
```

dbx begins execution by printing:

```
Reading symbolic information...
Read nnn symbols
(dbx)
```

To exit dbx and return to the command level, type:

```
(dbx) quit
```

#### 3.3. dbx Options

The options to dbx are:

- -r Execute objfile immediately. Parameters follow the object filename (redirection is handled properly). If the program terminates successfully, dbx exits. Otherwise, dbx reports the reason for termination and waits for your response. When -r is specified and standard input is not a terminal, dbx reads from /dev/tty.
- -k Kernel debugging: dbx uses page maps within the kernel's core image to map addresses.

#### -Idir

Add *dir* to the list of directories searched when looking for a source file. Normally, dbx looks for source files in the current directory and in the directory where *objfile* is located. The directory search path can also be set with the use command.

The *objfile* contains compiled object code. If it is not specified, one can use the debug command to specify the program to be debugged. The object file contains a symbol table, which includes the names of all the source files the compiler translated. These files are available for perusal while using the debugger.

If a file named core exists in the current directory, or a *corefile* is specified, dbx can be used to examine the state of the program when it faulted. If a



processID is given instead, dbx halts the process and begins debugging it. If you later detach the debugger from the it, the process continues to execute.

Debugger commands in the file .dbxinit are executed immediately after the symbolic information is read if that file exists in the current directory, or in the user's home directory if it is not found in the current directory.

#### 3.4. Listing Source Code

If you invoked dbx on an *objfile*, you can list portions of your program. For example, consider the program example.c, which you can see by typing:

```
(dbx) list 1,12
    1
        #include <stdio.h>
    2
    3
        main()
    4
    5
            printf("goodbye world!\n");
    6
            dumpcore();
    7
        }
    8
    9
        dumpcore()
  10
  11
            abort();
  12
```

If the range of lines starts past the end of file, dbx will tell you the program has only so many lines; if the range of lines goes past the end of file, dbx will print as many lines as it can, without complaining. You can also list just a single procedure by typing its name instead of a range of lines; for example list main prints ten lines starting near the top of the main () procedure.

#### 3.5. Listing Active Procedures

If your program fails to execute properly, you probably want to find out the procedures that were active when the program crashed.

```
where [n]
```

Display a list of the top n active procedures and functions on the stack. If n is not specified, all active procedures are displayed.

When debugging a post-mortem dump of the example.c program above, dbx prints the following:

```
(dbx) where
abort() at 0x80e5
dumpcore(), line 12 in "example.c"
main(0x1, 0xfffd84, 0xfffd8c), line 7 in "example.c"
(dbx)
```

Three other commands useful for viewing the stack are:

```
up[n]
```

Move up the call stack (towards main) n levels. If n is not specified, the default is one. This command allows you to examine the local variables in



functions other than the current one. In dbxtool, the line containing the call that passes from the n th outer level to the (n-1) th is highlighted for one second.

#### down [n]

Move down the call stack (towards the current stopping point) n levels. If n is not specified, the default is one.

#### proc [process\_id]

Specify for kernel debugging which user process is mapped into the *uarea* and hence has its kernel stack displayed by the where command. If no argument is given, proc reports the *process\_id* of the process currently mapped into the *uarea*.

### 3.6. Naming and Displaying Data

#### print expression [, expression ...]

Print the values of specified expressions. An expression may involve function calls if you are debugging an active process. If execution of a function encounters a breakpoint, execution halts and the dbx command level is reentered. A stack trace with the where command shows that the call originated from the dbx command level.

Variables having the same name as one in the current function may be referenced as funcname.variable, or filename.funcname.variable. The filename is required if funcname occurs in several files or is identical to a filename. For example, to access variable i inside routine a, which is declared inside module a.c, you would have to use print a.a.i to make the name a unambiguous. Use whereis to determine the fully qualified name of an identifier. See "dbx Scope Rules" in Chapter 1 for more details.

#### display [expression [, expression ...]]

Display the values of the expressions each time execution of the debugged program stops. The name qualification rules for print apply to display as well. With no arguments, the display command prints a list of the expressions currently being displayed, and a display number associated with each expression.

#### undisplay expression [, expression ...]

Stop displaying the expressions and their values each time execution of the program being debugged stops. The name qualification rules for print apply to undisplay as well. A numeric expression is interpreted as a display number and the corresponding expression is deleted from the display.

whatis identifier

whatis type

Print the declaration of the given identifier or type. The identifier may be qualified with block names as above. The *type* argument is useful to print all the members of a structure, union, or enumerated type.

#### which identifier

Print the fully qualified form of the given identifier; that is, the outer blocks with which the identifier is associated.



#### whereis identifier

Print the fully qualified form of all symbols whose names match the given identifier. The order in which the symbols are displayed is not meaningful.

#### assign variable = expression

#### set variable = expression

Assign the value of the expression to the variable. Currently no type conversion takes place if operands are of different types.

#### set81 fpreg = word1 word2 word3

Treat the 96-bit value gotten by concatenating *word1*, *word2*, and *word3* as an IEEE floating-point value, and assign it to the named MC68881 floating-point register *fpreg*. Note that MC68881 registers can also be set with the set command, but that the value is treated as double-precision and converted to extended precision. This command applies to Sun-3 systems only.

#### dump [func]

Display the names and values of all the local variables and parameters in *func*. If not specified, the current function is used.

#### 3.7. Setting Breakpoints

Breakpoints are set with the stop and when commands, which have the following forms:

#### stop at source-line-number[if condition]

Stop execution at the given line number when the *condition* is true. If *condition* is not specified, stop every time the line is reached.

#### stop in procedure/function[if condition]

Stop execution at the first line of the given procedure or function when the condition is true. If condition is not specified, stop every time the line is reached.

#### stop variable [if condition]

Stop execution when the value of *variable* changes and *condition* is true. If *condition* is not specified, stop every time the value of *variable* changes. This command performs interpretive execution, and thus is slower than most other commands.

#### stop if condition

Stop execution if *condition* becomes true. This command performs interpretive execution, and thus is slower than most other commands.

#### when in procedure/function { command; ...}

Execute the given dbx command(s) whenever the specified procedure or function is entered.

#### when at source-line-number { command; ...}

Execute the given dbx command(s) whenever the specified source-line-number is reached.

#### when condition { command; ...}

Execute the given dbx *command(s)* whenever the *condition* is true before a statement is executed. This command performs interpretive execution, and thus is slower than most other commands.



Note: in the when commands, the braces and semicolons between commands are required.

The following commands can be used to view and change breakpoints:

```
status [>filename]
```

Display the currently active trace, stop, and when commands. A command-number is listed for each command. The filename argument causes the output of status to be sent to that file.

```
delete command-number[,command-number...]
delete all
```

Remove the trace, when, and/or stop commands corresponding to the given *command-numbers*, or all of them. The status command explained above displays numbers associated with these commands.

clear source-line-number

Clear all breakpoints at the given source line number. If no source-linenumber is given, the current stopping point is used.

Two additional commands can be used to set a breakpoint when a signal is detected by the program, rather than a condition or location.

```
catch [number[, number...]]
```

Start trapping the signals with the given *number* (s) before they are sent to the program being debugged. This is useful when a program handles signals such as interrupts. Initially all signals are trapped except SIGHUP, SIGCONT, SIGCHILD, SIGALRM, SIGKILL, SIGSTP, and SIGWINCH. If no *number* is given, list the signals being caught.

```
ignore [number[, number...]]
```

Stop trapping the signals with the given *number* (s) before they are sent to the program being debugged. This is useful when a program handles signals such as interrupts. If no *number* is given, list the signals being ignored.

### 3.8. Running and Tracing Programs

You can run and trace your code using the following commands:

```
run [args] [ < filename ] [ >> filename ]
```

Start executing objfile, specified on the dbx command line (or with the most recent debug command), passing args as command line arguments; <, >, or >> can be used to redirect input or output in the usual manner. Otherwise, all characters in args are passed through unchanged. If no arguments are specified, the argument list from the last run command (if any) is used. If objfile has been written since the last time the symbolic information was read in, dbx reads the new information before beginning execution.

```
rerun [args] [ < filename ] [ >> filename ]
```

Identical to run, except in the case where no arguments are specified. In that case run runs the program with the same arguments as on the last invocation, whereas rerun runs it with no arguments at all.

```
cont [at source-line-number] [sig sig-number]
```

Continue execution from where it stopped, or, if the clause at *source-line-number* is given, at that line number. The *sig-number* causes execution to



continue as if that signal had occurred. The source-line-number is evaluated relative to the current file and must be within the current procedure/function. Execution cannot be continued if the process has finished (that is, has called the standard procedure \_exit). The dbx program captures control when the process attempts to exit, thereby letting the user examine the program state.

```
trace source-line-number [if condition]
trace procedure/function [if condition]
trace [in procedure/function] [if condition]
trace expression at source-line-number [if condition]
trace variable [in procedure/function] [if condition]
```

Display tracing information when the program is executed. A number is associated with the trace command, and can be used to turn the tracing off (see the delete command).

If no argument is specified, each source line is displayed before it is executed. Execution is substantially slower during this form of tracing.

The clause in *procedure/function* restricts tracing information to be displayed only while executing inside the given procedure or function. Note that the *procedure/function* traced must be visible in the scope in which the trace command is issued — see the func command.

The *condition* is a Boolean expression evaluated before displaying the tracing information; the information is displayed only if *condition* is true.

The first argument describes what is to be traced. The effects of different kinds of arguments are described below:

Table 3-2 Tracing and its Effects

source-line-number	Display the line immediately before executing it. Source line numbers in a file other than the current one must be preceded by the name of the file in quotes and a colon, for example, "mumble.p":17.
procedure/function	Every time the procedure or function is called, display information telling what routine called it, from what source line it was called, and what parameters were passed to it. In addition, its return is noted, and if it is a function, the return value is also displayed.
expression	The value of the expression is displayed whenever the identified source line is reached.
variable	The name and value of the variable are displayed whenever the value changes. Execution is substantially slower during this form of tracing.



Tracing is turned off whenever the function in which it was turned on is exited. For instance, if the program is stopped inside some procedure and tracing is invoked, the tracing will end when the procedure is exited. To trace the whole program, tracing must be invoked before a run command is issued.

When using conditions with trace, stop, and when, remember that variable names are resolved with respect to the scope current at the time the command is issued (not the scope of the expression inside the trace, stop, or when command). For example, if you are currently stopped in function foo () and you issue the command

```
stop in bar if x==5
```

the variable x refers to the x in function foo(), not in bar(). The func command can be used to change the scope before issuing a trace, stop, or when command.

### step [n]

Execute through the next n source lines and stop on the (n+1) th line. If n is not specified, it is taken to be one. Step into procedures and functions.

#### next[n]

Execute through the next n source lines and stop on the (n+1) th such line, counting functions as single statements.

# call procedure (parameters)

Execute the named *procedure* (or *function*), with the given *parameters*. If any breakpoints are encountered, execution halts and the dbx command level is re-entered. A stack trace with the where command shows that the call originated from the dbx command level.

If the source file in which the routine is defined was compiled with the -g flag, the number and types of parameters must match. However, if C routines are called that are not compiled with the -g flag, dbx does no parameter checking. The parameters are simply pushed on the stack as given in the parameter list. Currently, Fortran alternate return points are not passed properly.

# 3.9. Accessing Source Files and Directories

These commands let you access source files and directories without exiting dbx:

# edit [filename]

#### edit procedure/function

Invoke an editor on *filename* (or the current source file if none is specified). If a *procedure* or *function* name is specified, the editor is invoked on the file that contains it. The default editor invoked is vi. Set the environment variable EDITOR to the name of a preferred editor to override the default. For dbxtool, the editor comes up in a new window.

#### file [filename]

Change the current source file to *filename*, or print the name of the current source file if no *filename* is specified.



# func [procedure | function | objfile ]

Change the current function, or print the name of the current function if none is specified. Changing the current function implicitly changes the current source file variable file to the one that contains the function; it also changes the current scope used for name resolution. If the global scope is desired, the argument should be the *objfile*.

list [source-line-number [, source-line-number]]

#### list procedure/function

List the lines in the current source file from the first line number through the second. If no lines are specified, the next 10 lines are listed. If the name of a procedure or function is given, lines n-5 to n+5 are listed, where n is the first statement in the procedure or function. If the list command's argument is a procedure or function, the scope for further listing is changed to that routine — use the file command to change it back.

# use [directory ...]

Set the list of directories to search when looking for source files. If no *directory* is given, print the current list of directories. Supplying a list of directories replaces the current (possibly default) list. The list is searched from left to right.

### cd [dirname]

Change dbx's notion of the current directory to dirname. With no argument, use the value of the HOME environment variable.

#### pwd

Print dbx's notion of the current directory.

#### /string[/]

Search downward in the current file for the regular expression *string*. The search begins with the line immediately after the current line and, if necessary, continues until the end of the file. The matching line becomes the current line. In dbxtool, the matching line is highlighted for one second.

#### ?string[?]

Search upward in the current file for the regular expression *string*. The search begins with the line immediately before the current line and, if necessary, continues until the top of the file. The matching line becomes the current line. In dbxtool, the matching line is highlighted for one second.

When dbx searches for a source file, the value of file and the use directory search path are used. The value of file is appended to each directory in the use search path until a matching file is found. This file becomes the current file.

dbx knows the same filenames as were given to the compilers. For instance, if a file is compiled with the command

```
% cc -c -g ../mip/scan.c
```

then dbx knows the filename .../mip/scan.c, but not scan.c.



# 3.10. Machine-Level Commands

These commands are used to debug code at the machine level:

```
tracei [address] [if cond]
tracei [variable] [at address] [if cond]
   Turn on tracing of individual machine instructions.
stopi [variable] [if cond]
```

```
stopi [variable] [if cond]
stopi [at address] [if cond]
```

Set a breakpoint at the address of a machine instruction.

stepi nexti

Single step as in step or next, but do a single machine instruction rather than a line of source.

```
address, address / [ mode ] address / [ count ] [ mode ]
```

Display the contents of memory starting at the first address and continuing up to the second address, or until count items have been displayed. If no address is specified, the address following the one displayed most recently is used. The mode specifies how memory is displayed; if omitted, the last specified mode is used. The initial mode is X. The following modes are supported:

- i display as a machine instruction
- d display as a word in decimal
- D display as a longword in decimal
- o display as a word in octal
- O display as a longword in octal
- x display as a word in hexadecimal
- X display as a longword in hexadecimal
- b display as a byte in octal
- c display as a byte as a character
- s display as a string of characters terminated by a null byte
- f display as a single-precision real number
- g display as a double-precision real number
- E display as an extended-precision real number

Symbolic addresses used in this context are specified by preceding a name with an ampersand &. Registers are denoted by preceding a name with a dollar sign \$. Here is a table of register names:



\$d0-\$d7	data registers
\$a0-\$a7	address registers
\$fp	frame pointer (same as \$a6)
\$sp	stack pointer (same as \$a7)
\$pc	program counter
\$ps	program status
\$fp0-\$fp7	MC68881 data registers
\$fpc	MC68881 control register
\$fps	MC68881 status register
\$fpi	MC68881 instruction address register
\$fpf	MC68881 flags (unused, idle, busy)
\$fpg	MC68881 floating-point signal type

For example, to print the contents of the data and address registers in hex, type &\$d0/16X or &\$d0, &\$a7/X. To print the contents of register d0, type print \$d0 (one cannot currently specify a range with print). Addresses may be expressions made up of other addresses and the operators + (plus), - (minus), + (multiply), and indirection (unary +). The address may be a + alone, which causes the next location to be displayed.

# 3.11. Miscellaneous Commands

#### sh command-line

Pass the command line to the shell for execution. The SHELL environment variable determines which shell is used.

# alias new-command-name character-sequence

Respond to new-command-name as though it were character-sequence. Special characters occurring in character-sequence must be enclosed in double quotation marks. Alias substitution as in the C shell also occurs. For example, !:1 refers to the first argument. The command

```
alias mem "print (!:1)->mem1->mem2"
```

creates a mem command that takes an argument, evaluates its mem1->mem2 field, and prints the results.

```
help [command]
help
```

Print a short message explaining *command*. If no argument is given, display a synopsis of all dbx commands.

#### source filename

Read dbx commands from the given *filename*. This is especially useful when that file was created by redirecting a status command from an earlier debugging session.

```
quit
Exit dbx.

dbxenv
dbxenv stringlen num
```



dbxenv case [sensitive | insensitive ]
dbxenv speed seconds

Set dbx attributes. The dbxenv command with no argument prints the attributes and their current values. The keyword stringlen controls the maximum number of characters printed for a char \* variable in a C program (default 512). The keyword case controls whether upper and lower case letters are considered different. The default is sensitive; insensitive is most useful for debugging Fortran programs. The keyword speed determines the interval between execution of source statements during tracing (default 0.5 seconds).

### debug [-k] [objfile [corefile | process-id]]

Terminate debugging of the current program (if any), and begin debugging the one found in *objfile* with the given *corefile* or live process, without incurring the overhead of reinitializing dbx. If no arguments are specified, the name of the program currently being debugged and its arguments are printed. The -k flag specifies kernel debugging.

#### kill

Terminate debugging of the current process and kill the process, but leave dbx ready to debug another. This can eliminate remains of a window program you were debugging without exiting the debugger, or allow the object file to be removed and remade without incurring a "text file busy" error message.

#### attach

Attach to a process that began outside the control of dbx. The process is then under the control of dbx, which can examine it and change its state. You must have permission to send a signal to a process in order to attach it.

#### detach

Detach a process from dbx's grip. The process is no longer under the control of dbx, which can no longer examine it or change its state.

# 3.12. Debugging Processes that Fork

Debugging a process that creates a new process (using fork(2)) introduces unique problems. Using the ptrace(2) interface, dbx fetches from and stores into the program being debugged.

After the fork, there are two processes sharing the same text (code) space. The kernel does not allow ptrace() to write into a text space that is being used by more than one process. This means that the debugged program should not encounter any breakpoints while the child of the fork is still sharing its text space. In most cases, the child of the fork spawns a new program almost immediately, using exec(2). After the exec(), it is safe for the debugged program to encounter breakpoints. Therefore, it is recommended that a sleep(2) of two or three seconds be placed in the debugged code immediately after the fork. This gives the child of the fork time to execute a new program and get out of the way.



# adb Tutorial

adb T	'utorial	33
4.1.	A Quick Survey	33
	Starting adb	33
	Current Address	34
	Formats	34
	General Request Meanings	35
4.2.	Debugging C Programs	35
	Debugging A Core Image	35
	Setting Breakpoints	39
	Advanced Breakpoint Usage	42
	Other Breakpoint Facilities	43
4.3.	Maps	45
	407 Executable Files	45
	410 Executable Files	46
	413 Executable Files	47
	Variables	48
4.4.	Advanced Usage	48
	Formatted Dump	48
	Accounting File Dump	50
	Converting Values	50
4.5.	Patching	51
4.6.	Anomalies	52

# adb Tutorial

# 4.1. A Quick Survey

Starting adb

Available on most UNIX systems, adb is a debugger that permits you to examine core files resulting from aborted programs, display output in a variety of formats, patch files, and run programs with embedded breakpoints. This document provides examples of the more useful features of adb. The reader is expected to be familiar with basic UNIX commands, and with the C language.

Start adb with a shell command like

```
% adb objectfile corefile
```

where objectfile is an executable UNIX file and corefile is a core dump file. If you leave object files in a . out, then the invocation is simple:

```
% adb
```

If you place object files into a named *program*, then the invocation is a bit harder:

```
% adb program
```

The filename minus (-) means ignore the argument, as in:

```
% adb - core
```

This is for examining the core file without reference to an object file. The adb program provides requests for examining locations in either file: ? examines the contents of *objectfile*, while / examines the contents of *corefile*. The general form of these requests is:

```
address? format
```

or

address / format



# **Current Address**

adb maintains a current address, called dot. When an address is entered, the current address is set to that location, so that

0126?i

sets dot to octal 126 and displays the instruction at that address. The request

.,10/d

displays 10 decimal numbers starting at dot. Dot ends up referring to the address of the last item displayed. When used with the ? or / requests, the current address can be advanced by typing newline; it can be decremented by typing ^.

Addresses are represented by expressions. Expressions are made up of decimal integers, octal integers, hexadecimal integers, and symbols from the program under test. These may be combined with the operators + (plus), - (minus), \* (multiply), \* (integer divide), & (bitwise and), | (bitwise inclusive or), # (round up to the next multiple), and ~ (not). All arithmetic within adb is 32 bits. When typing a symbolic address for a C program, you can type name or \_name; adb recognizes both forms.

To display data, specify a collection of letters and characters to describe the format of the display. Formats are remembered, in the sense that typing a request without a format displays the new output in the previous format. Here are the most commonly used format letters:

Table 4-1 Some adb Format Letters

Some adb Format Letters			
Letter	Description		
b	one byte in octal		
С	one byte as a character		
0	one word in octal		
d	one word in decimal		
f	one long word in single-precision floating point		
i	MC68000 instruction		
s	a null terminated character string		
a	the value of dot		
u	one word as an unsigned integer		
n	print a newline		
r	print a blank space		
_ ^	backup dot (not really a format)		
+	advance dot (not really a format)		

Format letters are also available for long values: for example, D for long decimal, and F for double-precision floating point. Since integers are long-words on the Sun, capital letters are used more often then not. For other formats see the Chapter 5.

# **Formats**



# **General Request Meanings**

The general form of a request is:

address, count command modifier

which sets dot to address and executes command count times. The following table illustrates some general adb command meanings:

Table 4-2 Some adb Commands

Some adb Commands			
Command	Meaning		
?	Print contents from a out file		
/	Print contents from core file		
=	Print value of "dot"		
:	Breakpoint control		
\$	Miscellaneous requests		
;	Request separator		
!	Escape to shell		

Since adb catches signals, a user cannot use a quit signal to exit from adb. The request \$q or \$Q (or CTRL-D)) must be used to exit from adb.

# 4.2. Debugging C Programs

If you use adb because you are accustomed to it, you will want to compile programs with the -go option, to produce old-style symbol tables. This will make debugging proceed according to expectations.

# **Debugging A Core Image**

Consider the C program below, which illustrates a common error made by C programmers. The object of the program is to change the lower case t to an upper case T in the string pointed to by ch, and then write the character string to the file indicated by the first argument.



```
#include <stdio.h>
char *cp = "this is a sentence.";
main(argc, argv)
int argc;
char **argv;
    FILE *fp;
    char c;
    if (argc == 1) {
        fprintf(stderr, "usage: %s file\n", argv[0]);
    if ((fp = fopen(argv[1], "w")) == NULL) {
        perror(argv[1]);
        exit(2);
    cp = 'T';
    while (c = *cp++)
        putc(c, fp);
    fclose(fp);
    exit(0);
}
```

The bug is that the character T is stored in the pointer cp instead of in the string pointed to by cp. Compile the program as follows:

```
% cc -go example1.c
% a.out junk
Segmentation fault (core dumped)
```

Executing the program produces a core dump because of an out-of-bounds memory reference. Now invoke adb by typing:

```
% adb
core file = core -- program ''a.out''
memory fault
```

Commonly the first debugging request given is

```
$c
_main[8074](2,fffd7c,fffd88) + 92
```

which produces a C backtrace through the subroutines called. The output from adb tells us that only one function — main — was called, and the arguments argc and argv have the hexadecimal values 2 and fffd7c respectively. Both these values look reasonable — 2 indicates two arguments, and fffd7c equals the stack address of the parameter vector. The next request:



```
$C
_main[8074](2,fffd7c,fffd88) + 92
fp: 10468
c: 104
```

generates a C backtrace plus an interpretation of all the local variables in each function, and their values in hexadecimal. The value of the variable c looks incorrect since it is outside the ASCII range. The request

```
$r
d0
       54
                  frame+24
d1
       77
                  frame+47
d2
       2
                  man1
d3
       0
                  exp
d4
       0
                  exp
d5
       0
                  exp
d6
       0
                  exp
d7
       0
                  exp
       54
a0
                  frame+24
a1
       0
                  exp
a2
       0
                  exp
a3
       fffd7c
       fffd88
a4
a5
                  exp
a6
       fffd64
       fffd5c
sp
       8106
                   main+92
рс
       0
ps
                  exp
main+92:
                            ???
```

displays the registers, including the program counter, and an interpretation of the instruction at that location. The request

```
$e
environ:
            fffd88
sys nerr:
            48
__ctype_:
            202020
 exit nhandlers:
                         0
 exit tnames:
                         9b06
  lastbuf: 10684
  root:
            0
 lbound:
            0
 ubound:
            n
curbrk:
            12dd4
            8000
 d pot:
 d big pot:
                         8000
 d_r_pot:
            8000
 _d_r_big_pot:
                         8000
errno:
            0
 end:
            0
```



displays the values of all external variables.

A map exists for each file handled by adb. The map for a .out files is referenced by? whereas the map for core files is referenced by /. Furthermore, a good rule of thumb is to use? for instructions and / for data when looking at programs. To display information about maps, type:

This produces a report of the contents of the maps. More about these maps later.

In our example, we might want to see the contents of the string pointed to by cp. We would want to see the string pointed to by cp in the core file:

```
*charp/s
55:
data address not found
```

Because the pointer was set to 'T' (hex 54) and then incremented, it now equals hex 55. On the Sun, there are no symbols below address 8000, so the data address 55 cannot be found. We could also display information about the arguments to a function. To get the decimal value of the argc argument to main, which is a long integer, type:

```
main.argc/D
fffd6c: 2
```

To display the hex values of the three consecutive cells pointed to by argv in the function main, type:

```
*main.argv,3/X
fffd7c: fffdc0 fffdc6 0
```

Note that these values are the addresses of the arguments to main. Therefore, typing these hex values should yield the command-line arguments:

```
fffdc0/s
fffdc0: a.out
```

The request:

```
.=
fffdc0
```



displays the current address (not its contents) in hex, which has been set to the address of the first argument. The current address, dot, is used by adb to remember its current location. It allows the user to reference locations relative to the current address. For example

```
fffdc6: zzz
```

prints the first command-line argument.

**Setting Breakpoints** 

You set breakpoints in a program with the :b instruction, which has this form:

```
address:b [request]
```

Consider the C program below, which changes tabs into blanks, and is adapted from *Software Tools* by Kernighan and Plauger, pp. 18-27.

```
#include <stdio.h>
#define MAXLIN 80
#define YES 1
#define NO 0
#define TABSP
int tabs[MAXLIN];
main()
{
    int *ptab, col, c;
    ptab = tabs;
    settab (ptab);
                    /* set initial tab stops */
    col = 1;
    while ((c = getchar()) != EOF) {
        switch (c) {
        case '':
            while (tabpos(col) != YES) {
                putchar(' ');
                col++;
            putchar(' ');
            col++;
            break;
        case '\n':
            putchar('\n');
            col = 1;
            break;
        default:
            putchar(c);
            col++;
    }
    exit(0);
```

```
tabpos(col) /* return YES if col is a tab stop, NO if not */
int col;
{
   if (col > MAXLIN)
      return(YES);
   else
      return(tabs[col]);
}
settab(tabp) /* set initial tab stops every TABSP spaces
int *tabp;
{
   int i;
   for (i = 0; i <= MAXLIN; i++)
      (i % TABSP) ? (tabs[i] = NO) : (tabs[i] = YES);
}</pre>
```

Run the program under the control of adb, and then set four breakpoints as follows:

```
% adb a.out -
settab+4:b
tabpos+4:b
```

This sets breakpoints at the start of the two functions. The addresses are entered at symbol +4 so that they will appear in a C backtrace, since the first instruction of each function is a call to the C save routine csv. Sun compilers generate statement labels only with the -g option, which is incompatible with adb. Therefore it is impossible to plant breakpoints at locations other than function entry points using adb. To display the location of breakpoints, type:

```
$b
breakpoints
count bkpt command
1 _tabpos+4
1 _settab+4
```

A breakpoint is bypassed *count*-1 times before causing a stop. The *command* field indicates the adb requests to be executed each time the breakpoint is encountered. In this example no command fields are present.

Display the instructions at the beginning of function settab() in order to observe that the breakpoint is set after the link assembly instruction:



```
settab, 5?ia
_settab:
                        link
                                a6,#0
settab:
settab+4:
                        addl
                                \#-4,a7
                        moveml #<>,sp@
settab+a:
settab+e:
                        clrl
                                a6@(-4)
                                #50,a6@(-4)
settab+12:
                        cmpl
settab+la:
```

This request displays five instructions starting at settab with the address of each location displayed. Another variation is

```
settab,5?i
_settab:
_settab:
_link a6,#0
addl #-4,a7
moveml #<>,sp@
clrl a6@(-4)
cmpl #50,a6@(-4)
```

which displays the instructions with only the starting address. Note that we accessed the addresses from a .out with the ? command. In general, when asking for a display of multiple items, adb advances the current address the number of bytes necessary to satisfy the request; in the above example, five instructions were displayed and t he current address was advanced 26 bytes.

To run the program, type:

```
(:r
```

To delete a breakpoint, for instance the entry to the function tabpos (), type:

```
tabpos+4:d
```

Once the program has stopped, in this case at the breakpoint for settab(), adb requests can be used to display the contents of memory. To display a stack trace, for example, type:

```
$c
_settab[8250](10658) + 4
_main[8074](1,fffd84,fffd8c) + 1a
```

And to display three lines of eight locations each from the array called tabs, type:



tabs, 3/82 _tabs:	E							
tabs:	0	0	0	0	0	0	0	0
_	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0

At this time (at location settab+4) the tabs array has not yet been initialized. If you just deleted the breakpoint at tabpos+4, put it back by typing:

```
tabpos+4:b
```

To continue execution of the program from the breakpoint type:

```
:c
*
```

You will need to give the a .out program a line of data, as in the figure above. Once you do, it will encounter a breakpoint at tabpos+4 and stop again. Examine the tabs array once more: now it is initialized, and has a one set in every eighth location:

You will have to type: c eight more times in order to get your line of output, since there is a breakpoint at every input character. Type <u>CTRL-D</u> to terminate the a.out process; you are back in command-level of adb.

# Advanced Breakpoint Usage

The quit and interrupt signals act on adb itself, rather than on the program being debugged. If such a signal occurs, then the program being debugged is stopped and control is returned to adb. The signal is saved by adb and passed on to the test program if you type:

```
:c 0
```

Now let's reset the breakpoint at settab () and display the instructions located there when we reach the breakpoint. This is accomplished by:



```
settab+4:b settab,5?ia
_settab:
settab:
                        link
                               a6,#0
                        addl
                                #-4,a7
settab+4:
settab+a:
                        moveml #<>,sp@
                                a6@(-4)
 settab+e:
                        clrl
settab+12:
                                #50,a6@(-4)
                        cmpl
settab+la:
                _settab+4:
breakpoint
                                        addl
                                                 #-4,a7
```

It is possible to stop every two breakpoints, if you type, 2 before the breakpoint command. Variables can also be displayed at the breakpoint, as illustrated below:

```
tabpos+4,2:b main.col?X
:c

x

fffd64: 1

fffd64: 2
breakpoint _tabpos+4: addl #0,a7
```

This shows that the local variable col changes from 1 to 2 before the occurrence of the breakpoint.

Warning: setting a breakpoint causes the value of dot to be changed. However, executing the program under adb does not change dot. A breakpoint can be overwritten without first deleting the old breakpoint. For example:

```
settab+4:b main.ptab/X; main.c/X
:r
fffd68:     10658
fffd60:     0
breakpoint     _settab+4:     addl #-4,a7
```

The semicolon is used to separate multiple adb requests on a single line.

# Other Breakpoint Facilities

Arguments and change of standard input and output are passed to a program as follows. This request kills any existing program under test and starts a . out afresh:

```
:r argl arg2 ... <infile >outfile
```

The program being debugged can be single stepped as follows. If necessary, this request starts up the program being debugged and stops after executing the first instruction:

```
:s
```



You can enter a program at a specific address by typing:

address: r

The count field can be used to skip the first n breakpoints, as follows:

,n:r

This request may also be used for skipping the first n breakpoints when continuing a program:

, n:c

A program can be continued at an address different from the breakpoint by:

address:c

The program being debugged runs as a separate process, and can be killed by:

:k




# 4.3. Maps

Sun UNIX supports several executable file formats. Executable type 407 is generated by the cc (or ld) flag -N. Executable type 410 is generated by the flag -n. And executable type 413 is generated by the flag -z; the default is type 413. adb interprets these different file formats, and provides access to the different segments through a set of maps. To display the maps, type \$m from inside adb.

#### 407 Executable Files

In 407 files, instructions and data are intermixed. This makes it impossible for adb to differentiate data from instructions. Furthermore, some displayed symbolic addresses look incorrect (for example, data addresses as offsets from routines). Here is a picture of 407 files:

Figure 4-1 Executable File Type 407

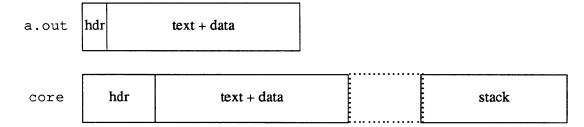

Here are the maps and variables for 407 files:


```
$m
             'a.out'
? map
b1 = 8000
                      e1 = 8f28
                                             f1 = 20
b2 = 8000
                      e2 = 9560
                                             f2 = 20
/ map
             `core'
b1 = 8000
                      e1 = b800
                                             f1 = 1800
b2 = fff000
                      e2 = 1000000
                                             f2 = 5000
ŜΨ
variables
b = 0100000
 = 03070
  = 0407
  = 0407
 = 010000
 = 07450
```




# 410 Executable Files

In 410 files (pure executable), instructions are separate from data. The ? command accesses the data part of the a .out file, telling adb to use the second part of the map in that file. Accessing data in the core file shows the data after it was modified by the execution of the program. Notice also that the data segment may have grown during program execution. Here is a picture of 410 files:

Figure 4-2 Executable File Type 410

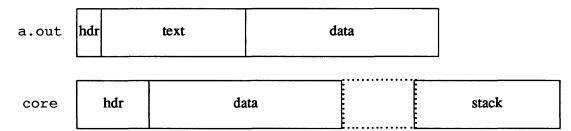

Here are the maps and variables for 410 files:

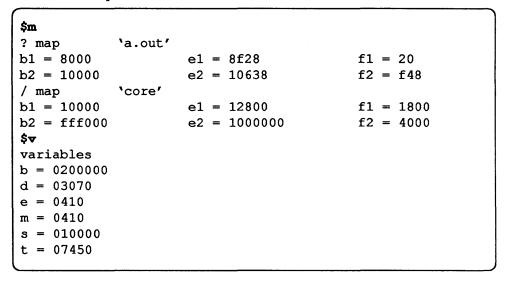




#### 413 Executable Files

In 413 files (pure demand-paged executable) the instructions and data are also separate. However, in this case, since data is contained in separate pages, the base of the data segment is also relative to address zero. In this case, since the addresses overlap, it is necessary to use the ?\* operator to access the data space of the a.out file. In both 410 and 413 files the corresponding core file does not contain the program text. Here is a picture of 413 files:

Figure 4-3 Executable File Type 413

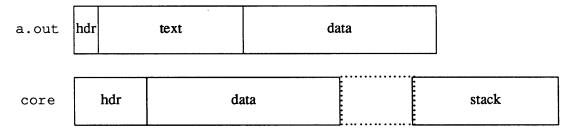

The only difference between a 410 and a 413 file is that 413 segments are rounded up to page boundaries. Here are the maps and variables for 413 files:

```
$m
? map
             'abort'
b1 = 8000
                      e1 = 9000
                                            f1 = 800
b2 = 10000
                      e2 = 10800
                                            f2 = 1800
/ map
             'core'
                      e1 = 12800
                                            f1 = 1800
b1 = 10000
b2 = fff000
                      e2 = 1000000
                                            f2 = 4000
$₹
variables
b = 0200000
d = 04000
e = 0413
m = 0413
s = 010000
t = 010000
```



#### Variables

The b, e, and f fields are used to map addresses into file addresses. The f1 field is the length of the header at the beginning of the file — 020 bytes for an a .out file and 02000 bytes for a core file. The f2 field is the displacement from the beginning of the file to the data. For a 407 file with mixed text and data, this is the same as the length of the header; for 410 and 413 files, this is the length of the header plus the size of the text portion. The b and e fields are the starting and ending locations for a segment. Given the address A, the location in the file (either a .out or core) is calculated as:

```
b1<A<e1 	 file address = (A-b1)+f1
b2<A<e2 	 file address = (A-b2)+f2
```

You can access locations by using the adb-defined variables. The \$v request displays the variables initialized by adb:

- b base address of data segment,
- d length of the data segment,
- s length of the stack,
- t length of the text,
- m execution type (407, 410, 413).

Those variables not presented are zero. Use can be made of these variables by expressions such as

```
<br/>b
```

in the address field. Similarly, the value of a variable can be changed by an assignment request such as


```
02000>b
```

which sets b to octal 2000. These variables are useful to know if the file under examination is an executable or core image file.

The adb program reads the header of the core image file to find the values for these variables. If the second file specified does not seem to be a core file, or if it is missing, then the header of the executable file is used instead.

One of the uses of adb is to examine object files without symbol tables; dbx cannot handle this kind of task. With adb, you can even combine formatting requests to provide elaborate displays. Several examples are given below.

The following adb command line displays four octal words followed by their ASCII interpretation from the data space of the core file:



#### **Formatted Dump**



Broken down, the various requests mean:

- <br/>
  The base address of the data segment.
- <br/>
  <br/>
  <br/>
  <br/>
  <br/>
  <br/>
  Print from the base address to the end-of-file. A negative count is used here and elsewhere to loop indefinitely or until some error condition (like end-of-file) is detected.

The format 404^8Cn is broken down as follows:

- 40 Print 4 octal locations.
- 4 Back up the current address 4 locations (to the original start of the field).
- Print 8 consecutive characters using an escape convention; each character in the range 0 to 037 is displayed as followed by the corresponding character in the range 0140 to 0177. An @ is displayed as @@.
- n Print a newline.

The following request could have been used instead to allow the displaying to stop at the end of the data segment.

```
<br/>b,<d/404^8Cn
```

The request <d provides the data segment size in bytes. Because adb can read in scripts, you can use formatting requests to produce image dump scripts. Invoked adb as follows:

```
% adb a.out core < dump
```

This reads in a script file, dump, containing formatting requests. Here is an example of such a script:

```
120$w
4095$s
$v
=3n
$m
=3n"C Stack Backtrace"
$C
=3n"C External Variables"
$e
=3n"Registers"
$r
0$s
=3n"Data Segment"
<b,-1/8ona
```

The request 120\$w sets the width of the output to 120 characters (normally, the width is 80 characters). adb attempts to display addresses as:



```
symbol + offset
```

The request 4095\$s increases the maximum permissible offset to the nearest symbolic address from the default 255 to 4095. The request = can be used to display literal strings. Thus, headings are provided in this dump program with requests of the form:

```
=3n"C Stack Backtrace"
```

This spaces three lines and displays the literal string. The request \$v\$ displays all non-zero adb variables. The request 0\$s sets the maximum offset for symbol matches to zero, thus suppressing the display of symbolic labels in favor of octal values. Note that this is only done for displaying the data segment. The request

```
<b,-1/8ona
```

displays a dump from the base of the data segment to the end-of-file with an octal address field and 8 octal numbers per line.

# **Accounting File Dump**

As another illustration, consider a set of requests to dump the contents /etc/utmp or /usr/adm/wtmp, both of which are composed of 8-character terminal names, 8-character login names, 16-character host names, and a 4-byte integer representing the login time.

```
% adb /etc/utmp -
0,-1?ccccccc8tcccccc8tcccccccccc16tYn
```

The c format is repeated 8 times, 8 times, and 16 times. The 8t means go to the 8th tab stop, and 16t means to to the 16th tab stop. Y causes the 4-byte integer representing the login time to print in *ctime* (3) format.


You can use adb to convert values from one representation to another. For example, to print the hexadecimal number ff in octal, decimal, and hexadecimal, type:

```
ff = odx
072 58 #3a
```

The default input radix of adb is hexadecimal. Formats are remembered, so that typing subsequent numbers will display them in the same format. Character values may be converted as well:

```
'a' = oc
0141 a
```

This technique may also be used to evaluate expressions, but be warned that all



# **Converting Values**



binary operators have the same precedence, which is lower than for unary operators.

# 4.5. Patching

Patching files with adb is accomplished with the write requests w or W. This is often used in conjunction with the locate requests 1 or L. In general, the syntax for these requests is as follows:

```
?1 value
```

The 1 matches on two bytes, whereas L matches four bytes. The w request writes two bytes, whereas W writes four bytes. The value field in either locate or write requests is an expression. Either decimal and octal numbers, or character strings, are permitted.

In order to modify a file, adb must be invoked as follows:

```
% adb -w file1 file2
```

When invoked with this option, file1 and file2 are created if necessary, and opened for both reading and writing.

For example, consider the following C program, zen.c: We will change the word "Thys" to "Thys" in the executable file.

```
char str1[] = "Thys is a character string";
int one = 1;
int number = 456;
long lnum = 1234;
float fpt = 1.25;
char str2[] = "This is the second character string";
main()
{
   one = 2;
}
```

Use the following requests:

```
% adb -w zen -
?1 'Th'
?W 'This'
```

The request ?1 starts a dot and stops at the first match of "Th", having set dot to the address of the location found. Note the use of ? to write to the a .out file. The form ?\* would be used for a 411 file.

More frequently the request is typed as:

```
?l 'Th'; ?s
```



which locates the first occurrence of "Th", and display the entire string. Execution of this adb request sets dot to the address of those characters in the string.

As another example of the utility of the patching facility, consider a C program that has an internal logic flag. The flag could be set using adb, before running the program. For example:

```
% adb a.out -
:s argl arg2
flag/w 1
:c
```

The :s request is normally used to single step through a process or start a process in single step mode. In this case it starts a .out as a subprocess with arguments arg1 and arg2. If there is a subprocess running, adb writes to it rather than to the file so the w request caused flag to be changed in the memory of the subprocess.

Below is a list of some strange things that users should be aware of.

- When displaying addresses, adb uses either text or data symbols from the a .out file. This sometimes causes unexpected symbol names to be displayed with data (for example, savr5+022). This does not happen if? is used for text (instructions) and / for data.
- 2) The adb debugger cannot handle C register variables in the most recently activated function.

4.6. Anomalies



# adb Reference

adb Reference	55
5.1. adb Options	55
5.2. Using adb	55
5.3. adb Expressions	56
Unary Operators	57
Binary Operators	57
5.4. adb Variables	58
5.5. adb Commands	58
adb Verbs	58
?, /, @, and = Modifiers	59
? and / Modifiers	60
: Modifiers	61
\$ Modifiers	62
5.6. adb Address Mapping	63
5.7. See Also	63
5.8. Diagnostic Messages from adb	63
5.9. Bugs	64

# adb Reference

# adb [-w][-k][-I dir][objectfile [corefile]]

An interactive, general-purpose, assembly-level debugger, adb examines files and provides a controlled environment for the execution of UNIX programs.

Normally objectfile is an executable program file, preferably containing a symbol table. If the file does not contain a symbol table, it can still be examined, but the symbolic features of adb cannot be used. The default objectfile is a .out.

The corefile is assumed to be a core image file produced after executing objectfile. The default corefile is core.

- -w Create both objectfile and corefile if necessary and open them for reading and writing so they can be modified using adb.
- -k Do UNIX kernel memory mapping; should be used when corefile is a UNIX crash dump or /dev/mem.
- -I Specifies a directory where files to be read with \$< or \$<< (see below) will be sought; the default is /usr/lib/adb.

adb reads commands from the standard input and displays responses on the standard output, ignoring QUIT signals. An INTERRUPT signal returns to the next adb command.

adb saves and restores terminal characteristics when running a sub-process. This makes it possible to debug programs that manipulate the screen. See tty (4).

In general, requests to adb are of the form

```
[address] [, count] [command] [;]
```

The symbol dot (.) represents the current location. It is initially zero. If address is present, then dot is set to address. For most commands count specifies how many times the command will be executed. The default count is 1 (one). Both address and count may be expressions.

# 5.1. adb Options

# 5.2. Using adb



# 5.3. adb Expressions

- . The value of dot.
- + The value of **dot** incremented by the current increment.
- The value of dot decremented by the current increment.
- & The last address typed; this used to be ".

### integer

A number. The prefixes 00 and 00 (zero oh) force interpretation in octal radix; the prefixes 0x and 0x force interpretation in decimal radix; the prefixes 0x and 0x force interpretation in hexadecimal radix. Thus 0020=016=0x10= sixteen. If no prefix appears, then the *default radix* is used; see the \$d command. The default radix is initially hexadecimal. Hexadecimal digits are 0123456789abcdefABCDEF with the obvious values. Note that if a hexadecimal number starts with a letter, but does not duplicate a defined symbol, it is accepted as a hexadecimal value. To enter a hexadecimal number that is the same as a defined symbol, precede it by 0, 0x, or 0x.

#### 'cccc'

The ASCII value of up to 4 characters. A backslash (\) may be used to escape a '.

#### <name

The value of *name*, which is either a variable name or a register name; adb maintains a number of variables (see VARIABLES) named by single letters or digits. If *name* is a register name, then the value of the register is obtained from the system header in *corefile*. The register names are those printed by the \$r command.

#### symbol

A symbol is a sequence of upper or lower case letters, underscores or digits, not starting with a digit. The backslash character (\) may be used to escape other characters. The value of the symbol is taken from the symbol table in objectfile. An initial \_ will be prepended to symbol if needed.

# \_symbol

In C, the true name of an external symbol begins with underscore (). It may be necessary to use this name to distinguish it from internal or hidden variables of a program.

#### routine.name

The address of the variable *name* in the specified C routine. Both *routine* and *name* are *symbols*. If *name* is omitted the value is the address of the most recently activated C stack frame corresponding to *routine*. Works only if the program has been compiled using the -go flag. See cc (1).

#### (expr)

The value of the expression expr.



# **Unary Operators**

### \*expression

The contents of the location addressed by exp in corefile.

# %expression

The contents of the location addressed by exp in objectfile (used to be @).

#### -expression

Integer negation.

### ~ expression

Bitwise complement.

### #expression

Logical negation.

### ^Fexpression

(Control-f) Translates program addresses into source file addresses. Works only if the program has been compiled using the -go flag. See cc (1).

### ^Aexpression

(Control-a) Translates source file addresses into program addresses. Works only if the program has been compiled using the -go flag. See cc (1).

#### `name

(Back-quote) Translates a procedure name into a source file address. Works only if the program has been compiled using the -go flag. See cc (1).

#### "filename"

A filename enclosed in quotation marks (for instance, main.c) produces the source file address for the zero-th line of that file. Thus to reference the third line of the file main.c, we say: "main.c"+3. Works only if the program has been compiled using the -go flag. See cc (1).

# **Binary Operators**

Binary operators are left associative and are less binding than unary operators.

expression-1+expression-2

Integer addition.

expression-1-expression-2

Integer subtraction.

expression-1 \* expression-2 Integer multiplication.

expression-1% expression-2

Integer division.

expression-1 & expression-2

Bitwise conjunction.

expression-1 | expression-2

Bitwise disjunction.

expression-1 # expression-2

Expression1 rounded up to the next multiple of expression2.



# 5.4. adb Variables

adb provides several variables. Named variables are set initially by adb but are not used subsequently. Numbered variables are reserved for communication as follows:

- 0 The last value printed.
- 1 The last offset part of an instruction source.
- 2 The previous value of variable 1.
- 9 The count on the last \$< or \$<< command.

On entry the following are set from the system header in the *corefile*. If *corefile* does not appear to be a **core** file then these values are set from *objectfile*.

- b The base address of the data segment.
- d The data segment size.
- e The entry point.
- m The 'magic' number (0407, 0410 or 0413).
- s The stack segment size.
- t The text segment size.

# 5.5. adb Commands

Commands to adb commands consist of a verb followed by a modifier or list of modifiers.

# adb Verbs

#### The verbs are:

- ? Print locations starting at address in objectfile.
- / Print locations starting at address in corefile.
- Print the value of address itself.
- Interpret address as a source file address, and print locations in objectfile or lines of the source text. Works only if the program has been compiled using the -go flag. See cc (1).
- : Manage a subprocess.
- \$ Execute miscellaneous commands.
- > Assign a value to a variable or register.

#### RETURN

Repeat the previous command with a *count* of 1. *Dot* is incremented by its current increment.

! Call the shell to execute the following command.

Each verb has a specific set of modifiers, these are described below.



?, /, @, and = Modifiers

The first four verbs described above take the same *modifiers*, which specify the format of command output. Each modifier consists of a letter preceded by an optional *repeat* count. Verb can take one or more modifiers.

$$\{?,/,0,=\}$$
 [[rount]fletter...]

Each modifier specifies a format that increments *dot* by a certain amount, which is given below. If a command is given without a modifier, the last specified format is used to display output. The following table shows the format letters, the amount they increment *dot*, and a description of what each letter does. Note that all octal numbers output by adb are preceded by 0.

format	<i>dot+=</i>	description
0	2	Print 2 bytes in octal.
0	4	Print 4 bytes in octal.
q	2	Print in signed octal.
Q	4	Print long signed octal.
đ	2	Print in decimal.
D	4	Print long decimal.
x	2	Print 2 bytes in hexadecimal.
x	4	Print 4 bytes in hexadecimal.
u	2	Print as an unsigned decimal number.
U	4	Print long unsigned decimal.
f	4	Print the 32 bit value as a floating point number.
F	8	Print double floating point.
b	1	Print the addressed byte in octal.
С	1	Print the addressed character.
С	1	Print the addressed character using the standard escape convention. Print control characters as ^X and the delete character as ^?.
S	n	Print the addressed characters until null character is reached; $n$ is the length of the string including its zero terminator.
S	n	Print string using the escape conventions of $\mathbb{C}$ ; $n$ is the length of the string including its zero terminator.
Y	4	Print 4 bytes in ctime (3) format.
i	n	Print as machine instructions; $n$ is the number of bytes occupied by the instruction. In this format, variables 1 and 2 are set to the offset parts of the source and destination respectively.



z	n	Print as machine instructions with MC68010 instruction timings; <i>n</i> is the number of bytes occupied by the instruction. In this format, variables 1 and 2 are set to the offset parts of the source and destination respectively.
I	0	Print the source text line specified by dot (@ command), or most closely corresponding to dot (? command).
a	0	Print the value of <i>dot</i> in symbolic form. Symbols are checked to ensure that they have an appropriate type as indicated below.  / local or global data symbol ? local or global text symbol = local or global absolute symbol
p	4	Print the addressed value in symbolic form using the same rules for symbol lookup as with a.
A	0	Print the value of $dot$ in source file symbolic form, that is: "file"+nnn. Works only if the program has been compiled with the -go flag. See $cc$ (1).
P	4	Print the addressed value in source file symbolic form, that is: "file" + nnn. Works only if the program has been compiled using the $-go$ flag. See $cc$ (1).
t	0	When preceded by an integer, tabs to the next appropriate tab stop. For example, 8t moves to the next 8-space tab stop.
r	0	Print a space.
n	0	Print a newline.
** **	0	Print the enclosed string.
^	0	Dot decremented by current increment; nothing is printed.
+	0	Dot incremented by 1; nothing is printed.
-	0	Dot decremented by 1; nothing is printed.

# ? and / Modifiers

Only the verbs? and / take the following modifiers:

# [ ?/]1 value mask

Words starting at *dot* are masked with *mask* and compared to *value* until a match is found. If the command is L instead of 1, the match is for 4 bytes at a time instead of 2. If no match is found *dot* is unchanged; otherwise *dot* is set to the matched location. If *mask* is omitted then -1 is used.

# [ ?/]w value ...

Write the 2-byte *value* into the addressed location. If the command is W instead of w, write 4 bytes instead of 2. Odd addresses are not allowed when writing to the subprocess address space.



#### [ ?/]m bl elfl [ ?/ ]

New values for (bl, el, fl) are recorded. If fewer than three expressions are given, then the remaining map parameters are left unchanged. If the ? or / is followed by \*, then the second segment (b2, e2, f2) of the address mapping is changed (see *Address Mapping* below). If the list is terminated by ? or /, then the file, *objectfile* or *corefile* respectively, is used for subsequent requests. For example, /m? causes / to refer to *objectfile*.

#### : Modifiers

Only the verb: takes the following modifiers:

- b cmd Set breakpoint at address. The breakpoint is executed count-1 times before causing a stop. Each time the breakpoint is encountered the command cmd is executed. If this command is omitted or sets dot to zero, then the breakpoint causes a stop.
- B Like b but takes a source file address. Works only if the program has been compiled using the -go flag. See cc(1).
- d Delete breakpoint at address.
- D Like d but takes a source file address. Works only if the program has been compiled using the -go flag. See cc (1).
- Run objectfile as a subprocess. If address is given explicitly, then the program is entered at this point; otherwise, the program is entered at its standard entry point. An optional count specifies how many breakpoints are to be ignored before stopping. Arguments to the subprocess may be supplied on the same line as the command. An argument starting with < or > causes the standard input or output to be established for the command. All signals are enabled on entry to the subprocess.
- c s The subprocess is continued with signal s; see sigvec (2). If address is given then the subprocess is continued at this address. If no signal is specified, then the signal that caused the subprocess to stop is sent. Breakpoint skipping is the same as for r.
- Same as for c except that the subprocess is single stepped *count* times. If there is no current subprocess, then *objectfile* is run as a subprocess as for r. In this case no signal can be sent; the remainder of the line is treated as an argument list for the subprocess.
- S Like s but single steps by source lines, rather than by machine instructions. This is achieved by repeatedly single-stepping machine instructions until the corresponding source file address changes. Thus procedure calls cause stepping to stop. Works only if the program has been compiled using the -go flag. See cc (1).
- i Add the signal specified by address to the list of signals that are passed directly to the subprocess with the minimum of interference. Normally, adb intercepts all signals destined for the subprocess, and the : c command must be issued to continue the process with the signal. Signals on this list are handed to the process with an implicit : c



- commands as soon as they are seen.
- t Remove the signal specified by *address* from the list of signals that are implicitly passed to the subprocess.
- k Terminate (kill) the current subprocess, if any.

#### \$ Modifiers

#### Only the verb \$ takes the following modifiers:

- < file Read commands from file. If this command is executed in a file, further commands in the file are not seen. If file is omitted, the current input stream is terminated. If a count is given, and it is zero, the command will be ignored. The value of the count will be placed in variable 9 before the first command in file is executed.</p>
- << file Similar to <, but can be used in a file of commands without closing the file. Variable 9 is saved during the execution of this command, and restored when it completes. There is a small, finite limit to the number of << files that can be open at once.
- > file Append output to file, which is created if it does not exist. If file is omitted, output is returned to the terminal.
- ? Print the process id, the signal that stopped the subprocess, and the registers. Produces the same response as \$ used without any modifier.
- r Print the general registers and the instruction addressed by pc; dot is set to pc.
- b Print all breakpoints and their associated counts and commands.
- c C stack backtrace. If address is given, it is taken as the address of the current frame instead of the contents of the frame-pointer register. If count is given, only the first count frames are printed.
- C Similar to c, but in addition prints the names and 32-bit values of all automatic and static variables for each active function. Works only if the program has been compiled using the -go flag. See cc (1).
- d Set the default radix to address and report the new value. Note that address is interpreted in the (old) current radix. Thus 10\$d never changes the default radix. To make the default radix decimal, use 0t10\$d.
- e Print the names and values of external variables.
- w Set the page width for output to address (default 80).
- s Set the limit for symbol matches to address (default 255).
- o Regard all input integers as octal.
- q Exit adb.
- v Print all non-zero variables in octal.
- m Print the address map.



- f Print a list of known source file names.
- p Print a list of known procedure names.
- p For kernel debugging. Change the current kernel memory mapping to map the designated user structure to the address given by the symbol u. The address argument is the address of the user's proc structure.
- i Show which signals are passed to the subprocess with the minimum of adb interference. Signals may be added to or deleted from this list using the :i and :t commands.
- W Re-open *objectfile* and *corefile* for writing, as though the —w command—line argument had been given.

#### 5.6. adb Address Mapping

The interpretation of an address depends on its context. If a subprocess is being debugged, addresses are interpreted in the usual way (as described below) in the address space of the subprocess. If the operating system is being debugged, either post-mortem or by using the special file /dev/mem to interactively examine and/or modify memory, the maps are set to map the kernel virtual addresses, which start at zero. For some commands, the address is not interpreted as a memory address at all, but as an ordered pair representing a file number and a line number within that file. The @ command always takes such a source file address, and several operators are available to convert to and from the more customary memory locations.

The address in a file associated with a written address is determined by a mapping associated with that file. Each mapping is represented by two triples (b1, e1, f1) and (b2, e2, f2), and the *file address* corresponding to a written address is calculated as follows.

$$b1 \le address < e1 \implies file\ address = address + f1 - b1$$

otherwise

$$b2 \le address < e2 \implies file address = address + f2 - b2$$

Otherwise, the requested *address* is not legal. If a ? or / request is followed by an \*, only the second triple is used.

The initial setting of both mappings is suitable for normal a .out and core files. If either file is not of the kind expected then, for that file, bI is set to 0, eI is set to the maximum file size, and fI is set to 0. This way, the whole file can be examined with no address translation.

5.7. See Also

$$dbx(1)$$
,  $ptrace(2)$ ,  $a.out(5)$ ,  $core(5)$ .

**5.8. Diagnostic Messages from** adb

After startup, the only prompt adb gives is

adb

when there is no current command or format. On the other hand, adb supplies comments about inaccessible files, syntax errors, abnormal termination of



commands, etc. Exit status is 0, unless the last command failed or returned non-zero status.

#### 5.9. Bugs

There is no way to clear all breakpoints with a single command.

Since no shell is invoked to interpret the arguments of the :r command, the customary wildcard and variable expansions cannot occur.

Since there is little type checking on addresses, using a source file address in an inappropriate context may lead to unexpected results: main?i will almost certainly not do anything useful.



# Debugging UNIX Kernels with adb

Debug	ging UNIX Kernels with adb	67
6.1.	Introduction	67
	Getting Started	67
	Establishing Context	68
6.2.	adb Command Scripts	68
	Extended Formatting Facilities	68
	Traversing Data Structures	72
	Supplying Parameters	73
	Standard Scripts	75
6.3.	Generating adb Scripts with adbgen	76
6.4	Summary	76

### Debugging UNIX Kernels with adb

This document describes the use of extensions made to the UNIX debugger adb for the purpose of debugging the UNIX kernel. It discusses the changes made to allow standard adb commands to function properly with the kernel and introduces the basics necessary for users to write adb command scripts that may be used to augment the standard adb command set. The examination techniques described here may be applied to running systems, as well as the post-mortem dumps automatically created by <code>savecore(8)</code> after a system crash. The reader is expected to have at least a passing familiarity with the debugger command language.

Modifications have been made to the standard UNIX debugger adb to simplify examination of the post-mortem dump generated automatically following a system crash. These changes may also be used when examining UNIX in its normal operation. This document serves as an introduction to the use of these facilities,

Use the -k option of adb when you want to examine the UNIX kernel:

but should not be construed as a description of how to debug the kernel.

% adb -k /vmunix /dev/mem

The -k option makes adb partially simulate the Sun-2 or Sun-3 virtual memory management unit when accessing the *core* file. In addition, the internal state maintained by the debugger is initialized from data structures maintained by the UNIX kernel explicitly for debugging.† A post-mortem dump may be examined in a similar fashion:

% adb -k vmunix.? vmcore.?

Supply the appropriate version of the saved operating system image, and its core dump, in place of the question mark.

6.1. Introduction

**Getting Started** 



<sup>†</sup> If the -k flag is not used when invoking adb, the user must explicitly calculate virtual addresses. With the -k option, adb interprets page tables to automatically perform virtual to physical address translation.

#### **Establishing Context**

During initialization adb attempts to establish the context of the currently active process by examining the value of the kernel variable panic\_regs. This structure contains the register values at the time of the call to the panic() routine. Once the stack pointer has been located, this command generates a stack trace:

\$c

An alternate method may be used when a trace of a particular process is required; see Section 6.3 for details.

#### 6.2. adb Command Scripts

This section supplies details about writing adb scripts to debug the kernel.

### Extended Formatting Facilities

Once the process context has been established, the complete adb command set is available for interpreting data structures. In addition, a number of adb scripts have been created to simplify the structured printing of commonly referenced kernel data structures. The scripts normally reside in the directory /usr/lib/adb, and are invoked with the \$< operator. Standard scripts are listed below in Table 6-1.

As an example, consider the listing that starts on the next page. The listing contains a dump of a faulty process's state.



```
% adb -k vmunix.3 vmcore.3
sbr 50030 slr 51e
physmem 3c0
$c
_panic[10fec](5234d) + 3c
_{\rm ialloc[16ea8](d44a2,2,dff)+c8}
_{\text{maknode}}[1d476](dff) + 44
_{copen[1c480](602,-1)} + 4e
_creat() + 16
syscall[2ea0a]() + 15e
level5() + 6c
5234d/s
nldisp+175:
                  ialloc: dup alloc
u$<u
_u:
_u:
         рс
         4be0
             d2
                      d3
                               d4
                                        d5
u+4:
         13b0
                      0
                               0
                                        0
                      d7
u+14:
             d6
                  2604
         0
             a2
                                        a5
u+1c:
                      a3
                               a4
                  c7800
         0
                               5a958
                                            d7160
u+2c:
             a 6
                      a7
         3e62
                      3e48
_u+34:
             sr
         27000000
                          p0lr
u+38:
             p0br
                                        plbrpllr
         105000
                      40000022
                                    fd7f4
                                            1ffe
_u+48:
             szpt
                           sswap
         1
                  0
_u+50:
                           ar0
             procp
                                    comm
         d7160
                      3fb2
                                    dtime^@^@^@^@^@
_u+158:
             arg0
                           arq1
                                        arg2
         1001c
                               ffffa4
                      -1
_u+178:
             uap
                      qsave
                                            error
         2958
                      2eb46
                                    1
_u+1b2:
             rv1
                      rv2
                               eosys
         0
                  14cac
                               0
             uid gid
u+1bc:
         49
             10
u+1c0:
             groups
         10
                  -1
                           -1
                                    -1
                  -1
                           -1
                                    -1
         -1
u+1e0:
             ruid
                      rgid
         49
             10
                           dsize
u+1e4:
             tsize
                                        ssize
         7
                  1b
                           2
_u+344:
             odsize
                           ossize
                                        outime
                           0
         0
                  0
u+350:
             signal
         0
                           0
                                    0
                  0
         0
                  0
                           0
                                    0
```



[	0		0		0		0	
	0		0		0		0	
	0		0				0	
					0			
	0		0		0		0	
	0		0		0		0	
	0		0		0		0	
	sim	mask	-		-		-	
		mask	^		^		^	
	0		0		0		0	
	0		0		0		0	
	0		0		0		0	
	0		0		0		0	
	0		0		0		0	
			0		-			
	0		-		0		0	
	0		0		0		0	
	0		0		0		0	
u+450:		onst	tack		old	lmask		code
-	0		800			0		
u+45c:	•	e i ~			020	sigsta	~ b	İ
-u+450:	^	SIG			OHE	TARL	LUK	
	0		0					
_u+464:		ofi.	le					
	d66	b4		d66	b4		d66	b4 0
	0		0		0		0	
	0							
			0		0		0	
	0		0		0		0	
	0		0		0		0	
	pof	ila						
	0	0	0	^	^	0	^	•
				0	0	0	0	0
ŧ	0	0	0	0	0	0	0	0
1	0	0	0	0				
u+4c8:		cdi	r		rdi	ir		ttypttydcmask
-	d44			0		5c6	~n	012
	411	uz		v		500	-0	012
		& cr						
_u+4d8:		uti	me				sti	me
1 -	0		0		0		35b	60
u+4e8:		max			ixı	~ <b>q q</b>		idrssisrss
-" ' <del>"</del> = 0 .		max.				-33		TATSSTSTSS
	9	_	35		43			
_u+4f8:		min			ma	jflt		nswap
	0		5		0			
u+504:		inh	lock			olock		msgsndmsgrcv
	3		7	-	0		0	301104104104
							U	
_u+514:		nsi	gnal	.s	nvo	CSW		nivcsw
	0		12		4			
u+520:		uti	me				sti	me
-	0		0		0		0	
			-				v	
_u+530:		max				css		idrssisrss
	0		0		0			
u+540:		min	flt		ma	jflt		nswap
1 -	0		0		0			•
۱		4-L				1001-		magandmagna
		TUD.	lock			olock		msgsndmsgrcv
_u+54c:			_					
-	0		0		0		0	
_u+54c: _u+55c:	0		0 gnal	.s	0 nvc	csw	0	nivcsw



```
0
                          0
0d7160$proc
d7160:
             link
                          rlink
                                        addr
        590e0
                      0
                               1057f4
d716c:
             upri
                      pri cpu stat
                                        timeniceslp
        066 024 020 03 01
                              024 0
d7173:
             cursiq
                          sig
        0
d7178:
             mask
                          ignore
                                        catch
        n
                 n
                          0
             flag
d7184:
                          uid pgrp
                                       pid ppid
        8001
                      31
                          2f
                              2f
                                  23
d7190:
             xstat
                          ru
                                   poip
                                            szpttsize
        0
                 0
                          0
                               1
d719e:
             dsize
                          ssize
                                        rssizemaxrss
        1b
                                   fffff
d71ae:
             swrss
                          swaddr
                                        wchantextp
                                   d8418
                 0
                          0
d71be:
             p0br
                          xlink
                                        ticks
        105000
                      0
                              15
d71c8:
                                   ndx idhashpptr
             %cpu
                               2
         0
                                   d70d4
d71d4:
             real itimer
                 0
                          0
                                   0
d71e4:
             quota
                          ctx
         0
                  5f236
0d8418$<text
d8418:
             daddr
         284
                 0
                          0
                                   0
         0
                  0
                          0
                                   0
                  0
                          0
         n
         ptdaddr
                      size
                                   caddr
                                            iptr
         184
                          d7160
                                        d47e0
         rssize
                 swrss
                          count
                                   ccount
                                            flagslptimpoip
             0
                          042 0
                  01
                      01
```

The cause of the crash was a panic (see the stack trace) due to a duplicate inode allocation detected by the ialloc() routine. The majority of the dump was done to illustrate the use of command scripts used to format kernel data structures. The u script, invoked by the command u\$<u, is a lengthy series of commands to pretty-print the user vector. Likewise, proc and text are scripts to format the obvious data structures. Let's quickly examine the text script, which has been broken into a number of lines for readability here; in actuality it is a single line of text.

```
./"daddr"n12Xn\
"ptdaddr"16t"size"16t"caddr"16t"iptr"n4Xn\
"rssize"8t"swrss"8t"count"8t"ccount"8t"flag"8t"slptim"8t"poip"n2x4bx
```



The first line produces the list of disk block addresses associated with a swapped out text segment. The n format forces a newline character, with 12 hexadecimal integers printed immediately after. Likewise, the remaining two lines of the command format the remainder of the text structure. The expression 16t tabs to the next column which is a multiple of 16.

The majority of the scripts provided are of this nature. When possible, the formatting scripts print a data structure with a single format to allow subsequent reuse when interrogating arrays of structures. That is, the previous script could have been written:

```
./"daddr"n12Xn
+/"ptdaddr"16t"size"16t"caddr"16t"iptr"n4Xn
+/"rssize"8t"swrss"8t"count"8t"count"8t"flag"8t"slptim"8t"poip"n2x4
```

But then, reuse of the format would have invoked only the last line of the format.

#### **Traversing Data Structures**

The adb command language can be used to traverse complex data structures. One such data structure, a linked list, occurs quite often in the kernel. By using adb variables and the normal expression operators it is a simple matter to construct a script which chains down the list, printing each element along the way.

For instance, the queue of processes awaiting timer events, the callout queue, is printed with the following two scripts:

```
callout:
    calltodo/"time"16t"arg"16t"func"
    *(.+0t12) $<callout.nxt</pre>
```

```
callout.nxt:
    ./D2p
    *+>1
    ,#<1$<
    <1$<callout.nxt</pre>
```

The first line of the script callout starts the traversal at the global symbol calltodo and prints a set of headings. It then skips the empty portion of the structure used as the head of the queue. The second line then invokes the script callout.nxt moving dot to the top of the queue — \*+ performs the indirection through the link entry of the structure at the head of the queue. The script callout.nxt prints values for each column, then performs a conditional test on the link to the next entry. This test is performed as follows:

```
(*+>1
```

This means to place the value of the link in the adb variable <1. Next:



```
,#<1$<
```

This means if the value stored in <1 is non-zero, then the current input stream (from the script callout.nxt) is terminated. Otherwise, the expression #<1 is zero, and the \$< operator is ignored. That is, the combination of the logical negation operator #, adb variable <1, and operator \$<, in effect, creates a statement of the form:

```
if (!link)
  exit;
```

The remaining line of callout.nxt simply reapplies the script on the next element in the linked list. A sample callout dump is shown below:

```
% adb -k /vmunix /dev/mem
sbr 50030 slr 51e
physmem 3c0
$<callout
calltodo:
calltodo: time
                            func
                    arg
                        _roundrobin
                        _if_slowtimo
                        schedcpu
                        _pffasttimo
                        _schedpaging
                        _pfslowtimo
d9ff4:
          12
                        _arptimer
          736
da044:
                 d7390
                          _realitexpire
                           _realitexpire
da004:
          206
                 d6fbc
                 d741c
                            _realitexpire
da024:
          649
da034:
          176929
                     d7304
                               _realitexpire
```

#### **Supplying Parameters**

A command script may use the address and count portions of an adb command as parameters. An example of this is the setproc script, used to switch to the context of a process with a known process ID:

```
0t99$<setproc
```

The body of setproc is:

```
.>4
*nproc>1
*proc>f
$<setproc.nxt
```

The body of setproc.nxt is:



```
(*(<f+0t42)&0xffff)="pid "D
,#(((*(<f+0t42)&0xffff))-<4)$<setproc.done
<l-1>1
<f+0t140>f
,#<1$<
$<setproc.nxt</pre>
```

The process ID, supplied as the parameter, is stored in the variable <4, the number of processes is placed in <1, and the base of the array of process structures in <f. Then setproc.nxt performs a linear search through the array until it matches the process ID requested, or until it runs out of process structures to check. The script setproc.done simply establishes the context of the process, then exits.



### **Standard Scripts**

Here are the command scripts currently available in /usr/lib/adb:

Table 6-1 Standard Command Scripts

_	Standard Command Scripts				
Name	Use	Description			
buf	addr\$ <buf< td=""><td>format block I/O buffer</td></buf<>	format block I/O buffer			
callout	<pre>\$<callout< pre=""></callout<></pre>	print timer queue			
clist	addr\$ <clist< td=""><td>format character I/O linked list</td></clist<>	format character I/O linked list			
dino	addr\$ <dino< td=""><td>format directory inode</td></dino<>	format directory inode			
dir	addr\$ <dir< td=""><td>format directory entry</td></dir<>	format directory entry			
file	addr\$ <file< td=""><td>format open file structure</td></file<>	format open file structure			
filsys	addr\$ <filsys< td=""><td>format in-core super block structure</td></filsys<>	format in-core super block structure			
findproc	pid\$ <findproc< td=""><td>find process by process id</td></findproc<>	find process by process id			
ifnet	addr\$ <ifnet< td=""><td>format network interface structure</td></ifnet<>	format network interface structure			
inode	addr\$ <inode< td=""><td>format in-core inode structure</td></inode<>	format in-core inode structure			
inpcb	addr\$ <inpcb< td=""><td>format internet protocol control block</td></inpcb<>	format internet protocol control block			
iovec	addr\$ <iovec< td=""><td>format a list of iov structures</td></iovec<>	format a list of iov structures			
ipreass	addr\$ <ipreass< td=""><td>format an ip reassembly queue</td></ipreass<>	format an ip reassembly queue			
mact	addr\$ <mact< td=""><td>show active list of mbuf's</td></mact<>	show active list of mbuf's			
mbstat	\$ <mbstat< td=""><td>show mbuf statistics</td></mbstat<>	show mbuf statistics			
mbuf	addr\$ <mbuf< td=""><td>show next list of mbuf's</td></mbuf<>	show next list of mbuf's			
mbufs	addr\$ <mbufs< td=""><td>show a number of mbuf's</td></mbufs<>	show a number of mbuf's			
mount	addr\$ <mount< td=""><td>format mount structure</td></mount<>	format mount structure			
pcb	addr\$ <pcb< td=""><td>format process context block</td></pcb<>	format process context block			
proc	addr\$ <proc< td=""><td>format process table entry</td></proc<>	format process table entry			
protosw	addr\$ <protosw< td=""><td>format protocol table entry</td></protosw<>	format protocol table entry			
rawcb	addr\$ <rawcb< td=""><td>format a raw protocol control block</td></rawcb<>	format a raw protocol control block			
rtentry	addr\$ <rtentry< td=""><td>format a routing table entry</td></rtentry<>	format a routing table entry			
rusage	addr\$ <rusage< td=""><td>format resource usage block</td></rusage<>	format resource usage block			
setproc	pid\$ <setproc< td=""><td>switch process context to pid</td></setproc<>	switch process context to pid			
socket	addr\$ <socket< td=""><td>format socket structure</td></socket<>	format socket structure			
stat	addr\$ <stat< td=""><td>format stat structure</td></stat<>	format stat structure			
tcpcb	addr\$ <tcpcb< td=""><td>format TCP control block</td></tcpcb<>	format TCP control block			
tcpip	addr\$ <tcpip< td=""><td>format a TCP/IP packet header</td></tcpip<>	format a TCP/IP packet header			
tcpreass	addr\$ <tcpreass< td=""><td>show a TCP reassembly queue</td></tcpreass<>	show a TCP reassembly queue			
text	addr\$ <text< td=""><td>format text structure</td></text<>	format text structure			
traceall	\$ <traceall< td=""><td>show stack trace for all processes</td></traceall<>	show stack trace for all processes			
tty	addr\$ <tty< td=""><td>format tty structure</td></tty<>	format tty structure			
u	addr\$ <u< td=""><td>format user vector, including pcb</td></u<>	format user vector, including pcb			
uio	addr\$ <uio< td=""><td>format uio structure</td></uio<>	format uio structure			
vtimes	addr\$ <vtimes< td=""><td>format vtimes structure</td></vtimes<>	format vtimes structure			



### 6.3. Generating adb Scripts with adbgen

You can use the adbgen program to write the scripts presented earlier in a way that does not depend on the structure member offsets of referenced items. For example, the text script given above depends on all printed members being located contiguously in memory. Using adbgen, the script could be written as follows (again it is really on one line, but broken apart for ease of display):

```
#include "sys/types.h"
#include "sys/text.h"

text
./"daddr"n{x_daddr,12X}n\
   "ptdaddr"16t"size"16t"caddr"16t"iptr"n\
{x_ptdaddr,X}{x_size,X}{x_caddr,X}{x_iptr,X}n\
   "rssize"8t"swrss"8t"count"8t"count"8t"flag"8t"slptim"8t"poi
{x_rssize,x}{x_swrss,x}{x_count,b}{x_ccount,b}\
   {x_flag,b}{x_slptime,b}{x_poip,x}{END}
```

The script starts with the names of the relevant header files, while the braces delimit structure member names and their formats. This script is then processed through adogen to get the adb script presented in the previous section. See Chapter 7 of this manual for a complete description of how to write adogen scripts. The real value of writing scripts this way becomes apparent only with longer and more complicated scripts (the u script for example). When scripts are written this way, they can be regenerated if a structure definition changes, without requiring people to calculate the offsets.

#### 6.4. Summary

The extensions made to adb provide basic support for debugging the UNIX kernel by eliminating the need for a user to carry out virtual-to-physical address translation. A collection of scripts has been written to format the major kernel data structures, and aid in switching between process contexts. This was carried out with only minimal changes to the debugger.



# Generating adb Scripts with adbgen

Generating adb Scripts with adbgen					
7.1. Example of adbgen	80				
7.2. Diagnostic Messages from adbgen	80				
7.3. Bugs in adbgen	80				

### Generating adb Scripts with adbgen

#### /usr/lib/adb/adbgen file.adb ...

This program makes it possible to write adb scripts that do not contain hard-coded dependencies on structure member offsets. After generating a C program to determine structure member offsets and sizes, adbgen proceeds to generate an adb script.

The input to adbgen is a file named file. adb containing adbgen header information, then a null line, then the name of a structure, and finally an adb script. The adbgen program only deals with one structure per file; all member names occurring in a file are assumed to be in this structure. The output of adbgen is an adb script in file (without the .adb suffix).

The header lines, up to the null line, are copied verbatim into the generated C program. These header lines often have #include statements to read in header files containing relevant structure declarations.

The second part of file.adb specifies a structure.

The third part contains an adb script with any valid adb commands (see Chapter 6 of this manual), and may also contain adbgen requests, each enclosed in braces. Request types are:

- 1) Print a structure member. The request form is {member, format} where member is a member name of the structure given earlier, and format is any valid adb format request. For example, to print the p\_pid field of the proc structure as a decimal number, say {p\_pid, d}.
- 2) Reference a structure member. The request form is {\*member, base} where member is the member name whose value is wanted, and base is an adb register name containing the base address of the structure. For example, to get the p\_pid field of the proc structure, get the proc structure address in an adb register, such as <f, and say {\*p\_pid, <f}.
- 3) Tell adbgen that the offset is OK. The request form is {OFFSETOK}.

  This is useful after invoking another adb script which moves the adb dot.
- 4) Get the size of the *structure*. The request form is {SIZEOF}; adbgen simply replaces this request with the size of the structure. This is useful for incrementing a pointer to step through an array of structures.



5) Get the offset to the end of the structure. The request form is {END}. This is useful at the end of a structure to get adb to align *dot* for printing the next structure member.

By keeping track of the movement of dot, adbgen emits adb code to move forward or backward as necessary before printing any structure member in a script. The model of dot's behavior is simple: adbgen assumes that the first line of the script is of the form struct\_address/adb text and that subsequent lines are of the form +/adb text. This causes dot to move in a sane fashion. Unfortunately, adbgen does not check the script to ensure that these limitations are met. However, adbgen does check the size of the structure member against the size of the adb format code, and warns you if they are not equal.

#### 7.1. Example of adbgen

If there were an include file x.h like this,

```
struct x {
    char *x_cp;
    char x_c;
    int x_i;
};
```

then the adbgen file (call it script.adb) to print it would be:

```
#include "x.h"
x
./"x_cp"16t"x_c"8t"x_i"n{x_cp,X}{x_c,C}{x_i,D}
```

After running adbgen, the output file script would contain:

```
./"x_cp"16t"x_c"8t"x_i"nXC+D
```

To invoke the script, type:

```
x$<script
```

### **7.2. Diagnostic Messages from** adbgen

The adbgen program generates warnings about structure member sizes not equal to adb format items, and complaints about badly formatted requests. The C compiler complains if you reference a non-existent structure member. It also complains about & before array names; these complaints may be ignored.

#### 7.3. Bugs in adbgen

Structure members that are bit fields cannot be handled, because C will not give the address of a bit field; the address is needed to determine the offset.



### Index

Special Characters	adb verbs, continued			
! adb verb, 58	e, 58			
\$ adb verb, 58	return, 58			
/ adb verb, 58	address mapping in adb, 63			
/ dbx command, 28	assign dbx command, 23			
: adb verb, 58	attach dbx command, 30			
= adb verb, 58				
> adb verb, 58	В			
? adb verb, 58	b adb variable — data segment base, 5			
@ adb verb, 58	breakpoints in dbx, 23 thru 24			
e adb verb, 58	buttons subwindow in dbxtool, 12			
0	~			
0 adb variable — last value printed, 58	$\mathbf{C}$			
<b>,</b>	call dbx command, 26			
1	catch dbx command, 24			
1 adb variable — last offset, 58	clear dbx command, 24			
1 day variable 1 last offset, 30	command buttons in dbxtool, 14			
2	cont, 14			
2 adb variable — previous value of 1, 58	next, 14			
2 add variable — previous value of 1, 36	print, 14			
9	redo, 14			
	step, 14			
9 adb variable — count on last read, 58	stop at, 14			
<b>A</b>	stop in, 14			
A	command subwindow in dbxtool, 12			
adb address mapping, 63	commands in adb, 58 thru 63			
adb commands, 58 thru 63	cont command button in dbxtool, 14			
adb expressions, 56 thru 57	cont dbx command, 24			
adb variables, 58				
0 — last value printed, 58	D			
1 — last offset, 58	d adb variable — data segment size, 58			
2 — previous value of 1, 58	dbx commands			
9 — count on last read, 58	/, 28			
b — data segment base, 58	assign, 23			
d — data segment size, 58	attach, 30			
e — entry point, 58	call, 26			
m — magic number, 58	catch, 24			
s — stack segment size, 58	clear, 24			
t — text segment size, 58	cont, 24			
adb verbs, 58	dbxenv, 30			
!, 58	delete all,24			
\$, 58	detach, 30			
/, 58	display,22			
:, 58	dump, 23			
=, 58	help, 29			
>, 58	ignore, 24			
?, 58	kill,30			

	<b>T</b>
dbx commands, continued	I
next, 26	ignore dbx command, 24
nexti, 28	
print, 22	K
quit, 29	kill dbx command, 30
rerun, 24	
run, 24 set, 23	M
set, 23 set 81, 23	m adb variable — magic number, 58
sh, 29	machine-level dbx commands, 28 thru 29
source, 29	miscellaneous dbx commands, 29 thru 30
status, 24	,,
step, 26	N
stop at, 23	name data in dbx, 22 thru 23
stop if,23	next command button in dbxtool, 14
stop in,23	next dbx command, 26
stop, 23	nexti dbx command, 28
stopi,28	next1 dox command, 20
trace, 25	0
tracei, 28	
undisplay, 22	options
whatis, 22	dbxtool, 11
when at, 23	P
when in, 23 when, 23	print command button in dbxtool, 14
whereis, 23	print dbx command, 22
which, 22	princ dox command, 22
dbx machine-level commands, 28 thru 29	0
dbx miscellaneous commands, 29 thru 30	quit dbx command, 29
dbxenv dbx command, 30	quit dox command, 29
.dbxinit, 11	R
dbxtool command buttons, 14	
cont, 14	redo command button in dbxtool, 14
next, 14	rerun dbx command, 24
print, 14	RETURN adb verb, 58
redo, 14	run dbx command, 24
step, 14	running programs in dbx, 24 thru 26
stop at, 14	S
stop in, 14	
dbxtool options, 11	s adb variable — stack segment size, 58
dbxtool subwindows	scrolling in dbxtool, 12 thru 13
buttons, 12	set dbx command, 23
command, 12	set 81 dbx command, 23
display, 12	setting breakpoints in dbx, 23 thru 24
source, 12	sh dbx command, 29
status, 12	source dbx command, 29
delete all dbx command, 24	source subwindow in dbxtool, 12
detach dbx command, 30	status dbx command, 24
display data in dbx, 22 thru 23	status subwindow in dbxtool, 12
display dbx command, 22	step command button in dbxtool, 14
display subwindow in dbxtool, 12	step dbx command, 26
dump dbx command, 23	stop at command button in dbxtool, 14
<b>T</b>	stop at dbx command, 23
${f E}$	stop dbx command, 23
e adb variable — entry point, 58	
	stop if dbx command, 23
expressions in adb, 56 thru 57	stop if dbx command, 23 stop in command button in dbxtool, 14
_	stop in command button in dbxtool, 14
expressions in adb, 56 thru 57	

#### T

t adb variable — text segment size, 58 trace dbx command, 25 tracei dbx command, 28 tracing programs with dbx, 24 thru 26

#### U

undisplay dbx command, 22

variables in adb, 58

- 0 last value printed, 58
- 1 last offset, 58
- 2 previous value of 1, 58
- 9 count on last read, 58
- b data segment base, 58
- d data segment size, 58

- e entry point, 58
  m magic number, 58
  s stack segment size, 58
  t text segment size, 58

#### verbs in adb, 58

- !,58

- \$, 58 /, 58 :, 58 =, 58 >, 58
- ?, 58 @, 58
- return, 58

#### W

whatis dbx command, 22 when at dbx command, 23 when dbx command, 23 when in dbx command, 23 whereis dbx command, 23 which dbx command, 22

# **Revision History**

Rev	Date	Comments
1-α	6 August 1985	Alpha release of this manual; material culled from old manuals.
51-β	11 October 1985	Beta release of this manual; old material extensively revised.
A	17 February 1986	Initial release of this manual, for customer shipment.
ļ		