



Parts Catalog - SCX-4600/4623 series



1. Print / Copy Speed
• 22 ppm in letter

2. Processor
• Jupiter5 375 Mhz

3. Printer Language Emulations
• SPL, PCL-5 (4623FW)

4. Memory
• 64 MB (4600/4623F)
• 128 MB (4623FN)
• 256MB (4623FW)

5. Interfaces
• One USB port
• One 10/100 Base TX network connector (4623FN)
• One 802.11b/g/n wireless module (4623FW)

6. Toner cartridge
• Initial : 0.7K / 1K
• Sales : 1.5K / 2.5K two types

7. ADF (4623 series)

**This Parts Catalog is a property of Samsung Electronics Co.,Ltd.
Any unauthorized use of this manual can be punished under
applicable International and/or domestic law.**











ExplodedView and Parts List











Contents

Power Cord	4	13. COVER-PLATEN	33
Thumbnail	5	14. OPE_4 in 1	35
1. MAIN	7	15. OPE_3 in 1	37
2. COVER	9	16. PLATEN-LOW END	39
3. COVER-MIDDLE ASSY	11	17. PLATEN-LOWER_4 in 1	41
4. COVER FRONT	13	18. PLATEN-LOWER_3 in 1	43
5. COVER REAR	15	19. PLATEN-UPPER_4 in 1	45
6. FRAME BASE-LOWER	17	20. PLATEN-UPPER_3 in 1	47
7. DRIVE MAIN-BRACKET	21	21. PLATEN-SHEET	49
8. FRAME BASE-PICK UP	23	22. ASSY_ADF_BASE	51
9. FUSER	25	23. ASSY-INPUT-TRAY	53
10. CASSETTE	27	24. ASSY_ADF_COVER	55
11. SCANNER_4 in 1	29	25. ASSY_PAPER-PATH	57
12. SCANNER_3 in 1	31	26. ASSY_DRIVING_MODULE	59
















Power Cord

Power Cord differs by countries. Please check your country code.








Top View	Side View	Part Code
		Usable Country Code
		3903-000020
		XAZ
		3903-000042
		SEE / STS / XSA / XSG XSS / XEV / XEG
		3903-000050
		XFA / XIP
		3903-000067
		XEU / XSS
		3903-000082
		XIL

Top View	Side View	Part Code
		Usable Country Code
		3903-000085
		XAA / XAX
		3903-000133
		KOR
		3903-000146
		XBH
		3903-000182
		ETS
		3903-000227
		TED


Thumbnail 1

 <p>(4 in 1)</p>	 <p>(3 in 1)</p>			
<p>1. MAIN</p>		<p>2. COVER</p>	<p>3. COVER-MIDDLE ASSY</p>	<p>4. COVER FRONT</p>
				
<p>5. COVER REAR</p>	<p>6. FRAME BASE-LOWER</p>	<p>7. DRIVE MAIN-BRACKET</p>	<p>8. FRAME BASE-PICK UP</p>	<p>9. FUSER</p>
				
<p>10. CASSETTE</p>	<p>11. SCANNER_4 in 1</p>	<p>12. SCANNER_3 in 1</p>	<p>13. COVER-PLATEN</p>	<p>14. OPE_4 in 1</p>

Thumbnail 2

				
<p>15. OPE_3 in 1</p>	<p>16. PLATEN-LOW END</p>	<p>17. PLATEN-LOWER_4 in 1</p>	<p>18. PLATEN-LOWER_3 in 1</p>	<p>19. PLATEN-UPPER_4 in 1</p>
				
<p>20. PLATEN-UPPER_3 in 1</p>	<p>21. PLATEN-SHEET</p>			

1. MAIN

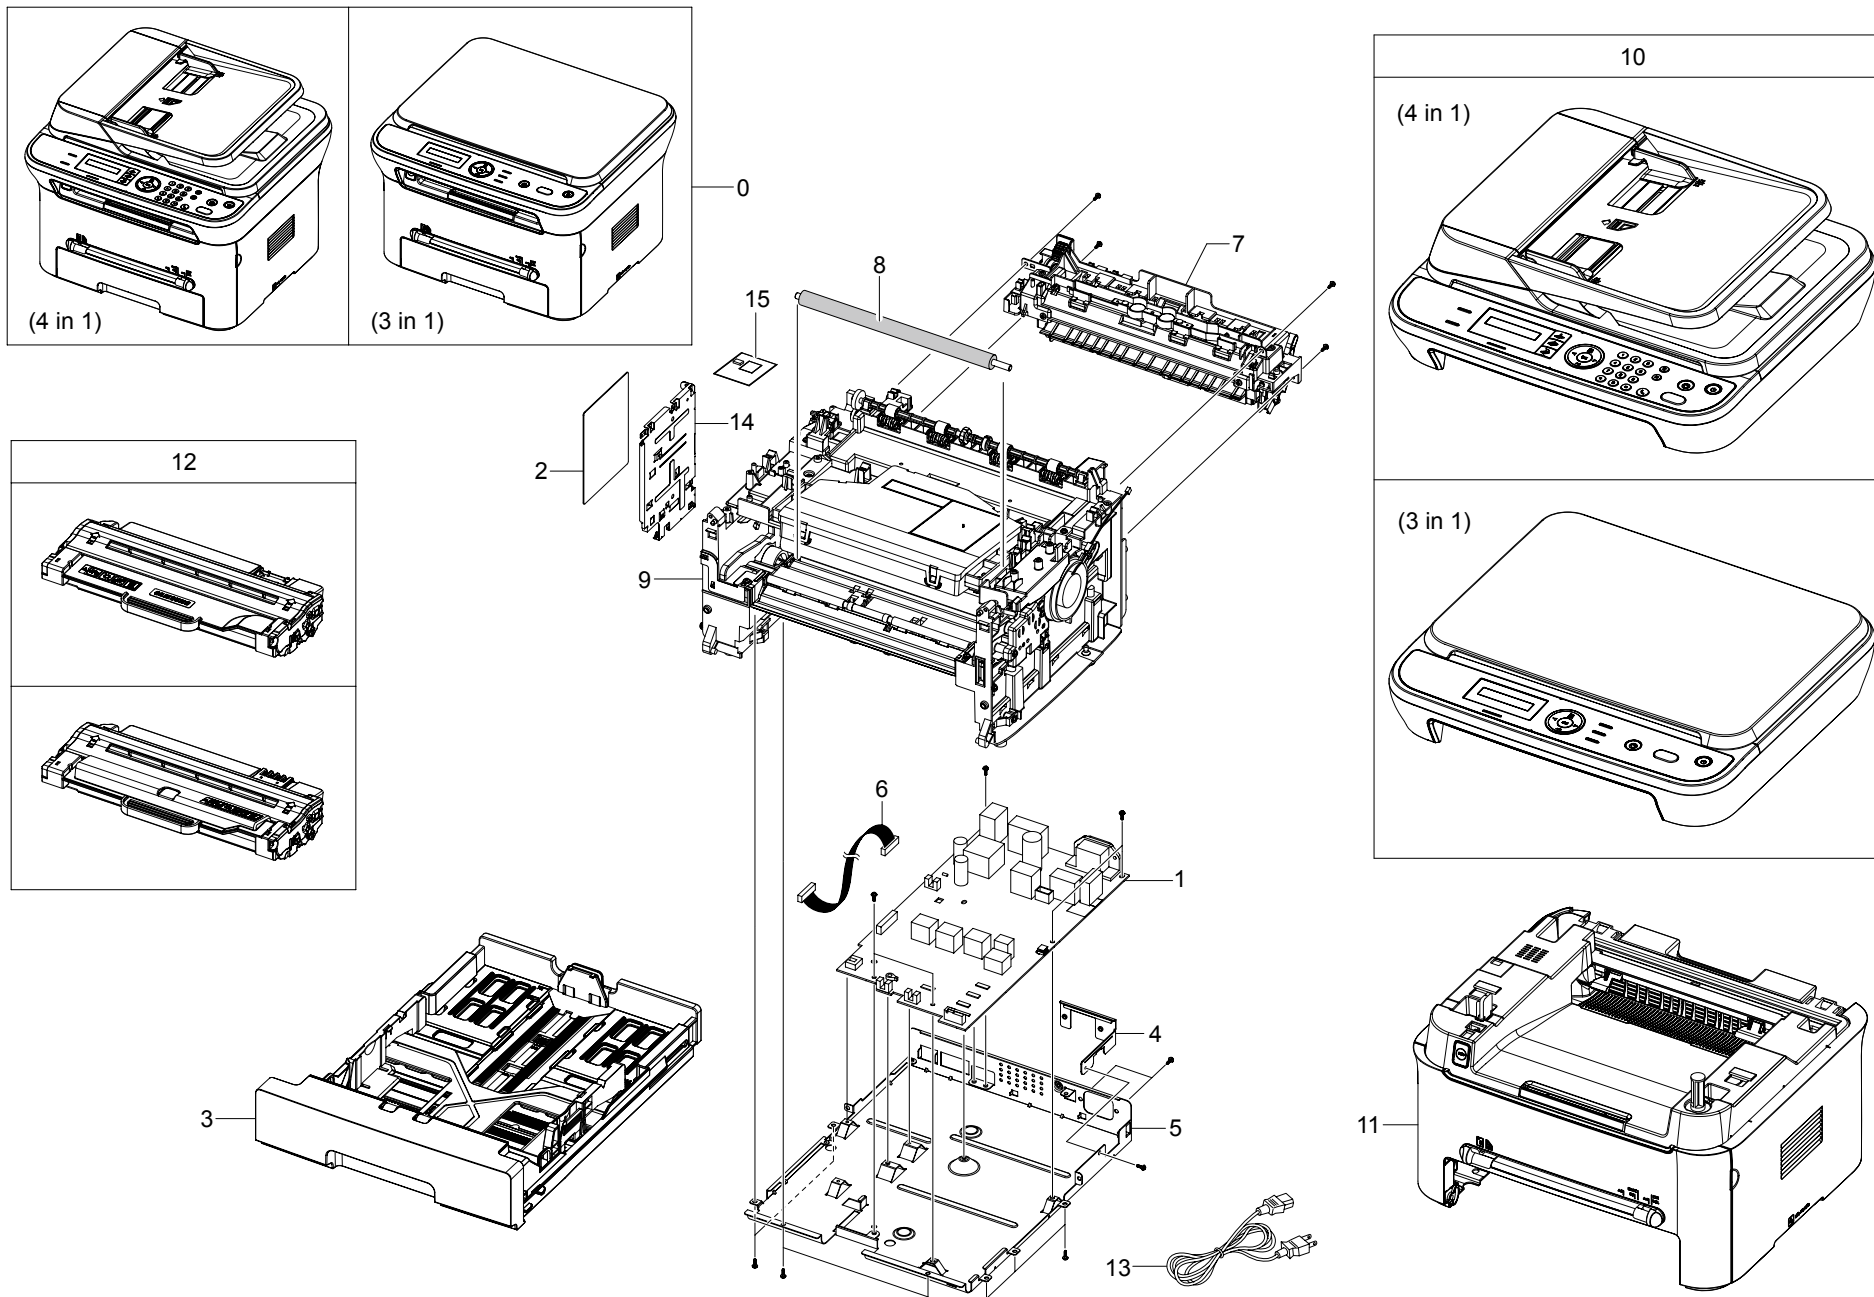


MAIN Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	SCX-4623FN	SET	1		4 in 1
0	SCX-4623FW	SET	1		4 in 1
0	SCX-4623F	SET	1		4 in 1
0	SCX-4600	SET	1		3 in 1
1	JC44-00178A	SMPS/HVPS-V1	1	SA	110V
1	JC44-00179A	SMPS/HVPS-V2	1	SA	220V
2	JC92-02179A	PBA-MAIN	1	SA	4623FN/Others
2	JC92-02179B	PBA-MAIN	1	SA	4623FN/SEE/XEC
2	JC92-02179D	PBA-MAIN	1	SA	4623FW/Others
2	JC92-02179E	PBA-MAIN	1	SA	4623FW/SEE/XEC
2	JC92-02188A	PBA-MAIN	1	SA	4623F/Others
2	JC92-02188B	PBA-MAIN	1	SA	4623F/SEE/XEC
2	JC92-02189A	PBA-MAIN	1	SA	4600
3	JC90-00943A	CASSETTE	1	SA	
4	JC61-00601A	BRACKET-P-INLET	1	SA	
5	JC63-02410A	SHIELD-ENGINE	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
6	JC39-01237A	HARNESS-ENGINE	1	SNA	
7	JC91-00945A	FUSER	1	SA	220V
7	JC91-00945B	FUSER	1	SA	220V/XIP
7	JC91-00946A	FUSER	1	SA	110V
8	JC66-01218A	ROLLER-TRANSFER	1	SA	
9	JC93-00088A	FRAME BASE-LOWER	1	SA	
10	JC97-03685A	SCANNER	1	SNA	4623F/FN
10	JC97-03684A	SCANNER	1	SNA	4600
11	JC95-01080A	COVER	1	SNA	4623FN
11	JC95-01080B	COVER	1	SNA	4623F
11	JC95-01080C	COVER	1	SNA	4600
12	-	CARTRIDGE-TONER	1	SNA	
13	-	CBF-POWER CORD	1	SA	Refer to power cord
14	JC63-02451A	SHIELD-CONTROLLER	1	SNA	
15	JC92-02308A	PBA-WNPC	1	SA	4623FW
16	JC39-01344A	HARNESS-WLAN	1	SA	4623FW

2. COVER

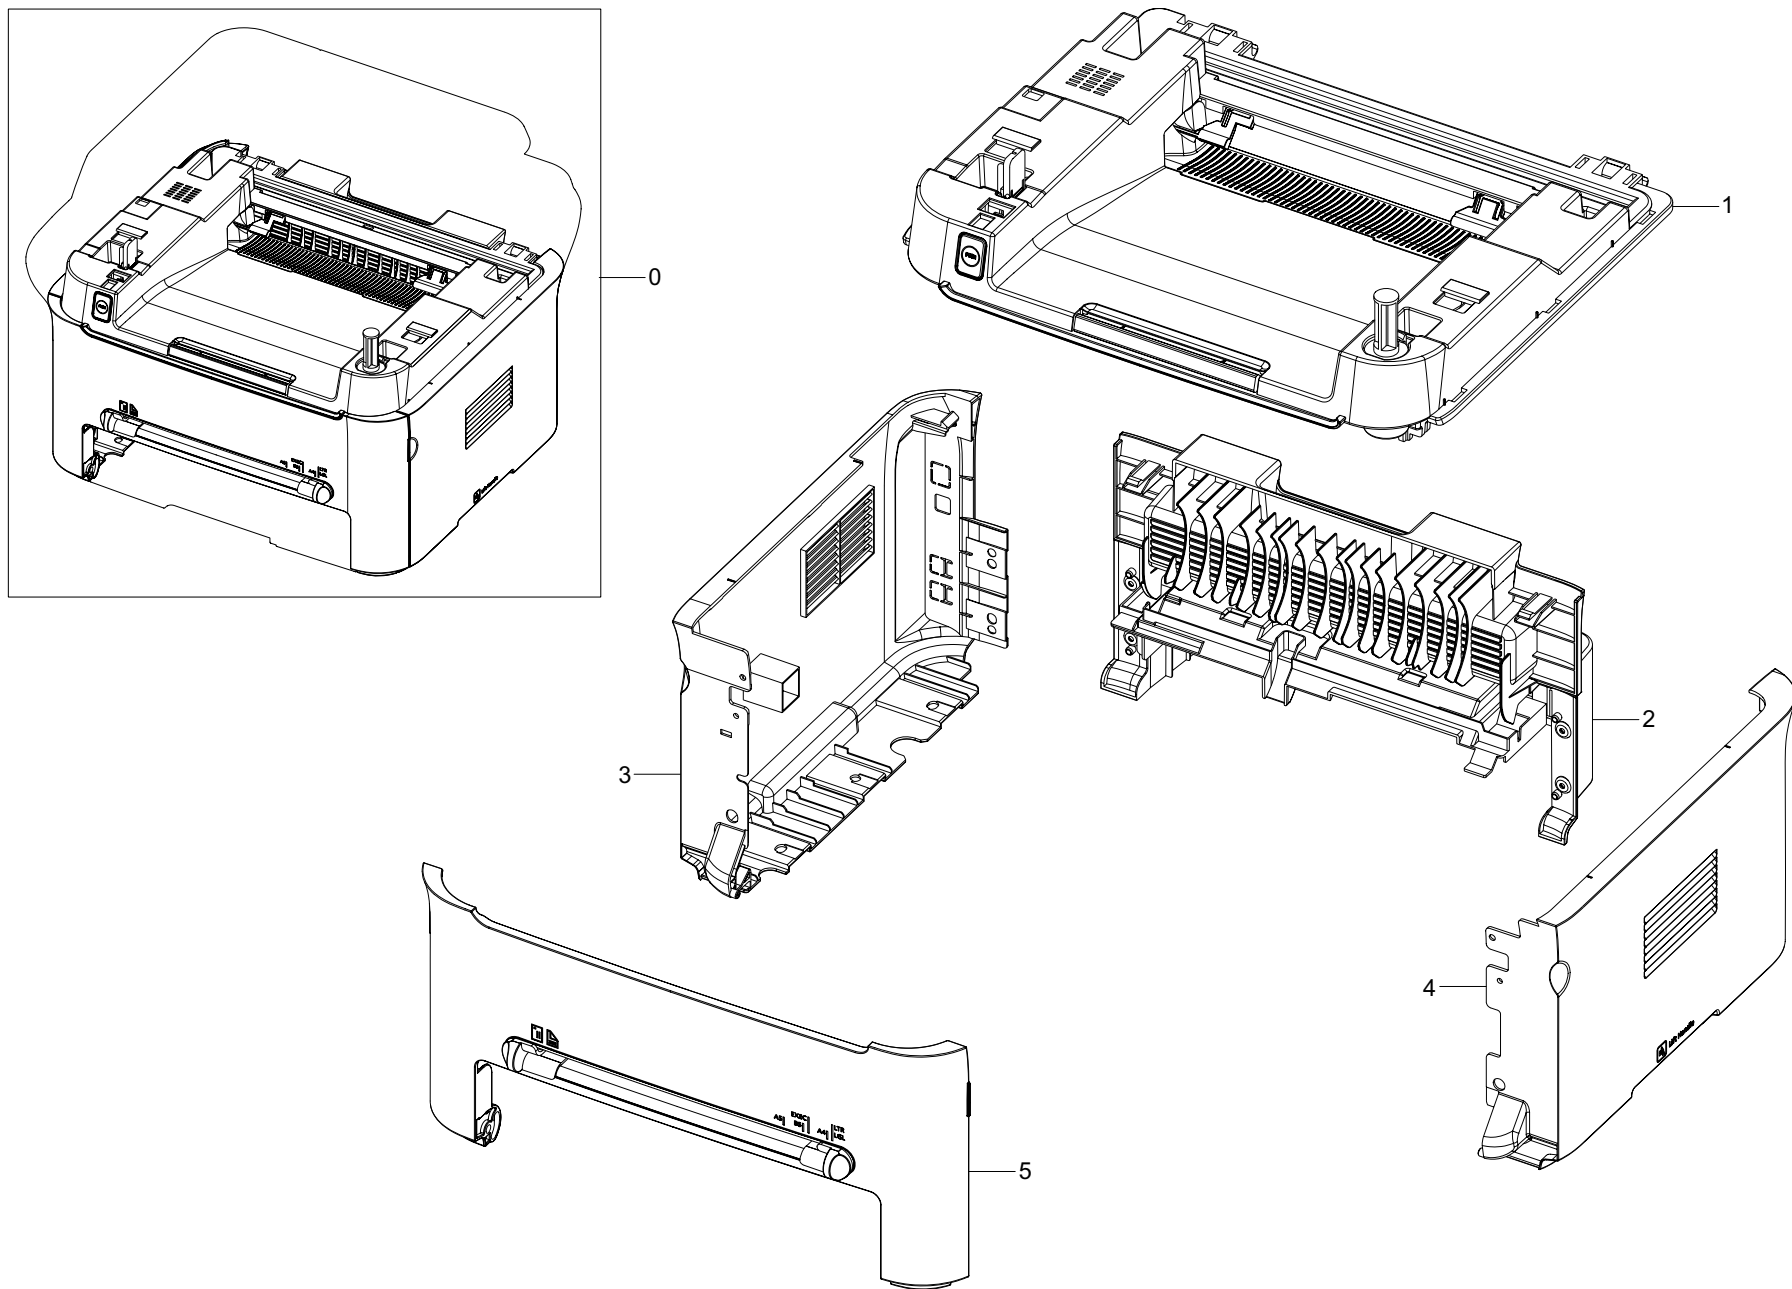


COVER Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01080A	COVER	1	SNA	4623FN
0	JC95-01080B	COVER	1	SNA	4623F
0	JC95-01080C	COVER	1	SNA	4600
1	JC95-01075A	COVER-MIDDLE ASSY	1	SA	4623F/FN
1	JC95-01075B	COVER-MIDDLE ASSY	1	SA	4600
2	JC95-01078A	COVER-REAR ASSY	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC63-02461A	COVER-LEFT	1	SNA	4623FN
3	JC63-02461B	COVER-LEFT	1	SNA	4623F
3	JC63-02461C	COVER-LEFT	1	SNA	4600
4	JC63-02460A	COVER-RIGHT	1	SNA	
5	JC95-01079A	COVER-FRONT ASSY	1	SA	

3. COVER-MIDDLE ASSY

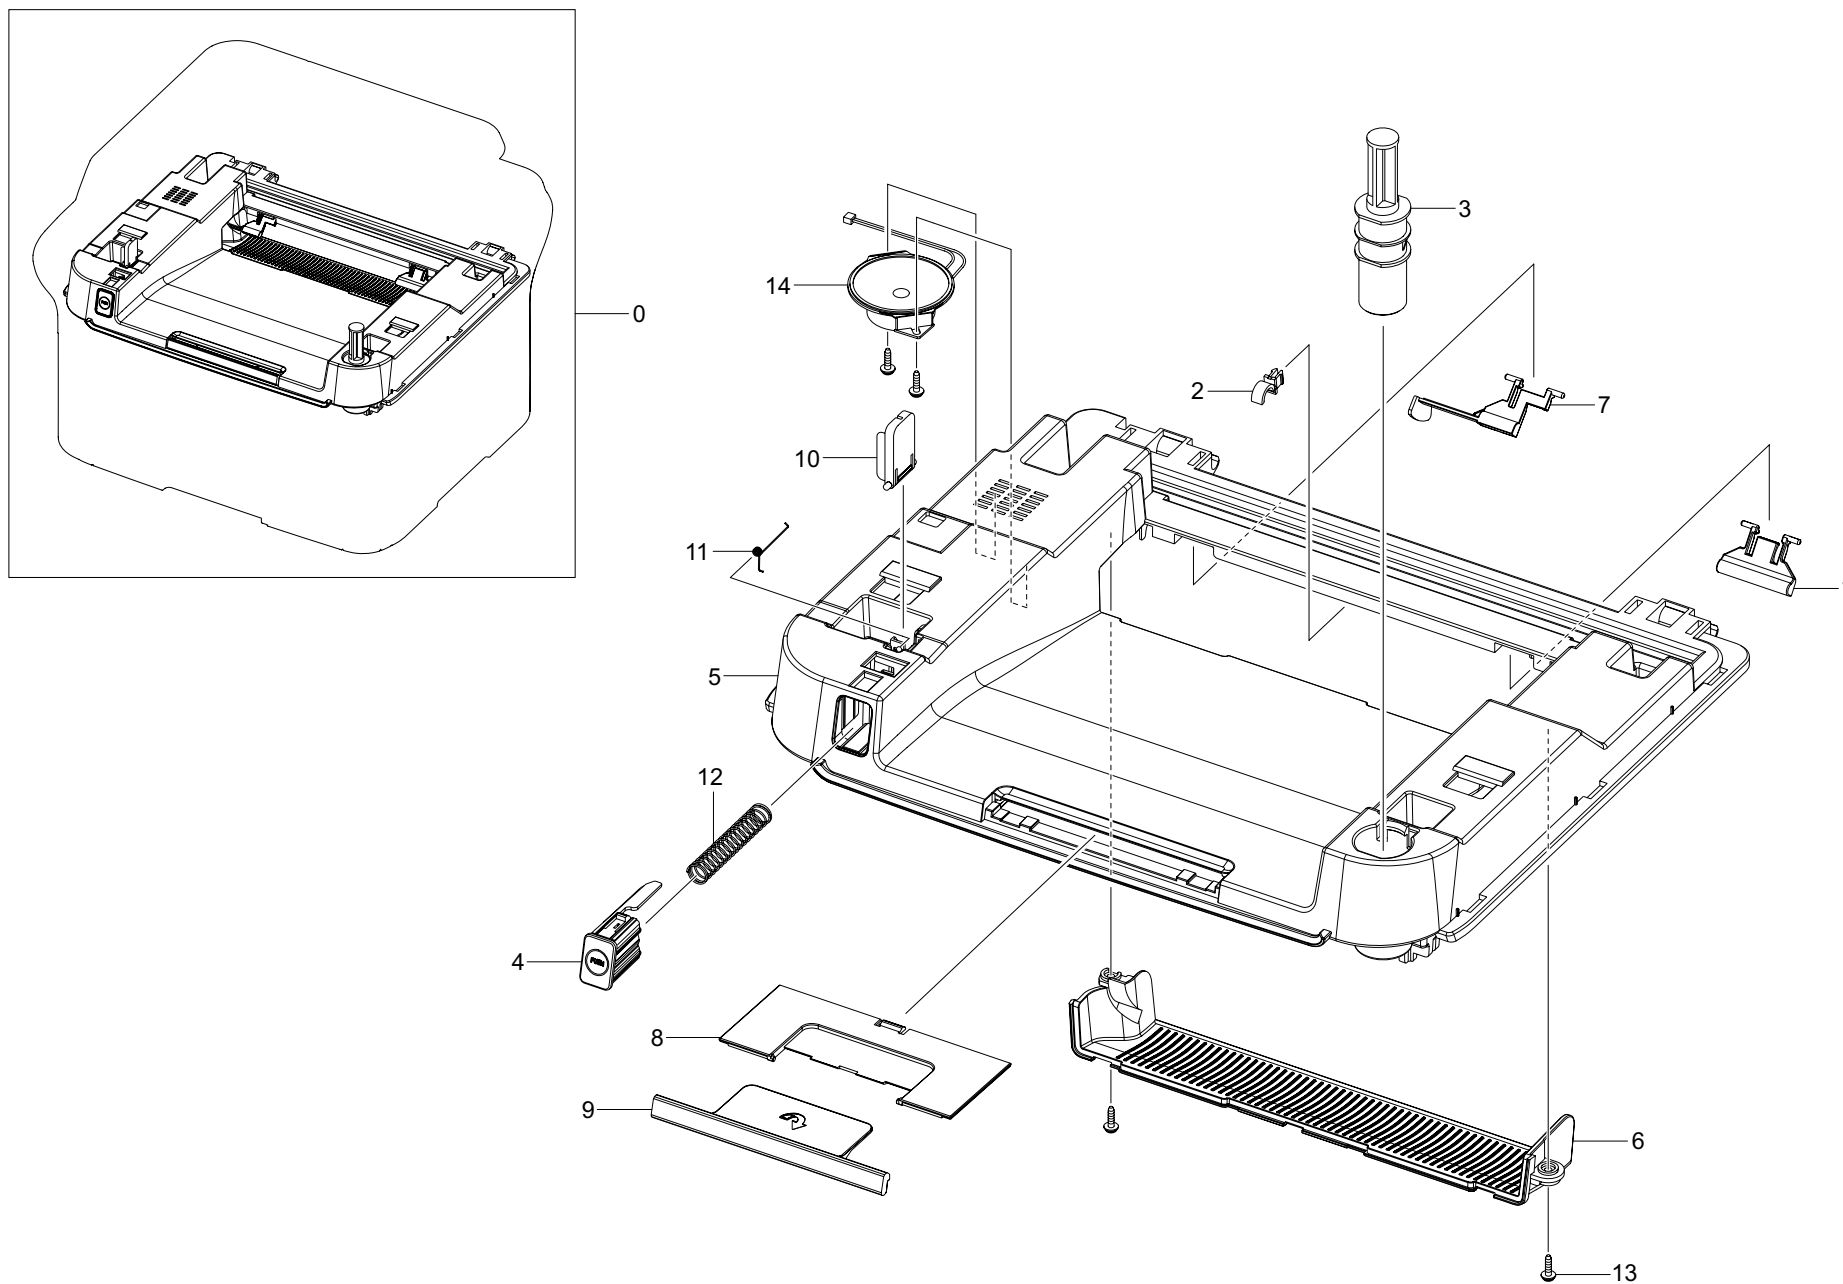



COVER-MIDDLE ASSY Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01075A	COVER-MIDDLE ASSY	1	SA	4623F/FN
0	JC95-01075B	COVER-MIDDLE ASSY	1	SA	4600
1	JC72-01343A	PMO-SUB_M_STACKER	1	SC	
2	JC72-00387A	PMO-BUSHING_F/DOWN	1	SA	
3	JC66-01932A	DAMPER-OPEN	1	SNA	
4	JC64-00523A	BUTTON-SCAN DOWN	1	SNA	
5	JC63-02458A	COVER-MIDDLE	1	SNA	
6	JC63-02390B	COVER-EXIT	1	SNA	
7	JC61-03446A	STACKER-BIN_FULL	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
8	JC61-02583B	STACKER-RX LARGE	1	SA	
9	JC61-02582A	STACKER-SMALL	1	SA	
10	JC61-00949A	STOPPER-M-LEVER	1	SA	
11	JC61-00026A	SPRING ETC-TS-CHARGE APOLLO	1	SNA	
12	6107-001345	SPRING-CS	1	SA	
13	6003-000196	SCREW-TAPTYPE	4	SA	4623F/FN
13	6003-000196	SCREW-TAPTYPE	2	SA	4600
14	3001-002262	SPEAKER	1	SA	4623F/FN

4. COVER FRONT

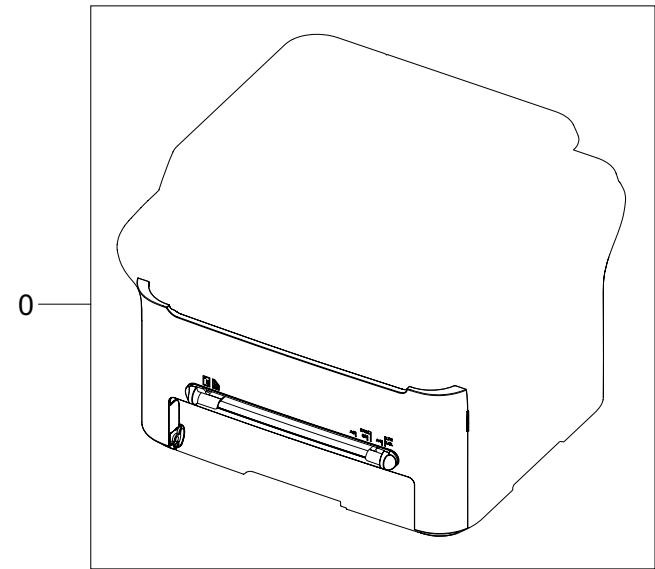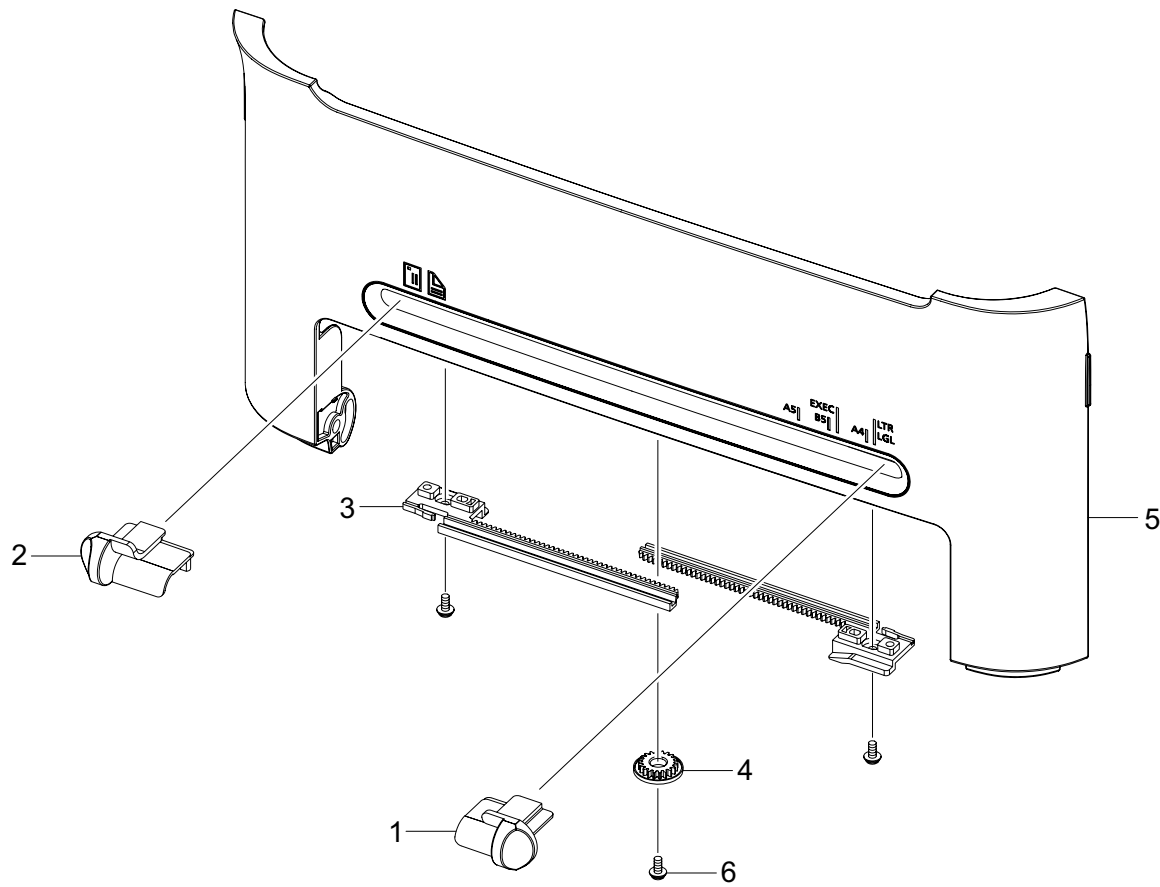


COVER FRONT Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01079A	COVER-FRONT ASSY	1	SA	
1	JC70-00477F	ADJUST-MANUAL R	1	SA	
2	JC70-00476F	ADJUST-MANUAL L	1	SA	
3	JC70-00304A	ADJUST RACK-M-MANUAL	2	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
4	JC66-00387A	GEAR-RACK_PINION	1	SA	
5	JC63-02464A	COVER-FRONT	1	SNA	
6	6003-000264	SCREW-TAPTYPE	3	SNA	

5. COVER REAR

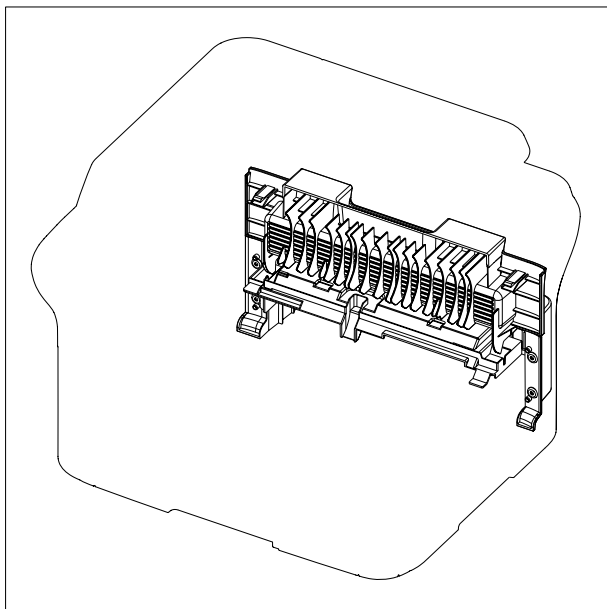

0

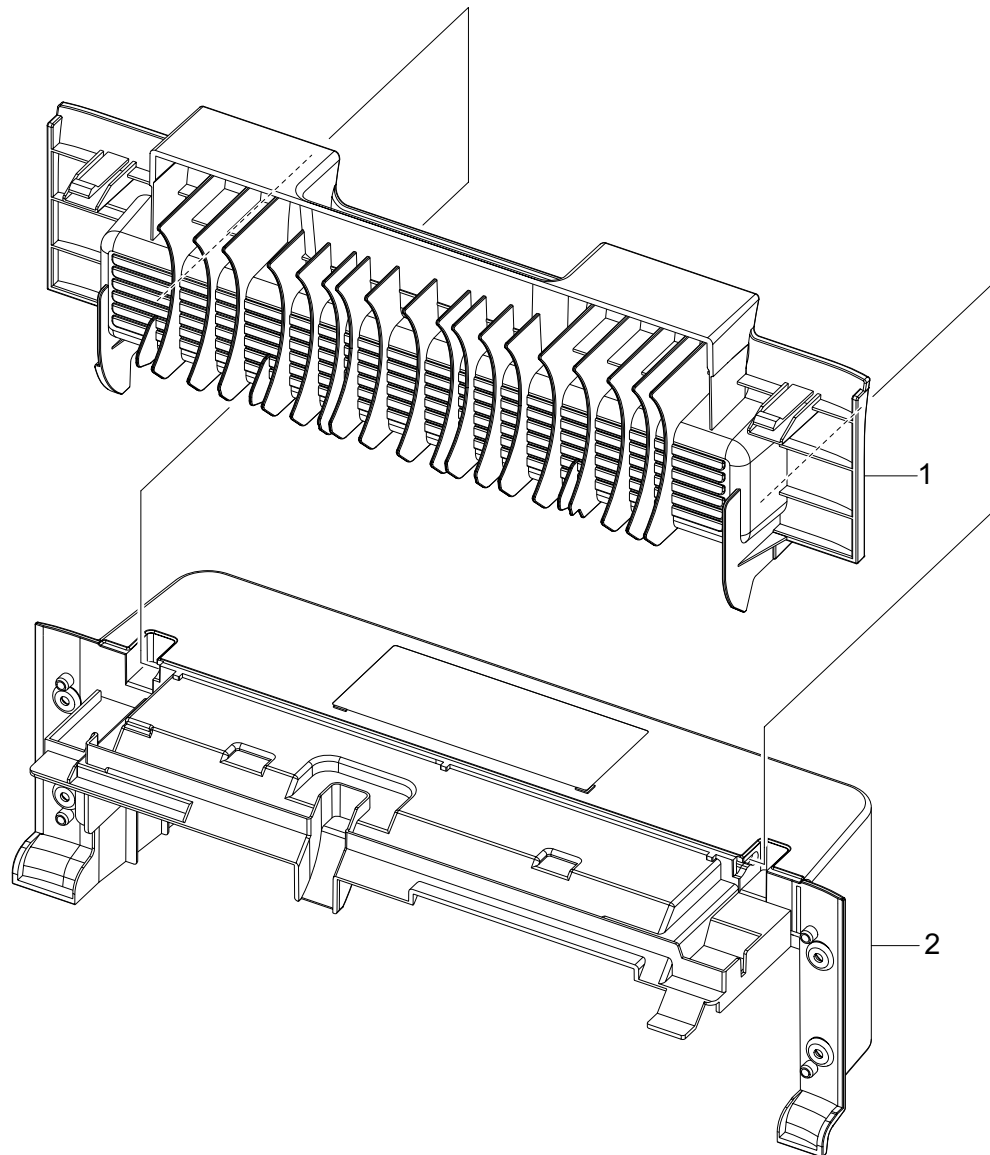

1

2


COVER REAR Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01078A	COVER-REAR ASSY	1	SA	
1	JC63-02462A	COVER-REAR	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
2	JC63-02463A	COVER-REAR DOWN	1	SNA	

6. FRAME BASE-LOWER1

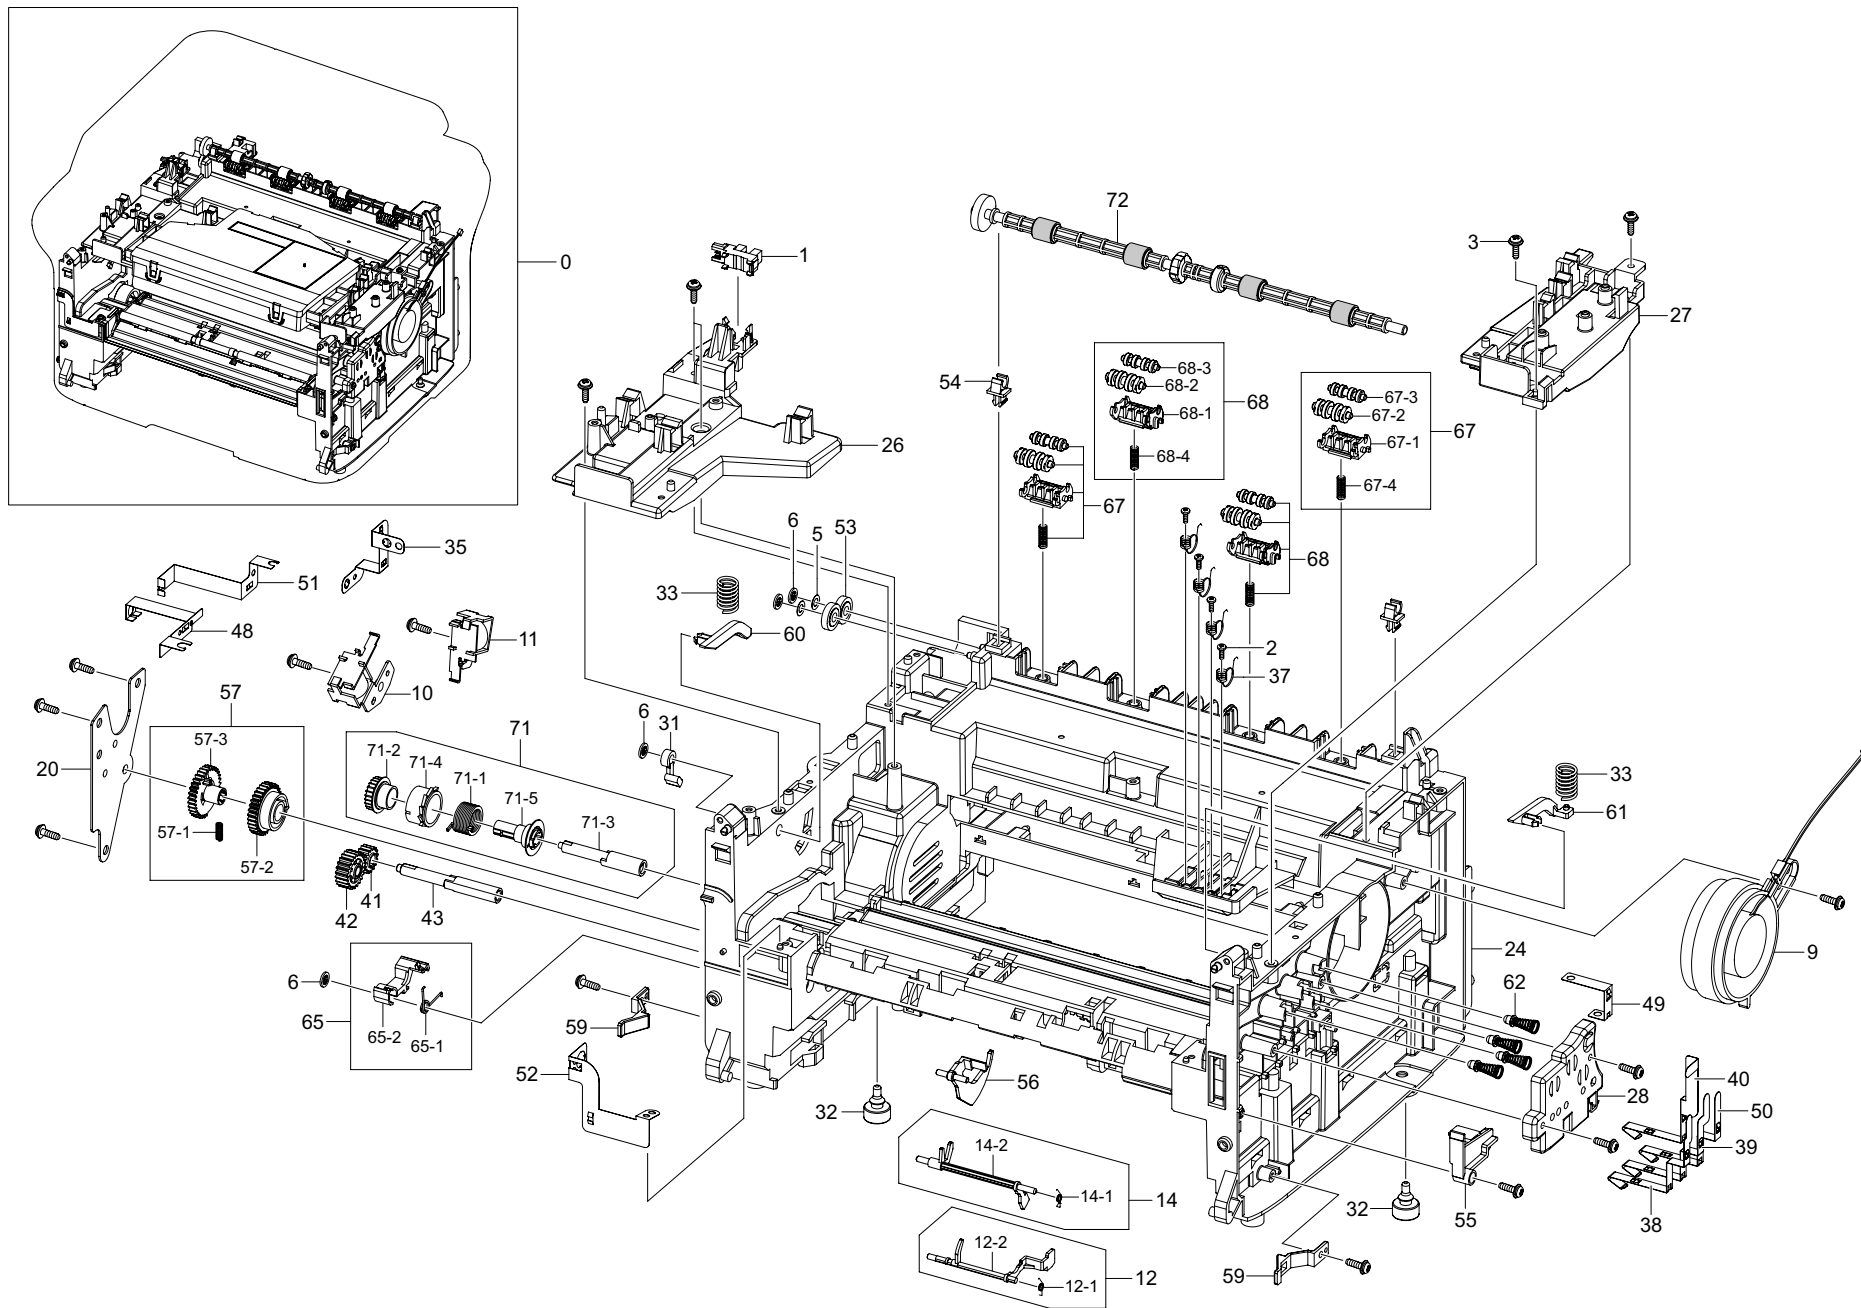

FRAME BASE-LOWER Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00088A	FRAME BASE-LOWER	1	SA	
1	0604-001393	PHOTO-INTERRUPTER	1	SA	
2	6002-000308	SCREW-TAPTYPE	4	SNA	
3	6003-000196	SCREW-TAPTYPE	35	SA	
4	6003-000282	SCREW-TAPTYPE	2	SNA	
5	6031-001051	WASHER-PLAIN	2	SNA	
6	6044-000001	RING-CS	4	SA	
7	6107-001162	SPRING-ETC	1	SA	
8	6107-001370	SPRING-CS	1	SA	
9	JC31-00087A	FAN-DC	1	SA	
10	JC33-00025B	SOLENOID-MANUAL	1	SA	
11	JC33-00026A	SOLENOID-PICK UP	1	SA	
12	JC93-00109A	FRAME-LOWER ACTUATOR MANUAL	1	SA	
12-1	6107-001165	SPRING-TS	1	SA	
12-2	JC72-00977A	PMO-ACTUATOR MANUAL	1	SA	
14	JC93-00110A	FRAME-LOWER ACTUATOR FEED	1	SA	
14-1	6107-001164	SPRING-TS	1	SA	
14-2	JC72-00976A	PMO-ACTUATOR FEED	1	SA	
16	JC61-00585A	BUSH-M-FEED IDLE	2	SA	
17	JC61-00587A	BUSH-M-PICK_UP R	1	SA	
18	JC61-00588A	BUSH-M-TR L	1	SA	
19	JC61-00594A	GUIDE-M-TR RIB	1	SA	
20	JC61-00602A	BRACKET-P-FEED	1	SA	
21	JC61-00604A	PLATE-P-SAW	1	SA	
22	JC61-00607A	GUIDE-P-TR	1	SA	
23	JC61-02468A	BUSH-TR_L	1	SA	
24	JC61-03322A	FRAME-BASE	1	SNA	
25	JC61-03440A	BRACKET-BUSH_TR L	1	SA	
26	JC61-03447A	FRAME-HOLDER_LSU_L	1	SNA	
27	JC61-03448A	FRAME-HOLDER_LSU_R	1	SNA	
28	JC61-03467A	HOUSING-TERMINAL	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
29	JC61-03498A	FRAME-COVER HOLDER L	1	SA	
30	JC61-03499A	FRAME-COVER HOLDER R	1	SA	
31	JC61-03524A	STOPPER-LEVER_DR	1	SA	
32	JC61-40001A	FOOT-ML80	2	SA	
33	JC61-70932A	SPRING ETC-GUIDE DEVE	2	SA	
34	JC61-70958A	SPRING ETC-TR	2	SA	
35	JC63-02411A	GROUND-FUSER	1	SNA	
36	JC63-02450A	GROUND-SHIELD	1	SNA	
37	JC65-00019A	TERMINAL-CRUM	4	SA	
38	JC65-00041A	TERMINAL-SUPPLY	1	SA	
39	JC65-00042A	TERMINAL-CON	1	SA	
40	JC65-00043A	TERMINAL-CR	1	SA	
41	JC66-00394A	GEAR-FEED 2	1	SA	
42	JC66-00396A	GEAR-IDLE 23	1	SA	
43	JC66-00398A	SHAFT-FEED	1	SA	
44	JC66-00526B	ROLLER-REGI	1	SA	
45	JC66-00527A	SHAFT-FEED IDLE	1	SA	
46	JC66-00598A	ROLLER-FEED	1	SA	
47	JC66-00720A	SHAFT-P-CORE	2	SA	
48	JC70-00308A	IPR-P-GROUND_DRIVE	1	SNA	
49	JC70-00311A	IPR-P-GROUND_TR	1	SNA	
50	JC70-00312A	IPR-P-TERMINAL CON	1	SA	
51	JC70-00335A	IPR-P_GROUND_DRIVE2	1	SNA	
52	JC70-00458A	IPR-P-GROUND_GUIDE PAPER	1	SNA	
53	JC72-00143A	PMO-GEAR_EXIT_DRV16	2	SNA	
54	JC72-00382B	PMO-BUSHING FEED	7	SA	
55	JC72-00974A	PMO-ACTUATOR CVR OPEN	1	SA	
56	JC72-00975A	PMO-ACTUATOR EMPTY	1	SA	
57	JC97-03141A	MEA UNIT-GEAR_PICKUP	1	SA	
57-1	6107-001167	SPRING-CS	1	SA	
57-2	JC72-00979A	PMO-GEAR PICK_UP A	1	SC	



FRAME BASE-LOWER Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
57-3	JC72-00980A	PMO-GEAR PICK_UP B	1	SC	
59	JC72-00983A	PMO-LOCKER CST	2	SA	
60	JC72-00984A	PMO-PLATE GUIDE DEVE_L	1	SA	
61	JC72-00985A	PMO-PLATE GUIDE DEVE_R	1	SA	
62	JC75-00049A	MEC-TERMINAL	4	SA	
63	JC93-00003A	DRIVE MAIN-BRACKET	1	SA	
64	JC93-00085A	FRAME BASE-PICK UP	1	SA	
65	JC93-00106A	FRAME-LEFT STOPPER PICK UP	1	SA	
65-1	6107-001170	SPRING-TS	1	SA	
65-2	JC66-00377A	CAM-M-PICK_UP	1	SA	
67	JC93-00107A	FRAME-ROLLER DECURL	2	SA	
67-1	JC61-01172A	HOLDER-M-EXIT F/DOWN	1	SNA	
67-2	JC66-00830A	ROLLER-M-EXIT FR	1	SA	
67-3	JC66-00824A	ROLLER-M-EXIT MAIN	1	SA	
67-4	6107-001163	SPRING-CS	1	SA	
68	JC93-00107B	FRAME-ROLLER DECURL	2	SA	
68-1	JC61-02702B	HOLDER-EXIT ROLLER	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
68-2	JC66-00830A	ROLLER-M-EXIT FR	1	SA	
68-3	JC66-00824A	ROLLER-M-EXIT MAIN	1	SA	
68-4	6107-001163	SPRING-CS	1	SA	
69	JC93-00108A	FRAME-FRONT GUIDE PAPER	1	SA	
69-1	JC61-00718A	GUIDE-P-PAPER	1	SA	
69-2	JC63-02483A	SHEET-GUIDE_PAPER	1	SA	
71	JC97-01788A	MEA UNIT-CLUTCH	1	SA	
71-1	6107-001171	SPRING-TS	1	SA	
71-2	JC66-00393A	GEAR-FEED 1	1	SA	
71-3	JC66-00398A	SHAFT-FEED	1	SA	
71-4	JC72-00978A	PMO-COLLAR_SPRING	1	SA	
71-5	JC72-00981A	PMO-HUB CLUTCH	1	SNA	
72	JC93-00097A	FRAME-ROLLER EXIT FACE DOWN	1	SA	
73	JC97-03585A	LSU	1	SNA	
74	JC39-01080A	HARNESS-BLDC_MOTOR_CLUTCH	1	SA	
75	JC39-01217A	HARNESS-LSU	1	SNA	

7. DRIVE MAIN-BRACKET

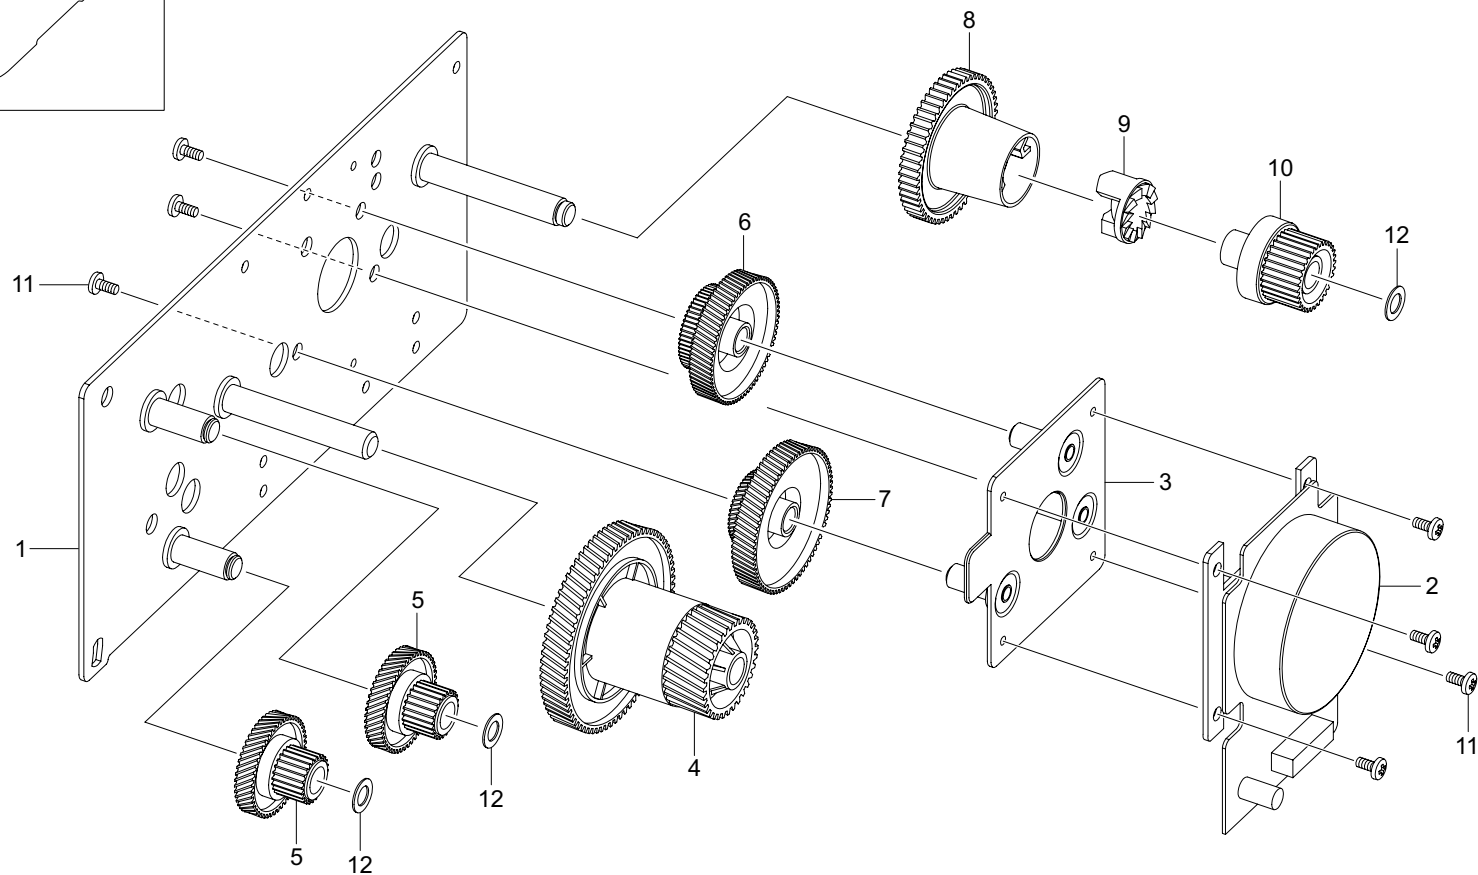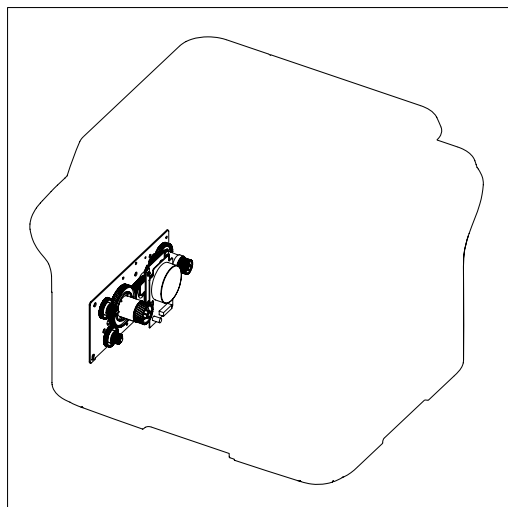


DRIVE MAIN-BRACKET Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00003A	DRIVE MAIN-BRACKET	1	SA	
1	JC61-00598B	BRACKET-P-GEAR 1400	1	SC	
2	JC31-00122A	MOTOR BLDC	1	SNA	
3	JC61-03395A	BRACKET-MOTOR_STEP	1	SA	
4	JC66-02316A	GEAR-RDCN_OPC	1	SA	
5	JC66-00389A	GEAR-RDCN 57/18	2	SA	
6	JC66-00392A	GEAR-RDCN 90/31	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
7	JC66-00390A	GEAR-RDCN 103/41	1	SA	
8	JC66-01203A	GEAR-DRV FUSER OUT	1	SA	
9	JC66-00340A	GEAR-HUB CLUTCH	1	SA	
10	JC66-01202A	GEAR-DRV FUSER IN	1	SA	
11	6003-000269	SCREW-TAPTYPE	5	SA	
12	6031-000023	WASHER-PLAIN	3	SA	

8. FRAME BASE-PICK UP

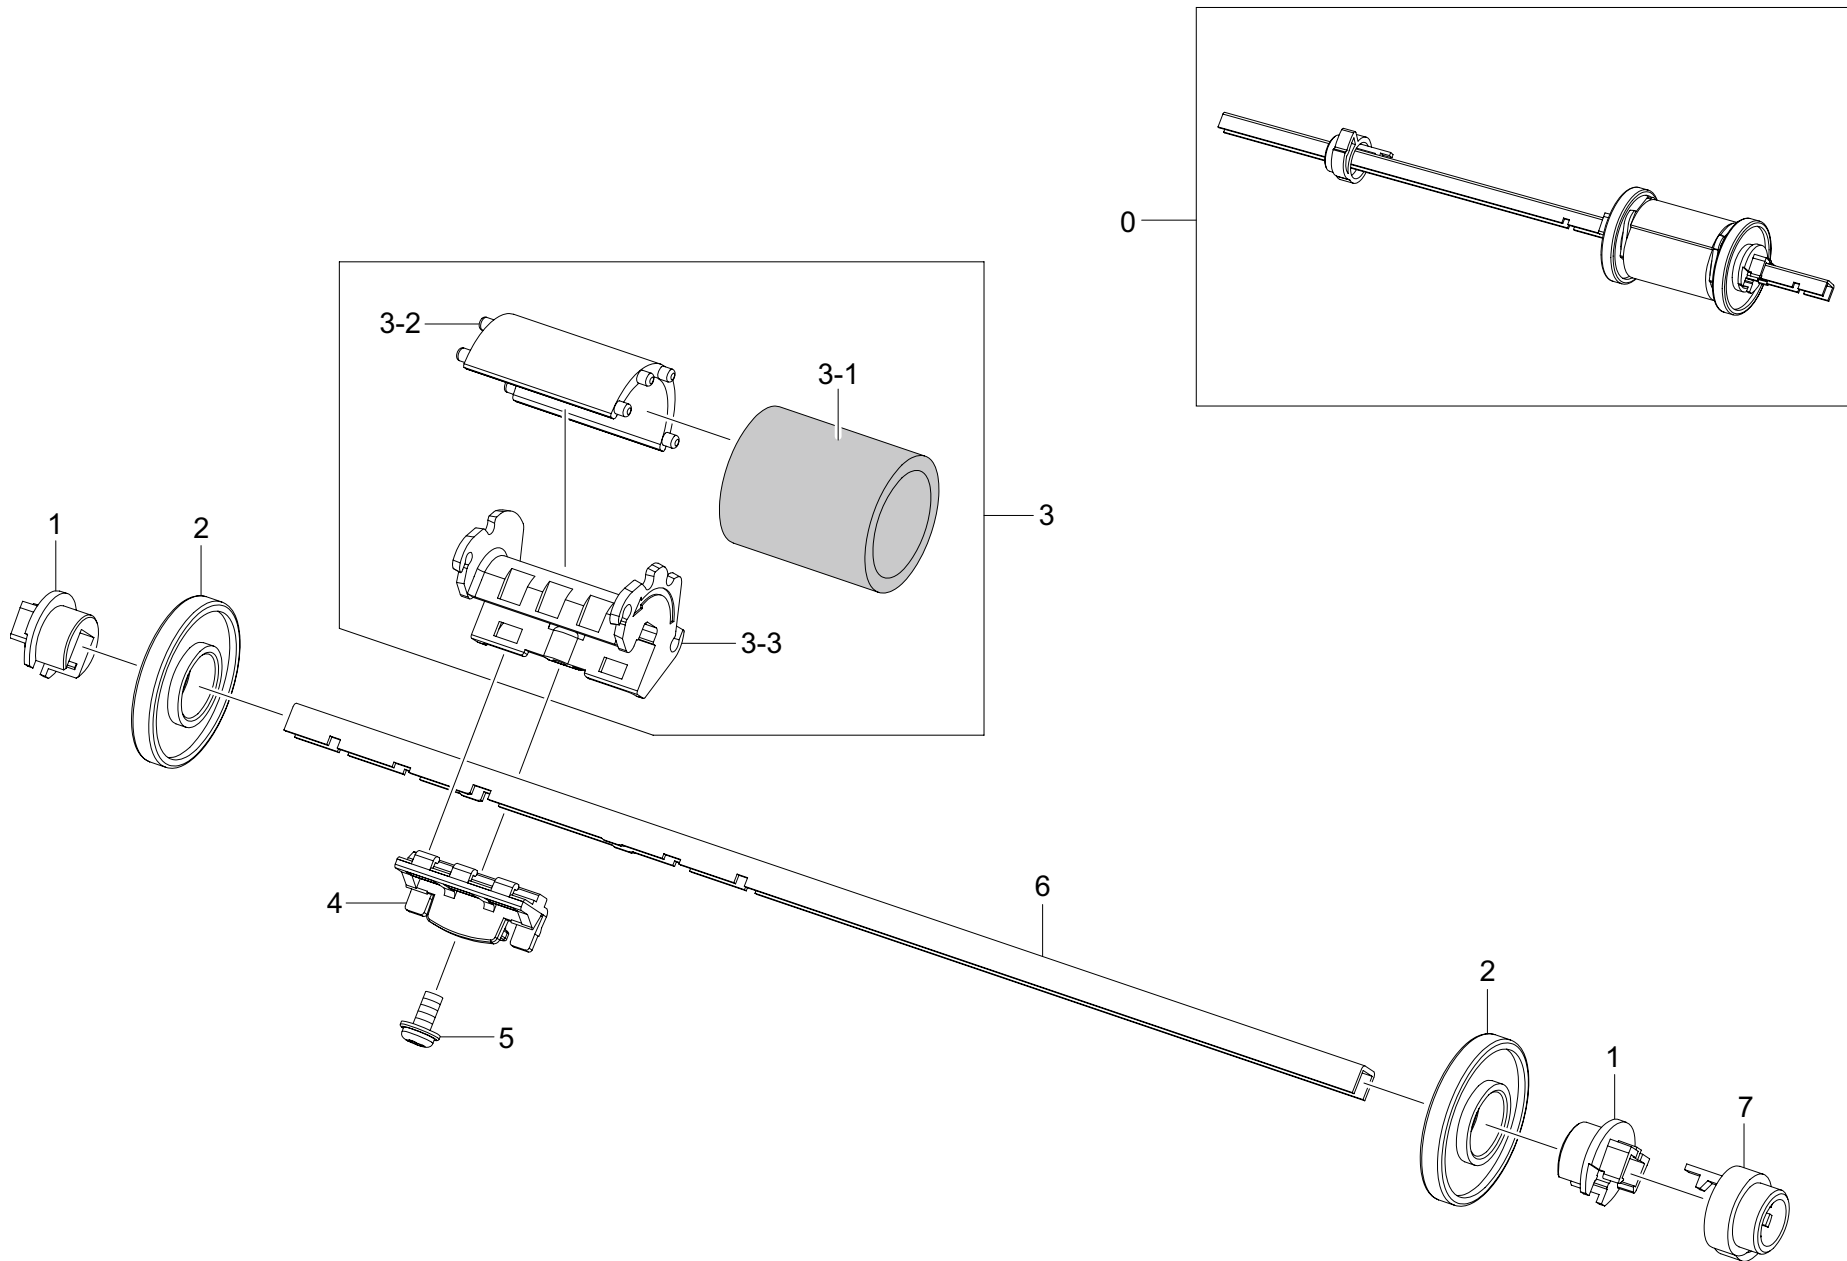


FRAME BASE-PICK UP Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00085A	FRAME BASE-PICK UP	1	SA	
1	JC61-03477A	STOPPER-PICK_UP	2	SA	
2	JC72-00982A	PMO-IDLE PICK_UP	2	SA	
3	JC93-00087A	FRAME BASE-PICK UP RUBBER	1	SA	
3-1	JC73-00315A	RUBBER-PICK_UP	1	SA	
3-2	JC61-03514A	HOUSING-PICKUP_RUB	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3-3	JC61-03435A	HOUSING-PICKUP	1	SA	
4	JC61-03485A	HOLDER-PICKUP	1	SA	
5	6003-000264	SCREW-TAPTYPE	1	SNA	
6	JC66-00399A	SHAFT-P-PICK_UP	1	SA	
7	JC61-00586A	BUSH-M-PICK_UP L	1	SA	

9. FUSER

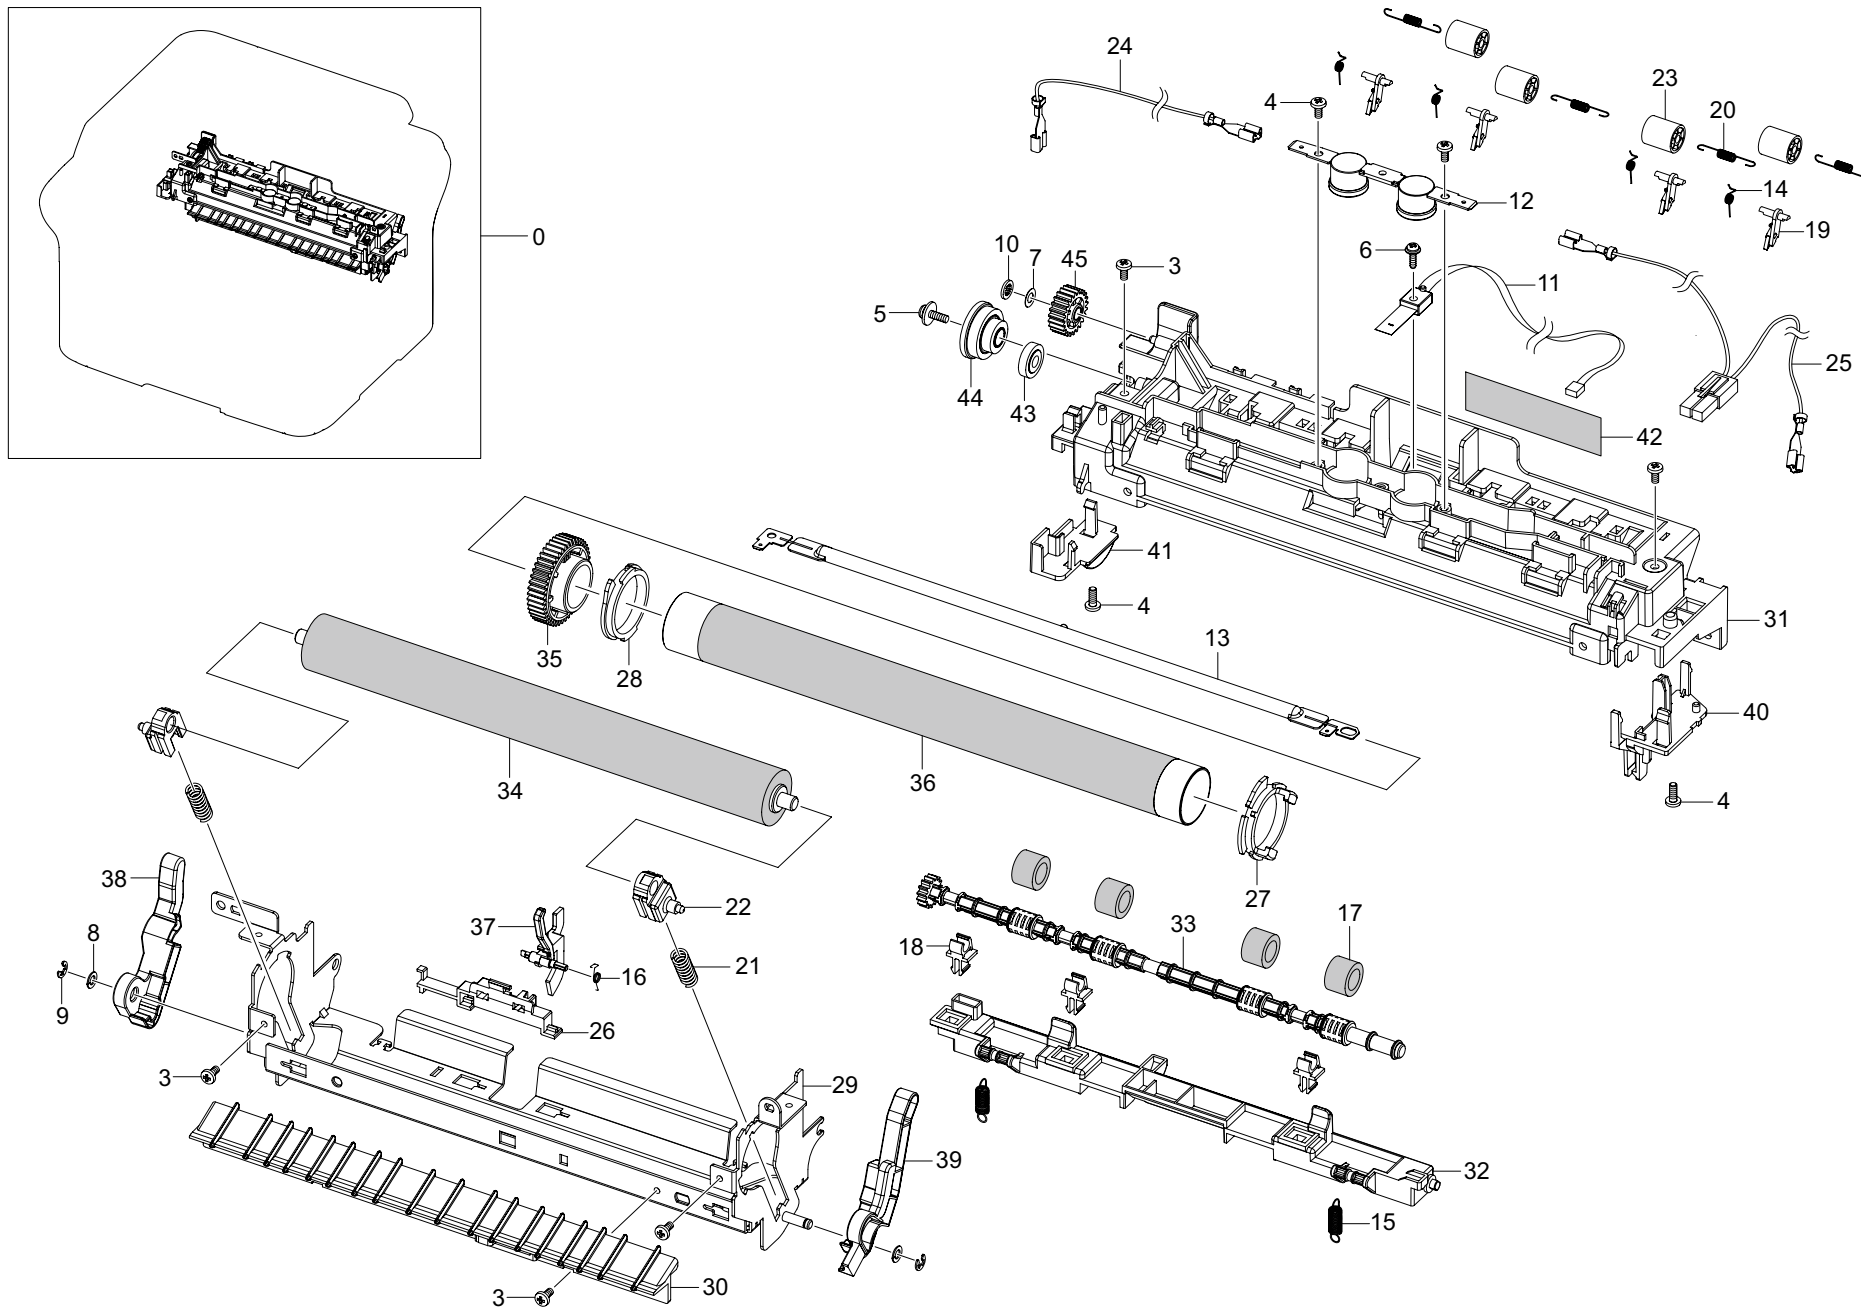


FUSER Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC91-00946A	FUSER	1	SA	110V
0	JC91-00945A	FUSER	1	SA	220V
0	JC91-00945B	FUSER	1	SA	220V/XIP
3	6003-000269	SCREW-TAPTYPE	5	SA	
4	6003-000282	SCREW-TAPTYPE	2	SNA	
5	6006-001078	SCREW-TAPTYPE	1	SNA	
6	6003-000196	SCREW-TAPTYPE	1	SA	
7	6031-001051	WASHER-PLAIN	1	SNA	
8	6031-001584	WASHER-PLAIN	2	SA	
9	6044-000159	RING-C	2	SA	
10	6044-000001	RING-CS	1	SA	
11	1404-001447	THERMISTOR-NTC ASSY	1	SA	
12	4712-001031	THERMOSTAT	1	SA	
13	4713-001211	LAMP-HALOGEN	1	SA	110V
13	4713-001212	LAMP-HALOGEN	1	SA	220V
14	6107-001800	SPRING-TS	4	SA	
15	6107-001802	SPRING-ES	2	SA	
16	6107-001165	SPRING-TS	1	SA	
17	JC73-00017A	RMO-RUBBER_EXIT	4	SA	
18	JC72-00382A	PMO-BUSHING TX	3	SNA	
19	JC61-02154A	GUIDE-CLAW	4	SNA	
20	JC61-70976A	SPRING ETC-FUSER EXIT	4	SNA	
21	JC61-00056A	SPRING ETC-PR(7300)	2	SA	
22	JC61-03473A	BUSH-PR HIGH	2	SNA	
23	JC72-40361A	PMO-ROLLER_EXIT	4	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
24	JC39-00819A	HARNESS-FUSER JOINT	1	SA	
25	JC39-01082A	HARNESS-FUSER AC	1	SA	
26	JC61-00581A	HOLDER-ACTUATOR	1	SA	
27	JC61-00887A	BUSH-M-HR R_R2	1	SA	
28	JC61-00888A	BUSH-M-HR L_R2	1	SA	
29	JC61-03449A	FRAME-FUSER	1	SNA	
30	JC61-03450A	GUIDE-INPUT	1	SNA	
31	JC63-02412A	COVER-FUSER	1	SNA	
32	JC63-02413A	COVER-FUSER DUMMY	1	SNA	
33	JC66-00380A	ROLLER-M-EXIT F/UP	1	SA	
34	JC66-00600A	ROLLER-PRESSURE	1	SA	
34	JC66-00600B	ROLLER-PRESSURE	1	SA	XIP
35	JC66-01254A	GEAR-FUSER	1	SA	
36	JC66-01256A	ROLLER-HEAT	1	SA	
36	JC66-01256B	ROLLER-HEAT	1	SA	XIP
37	JC66-02364A	ACTUATOR-EXIT	1	SNA	
38	JC66-02365A	LEVER-LINK JAM L	1	SNA	
39	JC66-02366A	LEVER-LINK JAM R	1	SNA	
40	JC67-00414A	CAP-FUSER LAMP R	1	SNA	
41	JC67-00415A	CAP-FUSER LAMP L	1	SNA	
42	JC68-01581B	LABEL-CAUTION	1	SNA	
43	JC72-00143A	PMO-GEAR_EXIT_DRV16	1	SNA	
44	JC66-02317A	GEAR-RDCN_EXIT	1	SA	
45	JC66-00396A	GEAR-IDLE 23	1	SA	

10. CASSETTE

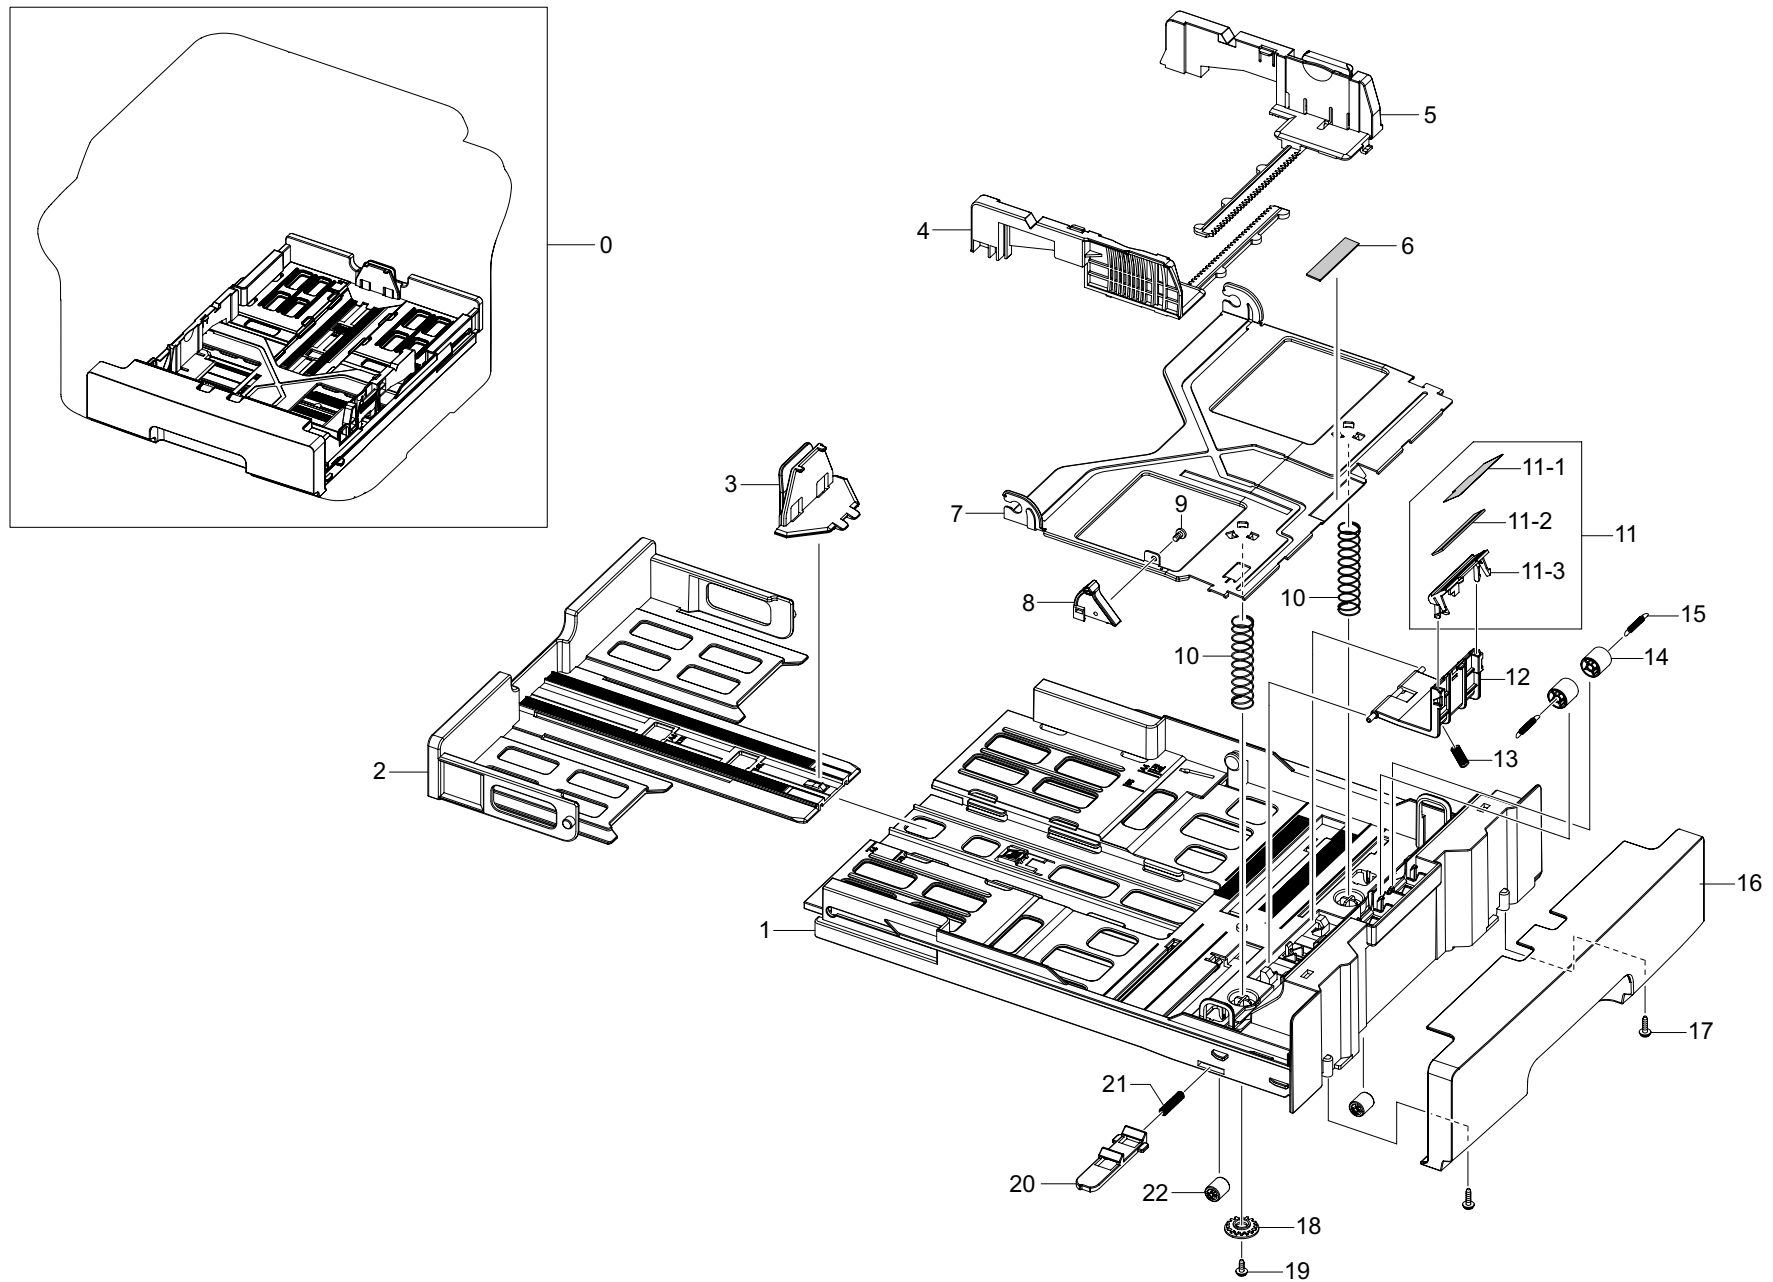



CASSETTE Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC90-00943A	CASSETTE	1	SA	
1	JC61-03343A	FRAME-CASSETTE	1	SNA	
2	JC61-03341A	GUIDE-EXTENSION CST	1	SNA	
3	JC72-00971A	PMO-EXTENSION SMALL	1	SA	
4	JC70-00300A	ADJUST-M-CASSETTE_L	1	SA	
5	JC70-00301A	ADJUST-M-CASSETTE_R	1	SC	
6	JC73-00141A	RPR-PAD CASSETTE	1	SA	
7	JC61-00603A	PLATE-P-KNOCK_UP	1	SNA	
8	JC66-00719A	CAM-M-KNOCK UP	1	SA	
9	6003-000261	SCREW-TAPTYPE	1	SNA	
10	6107-001166	SPRING-CS	2	SA	
11	JC90-00941A	CASSETTE-HOLDER PAD	1	SA	
11-1	JC63-00290A	SHEET-HOLDER PAD	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
11-2	JC73-00140A	RPR-FRICTION PAD	1	SA	
11-3	JC61-03344A	HOLDER-PAD	1	SA	
12	JC61-01978A	HOUSING-HOLDER PAD	1	SA	
13	JC61-70911A	SPRING ETC-EXIT ROLL FD	1	SA	
14	JC66-00529C	ROLLER-IDLE FEED	2	SA	
15	6107-001047	SPRING-ES	2	SA	
16	JC63-02452A	COVER-CASSETTE	1	SA	
17	6003-000196	SCREW-TAPTYPE	2	SA	
18	JG66-40003A	GEAR-PINION	1	SA	
19	6003-000264	SCREW-TAPTYPE	1	SNA	
20	JC72-00972A	PMO-PLATE_LOCKER	1	SA	
21	JG61-70531A	SPRING ETC-LOCKER,PLATE	1	SA	
22	JC72-40981A	PMO-ROLLER UPPER DP	2	SA	

11. SCANNER_4 in 1

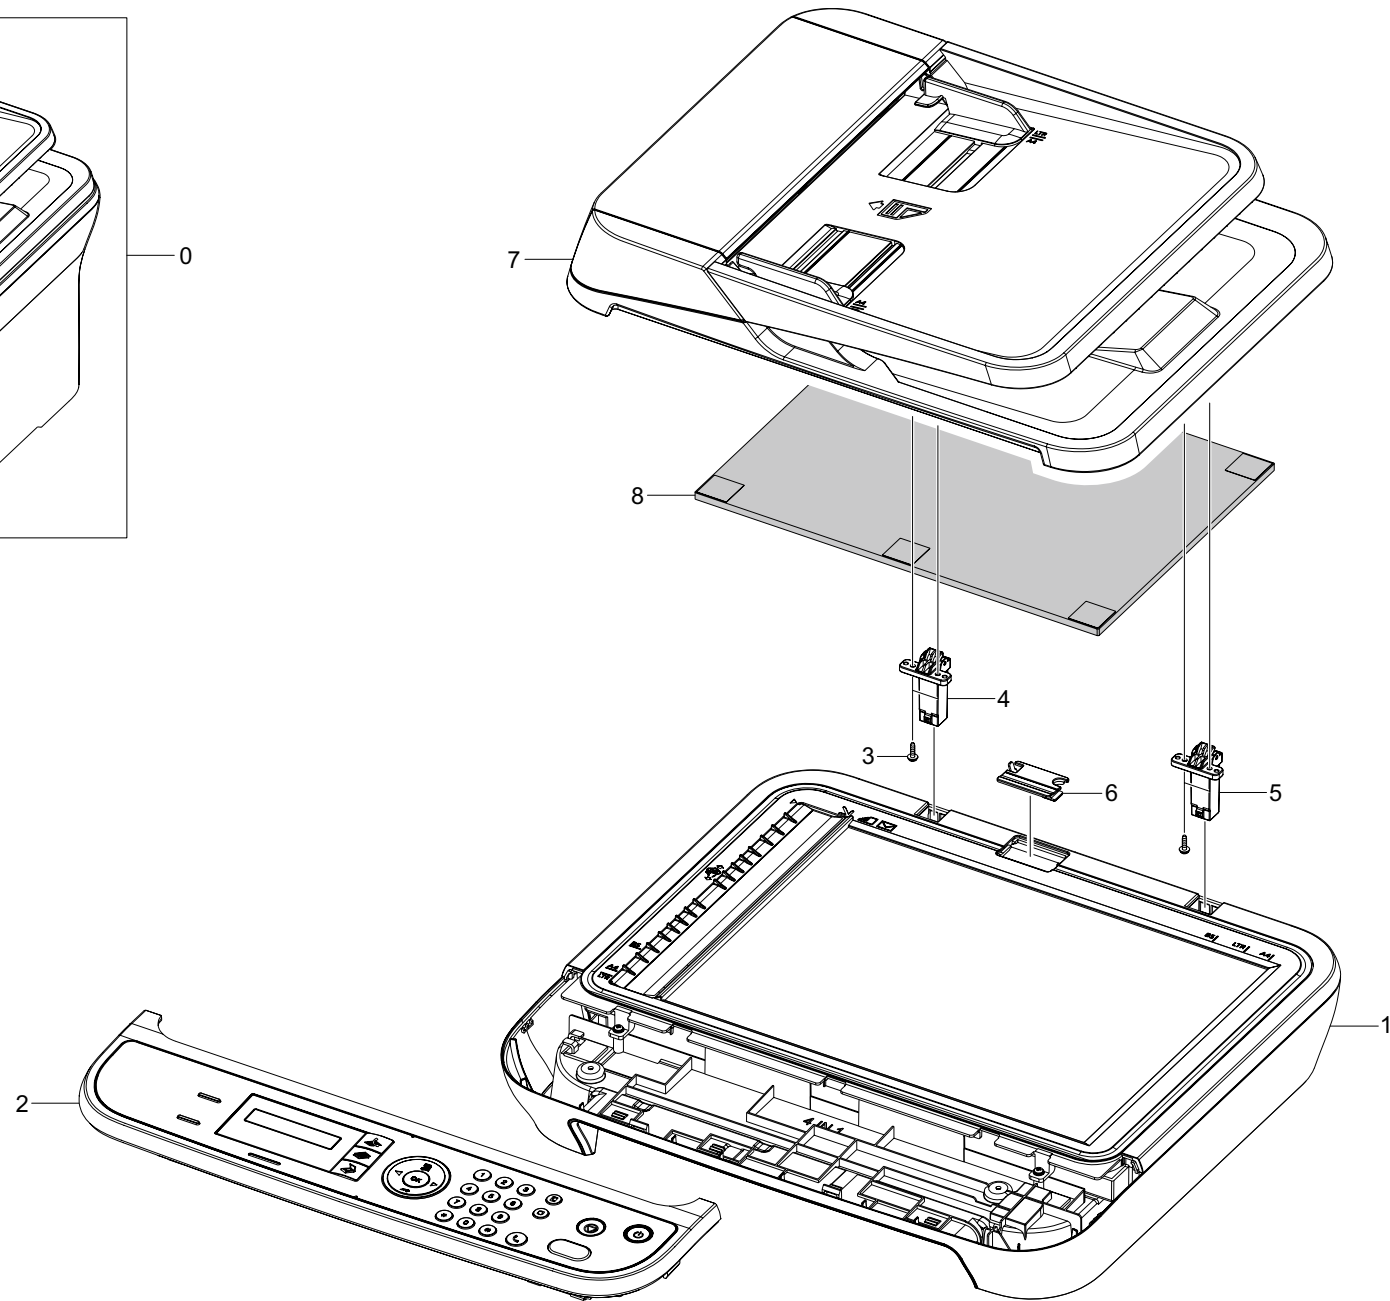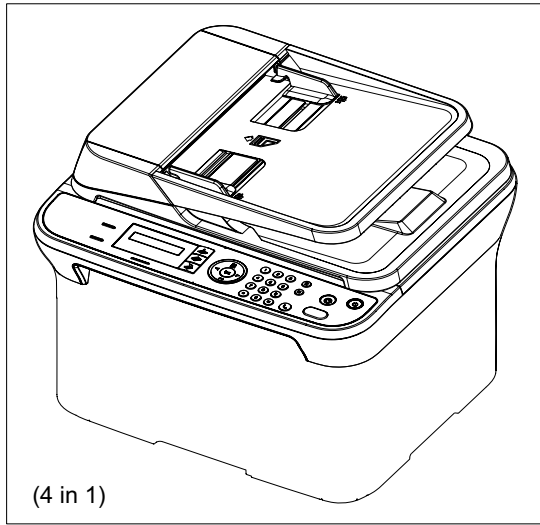





SCANNER_4 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03685A	SCANNER	1	SNA	4623FN/Others
0	JC97-03685B	SCANNER	1	SNA	4623FN/SEE/XEC
0	JC97-03685C	SCANNER	1	SNA	4623F/Others
0	JC97-03685D	SCANNER	1	SNA	4623F/SEE/XEC
0	JC97-03685F	SCANNER	1	SNA	4623FN/XAX/XBH
0	JC97-03685G	SCANNER	1	SNA	4623FN/XEV
0	JC97-03685H	SCANNER	1	SNA	4623FN/STS
0	JC97-03685J	SCANNER	1	SNA	4623FN/ETS
0	JC97-03685M	SCANNER	1	SNA	4623F/XAX/XBH
0	JC97-03685N	SCANNER	1	SNA	4623F/XEV

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03685P	SCANNER	1	SNA	4623F/STS
0	JC97-03685R	SCANNER	1	SNA	4623F/ETS
1	JC97-03677A	PLATEN	1	SNA	
2	-	OPE	1	SA	Refer to 14.OPE
3	6003-000196	SCREW-TAPTYPE	4	SA	
4	JC97-03191A	MEA UNIT-HINGE L	1	SA	
5	JC97-03190A	MEA UNIT-HINGE R	1	SA	
6	JC63-02454A	COVER-CONNECTOR	1	SNA	
7	JC97-03694A	ADF	1	SA	
8	JC63-02569A	SHEET-WHITE	1	SA	

12. SCANNER_3 in 1

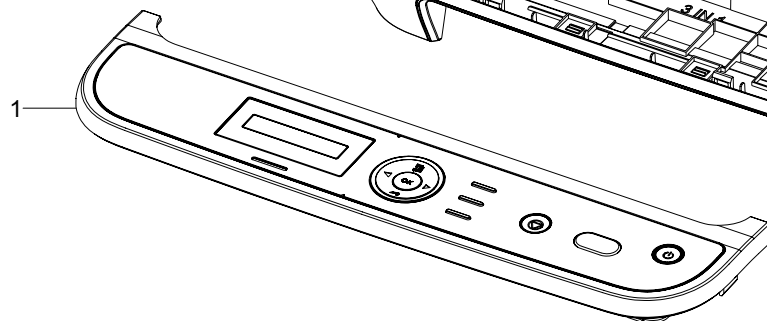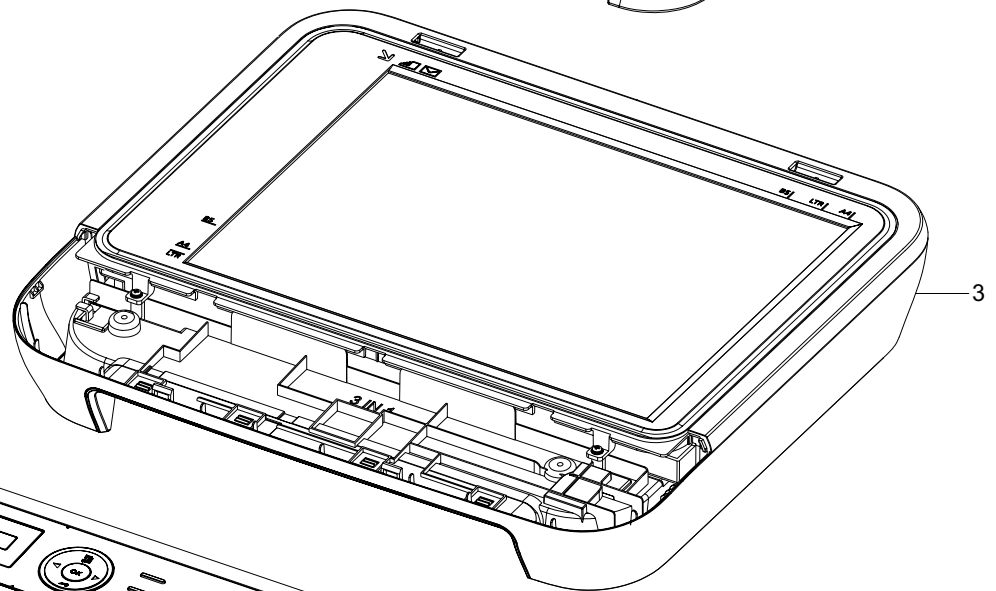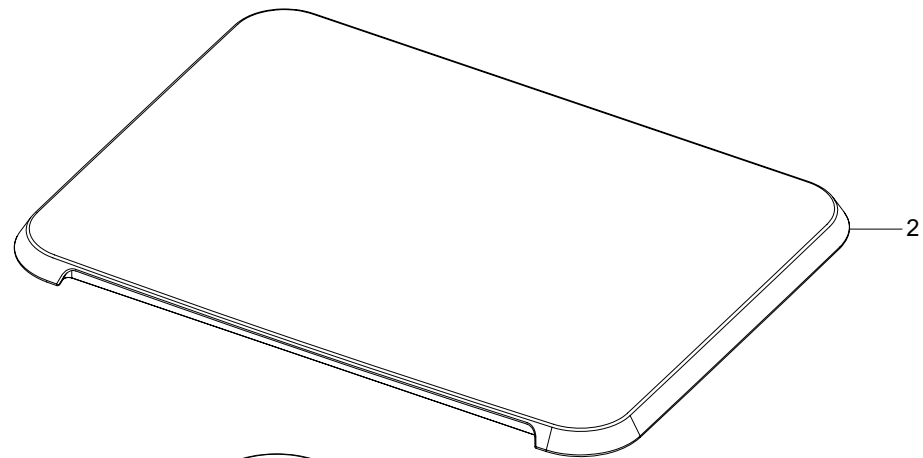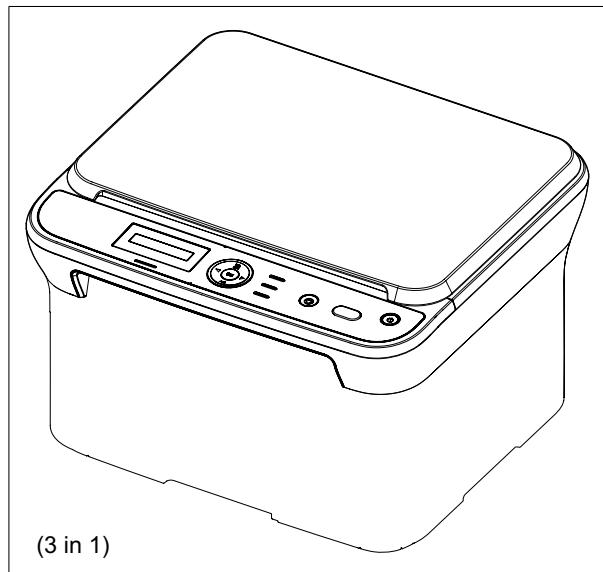


SCANNER_3 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03684A	SCANNER	1	SNA	4600/Others
0	JC97-03684D	SCANNER	1	SNA	4600/XAX/XBH
0	JC97-03684E	SCANNER	1	SNA	4600/XEV
0	JC97-03684F	SCANNER	1	SNA	4600/STS

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	-	OPE	1	SA	Refer to 15.OPE
2	JC97-03438A	MEA UNIT-COVER PLATEN	1	SA	
3	JC97-03680A	PLATEN	1	SA	

13. COVER-PLATEN

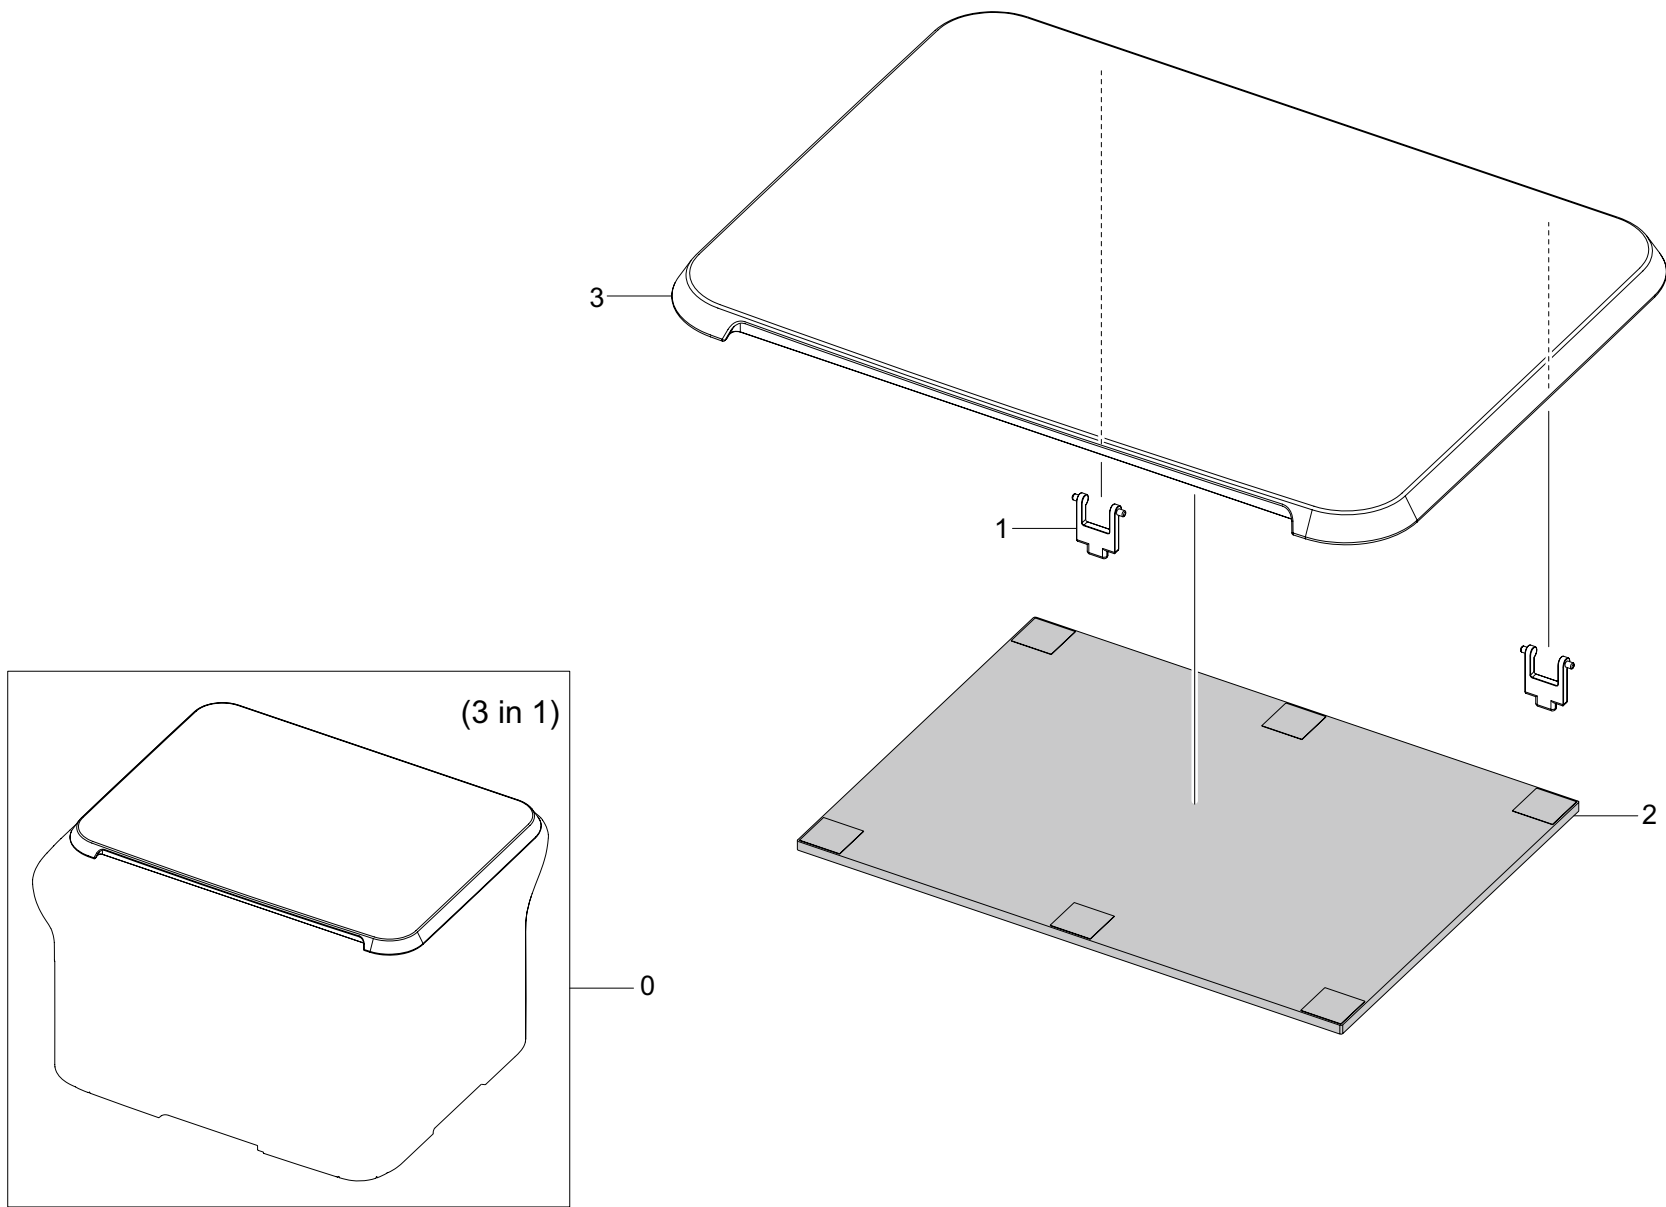



COVER-PLATEN Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03438A	MEA UNIT-COVER PLATEN	1	SA	4600
1	JC61-00929B	HINGE-PIVOT	2	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
2	JC63-00209A	SHEET-WHITE SPONGE	1	SNA	
3	JC63-01977A	COVER-PLATEN	1	SA	

14. OPE_4 in 1

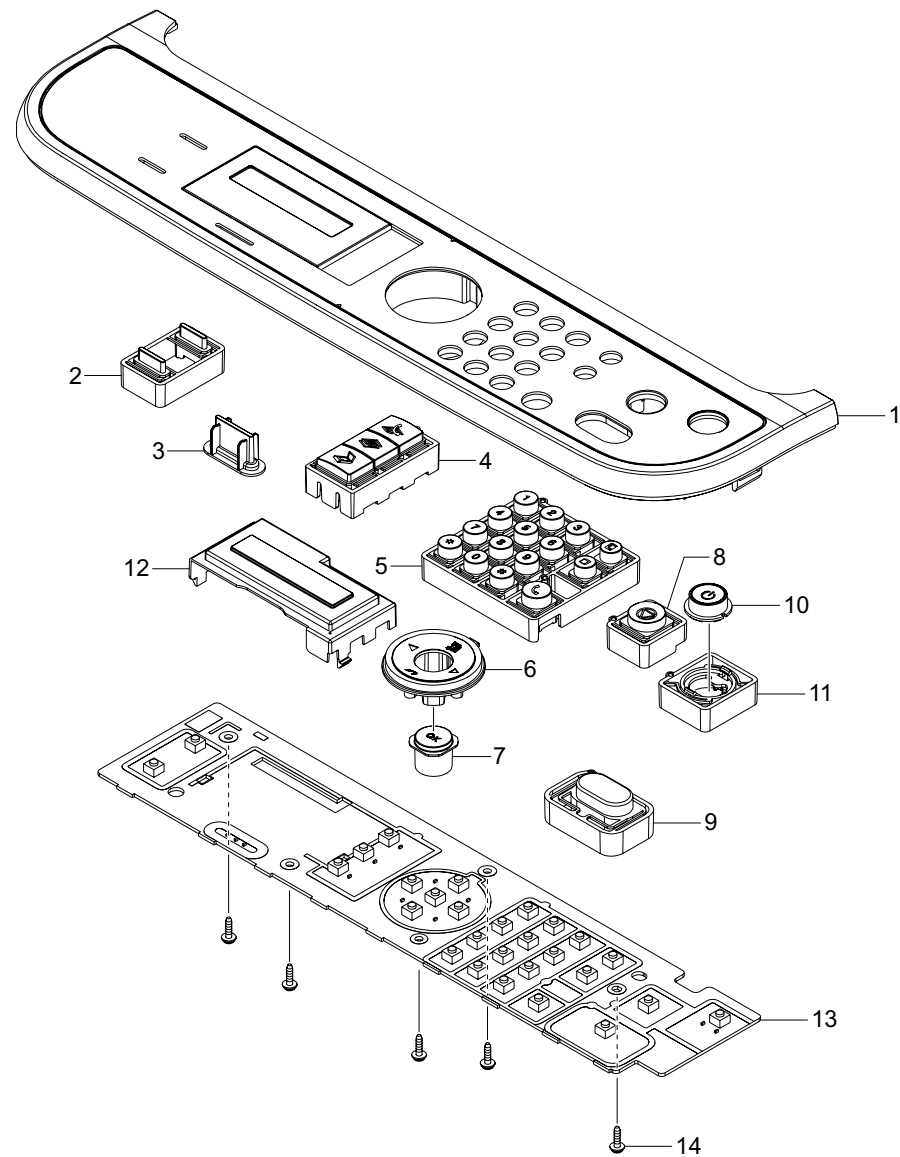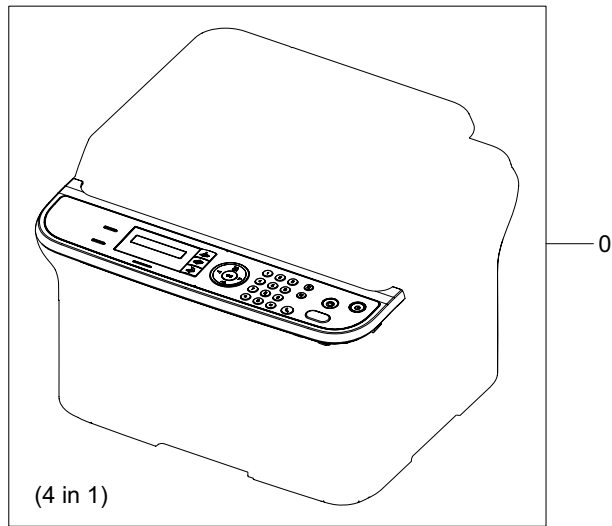



OPE_4 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03675A	OPE	1	SA	4623FN/Others
0	JC97-03675B	OPE	1	SA	4623FN/SEE/XEC
0	JC97-03675C	OPE	1	SA	4623F/Others
0	JC97-03675D	OPE	1	SA	4623F/SEE/XEC
0	JC97-03675F	OPE	1	SA	4623FN/XAX/XBH
0	JC97-03675G	OPE	1	SA	4623FN/XEV
0	JC97-03675H	OPE	1	SA	4623FN/STS
0	JC97-03675J	OPE	1	SA	4623FN/ETS
0	JC97-03675M	OPE	1	SA	4623F/XAX/XBH
0	JC97-03675N	OPE	1	SA	4623F/XEV
0	JC97-03675P	OPE	1	SA	4623F/STS
0	JC97-03675R	OPE	1	SA	4623F/ETS
0	JC97-03675W	OPE	1	SA	4623FW/Others
0	JC97-03675X	OPE	1	SA	4623FW/SEE/XEC
1	JC63-02453A	COVER-OPE	1	SNA	4623FN/Others
1	JC63-02453B	COVER-OPE	1	SNA	4623FN/SEE/XEC
1	JC63-02453C	COVER-OPE	1	SNA	4623F/Others
1	JC63-02453D	COVER-OPE	1	SNA	4623F/SEE/XEC
1	JC63-02453F	COVER-OPE	1	SNA	4623FN/XAX/XBH
1	JC63-02453G	COVER-OPE	1	SNA	4623FN/XEV
1	JC63-02453H	COVER-OPE	1	SNA	4623FN/STS
1	JC63-02453J	COVER-OPE	1	SNA	4623FN/ETS

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	JC63-02453M	COVER-OPE	1	SNA	4623F/XAX/XBH
1	JC63-02453P	COVER-OPE	1	SNA	4623F/STS
1	JC63-02453R	COVER-OPE	1	SNA	4623F/ETS
1	JC63-02453W	COVER-OPE	1	SNA	4623FW/Others
1	JC63-02453X	COVER-OPE	1	SNA	4623FW/SEE/XEC
2	JC64-00386B	KEY-EXTRA	1	SA	
3	JC64-00392A	KEY-STATUS	1	SNA	
3	JC64-00431A	KEY-STATUS	1	SNA	4623FW
4	JC64-00387B	KEY-FAX	1	SA	
5	JC64-00394B	KEY-TEL	1	SA	
6	JC64-00388B	KEY-MENU	1	SA	
7	JC64-00389B	KEY-OK	1	SA	
8	JC64-00393B	KEY-STOP	1	SA	
9	JC64-00410C	KEY-START	1	SNA	
10	JB64-00114D	KEY-POWER	1	SA	
11	JC64-00443A	KEY-POWER_B	1	SNA	
12	JC63-01802A	COVER-LCD	1	SNA	
13	JC92-02134A	PBA-OPE	1	SA	
13	JC92-02134B	PBA-OPE	1	SA	
14	6003-000196	SCREW-TAPTYPE	5	SA	
15	-	SHEET-OPE	1	SNA	

15. OPE_3 in 1

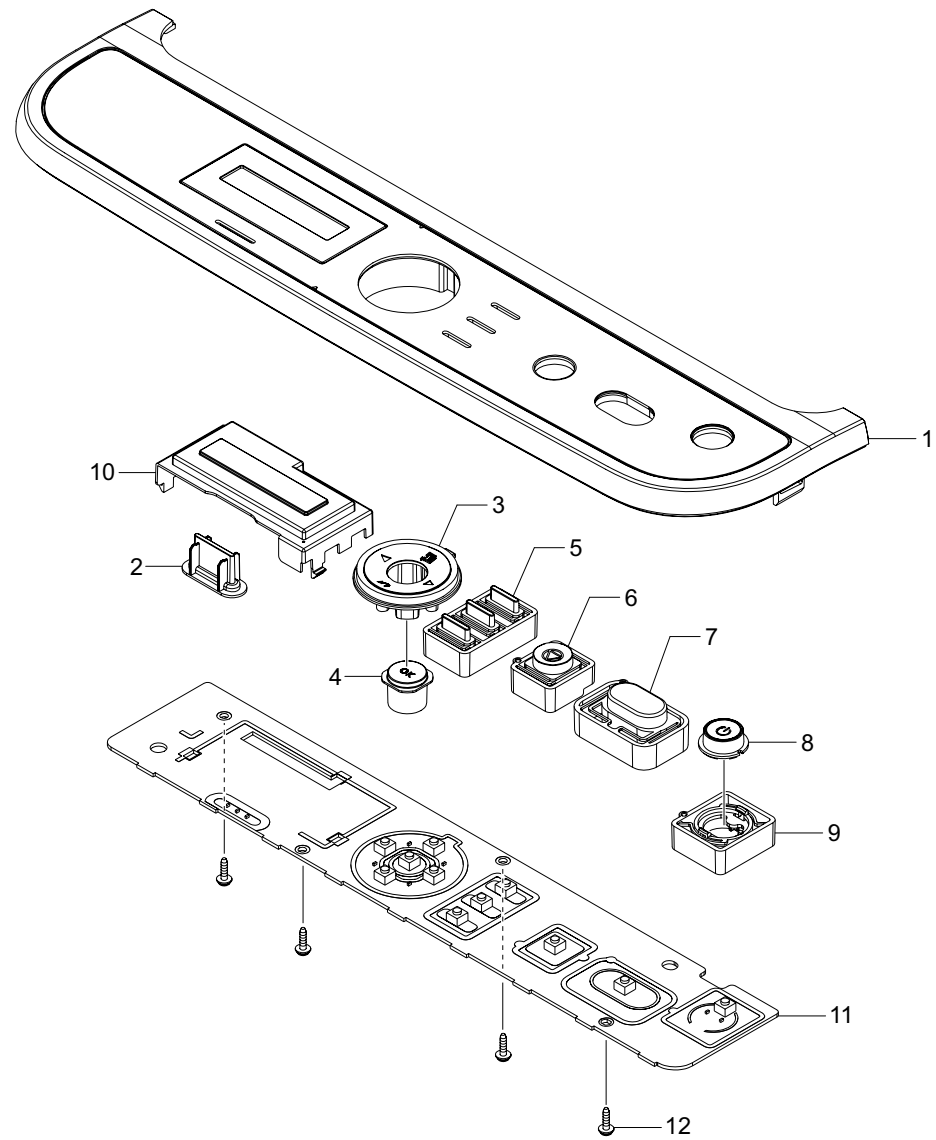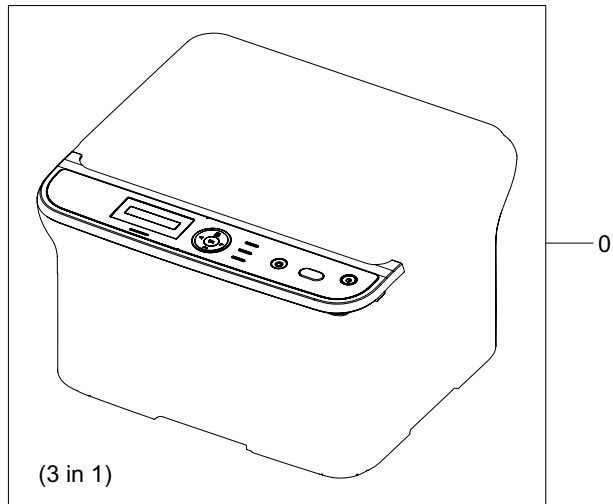



OPE_3 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03676A	OPE	1	SA	4600/Others
0	JC97-03676D	OPE	1	SA	4600/XAX/XBH
0	JC97-03676E	OPE	1	SA	4600/XEV
0	JC97-03676F	OPE	1	SA	4600/STS
1	JC63-02468A	COVER-OPE	1	SA	
2	JC64-00392A	KEY-STATUS	1	SNA	
3	JC64-00388B	KEY-MENU	1	SNA	
4	JC64-00389B	KEY-OK	1	SNA	
5	JC64-00430A	KEY-EXTRA	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
6	JC64-00393B	KEY-STOP	1	SNA	
7	JC64-00410C	KEY-START	1	SNA	
8	JB64-00114D	KEY-POWER	1	SNA	
9	JC64-00443A	KEY-POWER_B	1	SNA	
10	JC63-01802A	COVER-LCD	1	SNA	
11	JC92-02175A	PBA-OPE	1	SA	
12	6003-000196	SCREW-TAPTYPE	4	SNA	
13	-	SHEET-OPE	1	SNA	

16. PLATEN-LOW END

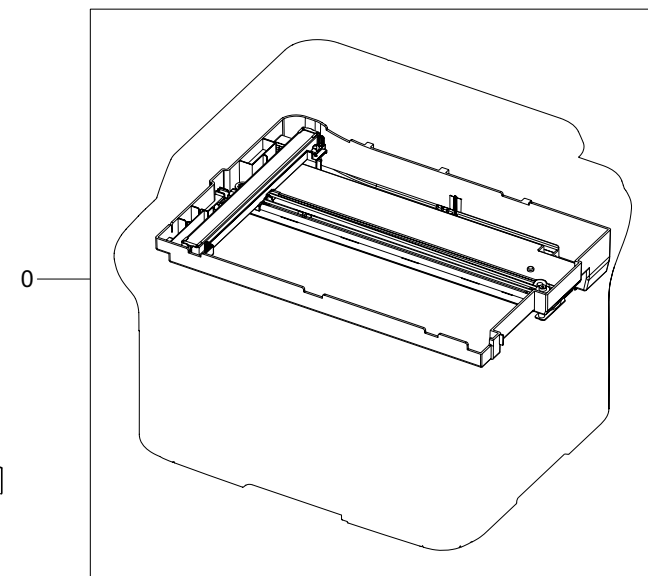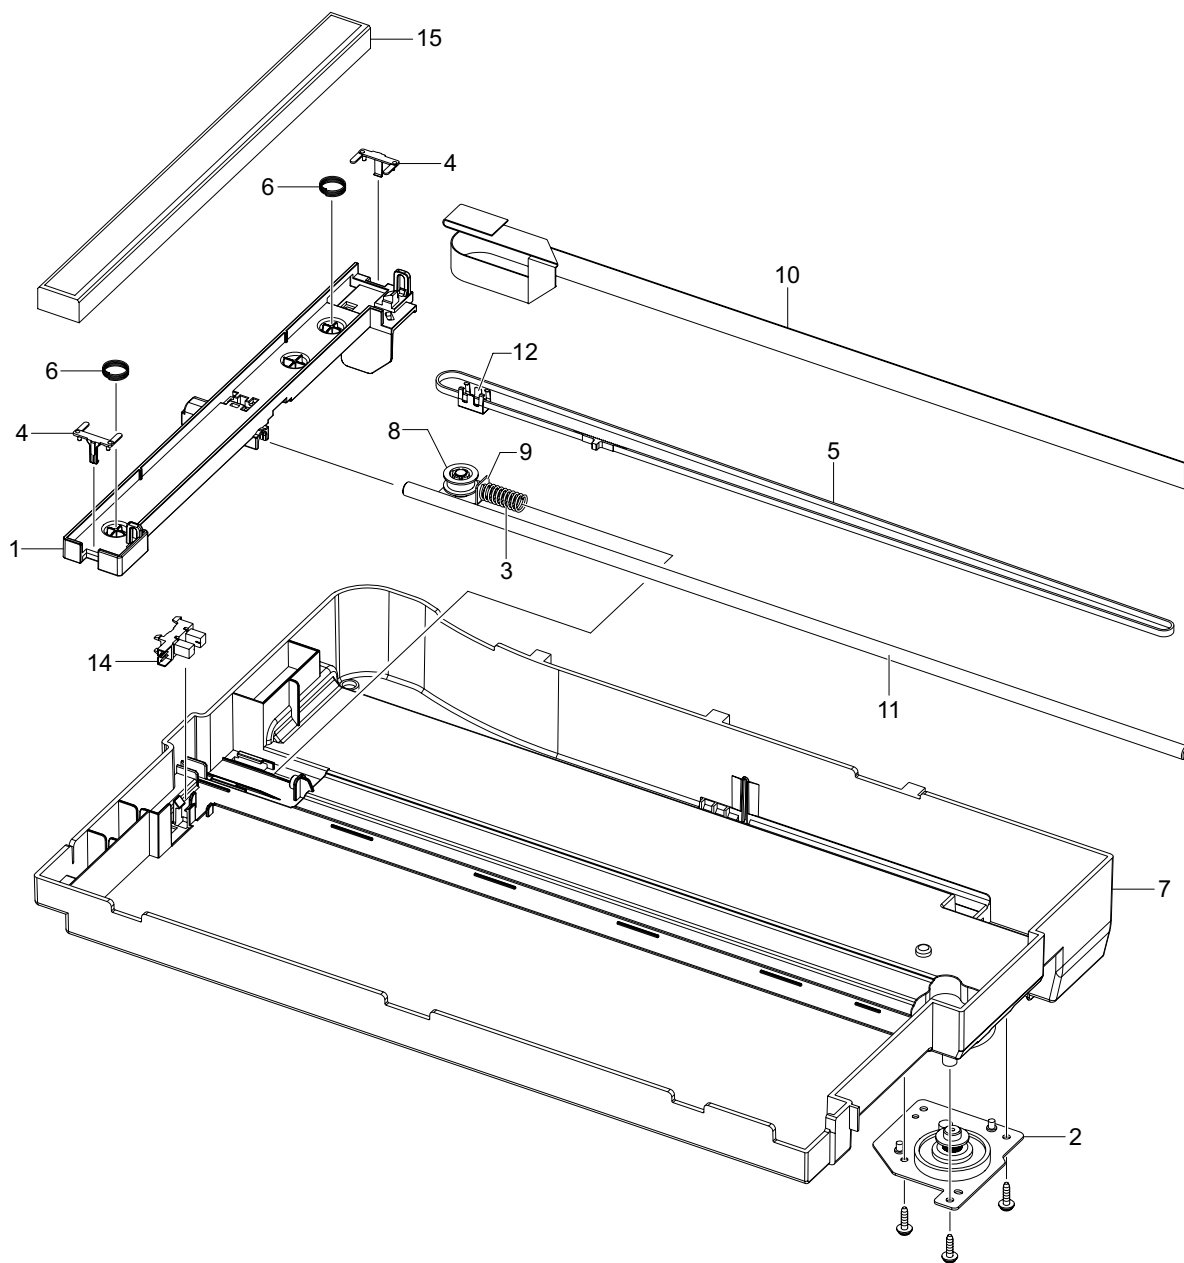



PLATEN-LOW END Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03686A	PLATEN-LOW END	1	SNA	
1	JC61-02506A	BRACKET-CIS	1	SNA	
2	JC93-00111A	DRIVE PLATEN	1	SA	
3	6107-001194	SPRING-CS	1	SA	
4	JC66-01580A	SLIDER-CIS	2	SA	
5	6602-001637	BELT-TIMING GEAR	1	SA	
6	6107-001137	SPRING-CS	2	SA	
7	JC61-02517A	FRAME-SCAN LOWER	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
8	JC66-00713A	PULLEY-M_IDLE	1	SNA	
9	JC61-00931A	BRACKET-P-PULLEY	1	SNA	
10		CIS_FPC_TULIP	1		
11	JC66-01448A	SHAFT-CIS	1	SA	
12	JB61-00232A	CLIP-P-BELT	1	SA	
13	6003-000196	SCREW-TAPTYPE	3	SA	
14	0604-001095	PHOTO-INTERRUPTER	1	SA	

17. PLATEN-LOWER_4 in 1

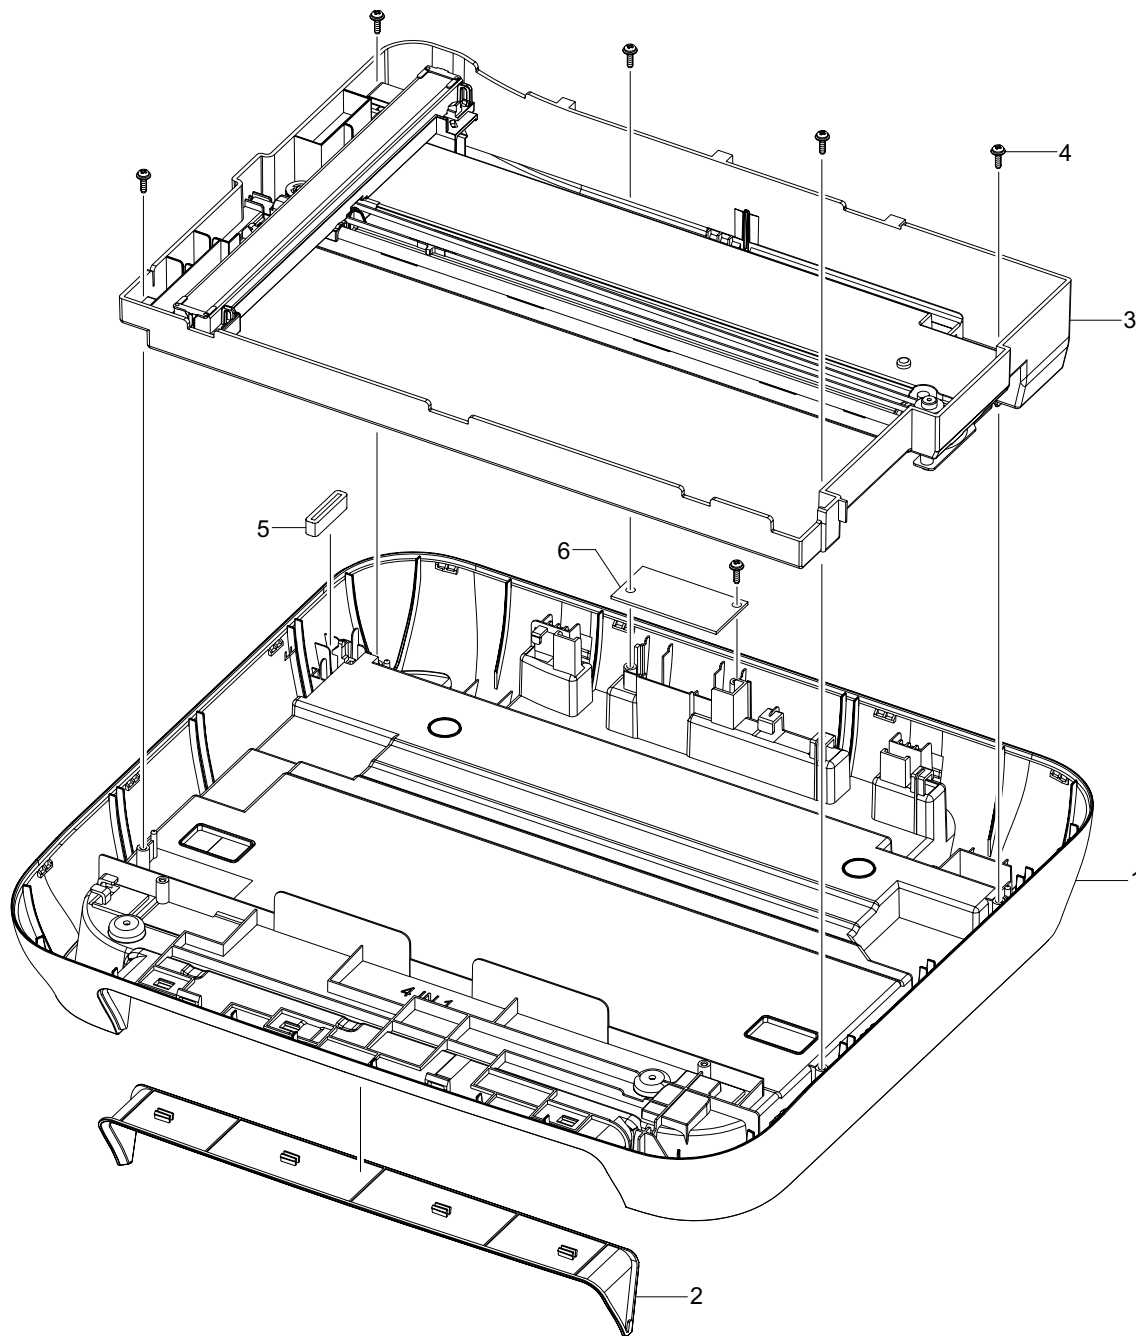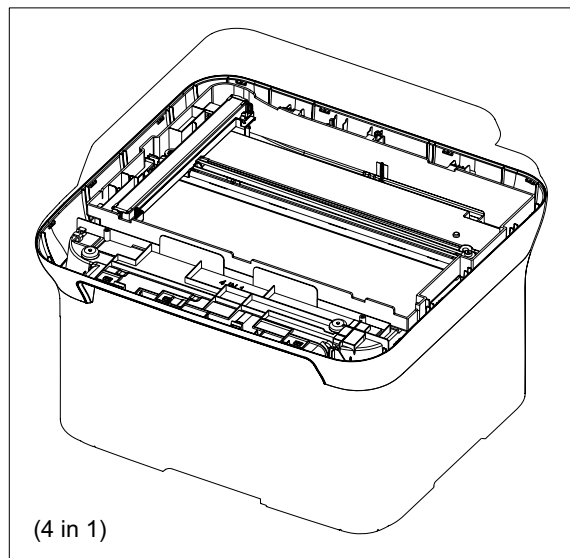



PLATEN-LOWER_4 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03679A	PLATEN-LOWER	1	SNA	4 in 1
1	JC63-02455A	COVER-SCAN LOWER	1	SNA	
2	JC63-02457A	COVER-OPE DECO	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC97-03686A	PLATEN-LOW END	1	SNA	
4	6003-000196	SCREW-TAPTYPE	6	SA	

18. PLATEN-LOWER_3 in 1

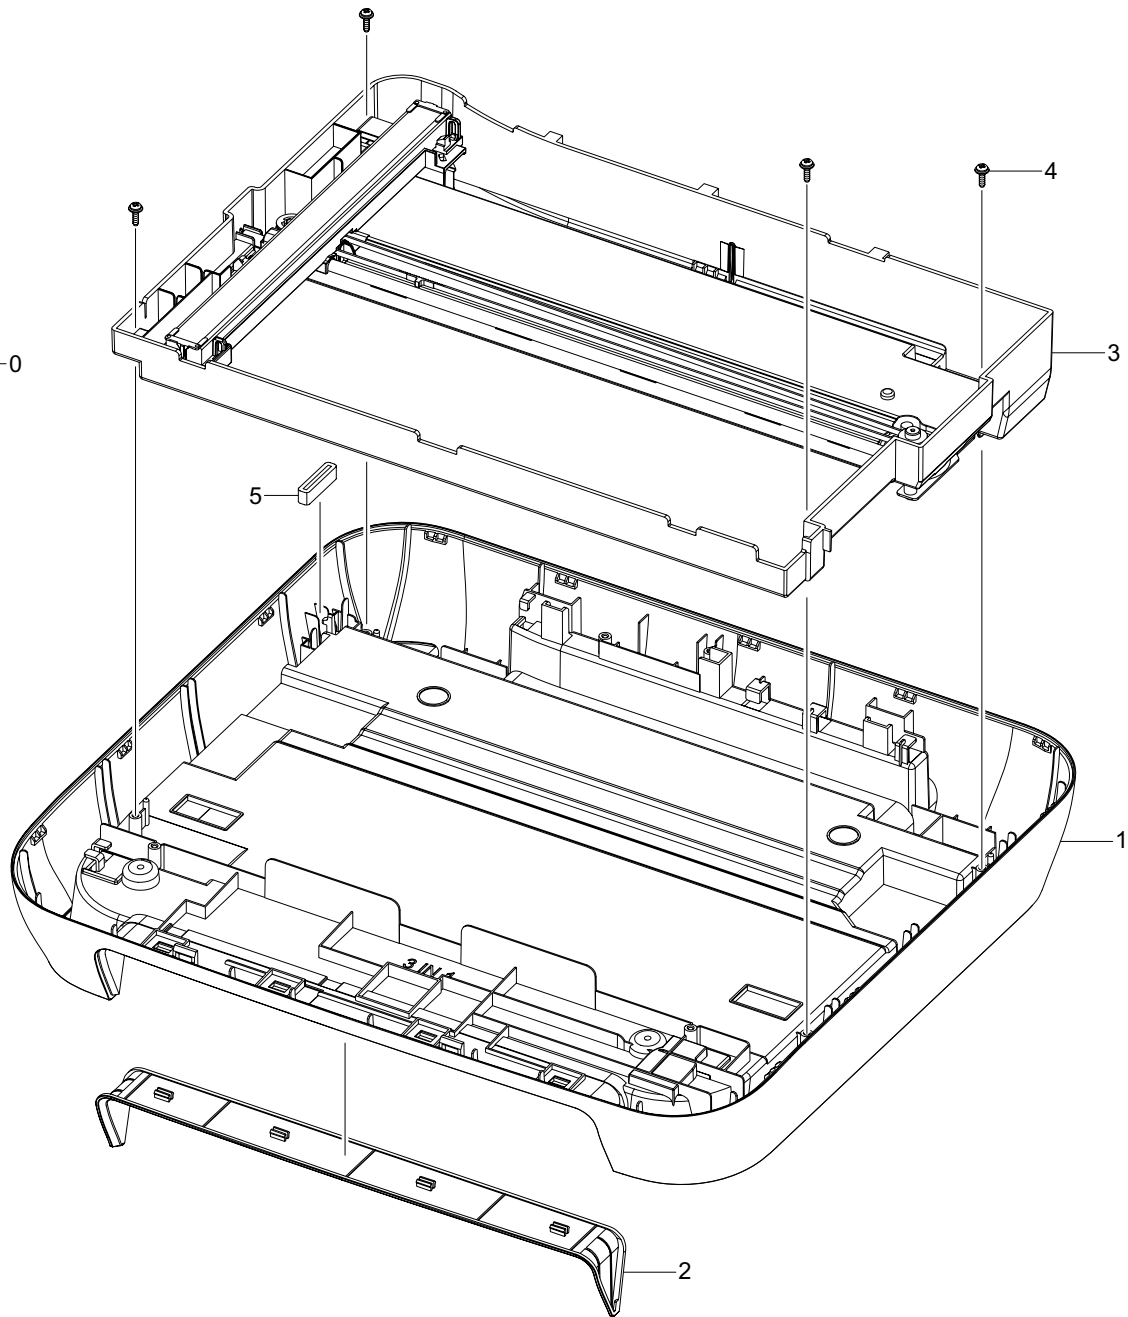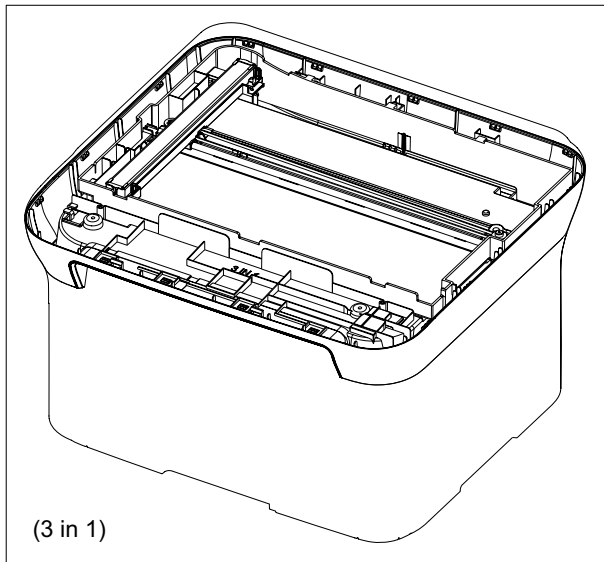



PLATEN-LOWER_3 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03682A	PLATEN-LOWER	1		3 in 1
1	JC63-02465A	COVER-SCAN LOWER	1		
2	JC63-02466A	COVER-OPE DECO	1		

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC97-03686A	PLATEN-LOW END	1		
4	6003-000196	SCREW-TAPTYPE	4		

19. PLATEN-UPPER_4 in 1

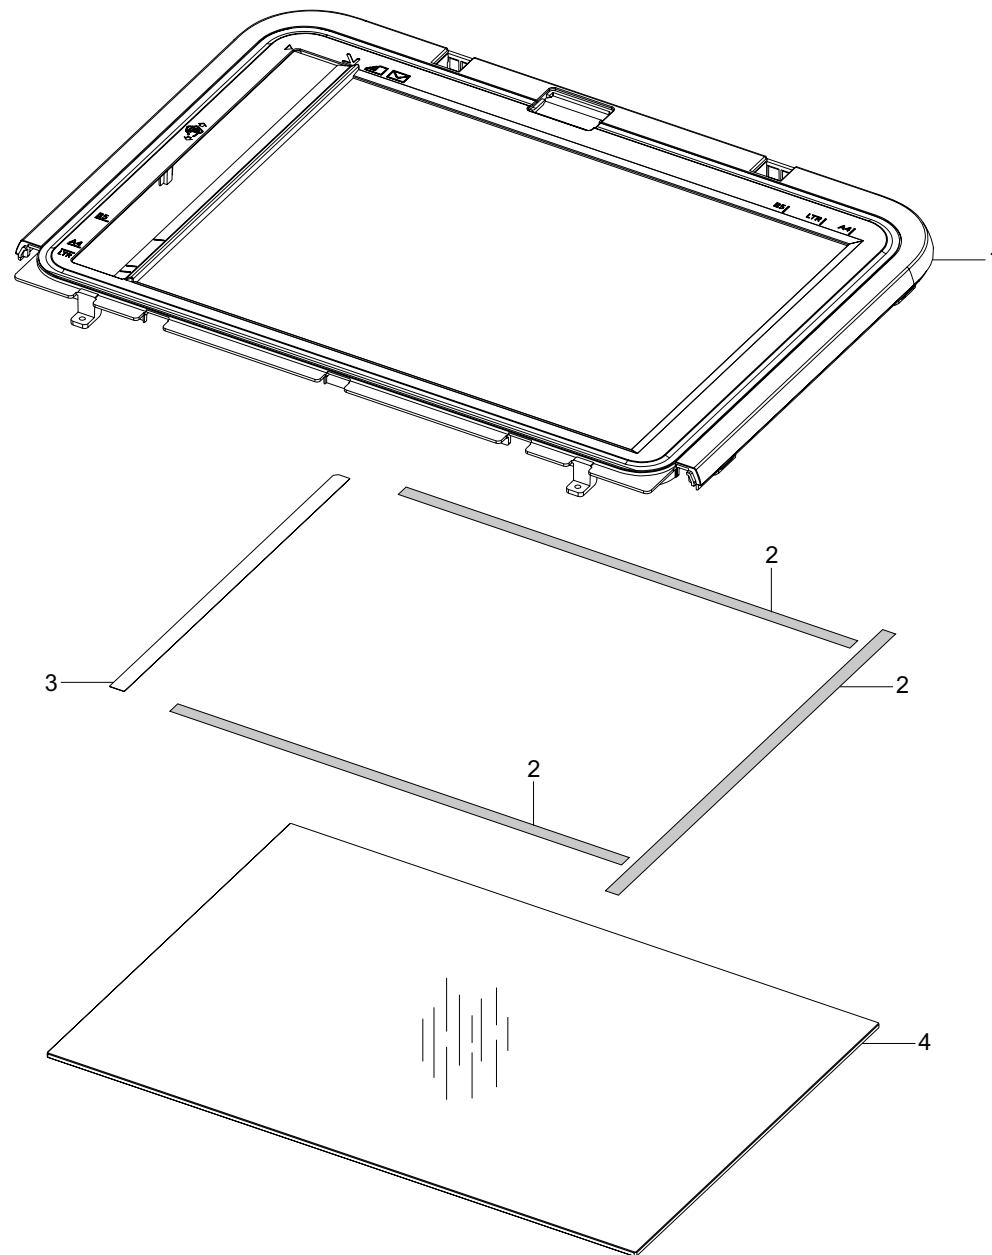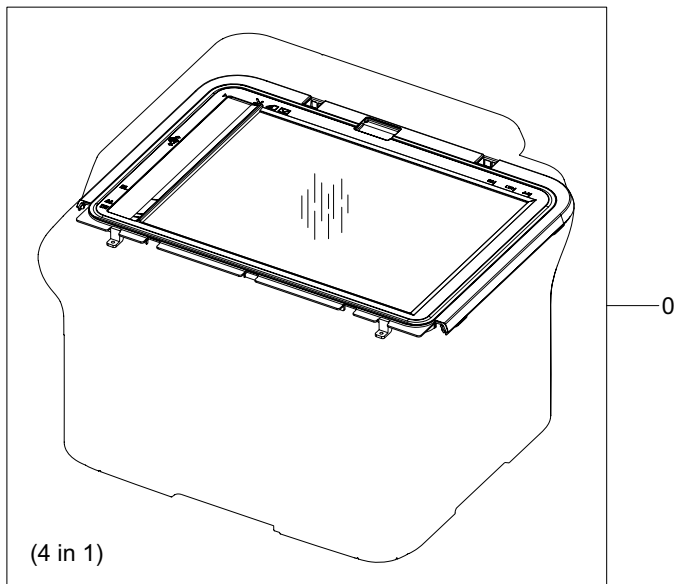



PLATEN-UPPER_4 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03678A	PLATEN-UPPER	1	SNA	4 in 1
1	JC63-02456A	COVER-SCAN UPPER	1	SNA	
2	0203-001267	TAPE-DOUBLE FACE	3	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC63-01906A	SHEET-SHADING	1	SNA	
4	JC01-00002A	GLASS-SCAN MONTBLANC	1	SC	

20. PLATEN-UPPER_3 in 1

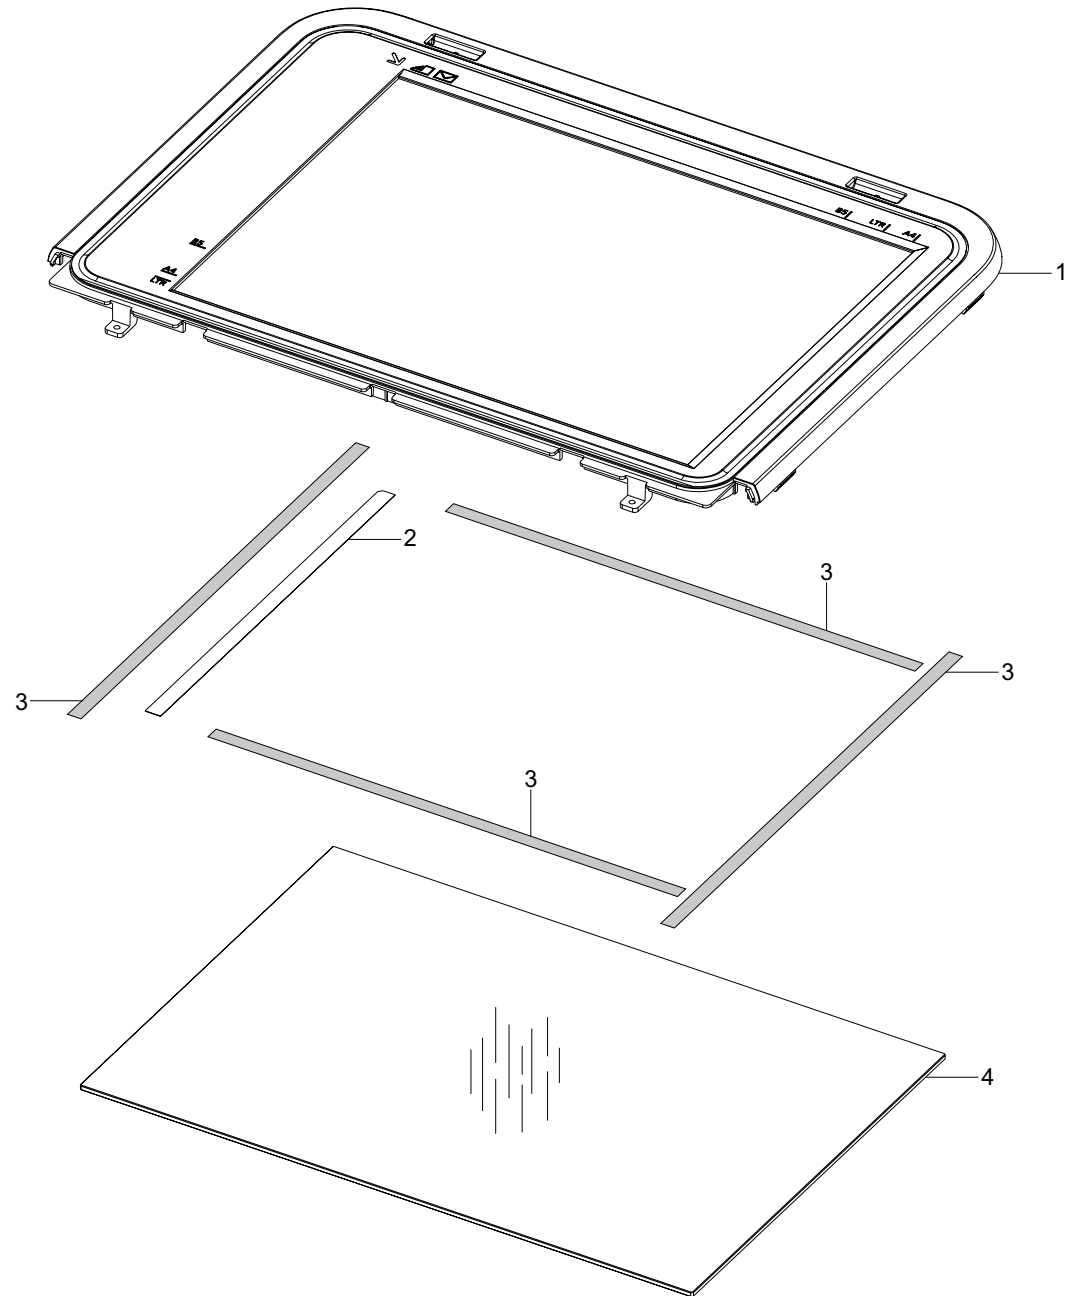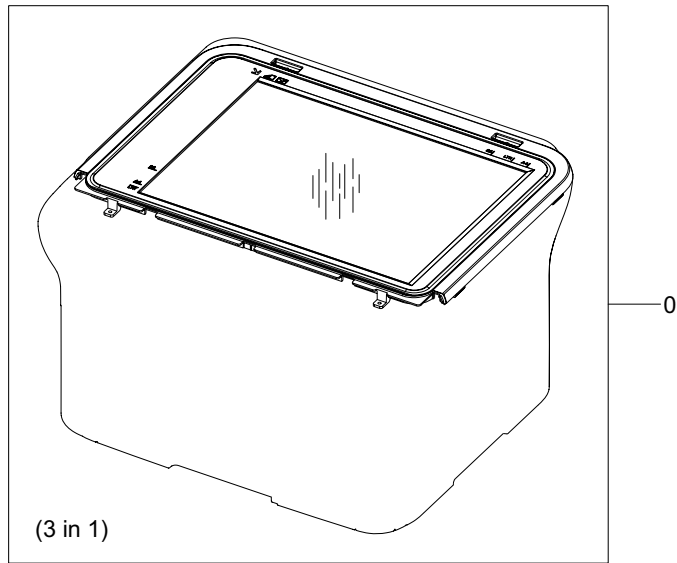



PLATEN-UPPER_3 in 1 Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03681A	PLATEN-UPPER	1	SNA	3 in 1
1	JC63-02467A	COVER-SCAN UPPER	1	SNA	
2	JC63-01906A	SHEET-SHADING	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	0203-001267	TAPE-DOUBLE FACE	4	SNA	
4	JC01-00002A	GLASS-SCAN MONTBLANC	1	SC	

21. PLATEN-SHEET

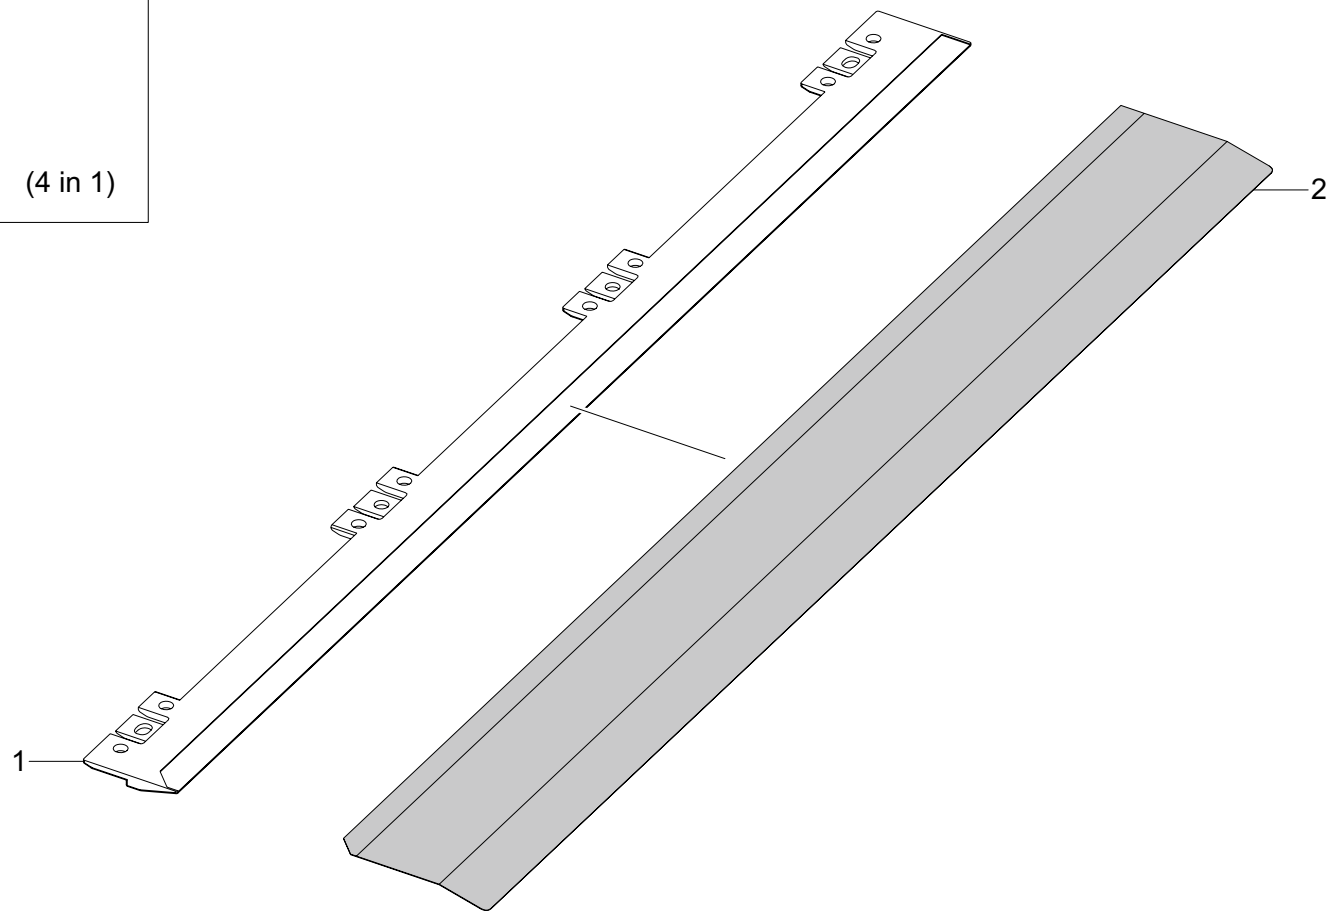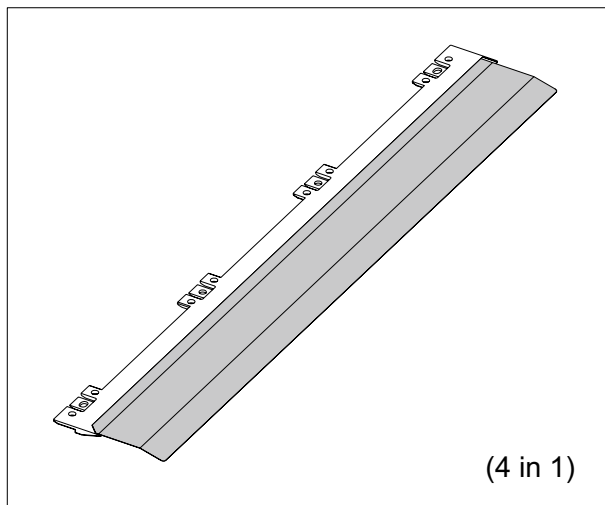


PLATEN-SHEET Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC97-03693A	PLATEN-SHEET	1	SA	
1	JC61-03513A	HOLDER-ADF SHEET	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
2	JC63-01794A	SHEET-ADF	1	SNA	

22. ASSY_ADF_BASE

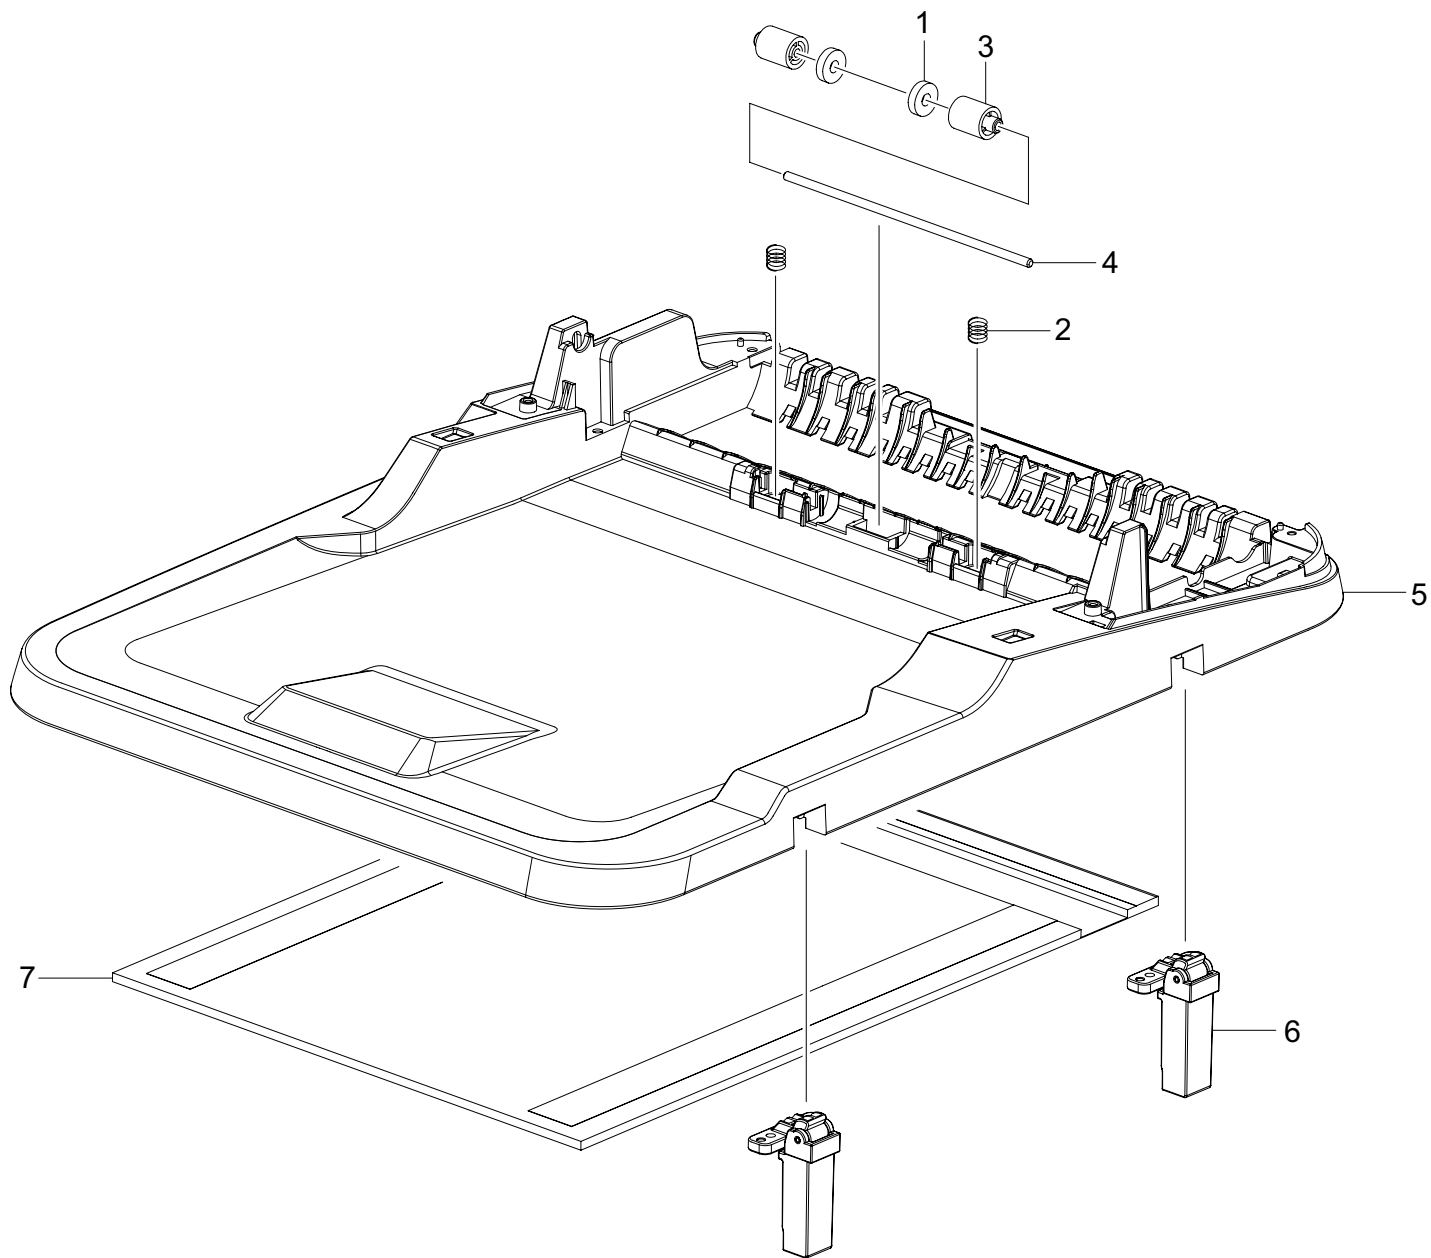


ASSY_ADF_BASE Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	-	WHEEL,EJECT	2	SNA	
2	-	SPRING,EJECT, IDLE	2	SNA	
3	JC81-07319A	CSP-ROLLER_EJECT_IDLE	2	SA	
4	-	SHAFT	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
5	JC81-07311A	CSP-FRAME_ADF_BASE	1	SA	
6	-	MEA UNIT HINGE	2	SNA	
7	-		1	SNA	

23. ASSY-INPUT-TRAY

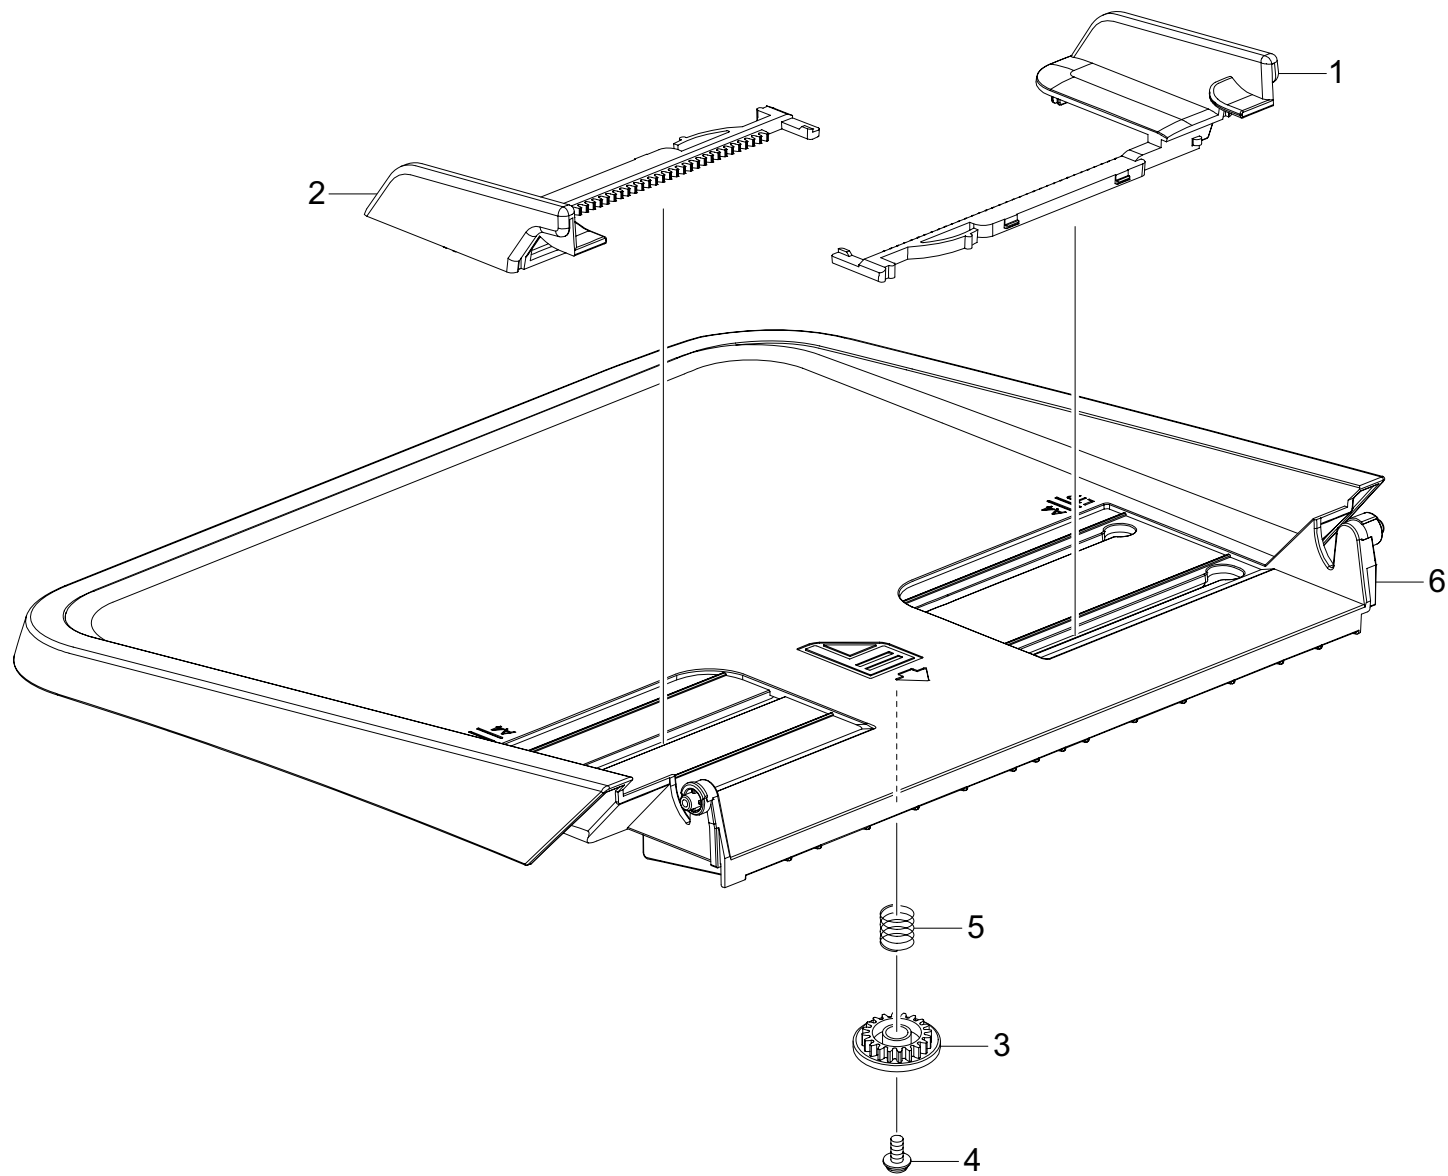


ASSY-INPUT-TRAY Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	JC81-07328A	CSP-EDGE_GUIDE_FRONT	1	SA	
2	JC81-07329A	CSP_EDGE_GUIDE_REAR	1	SA	
3	JC81-07339A	CSP-GEAR_PINION	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
4	-	SCREW-TAPTYPE	1	SNA	
5	-	SPRING	1	SNA	
6	JC81-07327A	CSP-TRAY_INPUT	1	SA	

24. ASSY_ADF_COVER

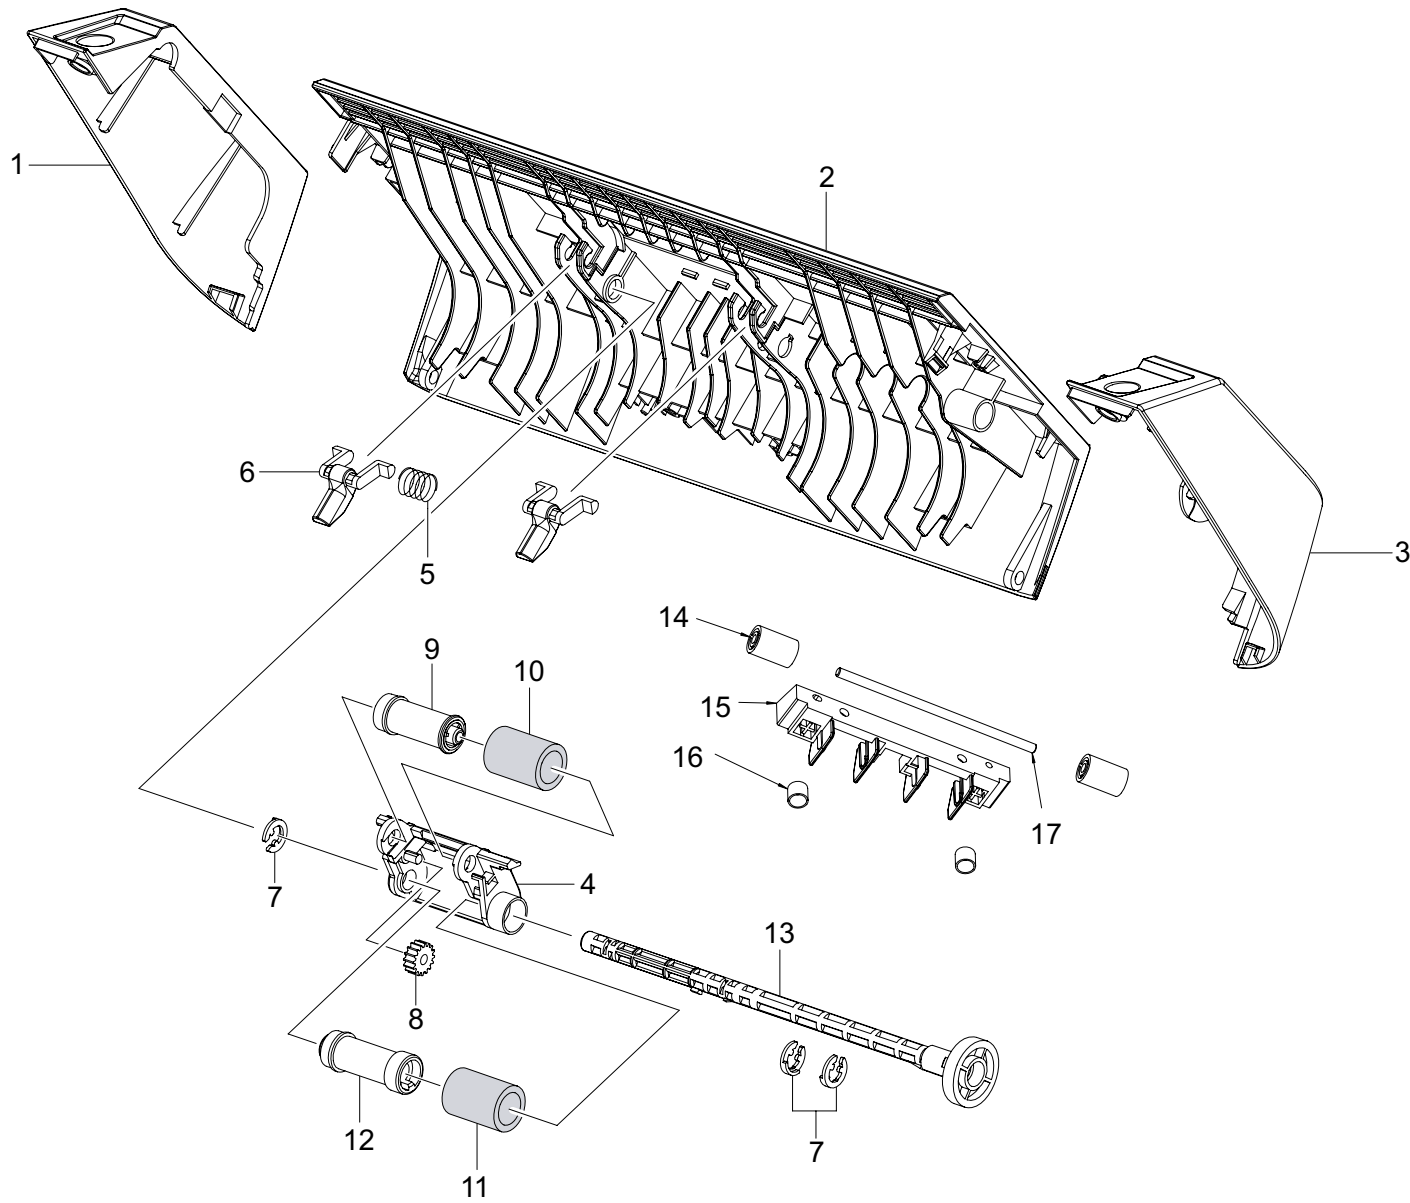


ASSY_ADF_COVER Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	JC81-07313A	CSP-COVER_ADF_FRONT	1	SA	
2	JC81-07312A	CSP-COVER_ADF_TOP	1	SA	
3	JC81-07314A	CSP-COVER_ADF_REAR	1	SA	
4	JC81-07317A	CSP-HOUSING_PICK_UP	1	SA	
5	-	SPRING	1	SNA	
6	JC81-07316A	CSP-STOPPER_PAPER	2	SA	
7	JC81-07318A	CSP-RING_CHESS	3	SA	
8	JC81-07332A	CSP-GEAR_PICK_IDLE	1	SA	
9	-	GEAR,PCIK FEEDING ROLLER	1	SNA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
10	-	RUBBER	1	SNA	
11	-	RUBBER	1	SNA	
12	JC81-07334A	CSP-GEAR_SEPARATE_ROLLER	1	SA	
13	JC81-07331A	CSP-GEAR_DRIVE_PICK	1	SA	
14	JC81-07315A	CSP-ROLLER_IDLE	2	SA	
15	JC81-07330A	CSP-FRAME_IDLE_UNIT	1	SA	
16	-	SPRING	2	SNA	
17	-	SHAFT IDLE ROLLER	1	SNA	

25. ASSY_PAPER-PATH

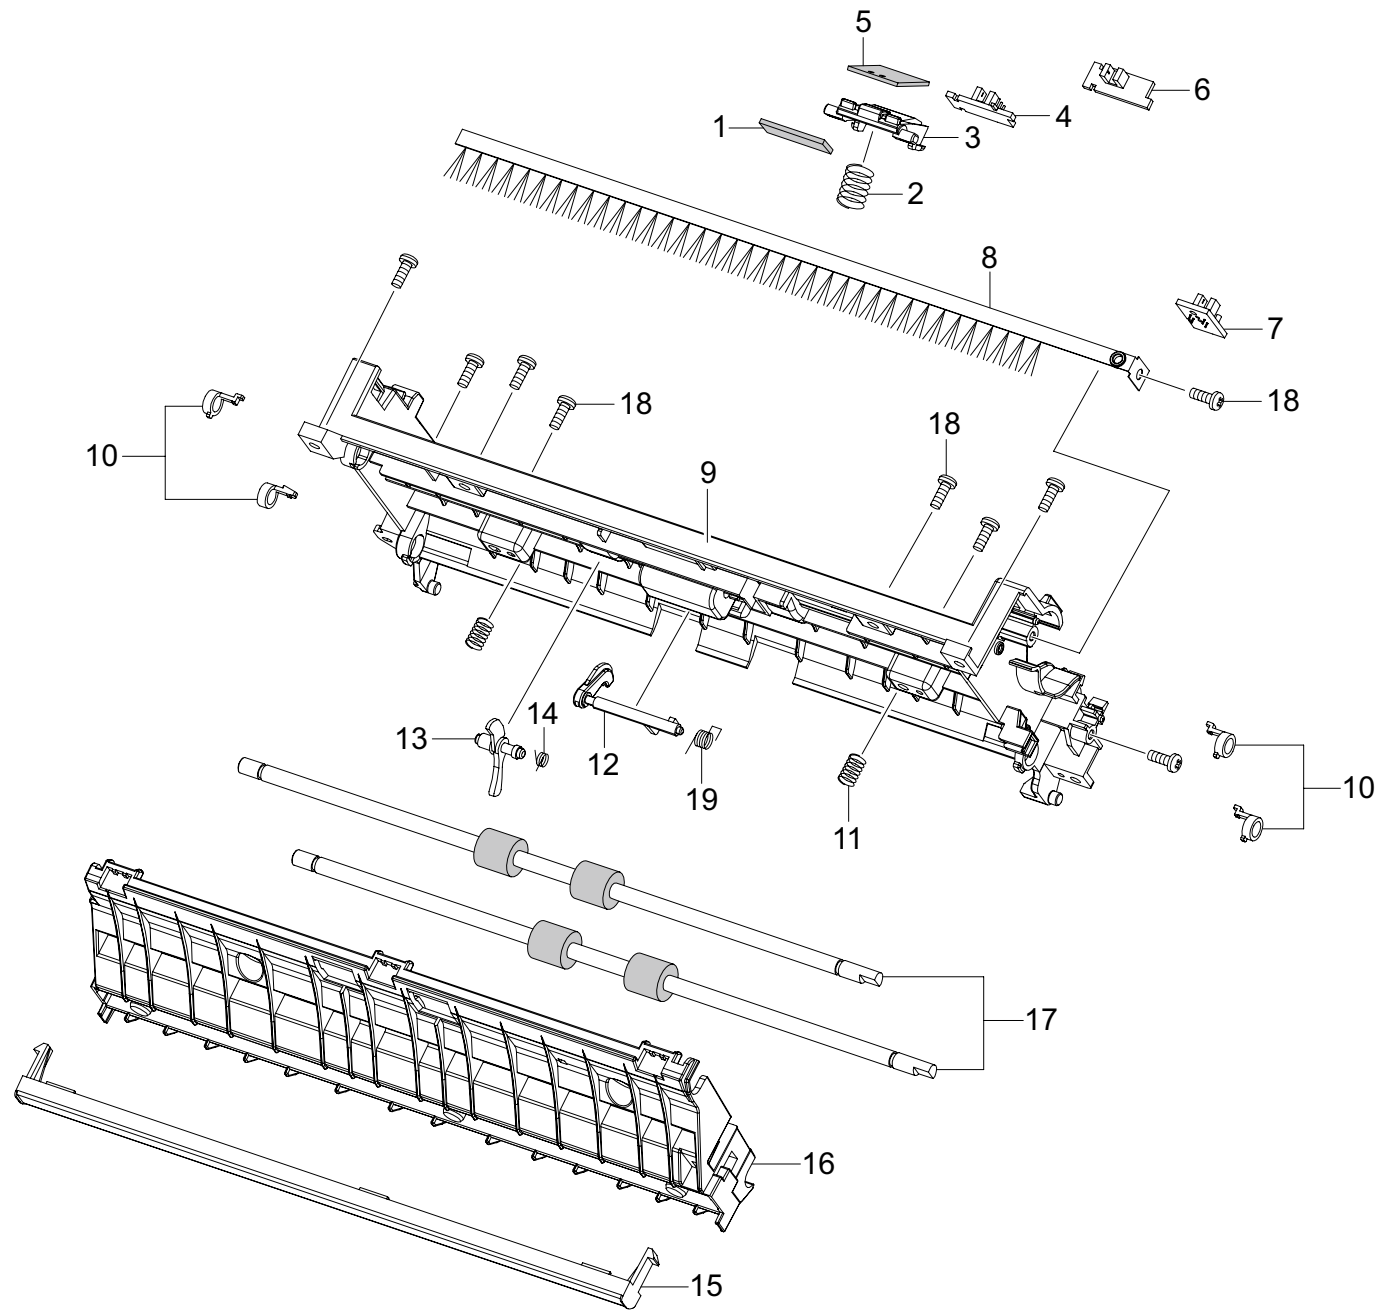


ASSY_PAPER-PATH Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	-		1	SNA	
2	-	SPRING	1	SNA	
3	JC81-07326A	CSP-HOLDER_SEPERATION	1	SA	
4	-	E-PAPER SENSOR	1	SNA	
5	-	RUBBER SEPARATION	1	SNA	
6	-	E-PAPER SENSOR	1	SNA	
7	-	COVER SENSOR	1	SNA	
8	-	BRUSH	1	SNA	
9	JC81-07320A	CSP-FRAME_DOCUMENT	1	SA	
10	JC81-07322A	CSP-BEARING	4	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
11	-	SPRING	2	SNA	
12	JC81-07325A	CSP_ARM-PAPER_POSITION	1	SA	
13	JC81-07324A	CSP-ARM_PAPER_DETECT	1	SA	
14	-	SPRING	1	SNA	
15	JC81-07323A	CSP-WHITE_BAR	1	SA	
16	JC81-07321A	CSP-FRAME_DOCUMENT_DOWN	1	SA	
17	-	ROLLER FEEDING	2	SNA	
18	-	SCREW-TAPTYPE	10	SNA	
19	-	SPRING	1	SNA	

26. ASSY_DRIVING_MODULE

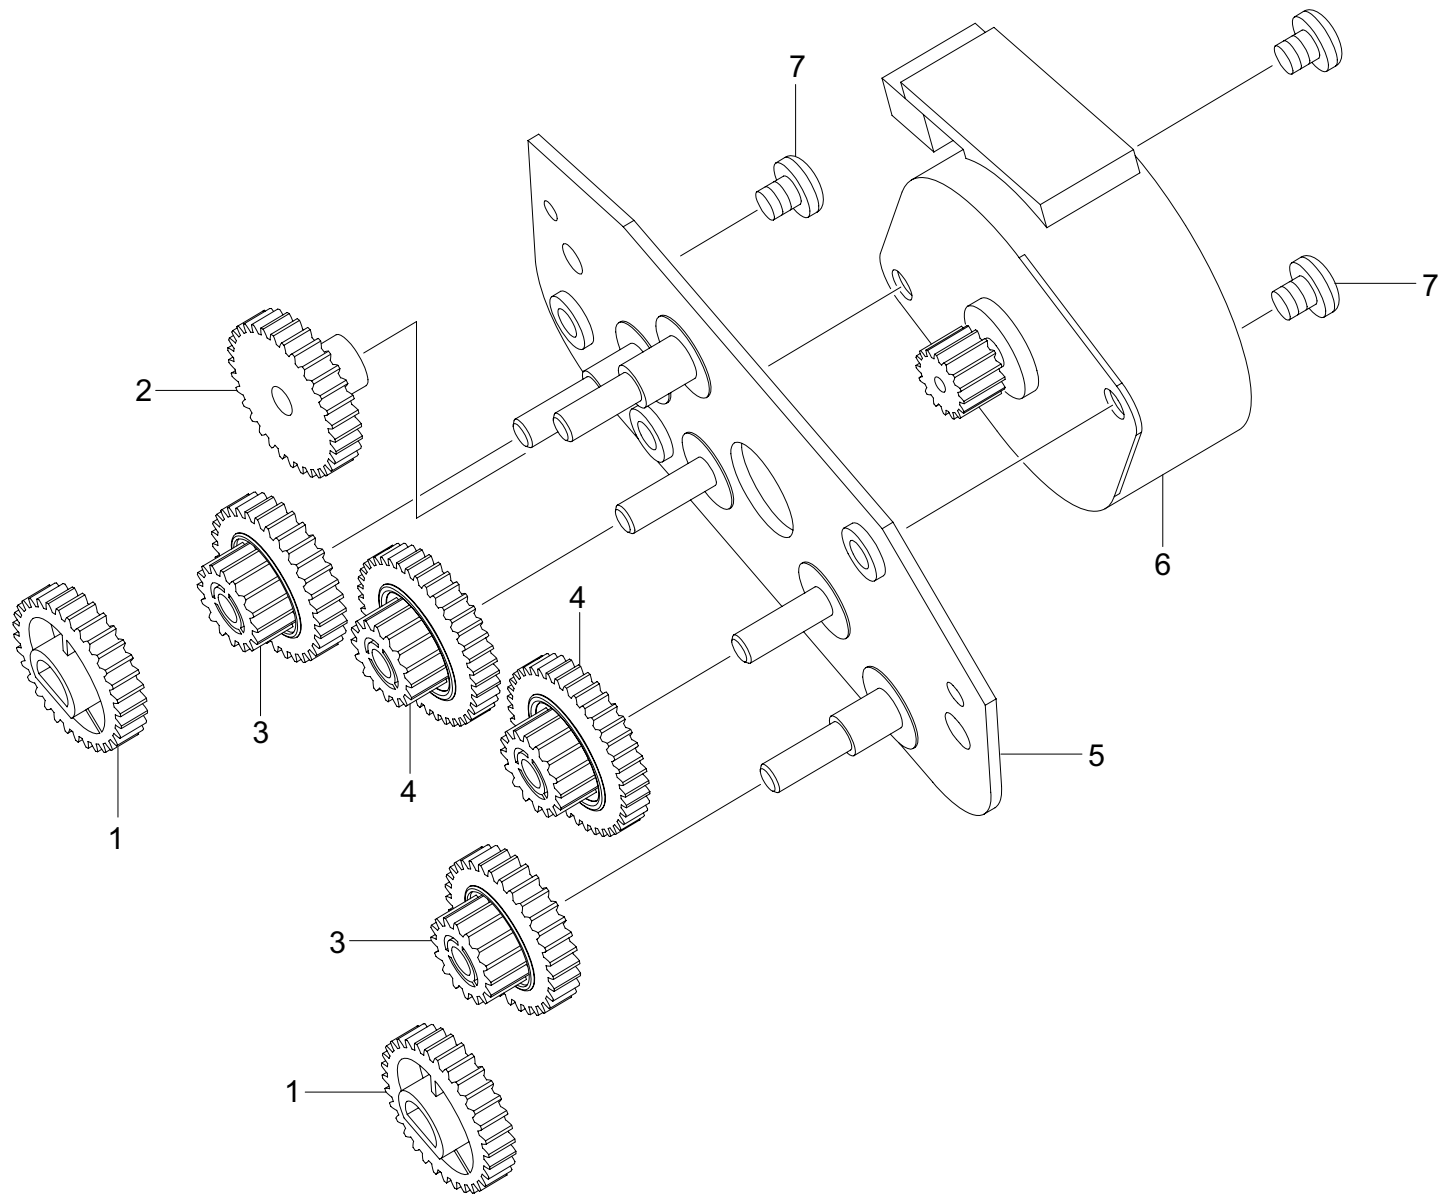

ASSY_DRIVING_MODULE Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	JC81-07336A	CSP-GEAR_FEEDING	2	SA	
2	JC81-07338A	CSP-GEAR_IDLE	1	SA	
3	JC81-07337A	CSP-GEAR_30T	2	SA	
4	JC81-07335A	CSP-GEAR_42T	2	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
5	JC81-07340A	CSP-PLATE-READING_MOTOR	1	SA	
6	-	STEP MOTOR	1	SNA	
7	-	SCREW-TAPTYPE	3	SNA	