


Dimensions

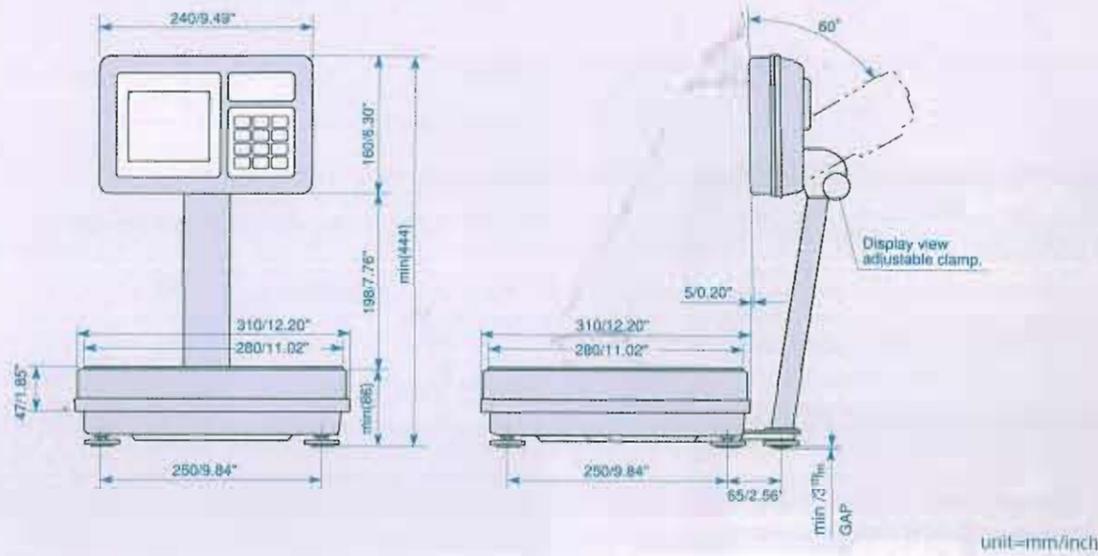

Specifications

	FS-6KA	FS-15KA	FS-30KA	FS-6KB	FS-15KB	FS-30KB
Capacity (kg)	6kg	15kg	30kg	6kg	15kg	30kg
Resolution (g)	1g/3kg 2g/6kg	2g/6kg 5g/15kg	5g/15kg 10g/30kg	1g/3kg 2g/6kg	2g/6kg 5g/15kg	5g/15kg 10g/30kg
Capacity (lb)	15lb	30lb	70lb	15lb	30lb	70lb
Resolution (lb) (USA only)	0.002lb/6lb 0.005lb/15lb	0.005lb/15lb 0.01lb/30lb	0.01lb/30lb 0.02lb/70lb	0.002lb/6lb 0.005lb/15lb	0.005lb/15lb 0.01lb/30lb	0.01lb/30lb 0.02lb/70lb
Capacity (oz)	240oz	480oz	1120oz	240oz	480oz	1120oz
Resolution (oz) (USA only)	0.05oz/120oz 0.1oz/240oz	0.1oz/240oz 0.2oz/480oz	0.2oz/480oz 0.5oz/1120oz	0.05oz/120oz 0.1oz/240oz	0.1oz/240oz 0.2oz/480oz	0.2oz/480oz 0.5oz/1120oz
Display	Liquid Crystal Display, Digital section- 7 segment x 5 digits 16mm height Analog sweep display section with 31 segments With backlighting (FS-KB only)					
Sensitivity drift	20ppm/°C					
Operating Temp.	5°C ~ 35°C 41°F ~ 95°F					
Weight	Approximately 10kg 22lb (Approximately 11.5kg 25lb with shipping carton)					
Power	6 x UM2/C size batteries or AC Adaptor					
Pan size	310(W) x 310(D)mm 12.2(W) x 12.2(D) inches					
Dimension	310(W) x 450(D) x 444(H)mm 12.2(W) x 17.7(D) x 17.5(H) inches					

*Specifications subject to change for improvement without notice.

Option

- OP-03 Serial Interface (RS-232C)
Comparator Output
- AC Adaptors AC adaptors are optional for the "KA" models.
"KB" backlit models come standard with an AC Adaptor.
AC 100 ~ 240V available.

AND

A&D MERCURY PTY. LTD.

ACN 007 556 209
Head Office
32 Dew Street
THEBARTON
South Australia 5031
Telephone (08) 8352 3033
Facsimile (08) 8352 7409

Victorian Office
Unit 4
Cnr. Arden & Lloyd Streets
KENSINGTON
Victoria 3031
Telephone (03) 9372 1522
Facsimile (03) 9372 1193


Email: sales@andmercury.com.au
Internet page: <http://www.andmercury.com.au>

1800 241 434

New South Wales Office
Unit 4
14 Abbott Road
SEVEN HILLS
New South Wales 2147
Telephone (02) 9674 5466
Facsimile (02) 9674 2544

Your Dealer

⌘ CATALOG NO FS-920105-2H

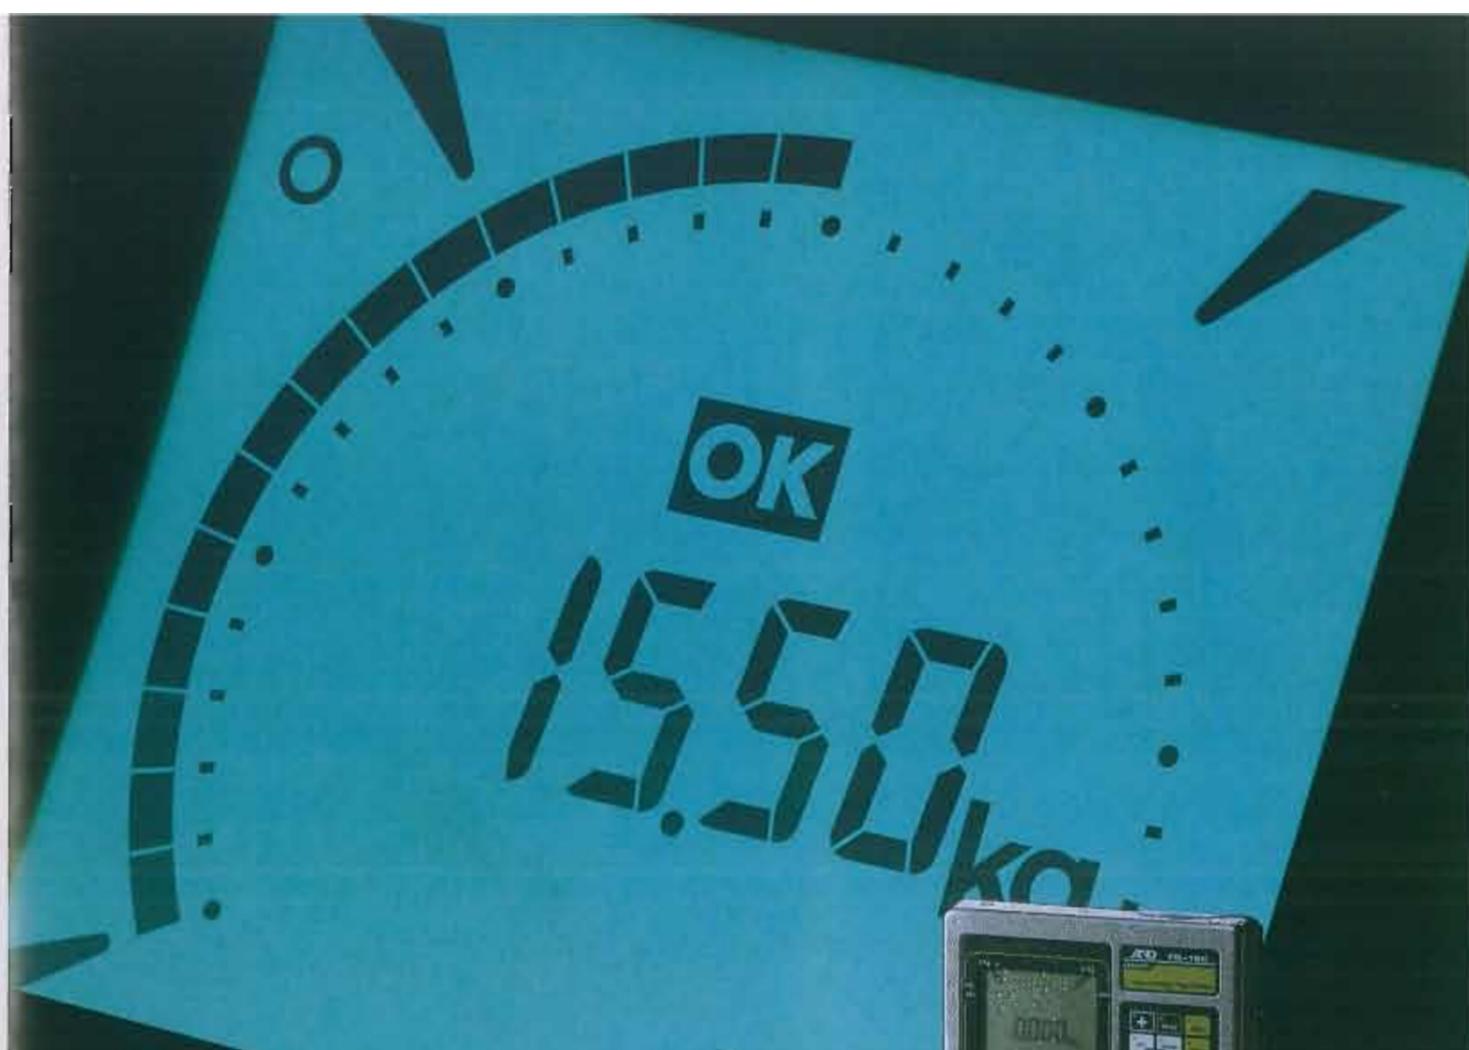

FS Series

Checkweighing Scale



IP65



AND

A&D MERCURY PTY. LTD.


...Clearly a Better Value

Easy-to-Use, Rugged Waterproof Stainless Steel Scales with an Analog Sweep LCD Display, Digital Keypad and Setpoint Memory Recall for Quick, Accurate, Reliable Measuring

The FS Series is built tough, yet easy-to-operate for a wide range of check weighing applications. With features like: Revolutionary large Analog Sweep LCD Display for easy, accurate operator judgements; Large sealed keypad for precise, simple operation with stored setpoint memory recall; Stainless steel construction and sealed weighing sensor for sanitary wash-downs; And a compact, portable but rugged design — this scale outperforms them all. Others don't even offer features that come standard with the FS Series.

OK

Fast and Simple Check Weighing



Simply key-in the HI and LO set point values, or recall them from up to 8 pre-set memories — and the FS comparator ensures your product is packed accurately!



Exclusive Analog Sweep LCD Display

The FS Series is designed for quick operator judgement using our exclusive 30 segment Analog Sweep Display. The clear — OK + comparator indicators and large 16mm weight display digits are easy-to-read. Also, internal software allows the display to be customized.

Dual Range Flexibility


The FS automatically switches at half of scale capacity for accuracy where you need it.

Tilt Display Head and Digital Keypad

The FS display head can be easily tilted for a better viewing angle or operator access. The digital keypad allows for easy limit setting and scale operation.

Key Disable

You can easily disable keys that could lead to operator errors. You can also allow, or dis-allow, changes to the comparator setpoints.

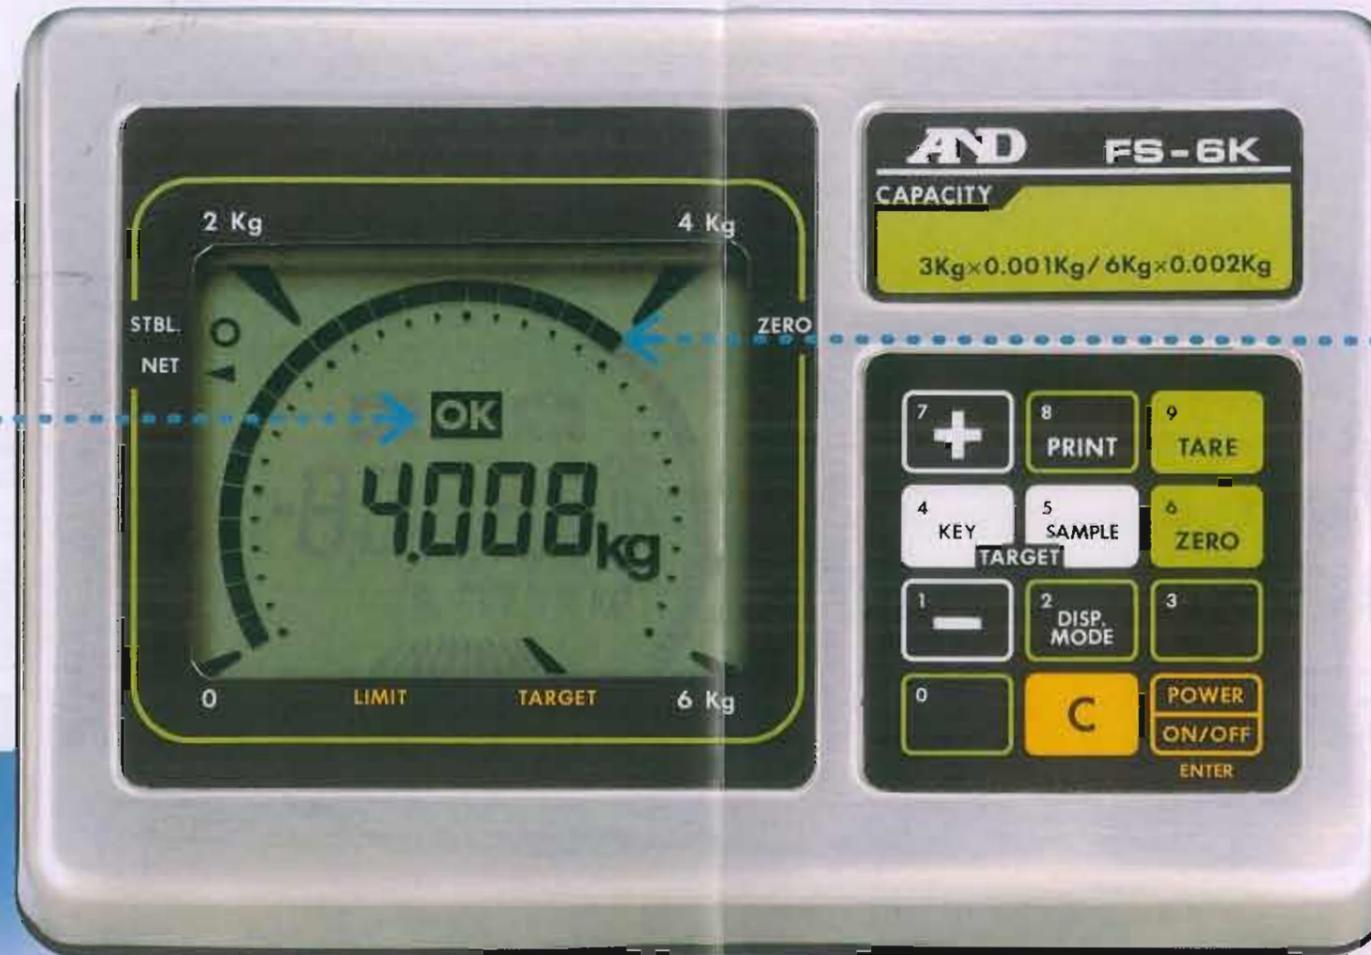


Battery Operation



The FS Series can be powered by six "C" size batteries that provide a minimum of 400 hours (Alkaline cells) of operation, or use an AC adaptor.

Waterproof to NEMA 4/IP-65

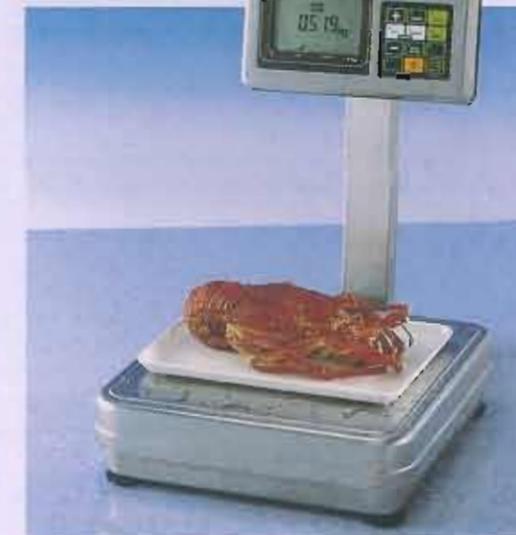

The FS Series is designed for use in wet environments and is suitable for hose-down cleaning. All electronic parts are safely protected against moisture and the weighing load cell has its own sealed waterproof housing.

Features

- Easy Operation, Quick Response Time.
- Analog Sweep LCD Display and Tilt Head.
- Waterproof Stainless Steel Construction with Sealed Load Cell.
- Dual Range for Greater Accuracy.
- Battery or AC Adaptor Operation.
- Backlit Display Optional for Low Light Conditions.

Target Weighing



With the FS's unique Analog Sweep LCD display, an operator can quickly judge when his target weight is approaching. Simply key-in the HI and LO set point values, or recall them from up to 8 pre-set memories.

Optional Backlit Display

The liquid crystal display is well suited to most lighting conditions — but for low light situations, an optional backlit model (FS-KB) is available.

