

LCD MONITOR USER MANUAL

GETTING STARTED.....	1
INTRODUCTION.....	1
FEATURES.....	1
UNPACKING AND CHECKING OF THE PACKAGE CONTENTS.....	1
INSTALLING THE MONITOR.....	2
OPERATING THE MONITOR.....	3
HOW TO USE THE OSD (ON SCREEN DISPLAY).....	3
THE ADJUSTMENT OF MONITOR'S SCREEN DISPLAY.....	3
ADJUSTING THE VIEWING ANGLE.....	4
MENU TABLE.....	5
FOR YOUR SAFETY.....	5
SPECIAL NOTES ON LCD MONITORS.....	7
CLEANING.....	7
SUPPORTED TIMING.....	8
TROUBLESHOOTING PROCEDURES.....	8
POWER MANAGEMENT.....	10
CONFORMITY AND COMPLIANCE.....	10

GETTING STARTED

WARNING: Do not operate the LCD monitor with unspecified power supply. Usage of incorrect voltage will cause malfunction and may cause fire or electric shock.

Introduction

Bright and sharp images of text and graphics are what you will find with your LCD color monitor. The LCD monitor provides a maximum resolution of 1024 x 768 pixels with a flicker-free display at up to 75Hz refresh rates that offers bright, sharp and vibrant color display without the radiation emission and hazards of CRT monitors.

Features

- Supports XGA resolution of 1024 x 768 pixels with 262K colors
- VESA DPMS-compliant power saving
- Digital Character Smoothing
- Automatic Set-Up
- Windows 95/98/2000 Plug & Play Compliant
- Versatile, functional & User friendly OSD
- Plug & Play: Conform to the VESA standards and support DDC1/2B spec.

Unpacking and Checking of the Package Contents

Before unpacking your LCD Monitor, prepare a suitable workspace for your LCD Monitor and computer. You need a stable, level, and clean surface near a wall outlet.

1. Set the LCD Monitor box in an upright position and open from the top of the box before removing the right/left cushions.
2. Remove the back cover from your monitor (pull from the bottom of cover to open) to install your PC system.

Accessories



1 pc
VGA Cable



1 pc
AC/DC Adapter



1 pc
Power Cord



1 pc
User's manual

Installing the Monitor

DO NOT install the monitor where sudden temperature changes may occur, or in humid, dusty, or smoky areas as it may cause fire, electric shock or damage.

DO NOT place your LCD Monitor near a window as it may be severely damaged if exposed to rain, water, moisture, or sunlight.


MAINTAIN good ventilation; covering of ventilation slots or holes may cause fire.

PLACE the monitor at least 4" (or 10 cm) way from the walls

SAFE storage temperature of the LCD Monitor is in a range of -20 to +65°C.

Connecting the monitor

1. Turn off your PC and the LCD Monitor before connecting your LCD monitor to the PC.
2. Connect the built-in VGA signal cable of the LCD monitor to the VGA port of the PC system. Make sure the cable head is securely connected.
3. Use Audio cable to connect "Audio in" jack on LCD Monitor and sound card's "Audio out" jack.
4. Plug the DC connector of the adaptor to your monitor's DC jack.
5. Plug the female end of the power cord into the AC adaptor.
6. Connect the male end of the power cord into a wall socket.
7. Turn on your computer, and then turn on your LCD Monitor.



① VGA connector

② 12V DC power adapter.


NOTE

For added protection, it is recommended to use a Surge Protection device plugged between the AC Adapter and the electrical wall outlet to prevent the effects of sudden current variations from reaching the LCD Monitor. Sudden peaks of electricity may

① VGA connector	Connect to the VGA port of PC
② Power	Plug into the AC power adapter.

OPERATING THE MONITOR

The LCD monitor has been preset at the factory with the Timing shown in Appendix to create optimal picture. Users are also able to adjust the picture to the desired brightness and sharpness by following the instructions.

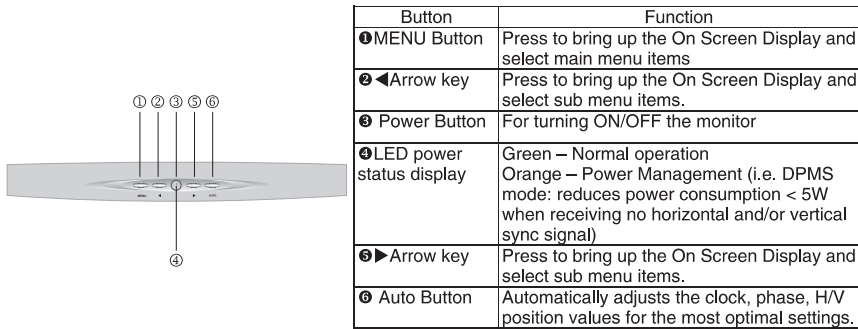

How to Use the OSD (On Screen Display)

OSD function allows the user to easily adjust the display to the desired quality
Structure of OSD



Operating Procedure


1. Power on the LCD monitor.
2. Press "MENU" to pop up OSD menu.
3. Press "◀" or "▶" to select main menu item.
4. Press "MENU" to select sub menu item.
5. Press "◀" or "▶" buttons to adjust.
6. Press the "AUTO" button when finish adjusting.

The Adjustment of Monitor's Screen Display

There are two ways to adjust the monitor's screen, i.e. auto adjustment and manual adjustment.

Auto adjustment

- a. Power ON the LCD monitor and computer.
- b. Select "AUTO" of OSD button for 3 seconds.
- c. The auto adjustment is started. "AUTO SETUP" will be displayed during auto adjustment. It takes about 10 seconds to finish adjustment.



Manual adjustment

- a) Power ON the LCD monitor and computer.
- b) Adjust according to the aforementioned "Operating Procedure" and "Menu Table" to adjust the screen to your favorable screen display.

OSD Adjustment Lock

This function is used to prevent changing the adjusted status by mistake. All the adjusting items except "BRIGHTNESS" will be locked.

- a) When OSD is not display, Press the "◀" buttons is adjust the brightness.



- b) When OSD is not display, Press the "▶" buttons is adjust the contrast.




- c) When OSD is not display, Press the "AUTO" buttons for 3 secs. is adjust the automatically adjusts the clock, phase, H/V position values for the most optimal settings.



Adjusting the Viewing Angle













Your LCD Monitor is designed to allow you to adjust it to an optimal viewing angle.



NOTE

Do not touch the screen while changing the viewing angle. It may damage the screen. Make sure not to catch your fingers while changing the viewing angle.

Menu Table

Main Menu	Function Name	Function
	CONTRAST	Adjusts the RGB color pattern set of the contrast.
	BRIGHTNESS	Adjusts the level of darkness on black portion.
	HORIZONTAL POSITION	Moves the screen horizontally (left/right)
	VERTICAL POSITION	Moves the screen vertically (up/down)
	CLOCK	Adjusts the number of pixels from source video.
	CLOCK PHASE	Adjusts the number of pixels from source video.
	OSD HORIZONTAL POSITION	Changes the OSD horizontal position.
	OSD VERTICAL POSITION	Changes the OSD vertical position.
	COLOR	USER: Preferred color is adjusted. 7300K: Factory preset color 9300K : Factory preset color
	LANGUAGE	Have "English,German, French , Spai sh , Italian ,Chinese" to choose OSD language
	FACTORY MODE	Reset factory preset.
	EXIT	Exit OSD.

FOR YOUR SAFETY

WARNING

ALWAYS OPERATE UNDER SPECIFIED POWER SUPPLY

Usage of incorrect voltage will cause malfunction and may cause fire or electric shock.

PROTECT and CORRECTLY USE THE CABLE

Do not pull or bend the power cable and signal cable or place the monitor or any heavy objects on the cables. If the cables are damaged, they may cause fire or electric shock.

IMMEDIATELY STOP OPERATING THE MONITOR WHEN YOU DETECT ANY ABNORMAL OCCURENCE

If you notice any abnormal phenomenon such as strange noise, smoke or smells, unplug the monitor and contact your dealer or the nearest service center immediately.

DO NOT REMOVE THE CABINET

Removing the cabinet may expose you to the danger of fire or electric shock.

DO NOT PUT ANY FOREIGN OBJECT INSIDE THE MONITOR

It may cause fire, electric shock or damage when operating the monitor with foreign objects inside.

DO NOT USE THE MONITOR NEAR WATER

Operating the monitor in close proximity to water where the water may be spilt or splashed onto the monitor may cause fire or electric shock.

BAD WEATHER CONDITIONS

It is advisable not to operate the monitor during heavy thunderstorms as intermittent breaks in power may cause malfunction. Do not touch the plug under these circumstances as it may cause electric shock.

CAUTION

DISCONNECT CABLES WHEN MOVING THE MONITOR

When moving the monitor, always turn off the switch, unplug the monitor, and disconnect the signal cable. If the cables are not properly disconnected when moving the monitor, it may cause fire or electric shock.

DO NOT TOUCH THE PLUG WITH WET HANDS

Pulling or inserting the plug with wet hands may cause electric shock.

HOLD THE PLUG WHEN DISCONNECTING

To disconnect the power cable or signal cable, always pull the cable by the plug. Never pull on the cable as this may cause fire or electric shock.

OTHERS

ERGONOMICS RECOMMENDATIONS

Do not operate the monitor in a dark room or against a bright background. For optimal viewing comfort, the monitor should be just below eye level and 30-60 cm (16-24 inches) away from your eyes. When using the monitor over a prolonged period of time, a ten-minute-break per hour is recommended.

SPECIAL NOTES ON LCD MONITORS

The following are normal with LCD monitors and do not indicate a problem.

When first turning on the LCD monitor, if the picture does not fit in the display area, it is because of the type of computer that is used. In such case, adjust the picture position to its correct position. (See Operating the Monitor)

The screen may flicker during initial use. Turn off the power switch and then turn it on again the flickering should disappear.

Users may notice a little uneven brightness on the screen depending on the desktop pattern they use. It is normal for LCD monitors to show such uneven brightness.

Due to the nature of the LCD screen, switching of images after a prolonged period of time of displaying the same image, the image from the previous screen may remain. In such case, the screen is recovered slowly by changing the image or turning off the power switch for hours.

If the screen becomes dark, flickers, or does not light-up, contact your dealer or the nearest service center for a backlight replacement. Do not attempt to replace it yourself.

If you need to return your unit for service and the original packaging was discarded, please contact your dealer or the nearest service center for advice or replacement of packaging.

Cleaning

WARNING

If you dropped any material or liquid such as water onto the monitor when cleaning, unplug the power cable immediately and contact your dealer or the nearest service center. Always make sure your hands are dry when unplugging the power cable.

CAUTION

For safety reasons, turn-off the power switch and unplug the monitor before cleaning.

Do not scratch or rub the screen with a hard object.

Never use any of the following solvents on the LCD monitor. Such harsh chemicals may cause damage to the cabinet and the LCD screen.

Thinner Spray-type cleaner Benzene Wax Abrasive cleaner Acid or Alkaline solvent

Rubbing the cabinet with products made of rubber or plastic for a long period of

time may cause degeneration or loss of paint on the cabinet.

Cabinet

Remove dirt with a lightly moistened cloth and a mild solvent detergent. Then wipe the cabinet with a soft dry cloth.

LCD

Periodic cleaning with a soft dry cloth is recommended.

Do not use tissue to clean the screen. It may damage the LCD screen.

Supported Timing

Supported Timing

Display Mode			Analog	
			Horizontal Frequency	Vertical Frequency
VESA	VGA	640×480	31.5 KHz	60.0 Hz
		720×400	37.5 KHz	75.0 Hz
	SVGA	800×600	31.5 KHz	70.1 Hz
			35.1 KHz	56.3 Hz
			37.9 KHz	60.3 Hz
			46.9 KHz	75.0 Hz
	XGA	1024×768	48.1 KHz	72.0 Hz
			48.4 KHz	60.0 Hz
			56.5 KHz	70.0 Hz
			58.1 KHz	72.0 Hz
60.0 KHz			75.0 Hz	
60.0 KHz			75.0 Hz	
Macintosh	VGA	640×480	35.0 KHz	66.7 Hz
		832×624	49.7 KHz	74.6 Hz
MS-DOS		640×350	31.5 KHz	70.1 Hz


Troubleshooting Procedures

If the LCD monitor fails to function correctly, please follow the following steps for a possible solution.

1. Perform the adjustments according to Operating the Monitor.
2. Refer to the following items if you cannot find a proper item listed in the Operating the Monitor or if the problem remains.
3. If the problem you have experienced is not described below or you cannot correct the problem, stop using the monitor and contact your dealer or the nearest service center for further assistance.

PROBLEM	CHECK TO SEE
No Display.	
a)Power indicator does not light up.	If the power cord is firmly plugged in the socket.
	If the power switch is turned on.
	If the AC socket is OK. Please check using another piece of equipment.
b)Power indicator is green.	If the blank screen saver is active, touch the keyboard or mouse.
	Increase the CONTRAST and/or BRIGHTNESS.
	If the computer is ON.
	If the signal cable is properly connected.
c)Power indicator is amber.	If the signal timing of the computer is within the spec of the monitor.
	If the monitor is on power management mode, touch the keyboard or the mouse.
	If the computer is ON.
	If the signal cable is properly connected.
Display is too dark or too bright.	If the signal timing of the computer is within the spec.
Display is not in the center.	If the video output level of the computer is within the spec.
Display is shaking.	If the power voltage is within the spec.
	If the signal timing of the computer is within the spec.
Display is not synchronized.	If the signal cable is properly connected.
	If the signal timing of the computer is within the spec.
	If the video output level of the computer is within the spec.

4. When “No Signal” is displayed:

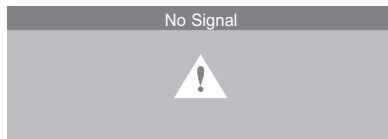

- (1) Check if the signal cable is connected correctly to the computer.
- (2) Check if the cable is broken.

Power Management

The LCD Monitor complies with the VESA DPMS (version 1.0p) power management proposal. The VESA DPMS proposal provides four phases of power saving modes by detecting the horizontal or vertical sync signal.

Item	DPMS Mode	Display	Power LED	Power Consumption	Recovery Time	H-sync	V-sync
1	On	Normal	Green	Normal	---	On	On
2	Stand By	No Display	Orange	≤5W	3 sec	< 10 KHz	On
3	Suspend	No Display	Orange	≤ 5W	3 sec	On	< 10 Hz
4	Off	No Display	Orange	≤ 5W	3 sec	<10KHz	<10Hz

CONFORMITY AND COMPLIANCE

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception (this can be determined by turning, the device off and on), you are encouraged to try to correct the interference by one or more of the following measures:

- *Reorient or relocate the receiving antenna.
- *Increase the separation between the equipment and the receiver.
- *Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- *Consult the dealer or an experienced radio/TV technician for help.

Caution:

To comply with the limits for an FCC Class B computing device, you should use the shielded signal cord and shielded power cord supplied with this unit. The Federal Communication Commission warns that changes or modifications of the unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radio Frequency Interference Statement

Warning:

This is a Class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Canadian Doc Notice

For Class B Computing Devices

1.This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the Radio Interference Regulation of the Canadian Department of Communications.

CE MARKING DECLARATION OF CONFROMITY

The LCD monitor complies with the requirements of related European standards, which include:

Emission: EN 55022, EN 61000-3-2, EN-61000-3-3

Immunity: EN 50082-1

Safety: EN 60950 [Low-Voltage Directive (73/23/EEC)]



ENERGY STAR

This product meets the Energy Star guidelines for energy efficiency.

