

Installation Instructions



ASSA ABLOY


ED5400 (A) Series ED5470 (B) Series Surface Vertical Rod Exit Devices

In U.S.:
Corbin Russwin, Inc.
225 Episcopal Road
Berlin, CT 06037 USA
www.corbinrusswin.com


In Canada:
ASSA ABLOY Door Security Solutions Canada
160 Four Valley Drive
Vaughan, Ontario, Canada L4K4T9
www.assaabloy.ca

Technical Product Support: Phone: 888-607-5703

FM164 (09/13)

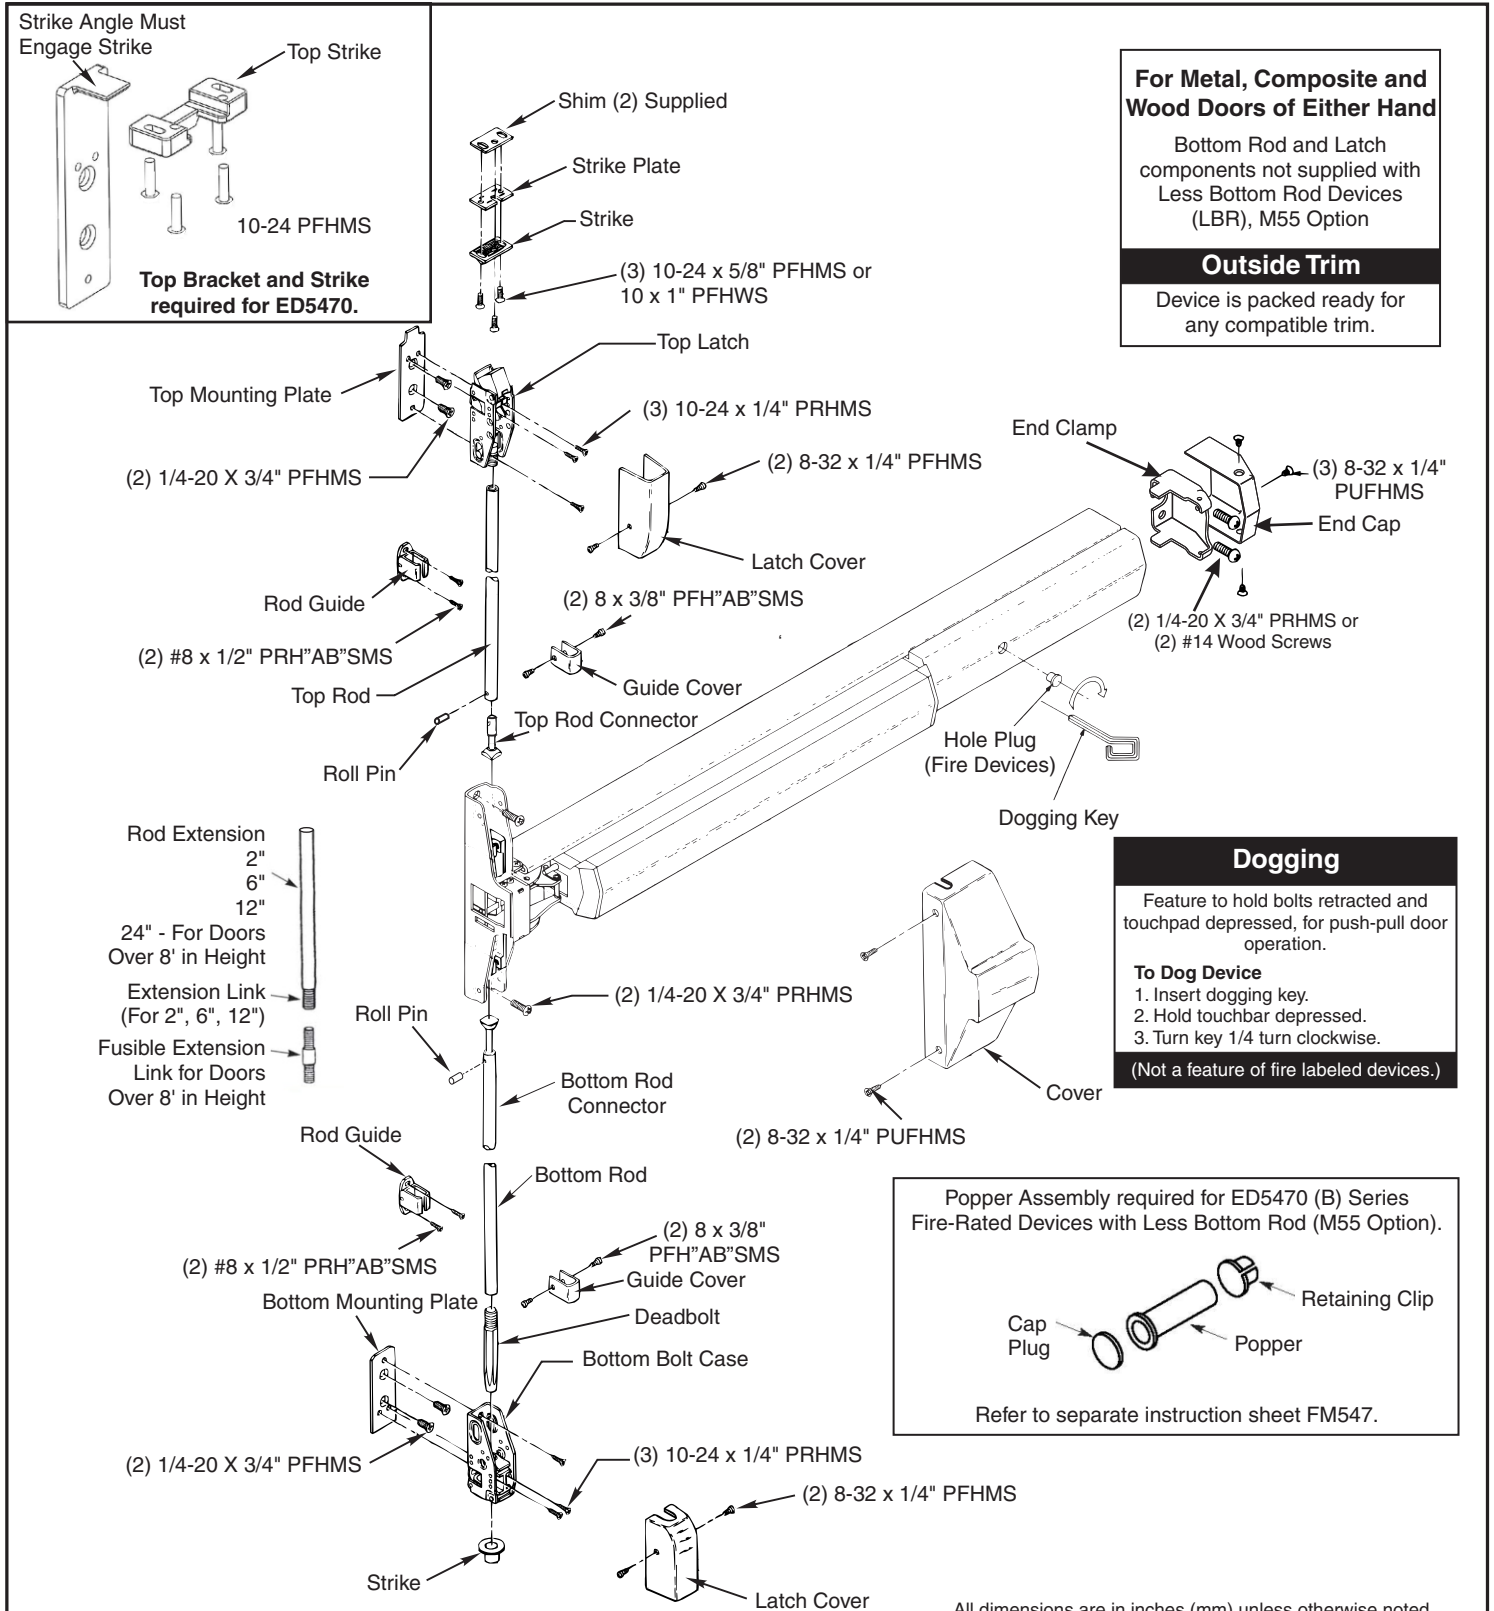


To Change Hands

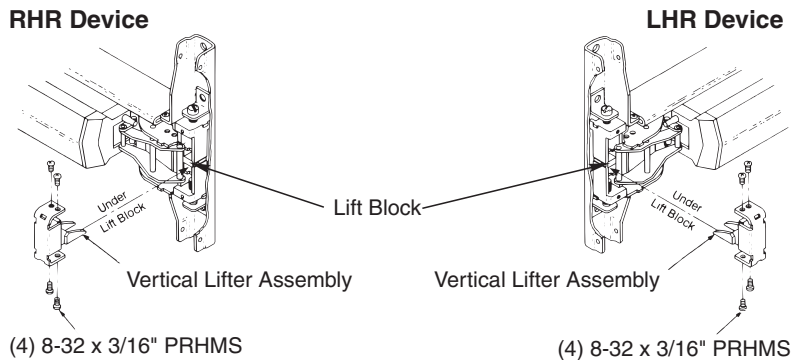


Remove (4) Screws and Vertical Lifter Assembly. Rotate device to opposite hand (180 degrees). Insert Lifter Assembly under Lift Block and re-install screws.

Note: Lifter must fit under lift block as shown.



1/4-20 Sex Nut Option



Recommended for wood composite or unreinforced metal doors.

Standard for Fire Rated doors.

Device	Quantity	Size
No Trim	8	1/4-20
With Trim	6	

Rod Extension Options



2" (51mm)
6" (152mm)
12" (305mm)
24" (610mm)
(Specify Device Finish)

Maintenance

1. Periodically remove covers and coat mechanisms with a silicone base lubricant. This is particularly required in corrosive environments for proper product function.
2. Check mounting fasteners periodically. Retighten if found loose. Apply screw locking compound (available at automotive part stores) or change part fasteners if screws continue to back out.
3. Periodic checks (and adjustments) of strikes are required to compensate for changes in the opening (e.g. door sagging).


Shim Kit Option

697F348 Black Finish

Kit consists of (2) Latch Head Shims (Device Cover seats on shim) and (2) End Clamp Shims (End Cap seats on shim), (2) Top and Bottom Latch Shims (Bolt Case Mounting Plates seat on shim), and (4) Rod Guide Shims.

Each shim is 1/8" (3.2mm) thick. More than two shim thicknesses 1/4" (6.4mm), require longer device mounting screws (not included).

Check Before Starting

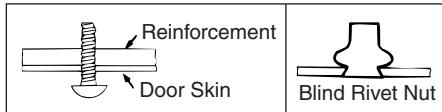



Unreinforced Doors or Frames

Doors and Frames with walls having a structural thickness (metal skin plus reinforcement or solid hardwood) to engage less than (3) full screw threads are considered unreinforced.

Unreinforced Doors: Use SNB (sex nuts and bolts).

Unreinforced Frames: Use Blind Rivet Nuts.

Recommended fasteners for unreinforced openings are not necessarily supplied by Corbin Russwin.

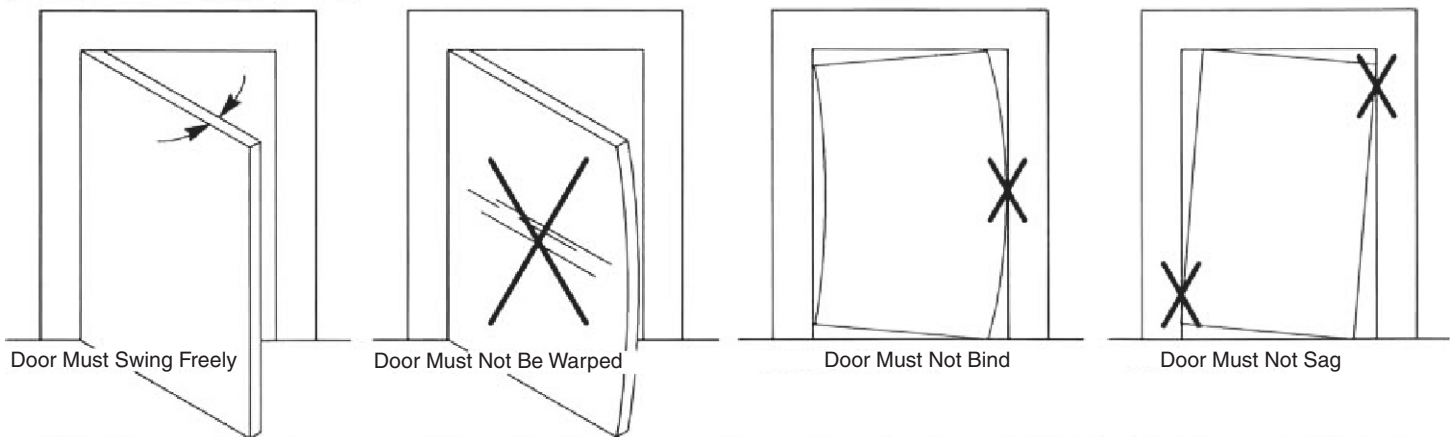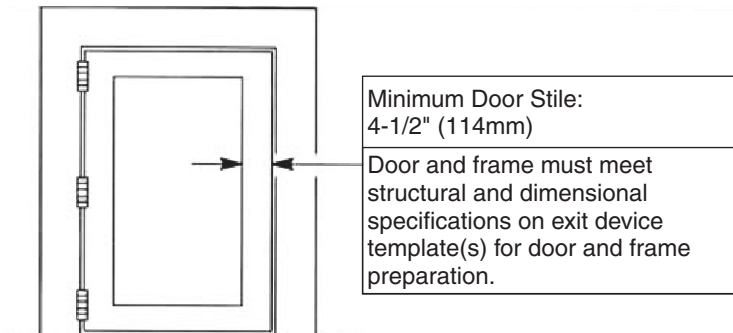

1. Mark Door


Locate and Mark Horizontal and Vertical Centerlines as shown.

LHR door shown.
Preparation is typical for both door hands.

Caution: If device is mounted higher or lower than shown, rod length must change. Lengthen or cut top and bottom rods as shown on Step 7.

LBR - For ED5470 Series Less Bottom Rod Devices, omit bottom latch and strike installation steps and see separate instructions for ED5470 Series top latch and strike.

NOTE: Less Bottom Rod Devices should not be used where security is a primary concern.

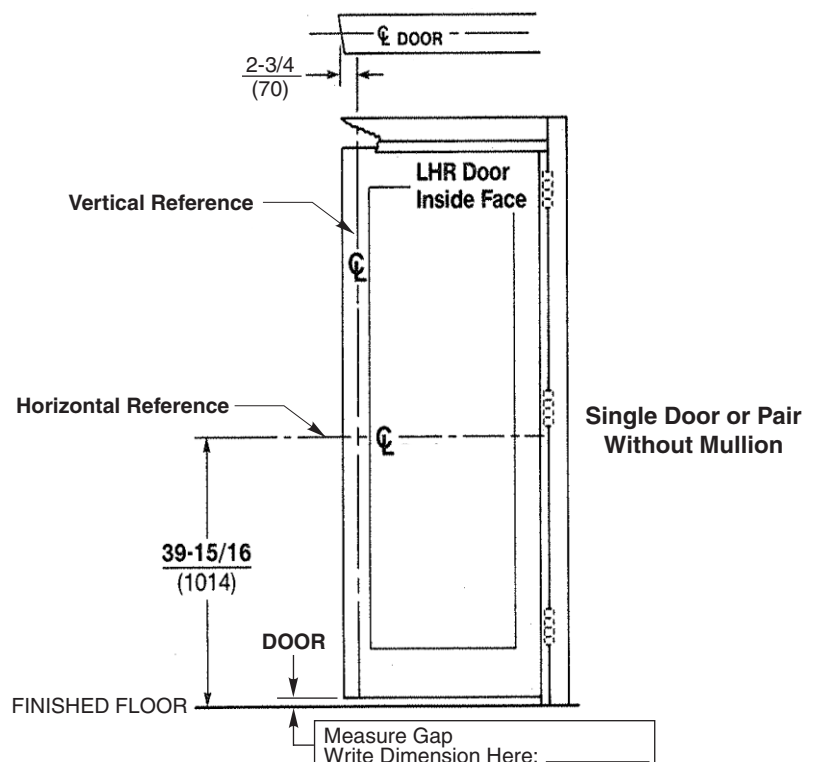

2. Prepare Door, Frame, & Sill

- Locate "Device Template" aligning VERTICAL REFERENCE and HORIZONTAL REFERENCE lines on door and template. Tape template to door face.
- Extend centerline of Rod and Strikes from "Device Template" to door top and bottom, on door face.
- Locate Top Latch/Strike, Bottom Case, and Bottom Strike templates, aligned on centerline of Rods and Strikes on door. Tape templates in place and mark holes.
- Locate and tape Trim Template to door (See instructions packed with Trim).
- Mark and prepare holes per installation template:


Device and Bolt Case Plates:

Each (2) 1/4-20 Machine Screws for metal reinforced doors OR
(2) 3/8" (10) Dia. Sex Nuts & Bolts


Top Strike: For ED5400 Series (2) 10-24 Machine Screws, or
(2) #10 Wood Screws

For ED5470 Series (4) 10-24 Machine Screws

Bottom Strike: 5/8" (16) Dia. 3/4" (19) Deep hole

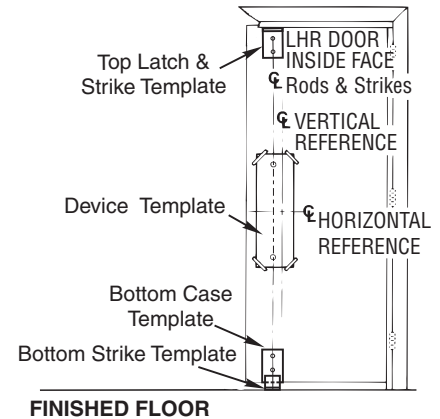

3. Clear Raised Door Molding

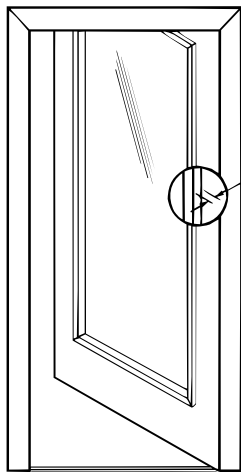


Device must seat flush on door surface or on shims that keep it parallel to door face.

(1) Shim Kit #697F348
per 1/4" (6mm) of raised molding

Longer mounting screws needed when more than (2) shim thicknesses of 1/8" (3) are used. See Shim Kit Option on page 2.


4. Size Device

Device must be field cut to size unless standard opening and device are 36" (0.91m).

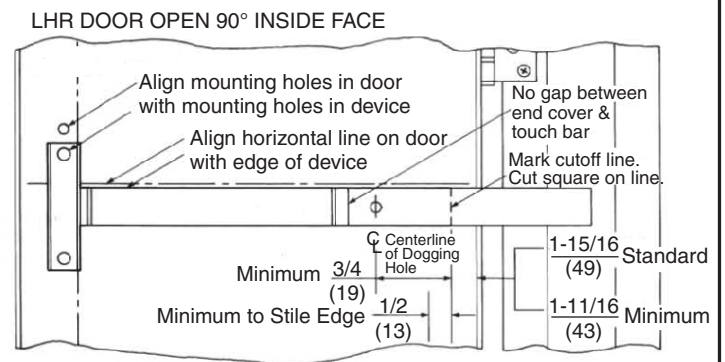

5. Install Device

- Mount trim (Follow Instructions Packed with Trim).
- Seat bar in place. Fasten device head (2 PRHMS or SNB).
- Set bar level. Locate end clamp holes.
- Prepare end clamp mounting holes. Mount end clamp (2 #1/4-20 PRHMS or 3/8 (10) dia. SNB).

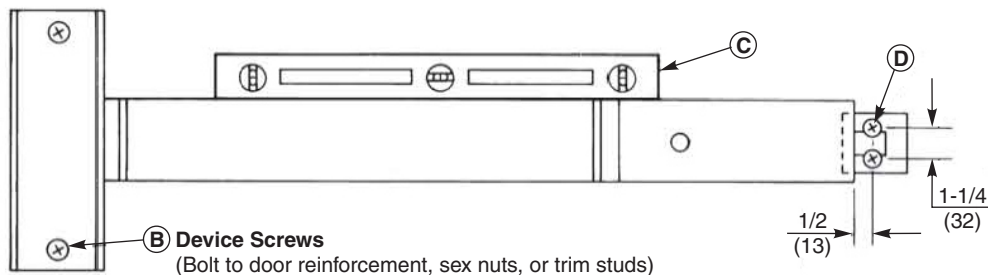


- Check slide action (Slide travel \approx 9/16" (14)).
 - Depress touchbar (slide should move up). Release touchbar (slide should fall back to original rest position).
 - Activate trim (slide should move up). Release trim activator (slide should fall back to rest position).

- (NOT FOR FIRE DEVICES) Depress touchbar, turn dogging key clockwise (bar must remain depressed, slide must remain in up position). Turn dogging key counterclockwise (bar should extend, slide should fall back to rest position).

- Tighten all mounting screws.


6. Set Latches, Strikes & Guides

Top Strike Detail for ED5400 Series

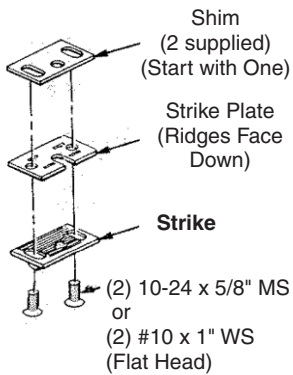


NOTE: Reserve third screw for Step 8 (E).

Top Strike Detail for ED5470 Series





NOTE: Reserve two screws for Step 8 (E).

Rod Guide Detail (Typical 2 Places)

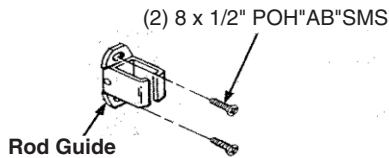

- Locate Rod Guide as dimensioned. Spot (2) mounting holes.
- Prepare holes.
Metal Door: .140 (3.50) dia. inside face
Wood Door: .140 (3.50) dia. x 3/4" (19) deep
- Mount Guide.

Bottom Strike Detail

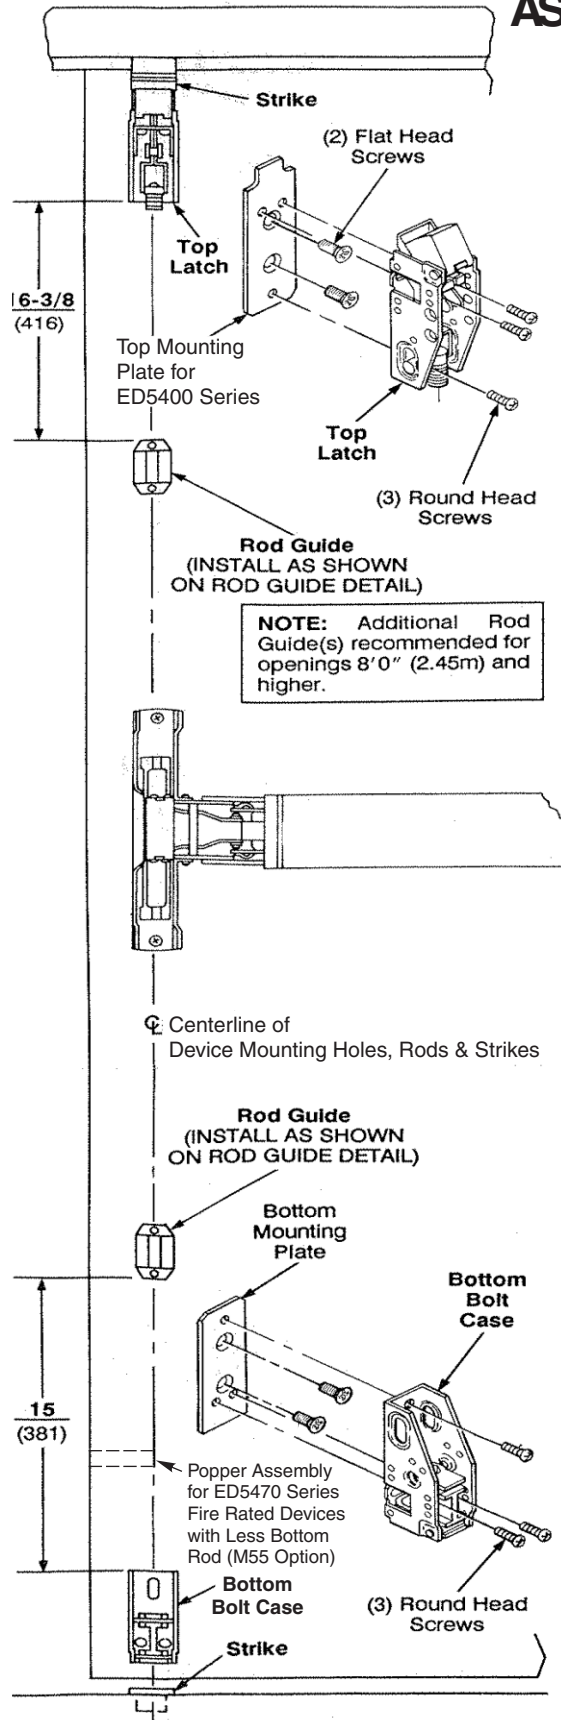

NOTE: Additional Rod Guide(s) recommended for openings 8'0" (2.45m) and higher.


All dimensions are in inches (mm) unless otherwise noted.

Copyright © 2013 Corbin Russwin Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin, Inc. is prohibited.

7. Prepare Rods

Top Rod

Ready for 84 (2134) Openings

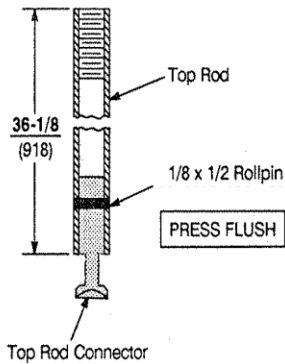

Openings Under 84 (2134)

For Top Rod cutoff length, deduct OPENING HEIGHT from 84 (2134).

Example:

Opening = 80 (2032)
 $84 - 80 = 4$ or $(2134) - (2032) = (102)$
 Top Rod must be cut 4 (102).

Openings Over 84 (2134)

For Top Rod additional length, deduct 84 (2134) from OPENING HEIGHT.

Example: Opening = 99 (2515)
 $99 - 84 = 15$ or $(2515) - (2134) = (381)$
 Top Rod must be lengthened 15 (381).


To Lengthen Rods

- Use Rod Extension(s) to extend Rod to length needed or longer (2", 6", 12", or 24" Rod Extensions available).
- Cut excess length from end of rod with pin hole.
- Apply screw locking compound* to Rod Extension(s) male threads. Thread Extension(s) until seated tight over Rod.

(*Available at automotive parts store.


To Cut Rods

- Cut from end with pin hole. NEVER CUT THREADED END.
- Press Jig until it bottoms over Rod.
- Drill 1/8" (3) dia. hole thru, 3/8" (10) from end of Rod.



Bottom Rod

Ready for 39-15/16 (1014) Floor to Device Center

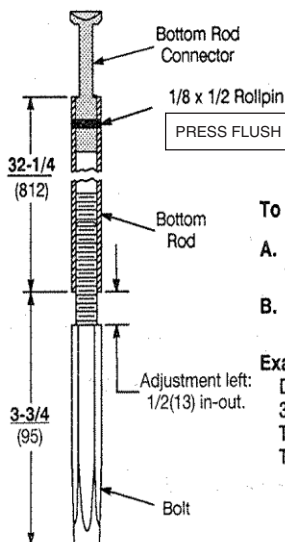


To Lower Device

- Bottom Rod cutoff length is distance that device was lowered below 39-15/16 (1014).
- Add to Top Rod a length equal to the Bottom Rod cut.

Examples:

Device at 36 (914) from floor.
 $39-15/16 - 36 = 3-15/16$ or $(1014) - (914) = (100)$
 The Bottom Rod must be cut 3-15/16 (100).
 The Top Rod must be lengthened 3-15/16 (100).

8. Complete Installation

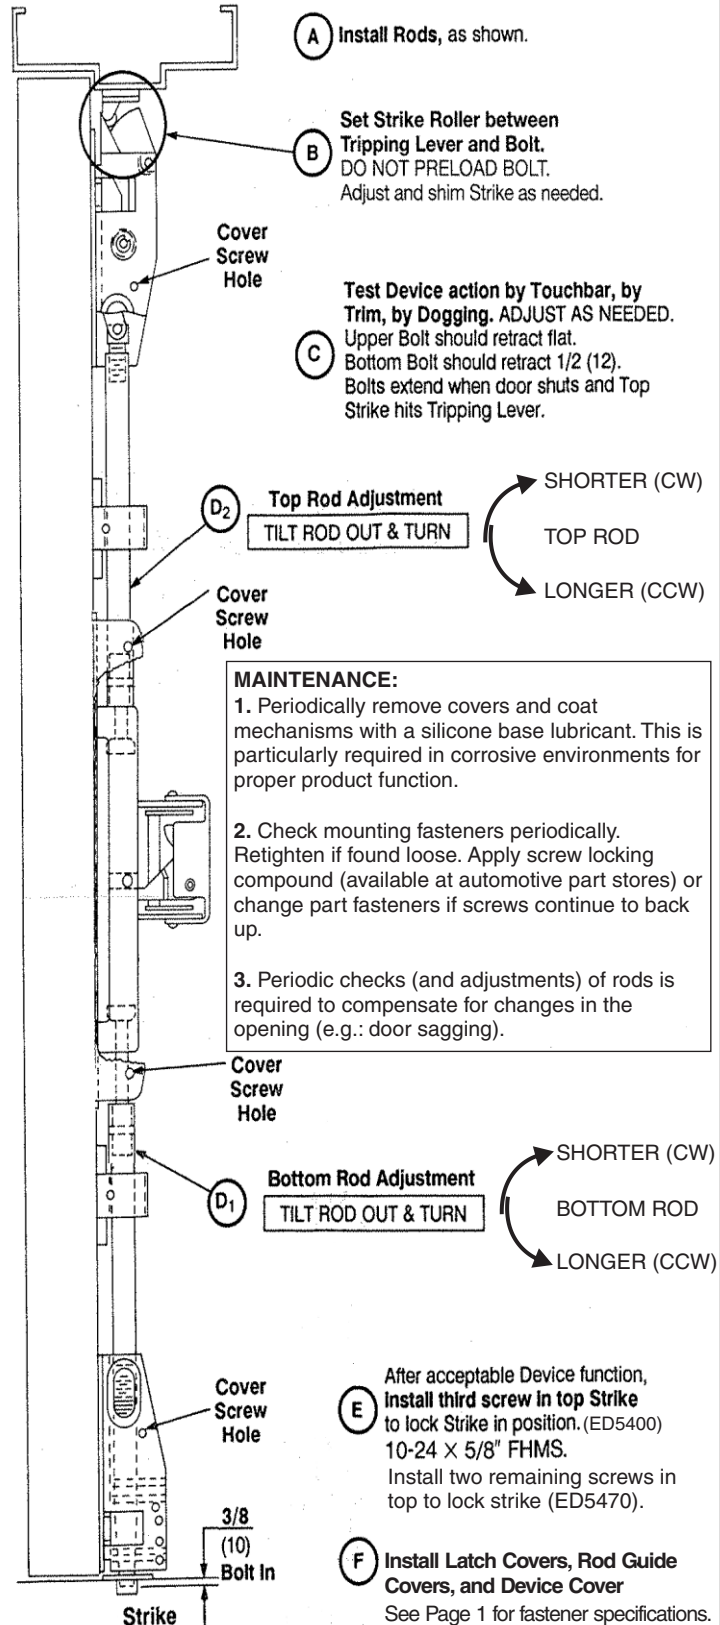

A Install Rods, as shown.

B Set Strike Roller between Tripping Lever and Bolt. DO NOT PRELOAD BOLT. Adjust and shim Strike as needed.

C Test Device action by Touchbar, by Trim, by Dogging. ADJUST AS NEEDED. Upper Bolt should retract flat. Bottom Bolt should retract 1/2 (12). Bolts extend when door shuts and Top Strike hits Tripping Lever.

D₂ Top Rod Adjustment
 TILT ROD OUT & TURN
 SHORTER (CW)
 TOP ROD
 LONGER (CCW)

MAINTENANCE:

- Periodically remove covers and coat mechanisms with a silicone base lubricant. This is particularly required in corrosive environments for proper product function.
- Check mounting fasteners periodically. Retighten if found loose. Apply screw locking compound (available at automotive part stores) or change part fasteners if screws continue to back up.
- Periodic checks (and adjustments) of rods is required to compensate for changes in the opening (e.g.: door sagging).



D₁ Bottom Rod Adjustment
 TILT ROD OUT & TURN
 SHORTER (CW)
 BOTTOM ROD
 LONGER (CCW)

E After acceptable Device function, install third screw in top Strike to lock Strike in position. (ED5400) 10-24 x 5/8" FHMS. Install two remaining screws in top to lock strike (ED5470).

F Install Latch Covers, Rod Guide Covers, and Device Cover
 See Page 1 for fastener specifications.

Plastic Installation Template for ED5000 Exit Devices

For use in conjunction with instruction sheets and door marker templates packed with exit device. Holes and slots are identified below by exit device series and trim. Prep door and frame for only those features required for the exit device being installed.

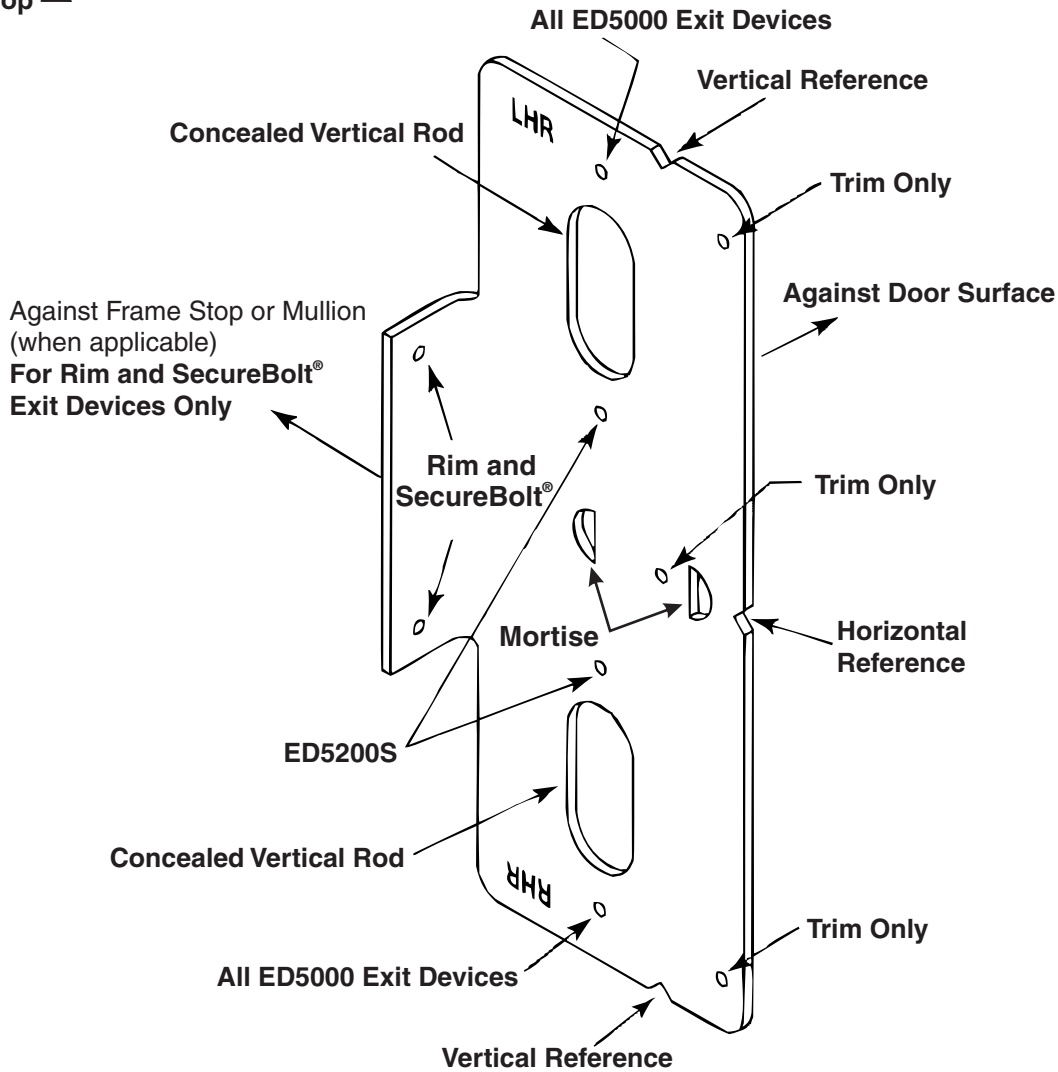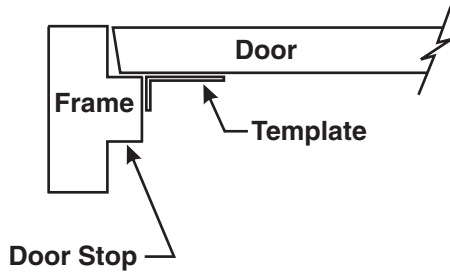

This page intentionally left blank.