2/4-Port KVM Switch
KVM-201 / KVM-401

PLANET KVM switches are designed to give you control of multiple computers using just one keyboard, mouse and VGA monitor. They provide more space in addition to saving the cost of multiple keyboards, mice and monitors. Switch between computers by just pressing a button on the panel or predefined Hot Key on connected keyboard. The KVM Switch series are the perfect choice for home, office, server farm, or testing site where there is a need to manage multiple computers efficiently and easily.
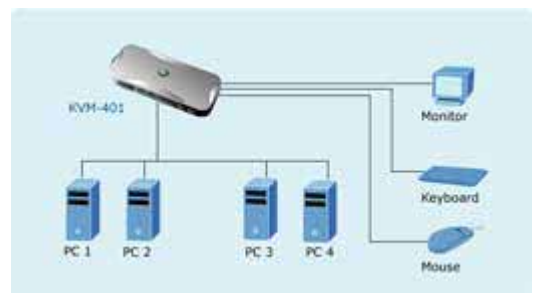
PLANET KVM Switches utilize advanced microprocessor emulation to intelligently manage each KVM port. This allows simultaneous boot-up of all the attached computers. Caps Lock, Num Lock and Scroll Lock status can also be saved for each computer. They support VGA, SVGA and MultiSync monitors.

Application
Home, Office or Test Site

Need to use multiple computers but lack space? Hate to move from computer to another computer? Or just want to save money on monitors, keyboards and mice? PLANET's KVM switches are the most cost-effective and simple solution. Multiple computers can be managed by a single monitor, keyboard and mouse directly. Not only Windows, other operating system such as iMac, Power Mac and Sun systems can also be supported. No software drivers or system configuration are required. Switching among computers is achieved simply by pushing a button on the switch or a predefined hotkey on the keyboard.

Features

- ☐ PS/2 keyboard and mouse control
- ☐ Supports Microsoft IntelliMouse®, IntelliMouse Explorer®, Logitech NetMouse® or other compatibles
- ☐ Supports for DOS, Windows 3.x/95/98/98SE/Me/NT/2000/XP/Server 2003, Unix, Linux
- ☐ Hot-Plugging of PCs for maintenance without powering down the KVM Switch or PCs
- ☐ Push button or hot key control for easy computer selection
- ☐ Plug-and-play, no Windows driver software needed for PS/2 keyboard and PS/2 operation
- ☐ Audible alert for port switching confirmation
- ☐ Auto-Scan mode for quick browsing of all connected PCs
- ☐ Keyboard/Mouse state saved and restored when switching ports
- ☐ LED indicators for easy status monitoring

SPECIFICATION

Model	KVM-201	KVM-401
Computer Port	2 PS/2 keyboard ports 2 PS/2 mouse ports 2 VGA ports	4 PS/2 keyboard ports 4 PS/2 mouse ports 4 VGA ports
Console Port	1 PS/2 keyboard port 1 PS/2 mouse port 1 VGA port	
Computer Port Connector	Keyboard: PS/2 Mini DIN 6-pin female Mouse: PS/2 Mini DIN 6-pin female Monitor: HDDB 15 pin female	Keyboard: PS/2 Mini DIN 6-pin female Mouse: PS/2 Mini DIN 6-pin female Monitor: HDDB 15 pin female
Console Port Connector	Keyboard: PS/2 Mini DIN 6-pin female Mouse: PS/2 Mini DIN 6-pin female Monitor: HDDB 15 pin female	
PC Selection	Hot Key, Push Button	
Keyboard Conversion	PS/2	

Mouse Conversion	PS/2	
Video resolution	1920 x 1440	
Bandwidth	400MHz	
Housing	Plastic	
Power Type	Bus Power	
Power Adapter (Optional)	DC 5V, 2A	
Operating Temperature	0 ~ 50 Degree C	
Storage Temperature	-20 ~ 60 Degree C	
Humidity	0 ~ 90% RH non-condensing	
Dimension (L x W x H)	116.5 x 87 x 31 mm	196 x 85 x 35 mm
Weight (g)	135	225

Ordering Information

KVM-201	2-Port KVM Switch
KVM-401	4-Port KVM Switch

Relate Product

KVM-CB-1.8	1.8m KVM cable
KVM-CB-3	3m KVM cable
KVM-CB-5	5m KVM cable